

# TLE987x

## Microcontroller with LIN and BLDC MOSFET Driver for Automotive Applications BE-/BF-Step

### User Manual

#### About this document

This User Manual is addressed to embedded hardware and software developers. It provides the reader with detailed descriptions about the behavior of the TLE987x functional units and their interaction.

The manual describes the functionality of the superset device of the TLE987x Embedded Power IC family. For the available functionality (features) of a specific TLE987x derivative (derivative device), please refer to the respective Data Sheet. For simplicity, the various device types are referenced by the collective term TLE987x throughout this manual.

## 1 TLE987x product variants

This chapter lists the product variants for which this document applies to.

### 1.1 TLE987x Grade 1 derivatives

The following table lists the Grade 1 derivatives.

**Table 1** Grade 1 derivatives

Product Name	Max. operating Frequency [MHz]	Flash Size [KB]	RAM Size [KB]	Tj [°C]	Package
TLE9871QXA20	24	36	3	-40..+150	VQFN-48-31
TLE9877QXA20	24	64	6	-40..+150	VQFN-48-31
TLE9877QXA40	40	64	6	-40..+150	VQFN-48-31
TLE9879QXA40	40	128	6	-40..+150	VQFN-48-31
TLE9879-2QXA40	40	128	6	-40..+150	VQFN-48-31

### 1.2 TLE987x Grade 0 derivatives

The following table lists the Grade 0 derivatives.

**Table 2** Grade 0 derivatives

Product Name	Max. operating Frequency [MHz]	Flash Size [KB]	RAM Size [KB]	Tj [°C]	Package
TLE9873QXW40	40	48	3	-40..+175	VQFN-48-29
TLE9877QXW40	40	64	6	-40..+175	VQFN-48-29
TLE9879QXW40	40	128	6	-40..+175	VQFN-48-29

## Table of Contents

<b>1</b>	<b>TLE987x product variants</b> .....	<b>1</b>
1.1	TLE987x Grade 1 derivatives .....	1
1.2	TLE987x Grade 0 derivatives .....	1
<b>2</b>	<b>Overview</b> .....	<b>15</b>
2.1	Abbreviations .....	17
<b>3</b>	<b>Modes of Operation</b> .....	<b>19</b>
<b>4</b>	<b>Device Register Types</b> .....	<b>22</b>
<b>5</b>	<b>Power Management Unit (PMU)</b> .....	<b>23</b>
5.1	Features .....	23
5.2	Introduction .....	23
5.2.1	Block Diagram .....	24
5.2.2	PMU Modes Overview .....	26
5.3	Power Supply Generation Unit (PGU) .....	30
5.3.1	Voltage Regulator 5.0V (VDDP) .....	31
5.3.2	Voltage Regulator 1.5V (VDDC) .....	32
5.3.3	External Voltage Regulator 5.0V (VDDEXT) .....	33
5.3.4	PMU Register Overview .....	35
5.3.5	Register Definition .....	35
5.3.5.1	Power Supply Generation Register .....	35
5.3.5.2	VDDEXT Control Register .....	39
5.4	Power Control Unit .....	41
5.4.1	Power Control Unit - Fail Safe Scenarios .....	41
5.4.1.1	Power Supervision Function of PCU .....	41
5.4.1.2	Watchdog (WDT1) Fail Safe .....	42
5.4.1.3	Main Regulators Fail Safe .....	42
5.4.1.4	VDDEXT Failure .....	42
5.4.1.5	Wake-Up from Stop Mode with Reset Fail Safe .....	42
5.4.2	Register Definition .....	44
5.4.2.1	PMU System Fail Register .....	44
5.4.2.2	PMU Wake Fail Register .....	46
5.5	Wake-Up Management Unit (WMU) .....	47
5.5.1	Functional Description .....	47
5.5.2	Register Definition .....	48
5.5.2.1	PMU Wake-Up Configuration Register .....	49
5.5.2.2	PMU Wake-Up Status Register .....	57
5.6	Cyclic Management Unit (CMU) .....	61
5.6.1	Functional Description .....	61
5.6.2	Cyclic Sense Mode .....	61
5.6.2.1	Configuration of Cyclic Sense Mode .....	63
5.6.3	Cyclic Wake Mode .....	64
5.6.4	Register Definition .....	64
5.6.4.1	Cyclic Wake Configuration Registers (CYCMU) .....	65
5.7	Reset Management Unit (RMU) .....	69
5.7.1	Functional Description .....	69
5.7.2	Register Definition .....	75

5.7.2.1	Reset Management Unit Registers (RMU)	75
5.8	PMU Data Storage Area	79
5.8.1	Functional Description	79
5.8.2	Register Definition	79
5.8.2.1	Data Storage Registers	80
5.9	Register Access Hints	84
5.9.1	Register List	85
<b>6</b>	<b>System Control Unit - Digital Modules (SCU-DM)</b>	<b>86</b>
6.1	Features	86
6.2	Introduction	86
6.2.1	Block Diagram	87
6.2.2	SCU Register Overview	88
6.2.2.1	Register Map	88
6.3	Clock Generation Unit	91
6.3.1	Low Precision Clock	91
6.3.2	High Precision Oscillator Circuit (OSC_HP)	91
6.3.2.1	External Input Clock Mode	92
6.3.2.2	External Crystal Mode	92
6.3.3	Phase-Locked Loop (PLL) Module	93
6.3.3.1	Features	93
6.3.3.2	PLL Functional Description	94
6.3.3.3	Oscillator Watchdog	98
6.3.3.4	PLL VCO Lock Detection	98
6.3.3.5	Internal Oscillator (OSC_PLL)	99
6.3.3.6	Switching PLL Parameters	99
6.3.3.7	Oscillator Watchdog Event or PLL Loss of Lock Detection	99
6.3.3.8	Oscillator Watchdog Event or Loss of Lock Recovery	100
6.3.4	Clock Control Unit	101
6.3.4.1	Clock Tree	102
6.3.4.2	Startup Control for System Clock	103
6.3.5	External Clock Output	103
6.3.6	CGU Registers	103
6.3.6.1	PLL Oscillator Register	104
6.3.6.2	PLL Registers	106
6.3.6.3	System Clock Control Registers	111
6.3.6.4	Analog Peripherals Clock Control Registers	112
6.3.6.5	External Clock Control Register	118
6.4	Reset Control	120
6.4.1	Types of Reset	120
6.4.2	Overview	120
6.4.3	Module Reset Behavior	121
6.4.4	Functional Description of Reset Types	122
6.4.4.1	Power-On / Brown-out Reset	122
6.4.4.2	Wake-up Reset	122
6.4.4.3	Hardware Reset	122
6.4.4.4	WDT1 Reset	122
6.4.4.5	WDT / Soft Reset	122

6.4.5	Reset Register Description .....	123
6.4.6	Bootling Scheme .....	124
6.5	Power Management .....	125
6.5.1	Overview .....	125
6.5.2	Functional Description .....	126
6.5.2.1	Slow Down Mode .....	126
6.5.2.2	Stop Mode .....	126
6.5.2.3	Sleep Mode .....	128
6.5.3	Register Description .....	129
6.6	Interrupt Management .....	130
6.6.1	Overview .....	130
6.6.1.1	External Interrupts .....	131
6.6.1.2	Extended Interrupts .....	131
6.6.2	Interrupt Node Assignment .....	132
6.6.3	Interrupt Related Registers .....	133
6.6.3.1	Interrupt Event Enable Control .....	133
6.6.3.2	DMA Interrupt Event Enable and Select Control .....	137
6.6.4	Implementation of DMA Request inside the SCU .....	142
6.6.5	NMI Event Flags Handling .....	142
6.7	General Port Control .....	143
6.7.1	Input Pin Function Selection .....	143
6.7.2	Port Output Control .....	147
6.7.3	GPT12 T3IN/T4IN Input Pin Function Selection .....	153
6.8	Flexible Peripheral Management .....	154
6.8.1	Peripheral Management Registers .....	154
6.9	Module Suspend Control .....	156
6.10	Watchdog Timer .....	158
6.10.1	Functional Description .....	159
6.10.2	Register Description .....	161
6.11	Error Detection and Correction Control for Memories .....	164
6.11.1	Error Detection and Correction Control Register .....	164
6.11.2	Error Detection and Correction Status Register .....	165
6.12	Miscellaneous Control .....	167
6.12.1	Bit Protection Register .....	167
6.12.2	System Control and Status Registers .....	169
6.13	Register Access Hints .....	176
6.13.1	Register List .....	177
<b>7</b>	<b>System Control Unit - Power Modules (SCU-PM) .....</b>	<b>178</b>
7.1	Features .....	178
7.2	Introduction .....	178
7.2.1	Block Diagram .....	178
7.3	Clock Watchdog Unit (CWU) .....	179
7.3.1	Fail Safe Functionality of Clock Generation Unit (Clock Watchdog) .....	179
7.3.1.1	Functional Description of Clock Watchdog Module .....	180
7.3.2	Clock Generation Unit Register .....	181
7.4	Interrupt Control Unit (ICU) .....	186
7.4.1	Structure of PREWARN_SUP_NMI .....	186

7.4.2	Interrupt Control Unit Status Register .....	187
7.4.2.1	Interrupt Control Unit Status Overview Register .....	187
7.4.2.2	Interrupt Control Unit - Interrupt Enable Register .....	204
7.5	Power Control Unit for Power Modules (PCU_PM) .....	211
7.5.1	VSD-Overvoltage System Shutdown .....	212
7.5.2	Overtemperature System Shutdown .....	212
7.5.3	Power Control Unit Register .....	213
7.6	MISC Control .....	215
7.6.1	Bus Faults .....	215
7.6.1.1	Bus Fault Control Register .....	215
7.7	Register Access Hints .....	220
<b>8</b>	<b>ARM Cortex-M3 Core .....</b>	<b>221</b>
8.1	Features .....	221
8.2	Introduction .....	222
8.2.1	Block Diagram .....	222
8.3	Functional Description .....	223
8.3.1	Registers .....	223
8.3.1.1	General-Purpose Registers .....	223
8.3.1.2	Special-Purpose Program Status Registers (xPSR) .....	224
8.4	Summary of Processor Registers .....	225
8.5	Instruction Set Summary .....	269
<b>9</b>	<b>DMA Controller .....</b>	<b>273</b>
9.1	Features .....	273
9.2	Introduction .....	274
9.2.1	Block Diagram .....	274
9.3	Functional Description .....	275
9.3.1	DMA Mode Overview .....	275
9.3.2	DMA Arbitration Rate .....	276
9.3.3	Channel Control Data Structure .....	289
9.4	Register Definition .....	300
<b>10</b>	<b>Address Space Organization .....</b>	<b>320</b>
<b>11</b>	<b>Memory Control Unit .....</b>	<b>324</b>
11.1	Features .....	324
11.2	Introduction .....	324
11.2.1	Block Diagram .....	324
11.3	NVM Module (Flash Memory) .....	326
11.3.1	Definitions .....	327
11.3.1.1	General Definitions .....	327
11.3.2	Functional Description .....	329
11.3.2.1	Basic Block Functions .....	329
11.3.2.2	Memory Cell Array .....	330
11.3.2.3	SFR Accesses .....	331
11.3.2.4	Memory Read .....	331
11.3.2.5	Memory Write .....	331
11.3.2.6	Timing .....	332
11.3.2.7	Verify .....	332

11.3.2.8	Tearing-Safe programming .....	332
11.3.2.9	Disturb handling .....	332
11.3.2.10	ECC and EDC .....	332
11.3.2.11	Resume from disturbed Program/Erase operation .....	333
11.3.2.12	Code and Data Access through the AHB-Lite Interface .....	333
11.3.2.13	Prefetch Unit .....	333
11.4	BootROM Module .....	334
11.4.1	BootROM addressing .....	334
11.4.2	BootROM firmware program structure .....	334
11.5	RAM Module .....	334
11.5.1	RAM Addressing .....	335
11.6	Memory Protection Unit (MPU) .....	335
<b>12</b>	<b>Interrupt System .....</b>	<b>336</b>
12.1	Features .....	336
12.2	Introduction .....	336
12.2.1	Overview .....	336
12.3	Functional Description .....	338
12.3.1	Interrupt Node Assignment .....	338
12.3.1.1	Interrupt Node 0 and 1 - GPT12 Timer Module .....	338
12.3.1.2	Interrupt Node 2 - Measurement Unit .....	339
12.3.1.3	Interrupt Node 3 - 10 Bit ADC (ADC1) .....	340
12.3.1.4	Interrupt Nodes 4/5/6/7 - Capture Compare Unit (CCU6) .....	341
12.3.1.5	Interrupt Node 8 and 9 - SSC1/SSC2 .....	342
12.3.1.6	Interrupt Node 10 - UART1/LIN Transceiver .....	343
12.3.1.7	Interrupt Node 11 - UART2 .....	344
12.3.1.8	Interrupt Node 12 - External Interrupt 0/MON .....	345
12.3.1.9	Interrupt Node 13 - External Interrupt 1 .....	346
12.3.1.10	Interrupt Node 14 - Bridge Driver .....	347
12.3.1.11	Interrupt Node 15 - DMA Controller .....	348
12.3.1.12	Non Maskable Interrupt (NMI) .....	349
12.3.1.13	Interrupt Flags Overview .....	350
12.3.2	Interrupt Structure .....	359
12.3.3	Interrupt Source and Vector .....	359
12.3.4	Interrupt Priority .....	362
12.4	Interrupt Handling .....	363
12.5	Register Definition .....	364
12.5.1	Interrupt Node Enable Registers .....	364
12.5.2	External Interrupt Control Registers .....	366
12.5.3	Interrupt Flag Registers .....	368
12.6	Interrupt Priority Registers .....	381
<b>13</b>	<b>Watchdog Timer (WDT1) .....</b>	<b>382</b>
13.1	Features .....	382
13.2	Introduction .....	383
13.3	Functional Description .....	384
13.3.1	Modes of Operation .....	384
13.3.2	Normal Operation .....	384
13.4	Register Definition .....	387

<b>14</b>	<b>GPIO Ports and Peripheral I/O</b>	<b>389</b>
14.1	Features	389
14.2	Introduction	389
14.2.1	Port 0 and Port 1	389
14.2.2	Port 2	392
14.3	General Port Register Description	393
14.3.1	Port Data Register	394
14.3.2	Direction Register	394
14.3.3	Open Drain Control Register	395
14.3.4	Pull-Up/Pull-Down Device Register	396
14.3.5	Alternate Input Functions	397
14.3.6	Alternate Output Functions	397
14.3.7	Register Map	398
14.4	TLE987x Port Module	399
14.4.1	Port 0	399
14.4.1.1	Overview	399
14.4.1.2	Port 0 Functions	400
14.4.1.3	Port 0 Register Description	402
14.4.2	Port 1	406
14.4.2.1	Overview	406
14.4.2.2	Port 1 Functions	407
14.4.2.3	Port 1 Register Description	409
14.4.3	Port 2	413
14.4.3.1	Overview	413
14.4.3.2	Port 2 Functions	413
14.4.3.3	Port 2 Register Description	415
14.5	Alternate Function Map	416
<b>15</b>	<b>General Purpose Timer Units (GPT12)</b>	<b>418</b>
15.1	Features	418
15.1.1	Features Block GPT1	418
15.1.2	Features Block GPT2	418
15.2	Introduction	419
15.2.1	Block Diagram GPT1	420
15.2.2	Block Diagram GPT2	421
15.3	Timer Block GPT1	422
15.3.1	GPT1 Core Timer T3 Control	423
15.3.2	GPT1 Core Timer T3 Operating Modes	425
15.3.3	GPT1 Auxiliary Timers T2/T4 Control	431
15.3.4	GPT1 Auxiliary Timers T2/T4 Operating Modes	432
15.3.5	GPT1 Clock Signal Control	440
15.3.6	Interrupt Control for GPT1 Timers	442
15.3.7	GPT1 Registers	443
15.3.7.1	GPT1 Timer Registers	443
15.3.7.2	GPT1 Timer Control Registers	444
15.3.7.3	GPT1 Timer Interrupt Control Registers	452
15.4	Timer Block GPT2	453
15.4.1	GPT2 Core Timer T6 Control	454

15.4.2	GPT2 Core Timer T6 Operating Modes .....	456
15.4.3	GPT2 Auxiliary Timer T5 Control .....	459
15.4.4	GPT2 Auxiliary Timer T5 Operating Modes .....	460
15.4.5	GPT2 Register CAPREL Operating Modes .....	464
15.4.6	GPT2 Clock Signal Control .....	469
15.4.7	Interrupt Control for GPT2 Timers and CAPREL .....	471
15.4.8	GPT2 Registers .....	472
15.4.8.1	GPT2 Timer Registers .....	472
15.4.8.2	GPT2 Timer Control Registers .....	473
15.4.8.3	GPT2 Timer and CAPREL Interrupt Control Registers .....	478
15.5	Miscellaneous GPT12 Registers .....	479
15.6	Register Map .....	481
15.7	Implementation of the GPT12 Module .....	482
15.7.1	Module Connections .....	482
<b>16</b>	<b>Timer2 and Timer21 .....</b>	<b>485</b>
16.1	Features .....	485
16.2	Introduction .....	485
16.2.1	Timer2 and Timer21 Modes Overview .....	486
16.3	Functional Description .....	487
16.3.1	Auto-Reload Mode .....	487
16.3.1.1	Up/Down Count Disabled .....	487
16.3.1.2	Up/Down Count Enabled .....	488
16.3.2	Capture Mode .....	490
16.3.3	Count Clock .....	491
16.4	Module Interfaces .....	492
16.4.1	Interfaces of the Timer2 and Timer21 .....	492
16.5	Interrupt Generation .....	493
16.6	Register Definition .....	494
16.6.1	Timer 2 Registers .....	494
16.6.1.1	Mode Register .....	494
16.6.1.2	Control Register .....	495
16.6.1.3	Timer 2 Reload/Capture Register .....	497
16.6.1.4	Timer 2 Count Register .....	498
16.6.2	Register Map .....	499
<b>17</b>	<b>Timer3 .....</b>	<b>500</b>
17.1	Features .....	500
17.2	Introduction .....	500
17.3	Functional Description .....	500
17.3.1	Timer3 Modes Overview .....	501
17.3.2	Mode 0 .....	503
17.3.3	Mode 1a .....	504
17.3.4	Mode 1b .....	505
17.3.5	Mode 2 .....	506
17.3.6	Mode 3a .....	507
17.3.7	Mode 3b .....	508
17.4	Interrupts .....	509
17.5	Register Definition .....	510



17.5.1	Timer 3 Control Registers .....	510
<b>18</b>	<b>Capture/Compare Unit 6 (CCU6) .....</b>	<b>518</b>
18.1	Feature Set Overview .....	518
18.2	Introduction .....	519
18.2.1	Block Diagram .....	520
18.3	Operating Timer T12 .....	521
18.3.1	T12 Overview .....	522
18.3.2	T12 Counting Scheme .....	524
18.3.2.1	Clock Selection .....	524
18.3.2.2	Edge-Aligned / Center-Aligned Mode .....	525
18.3.2.3	Single-Shot Mode .....	527
18.3.3	T12 Compare Mode .....	528
18.3.3.1	Compare Channels .....	528
18.3.3.2	Channel State Bits .....	529
18.3.3.3	Hysteresis-Like Control Mode .....	533
18.3.4	Compare Mode Output Path .....	534
18.3.4.1	Dead-Time Generation .....	534
18.3.4.2	State Selection .....	536
18.3.4.3	Output Modulation and Level Selection .....	537
18.3.5	T12 Capture Modes .....	539
18.3.6	T12 Shadow Register Transfer .....	542
18.3.7	Timer T12 Operating Mode Selection .....	543
18.4	Operating Timer T13 .....	544
18.4.1	T13 Overview .....	544
18.4.2	T13 Counting Scheme .....	546
18.4.2.1	Clock Selection .....	546
18.4.2.2	T13 Counting .....	547
18.4.2.3	Single-Shot Mode .....	547
18.4.2.4	Synchronization to T12 .....	548
18.4.3	T13 Compare Mode .....	550
18.4.4	Compare Mode Output Path .....	551
18.4.5	T13 Shadow Register Transfer .....	553
18.5	Trap Handling .....	554
18.6	Multi-Channel Mode .....	556
18.7	Hall Sensor Mode .....	558
18.7.1	Hall Pattern Evaluation .....	559
18.7.2	Hall Pattern Compare Logic .....	561
18.7.3	Hall Mode Flags .....	562
18.7.4	Hall Mode for Brushless DC-Motor Control .....	563
18.8	General Module Operation .....	565
18.8.1	Input Selection .....	565
18.9	Module Interfaces .....	565
18.9.1	Interfaces of the CCU6 Module .....	565
18.10	Interrupt Handling .....	567
18.10.1	Interrupt Structure .....	567
18.11	Register Definition .....	569
18.11.1	CCU6 Register Description .....	569

18.11.1.1	System Registers .....	571
18.11.2	Timer 12 – Related Registers .....	574
18.11.3	Timer 13 – Related Registers .....	584
18.11.4	Capture/Compare Control Registers .....	587
18.11.5	Global Modulation Control Registers .....	598
18.11.6	Multi-Channel Modulation Control Registers .....	603
18.11.7	Interrupt Control Registers .....	609
18.11.8	Register Map .....	621
<b>19</b>	<b>UART1/UART2 .....</b>	<b>623</b>
19.1	Features .....	623
19.2	Introduction .....	623
19.2.1	Block Diagram .....	623
19.3	UART Modes .....	624
19.3.1	Mode 0, 8-Bit Shift Register, Fixed Baud Rate .....	624
19.3.2	Mode 1, 8-Bit UART, Variable Baud Rate .....	624
19.3.3	Mode 2, 9-Bit UART, Fixed Baud Rate .....	626
19.3.4	Mode 3, 9-Bit UART, Variable Baud Rate .....	626
19.4	Multiprocessor Communication .....	628
19.5	Baud Rate Generation .....	629
19.5.1	Baud-rate Generator .....	629
19.6	LIN Support in UART .....	631
19.6.1	LIN Protocol .....	631
19.6.2	LIN Header Transmission .....	632
19.6.2.1	Automatic Synchronization to the Host .....	633
19.6.2.2	Initialization of Break/Synch Field Detection Logic .....	634
19.6.2.3	Baud Rate Range Selection .....	634
19.6.2.4	LIN Baud Rate Detection .....	636
19.7	Module Interfaces .....	638
19.8	Interrupts .....	639
19.9	Register Definition .....	640
19.9.1	UART Registers .....	640
19.9.1.1	UART Control Registers .....	640
19.9.1.2	Baud-Rate Generator Control and Status Registers .....	642
19.9.1.3	Baud-Rate Generator Timer/Reload Registers .....	645
19.9.2	Register Map .....	647
<b>20</b>	<b>LIN Transceiver .....</b>	<b>648</b>
20.1	Features .....	648
20.2	Introduction .....	649
20.2.1	Block Diagram .....	649
20.3	Functional Description .....	650
20.3.1	LIN Transceiver Modes .....	650
20.3.2	LIN Transceiver Status for Mode Selection .....	653
20.3.3	LIN Transceiver Error Handling .....	653
20.3.4	Slope Modes .....	654
20.3.5	LIN Transceiver Slope Mode Status .....	655
20.4	Register Definition .....	656
20.5	Register Access Hints .....	659

<b>21</b>	<b>High-Speed Synchronous Serial Interface (SSC1/SSC2)</b>	<b>660</b>
21.1	Features	660
21.2	Introduction	661
21.2.1	Block Diagram	661
21.3	Functional Description	662
21.3.1	SSC1 and SSC2 Modes Overview	662
21.3.2	Operating Mode Selection	663
21.3.3	Full-Duplex Operation	664
21.3.4	Half-Duplex Operation	667
21.3.5	Continuous Transfers	668
21.3.6	Baud Rate Generation	669
21.3.7	Error Detection Mechanisms	671
21.3.7.1	Port Control	673
21.4	Module Interfaces	673
21.4.1	Interfaces of the SSC Module	673
21.5	Interrupts	676
21.6	Register Definition	677
21.6.1	SSC1 and SSC2 Register Definition	677
21.6.1.1	Port Input Select Register	677
21.6.1.2	Configuration Register	677
21.6.1.3	Baud Rate Timer Reload Register	682
21.6.1.4	Transmitter Buffer Register	682
21.6.1.5	Receiver Buffer Register	683
21.6.2	Register Map	683
<b>22</b>	<b>Measurement Unit</b>	<b>684</b>
22.1	Features	684
22.2	Introduction	684
22.2.1	Block Diagram	685
22.2.1.1	Block Diagram BEMF Comparator	687
22.2.2	Measurement Unit Register Overview	688
22.3	8-bit - 10 Channel ADC Core (ADC2)	688
22.3.1	8-bit ADC Channel Allocation	689
22.3.2	Transfer Characteristics of ADC2	689
22.3.3	8-bit - 10 Channel Control Registers	690
22.4	ADC Input Selection	690
22.4.1	Functional Description	690
22.4.2	Port 2 ADC Selection Register	690
22.5	VDH Input Voltage Attenuator	693
22.5.1	Functional Description	693
22.5.2	VDH Input Attenuator Control Register	694
22.6	BEMF Comparators	696
22.6.1	Functional Description	696
22.6.1.1	Postprocessing of BEMF Comparator Signals	697
22.6.2	BEMF Comparators Control and Status Register	699
22.7	Central and PMU Regulator Temperature Sensor	703
22.7.1	Functional Description	703
22.7.2	Temperature Sensor Control Register	705

22.8	Supplement Modules .....	707
22.8.1	Functional Description .....	707
22.8.1.1	ADC2 Functional Safety Feature .....	707
22.8.2	Supplement Modules Control and Status Register .....	708
<b>23</b>	<b>Measurement Core Module (incl. ADC2) .....</b>	<b>711</b>
23.1	Features .....	711
23.2	Introduction .....	711
23.2.1	Block Diagram .....	711
23.2.2	Measurement Core Module Modes Overview .....	712
23.3	ADC2 - Core (8-bit ADC) .....	713
23.3.1	Functional Description .....	713
23.3.2	ADC2 Control Registers .....	714
23.4	Channel Controller .....	717
23.4.1	Functional Description .....	717
23.4.2	Channel Controller Control Registers .....	720
23.5	Calibration Unit .....	740
23.5.1	Functional Description .....	740
23.5.1.1	Method for determining the Calibration Parameters .....	740
23.5.1.2	Setup of Calibration Unit .....	740
23.5.2	Calibration Unit Control Registers .....	742
23.6	IIR-Filter .....	748
23.6.1	Functional Description .....	748
23.6.1.1	Step Response .....	749
23.6.2	IIR Filter Control Registers .....	751
23.7	Signal Processing .....	766
23.7.1	Functional Description .....	766
23.7.2	Postprocessing Control Registers .....	768
23.8	Start-up Behavior after Reset .....	791
23.9	Postprocessing Default Values .....	791
<b>24</b>	<b>10-Bit Analog Digital Converter (ADC1) .....</b>	<b>793</b>
24.1	Features .....	793
24.2	Introduction .....	794
24.2.1	Block Diagram .....	794
24.2.2	ADC1 Modes Overview .....	795
24.3	ADC1 - Core (10-Bit ADC) .....	795
24.3.1	Functional Description .....	795
24.3.2	ADC1 Control and Status Registers .....	796
24.4	Channel Controller .....	800
24.4.1	Functional Description .....	800
24.4.2	Channel Controller Control Registers .....	801
24.5	Conversion Result Handling .....	814
24.5.1	Functional Description .....	814
24.5.2	Result Registers .....	814
24.6	DMA Requests .....	833
24.7	Interrupts .....	833
24.7.1	Interrupt Registers .....	835
24.8	Module Interfaces .....	842

24.8.1	ADC1 Hardware Trigger Selection .....	842
<b>25</b>	<b>14-Bit Sigma Delta ADC (ADC3 / ADC4) - only valid for TLE9879-2QXA40 .....</b>	<b>843</b>
25.1	Features .....	843
25.2	Functional Description .....	843
25.2.1	Input Voltage Range of SDADC .....	845
25.2.2	Interpretation of SDADC output code .....	845
25.2.3	Calculation of SDADC output code .....	846
25.2.4	Offset Compensation .....	846
25.3	SDADC Control Register .....	847
<b>26</b>	<b>High-Voltage Monitor Input .....</b>	<b>851</b>
26.1	Features .....	851
26.2	Introduction .....	851
26.2.1	Block Diagram .....	851
26.3	Functional Description .....	852
26.4	Register Definition .....	854
26.4.1	Monitor Input Registers .....	854
<b>27</b>	<b>Bridge Driver (incl. Charge Pump) .....</b>	<b>856</b>
27.1	Features .....	856
27.2	Introduction .....	856
27.2.1	Block Diagram .....	857
27.2.2	General .....	857
27.3	Functional Description .....	858
27.3.1	Normal Operation .....	858
27.3.2	Slew Rate Control .....	858
27.3.3	PWM Operation .....	860
27.3.4	Supply-Generation of Driver .....	861
27.3.4.1	Clock Generator of Driver Supply .....	862
27.3.5	Overcurrent Detection - VDS measurement .....	862
27.3.6	OFF-State Short Circuit Detection .....	863
27.3.7	Channel turn on/off delay measurement .....	864
27.4	Application Hints .....	865
27.4.1	Bridge Driver Diagnosis .....	865
27.4.1.1	Off-Diagnosis .....	865
27.4.1.2	On-Diagnosis .....	867
27.4.1.3	Open-Load Detection .....	870
27.5	Register Definition .....	871
27.5.1	Driver Register .....	872
27.5.2	Driver Trimming Register .....	886
27.5.3	Charge Pump Control and Status Register .....	891
<b>28</b>	<b>Current Sense Amplifier .....</b>	<b>895</b>
28.1	Features .....	895
28.2	Introduction .....	895
28.2.1	Block Diagram .....	896
28.2.2	Recommended Offset Calibration .....	897
28.3	Functional Description .....	898
28.3.1	ADC Code Calculation .....	898

---

28.4	Register Definition .....	899
<b>29</b>	<b>Revision History .....</b>	<b>901</b>

---

**Overview**

## 2 Overview

### Summary of Features

- 32-bit ARM Cortex M3 Core
  - up to 40 MHz clock frequency
  - one clock per machine cycle architecture
- On-chip memory
  - up to 128 KByte Flash including
  - 4 KByte EEPROM (emulated in Flash)
  - 512 Byte 100 Time Programmable Memory (100TP)
  - up to 6 KByte RAM
  - Boot ROM for startup firmware and Flash routines
- On-chip OSC and PLL for clock generation
  - PLL loss-of-lock detection
- MOSFET driver including charge pump
- 10 general-purpose I/O Ports (GPIO)
- 5 analog inputs, 10-bit A/D Converter (ADC1)
- 2 differential Sigma Delta 14-bit ADC (ADC3/4), only TLE9879-2QXA40 variant
- 16-bit timers - GPT12, Timer 2, Timer 21 and Timer 3
- Capture/compare unit for PWM signal generation (CCU6)
- 2 full duplex serial interfaces (UART) with LIN support (for UART1 only)
- 2 synchronous serial channels (SSC)
- On-chip debug support via 2-wire SWD
- 1 LIN 2.2 transceiver, excluding TLE9871 variants
- Bidirectional PWM interface, TLE9871 variants
- 1 high voltage monitoring input
- Single power supply from 5.5 V to 27 V
- Extended power supply voltage range from 3 V to 28 V
- Low-dropout voltage regulators (LDO)
- High speed operational amplifier for motor current sensing via shunt
- 5 V voltage supply for external loads (e.g. Hall sensor)
- Core logic supply at 1.5 V
- Programmable window watchdog (WDT1) with independent on-chip clock source
- Power saving modes
  - MCU slow-down Mode
  - Sleep Mode
  - Stop Mode
  - Cyclic wake-up Sleep Mode
- Power-on and undervoltage/brownout reset generator
- Overtemperature protection
- Short circuit protection

---

## Overview

- Loss of clock detection with fail safe mode entry for low system power consumption
- Temperature Range  $T_j = -40^{\circ}\text{C}$  up to  $+175^{\circ}\text{C}$
- Package VQFN-48 with LTI feature
- Green package (RoHS compliant)
- AEC qualified



## Overview

### 2.1 Abbreviations

The following acronyms and terms are used within this document. List see in [Table 3](#).

**Table 3** Acronyms

Acronyms	Name
AHB	Advanced High-Performance Bus
APB	Advanced Peripheral Bus
CCU6	Capture Compare Unit 6
CGU	Clock Generation Unit
CLKMU	Clock Management Unit
CMU	Cyclic Management Unit
CP	Charge Pump for MOSFET driver
CSA	Current Sense Amplifier
DPP	Data Post Processing
ECC	Error Correction Code
EEPROM	Electrically Erasable Programmable Read Only Memory
EIM	Exceptional Interrupt Measurement
FSM	Finite State Machine
GPIO	General Purpose Input Output
H-Bridge	Half Bridge
ICU	Interrupt Control Unit
IEN	Interrupt Enable
IIR	Infinite Impulse Response
LDM	Load Instruction
LDO	Low DropOut voltage regulator
LIN	Local Interconnect Network
LSB	Least Significant Bit
LTI	Lead Tip Inspection
MCU	Memory Control Unit
MF	Measurement Functions
MSB	Most Significant Bit
MPU	Memory Protection Unit
MRST	Master Receive Slave Transmit
MTRSR	Master Transmit Slave Receive
MU	Measurement Unit
NMI	Non Maskable Interrupt
NVIC	Nested Vector Interrupt Controller
NVM	Non-Volatile Memory
OTP	One Time Programmable
OSC	Oscillator

---

**Overview**
**Table 3 Acronyms**

<b>Acronyms</b>	<b>Name</b>
PBA	Peripheral Bridge
PC	Program Counter
PCU	Power Control Unit
PD	Pull Down
PGU	Power supply Generation Unit
PLL	Phase Locked Loop
PMU	Power Management Unit
PPB	Private Peripheral Bus
PSW	Program Status Word
PU	Pull Up
PWM	Pulse Width Modulation
RAM	Random Access Memory
RCU	Reset Control Unit
RMU	Reset Management Unit
ROM	Read Only Memory
SCU-DM	System Control Unit - Digital Modules
SCU-PM	System Control Unit - Power Modules
SFR	Special Function Register
SOW	Short Open Window (for WDT)
SPI	Serial Peripheral Interface
SSC	Synchronous Serial Channel
STM	Store Instruction
SWD	ARM Serial Wire Debug
TCCR	Temperature Compensation Control Register
TMS	Test Mode Select
TSD	Thermal Shut Down
UART	Universal Asynchronous Receiver Transmitter
VBG	Voltage reference Band Gap
VCO	Voltage Controlled Oscillator
VPRE	Pre Regulator
WDT	Watchdog Timer in SCU-DM
WDT1	Watchdog Timer in SCU-PM
WMU	Wake-up Management Unit
100TP	100 Time Programmable

## Modes of Operation

### 3 Modes of Operation

This highly integrated circuit contains analog and digital functional blocks. An embedded 32-bit microcontroller is available for system and interface control. On-chip, low-dropout regulators are provided for internal and external power supply. An internal oscillator provides a cost effective clock that is particularly well suited for LIN communications. A LIN transceiver is available as a communication interface. Driver stages for a Motor Bridge or BLDC Motor Bridge with external MOSFET are integrated, featuring PWM capability, protection features and a charge pump for operation at low supply voltage. A 10-bit SAR ADC and two differential 14-bit Sigma Delta ADCs<sup>1)</sup> are implemented for high precision sensor measurement. An 8-bit ADC is used for diagnostic measurements.

The Micro Controller Unit supervision and system protection (including a reset feature) is complemented by a programmable window watchdog. A cyclic wake-up circuit, supply voltage supervision and integrated temperature sensors are available on-chip.

All relevant modules offer power saving modes in order to support automotive applications connected to terminal 30. A wake-up from power-save mode is possible via a LIN bus message, via the monitoring input or using a programmable time period (cyclic wake-up).

The TLE987x has several operation modes mainly to support low power consumption requirements.

#### Reset Mode

The Reset Mode is a transition mode used e.g. during power-up of the device after a power-on reset, or after wake-up from Sleep Mode. In this mode, the on-chip power supplies are enabled and all other modules are initialized. Once the core supply VDDC is stable, the device enters Active Mode. If the watchdog timer WDT1 fails more than four times, the device performs a fail-safe transition to Sleep Mode.

#### Active Mode

In Active Mode, all modules are activated and the TLE987x is fully operational.

#### Stop Mode

Stop Mode is one of two major low power modes. The transition to the low power modes is performed by setting the corresponding bits in the mode control register. In Stop Mode the embedded microcontroller is still powered, allowing faster wake-up response times. Wake-up from this mode is possible through LIN bus activity, by using the high-voltage monitoring pin or the corresponding 5V GPIOs.

#### Stop Mode with Cyclic Wake-Up

The Cyclic Wake-Up Mode is a special operating mode of the Stop Mode. The transition to the Cyclic Wake-Up Mode is done by first setting the corresponding bits in the mode control register followed by the Stop Mode command. In addition to the cyclic wake-up behavior (wake-up after a programmable time period), asynchronous wake events via the activated sources (LIN and/or MON) are available, as in normal Stop Mode.

#### Sleep Mode

The Sleep Mode is a low-power mode. The transition to the low-power mode is done by setting the corresponding bits in the MCU mode control register or in case of failure, see below. In Sleep Mode the embedded microcontroller power supply is deactivated allowing the lowest system power consumption. A wake-up from this mode is possible by LIN bus activity, the High Voltage Monitor Input pin or Cyclic Wake-up.

#### Sleep Mode in Case of Failure

Sleep Mode is activated after 5 consecutive watchdog failures or in case of supply failure (5 times). In this case, MON is enabled as the wake source and Cyclic Wake-Up is activated with 1s of wake time.

1) for TLE9879-2QXA40 variant only

## Modes of Operation

### Sleep Mode with Cyclic Wake-Up

The Cyclic Wake-Up Mode is a special operating mode of the Sleep Mode. The transition to Cyclic Wake-Up Mode is performed by first setting the corresponding bits in the mode control register followed by the Sleep and Stop Mode command. In addition to the cyclic wake-up behavior (wake-up after a programmable time period), asynchronous wake events via the activated sources (LIN and/or MON) are available, as in normal Sleep Mode.

When using Sleep Mode with cyclic wake-up the voltage regulator is switched off and started again with the wake. A limited number of registers is buffered during sleep, and can be used by SW e.g. for counting sleep/wake cycles.

### MCU Slow Down Mode

In MCU Slow Down Mode the MCU frequency is reduced for saving power during operation. LIN communication is still possible. LS MOSFET can be activated.

### Wake-Up Source Prioritization

All wake-up sources have the same priority. In order to handle the asynchronous nature of the wake-up sources, the first wake-up signal will initiate the wake-up sequence. Nevertheless all wake-up sources are latched in order to provide all wake-up events to the application software. The software can clear the wake-up source flags. This is to ensure that no wake-up event is lost.

As default wake-up source, the MON input is activated after power-on reset only. Additionally, the device is in Cyclic Wake-Up Mode with the max. configurable dead time setting.

The following table shows the possible power mode configurations including the Stop Mode.

**Table 4 Power Mode Configurations**

Module/Function	Active Mode	Stop Mode	Sleep Mode	Comment
VDDEXT	ON/OFF	ON (no dynamic load)/OFF	OFF	-
Bridge Driver	ON/OFF	OFF	OFF	
LIN TRx	ON/OFF	wake-up only/ OFF	wake-up only/ OFF	-
VS sense	ON/OFF brownout detection	brownout detection	POR on VS	brownout det. done in PCU
GPIO 5V (wake-up)	n.a.	disabled/static	OFF	-
GPIO 5V (active)	ON	ON	OFF	-
WDT1	ON	OFF	OFF	-
CYCLIC WAKE	n.a.	cyclic wake-up/ cyclic sense/OFF	cyclic wake-up/ OFF	-
Measurement	ON <sup>1)</sup>	OFF	OFF	-
MCU	ON/slow- down/STOP	STOP <sup>2)</sup>	OFF	-
CLOCK GEN (MC)	ON	OFF	OFF	-
LP_CLK (18 MHz)	ON	OFF	OFF	WDT1
LP_CLK2 (100 kHz)	ON/OFF	ON/OFF	ON/OFF	for cyclic wake-up

1) May not be switched off due to safety reasons

2) MC PLL clock disabled, MC supply reduced to  $V_{DCCOUT\_Stop\_Red}$

---

**Modes of Operation****Wake-Up Levels and Transitions**

The wake-up can be triggered by rising, falling or both signal edges for the monitor input, by LIN or by cyclic wake-up.

---

**Device Register Types**

## 4 Device Register Types

The following register types are used within this device. List see in [Table 5](#).

**Table 5 Register Types**

Type	can be modified by			Description
	Hardware	Firmware	Software	
r	yes	no	no	read-only flag
rh	yes	no	no	read-only flag which is modified by hardware
rhc	yes	no	yes	read-only flag which status can be clear by a read operation
rw	no	no	yes	bit can be read or written
rwp	yes	yes	no	protected bit; read operation is always possible
rwp2	yes	yes	yes	protected bit; protection can be removed by writing scu password.
rwh	yes	no	yes	bit can be written by hardware and software; hardware has priority
rwh1	yes	no	yes	bit can be set by software and is cleared by hardware; hardware has priority.
rwc	yes	no	yes	bit can be written by hardware and software; writing to register with any value clears the status.
rwd	no	no	yes	bit can be read/written by software. Write is delayed for synch. purpose.
rwhir	yes	no	yes	bit can be written by hardware and software; hardware has only priority to clear the bit.
w	yes	yes	yes	bit can be written by hardware or software; this bit can only be set by software; it is cleared by hardware.
wh	yes	no	yes	bit can be written by hardware and software; hardware has priority
wi	no	yes	yes	bit can be written by hardware or software; this bit can only be set by software; it is cleared by hardware.

## **5 Power Management Unit (PMU)**

### **5.1 Features**

- System modes control (startup, sleep, stop and active)
- Power management (cyclic wake-up)
- Control of system voltage regulators with diagnosis (overload, short, overvoltage)
- Fail safe mode detection and operation in case of system errors (watchdog fail)
- Wake-up sources configuration and management (LIN, MON, GPIOs)
- System error logging


### **5.2 Introduction**

The power management unit is responsible for generating all required voltage supplies for the embedded MCU (VDDC, VDDP) and the external supply (VDDEXT). The power management unit is designed to ensure fail-safe behavior of the system IC by controlling all system modes including the corresponding transitions. Additionally, the PMU provides well defined sequences for the system mode transitions and generates hierarchical reset priorities. The reset priorities control the reset behavior of all system functionalities especially the reset behavior of the embedded MCU. All these functions are controlled by a state machine. The system master functionality of the PMU make use of an independent logic supply and system clock. For this reason, the PMU has an "Internal logic supply and system clock" module which works independently of the MCU clock.

**Power Management Unit (PMU)**

**5.2.1 Block Diagram**

The following figure shows the structure of the Power Management Unit. **Table 6** describes the submodules in more detail.

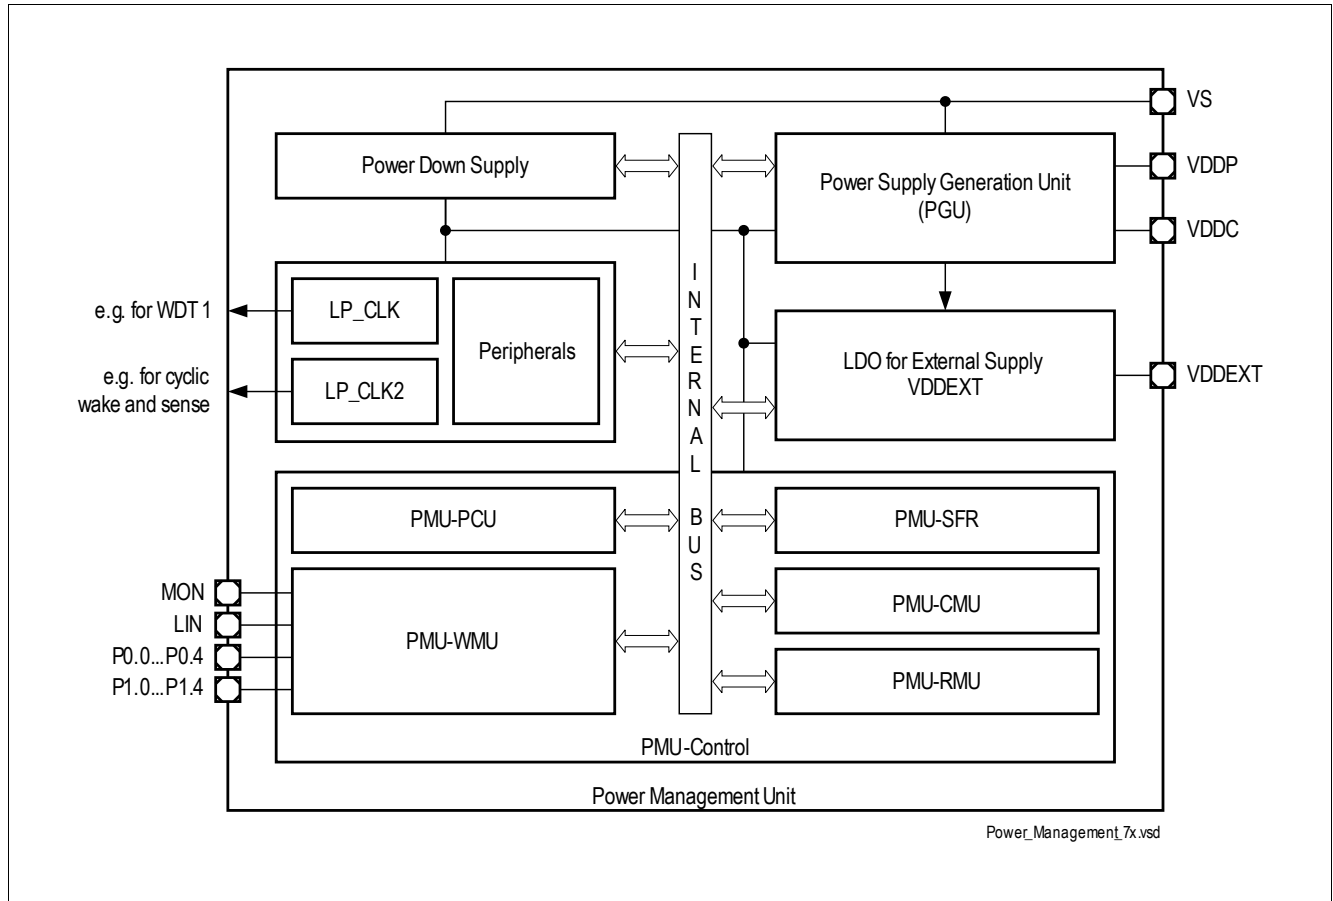

**Figure 1 Power Management Unit Block Diagram**

**Table 6 Description of PMU Submodules**

<b>Mod. Name</b>	<b>Modules</b>	<b>Functions</b>
Power Down Supply	Independent supply voltage generation for PMU	This supply is dedicated to the PMU to ensure an independent operation from generated power supplies (VDDP, VDDC).
LP_CLK (= 18 MHz)	- Clock source for all PMU submodules - Backup clock source for System - Clock source for WDT1	This ultra low power oscillator generates the clock for the PMU. This clock is also used as backup clock for the system in case of PLL Clock failure and as an independent clock source for WDT1.
LP_CLK2 (= 100 kHz)	Clock source for PMU	This ultra low power oscillator generates the clock for the PMU in Stop Mode and in the cyclic modes.
Peripherals	Peripheral blocks of PMU	These blocks include the analog peripherals to ensure a stable and fail-safe PMU startup and operation (bandgap, bias).



---


**Power Management Unit (PMU)**
**Table 6 Description of PMU Submodules (cont'd)**

<b>Mod. Name</b>	<b>Modules</b>	<b>Functions</b>
Power Supply Generation Unit (PGU)	Voltage regulators for VDDP and VDDC	This block includes the voltage regulators for the pad supply (VDDP) and the core supply (VDDC).
VDDEXT	Voltage regulator for VDDEXT to supply external modules (e.g. sensors)	This voltage regulator is a dedicated supply for external modules and can also be used for cyclic sense operations (e.g. with hall sensor).
PMU-SFR	All Extended Special Function registers that are relevant to the PMU.	This module contains all registers needed to control and monitor the PMU.
PMU-PCU	Power Control Unit of the PMU	This block is responsible for controlling all power related actions within the PGU Module. It also contains all regulator related diagnostics such as undervoltage and overvoltage detection as well as overcurrent and short circuit diagnostics.
PMU-WMU	Wake-Up Management Unit of the PMU	This block is responsible for controlling all wake-up related actions within the PMU Module.
PMU-CMU	Cyclic Management Unit of the PMU	This block is responsible for controlling all actions in cyclic mode.
PMU-RMU	Reset Management Unit of the PMU	This block generates resets triggered by the PMU such as undervoltage or short circuit reset, and passes all resets to the relevant modules and their register.

## Power Management Unit (PMU)

### 5.2.2 PMU Modes Overview

The following state diagram shows the available modes of the device.

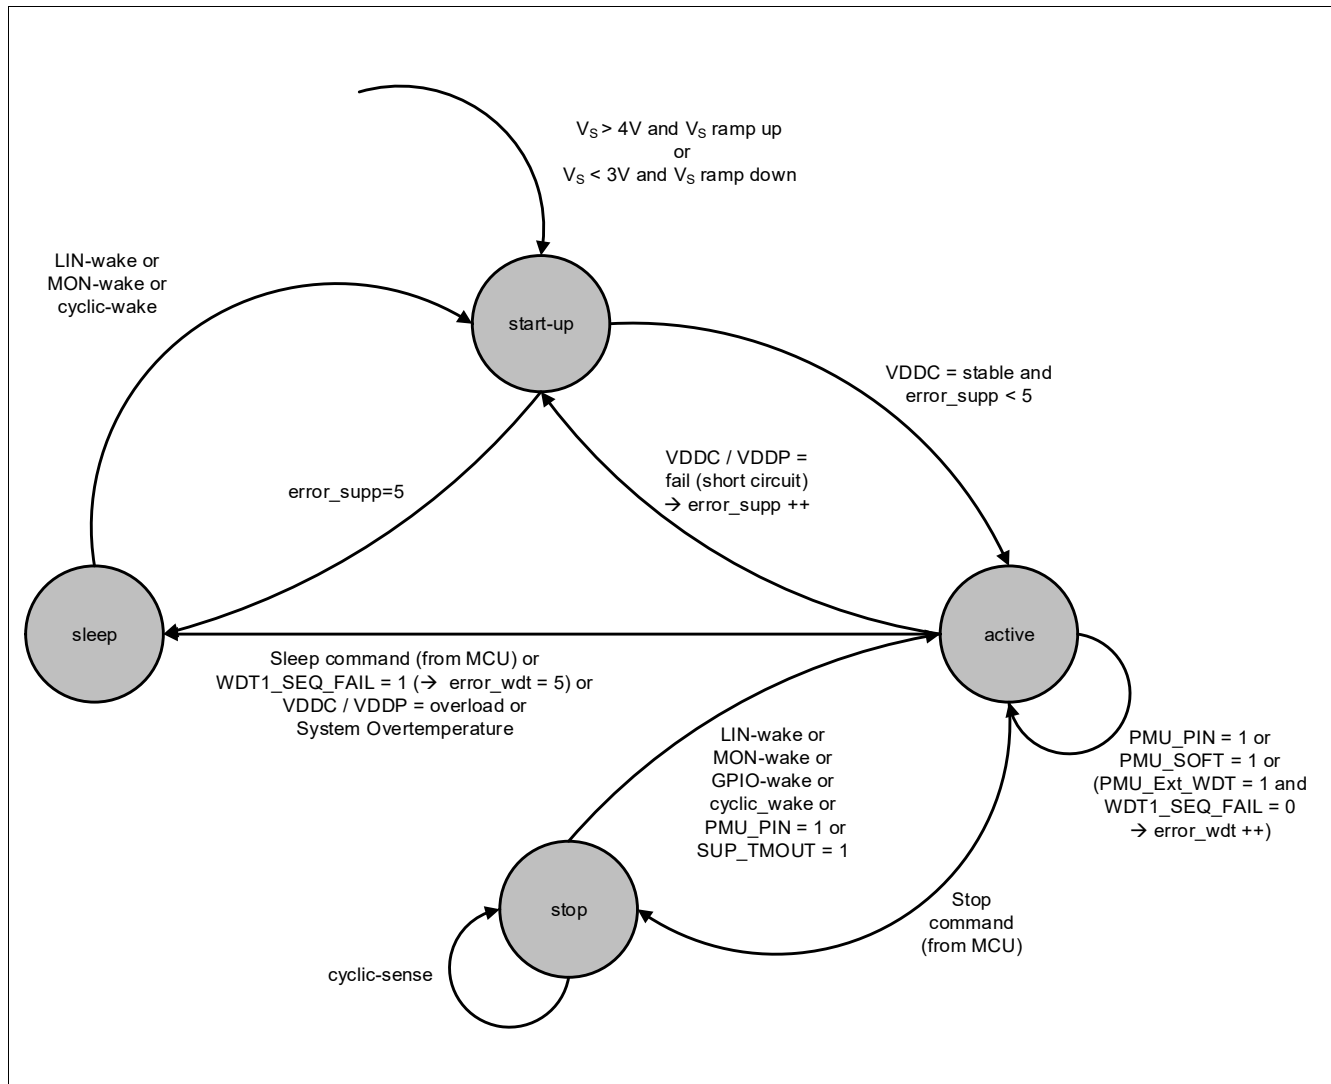

**Figure 2** Power Management Unit System Modes


#### Active Mode

In Active Mode the Power Management Unit releases the reset of the embedded MCU and the application software takes control of the system. Now the PMU is responsible for supplying and supervising the embedded system. The supervision functionality of the PMU monitors the output voltage/current of the generated supplies and the status information of the system watchdog (WDT1).

#### Sleep Mode

The Sleep Mode is the power saving mode where the lowest power consumption is achieved. In this mode the PMU resets all system functionalities and switches off all voltage supplies (VDDP, VDDC, VDDEXT) which are generated in the PMU. The only submodules of the PMU which stay active are the ones responsible for controlling the wake-up procedure of the system. [Figure 3](#) shows the Sleep Mode entry procedure.

Power Management Unit (PMU)

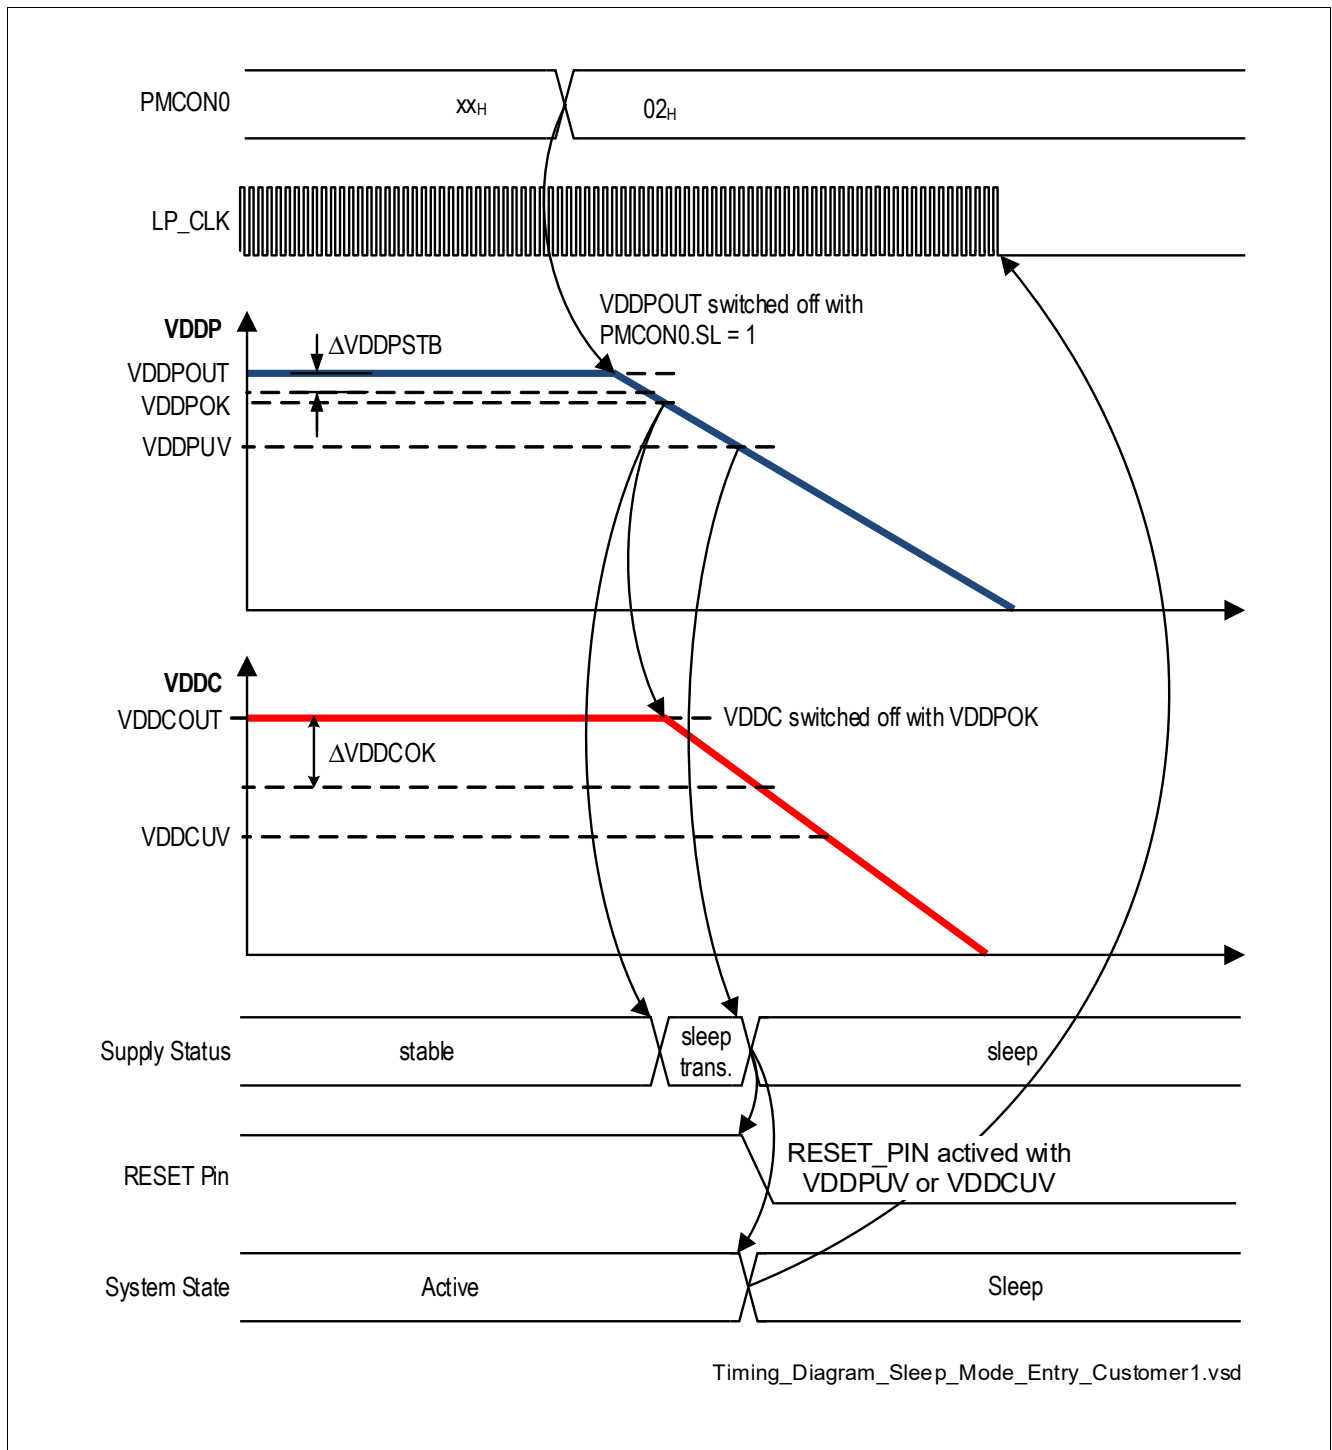

**Figure 3 Sleep Mode Entry Timing**

The arrows in the diagram above display a causal connection between the various steps and not necessarily a voltage based connection.


The Sleep Mode is terminated by a LIN pulse or a corresponding (rising edge / falling edge) activity at the MON input. The PMU processes the wake-up information in an independent State Machine FSM which starts the PMU internal system clock to process the startup sequences in a synchronous way. A successful startup sequence enters the startup Mode automatically. [Figure 4](#) illustrates the wake via LIN.

The Sleep Mode can be terminated by synchronous wake-up events too. If this is desired, the PMU must be configured by setting the corresponding SFRs. A synchronous wake-up can be configured using the Cyclic

**Power Management Unit (PMU)**

Sense. If these synchronous wake-up events are configured then the power consumption of the PMU increases in Sleep Mode. The increased current consumption is caused by an oscillator which generates the needed time base (typically 100 kHz).

The wake-up procedure from Sleep Mode via MON pins (instead of LIN) follows the same sequence as shown in **Figure 4**.

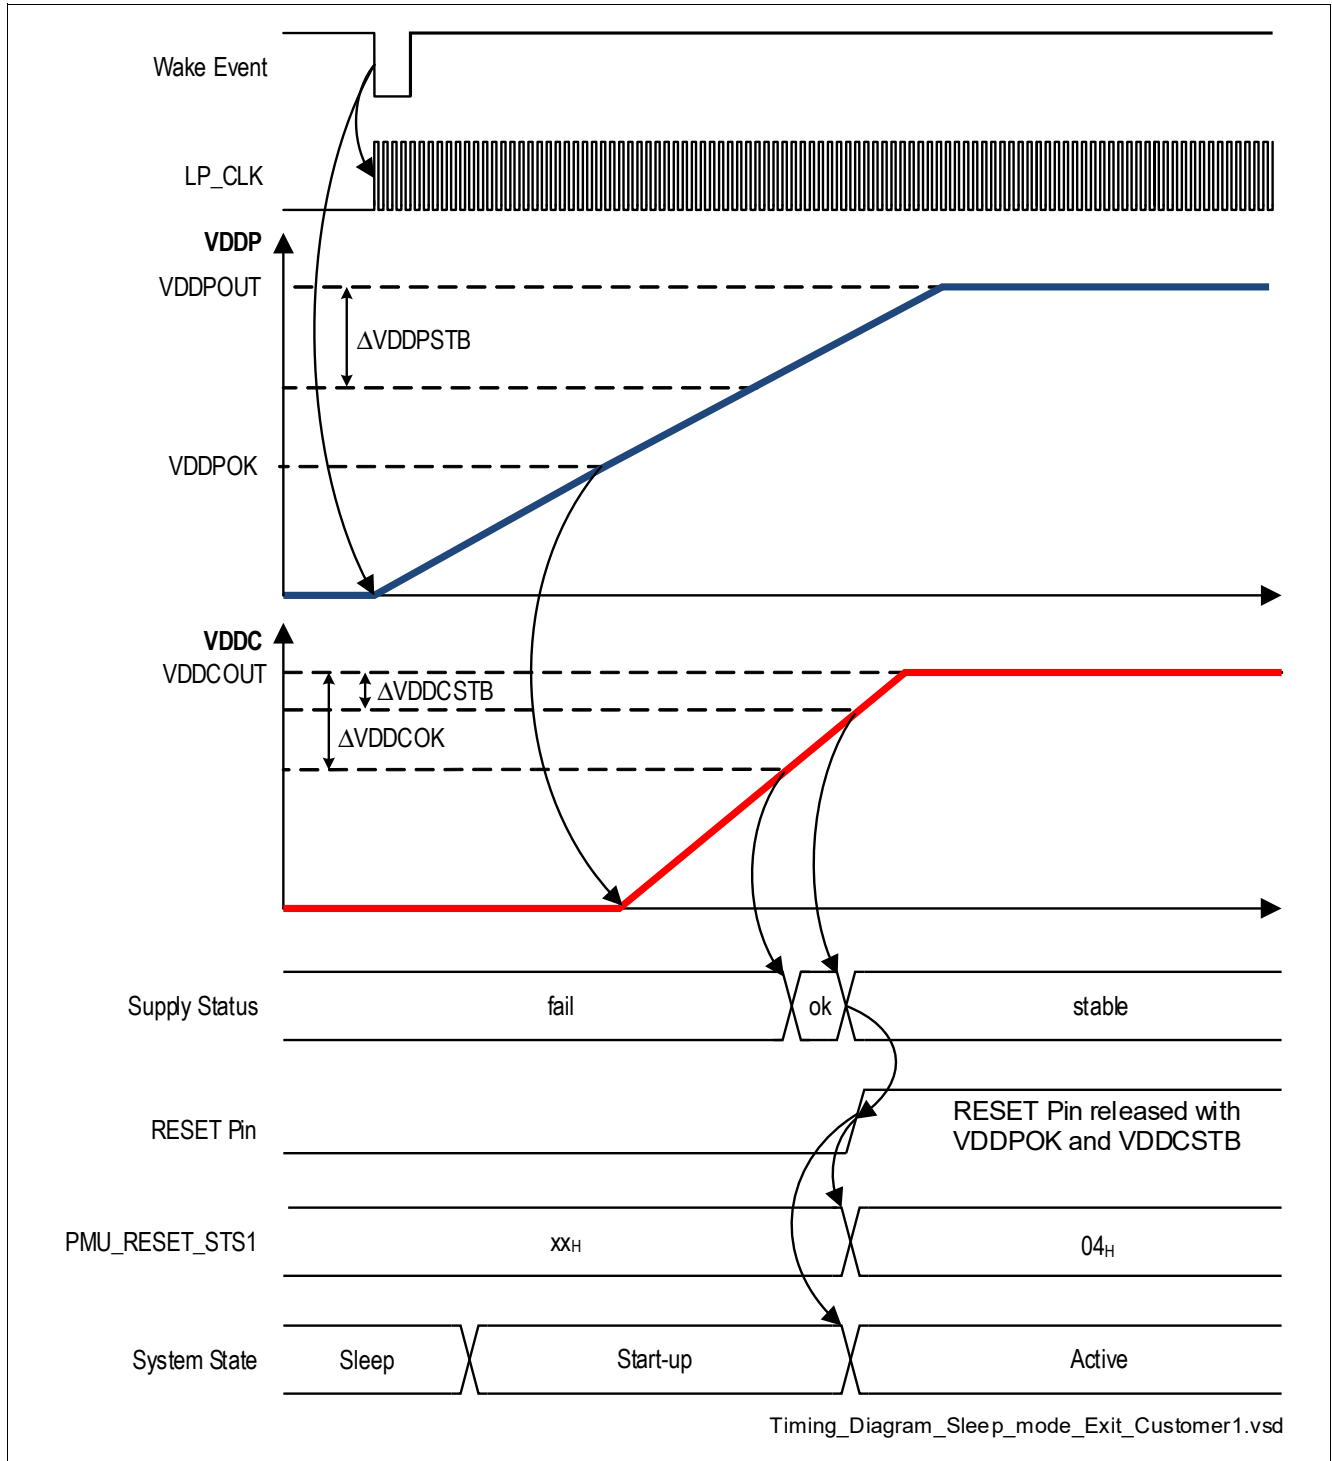


**Figure 4 Sleep Mode LIN Wake-Up Timing**

The arrows in the diagram above display a causal connection between the various steps and not necessarily a voltage based connection.

**Power Management Unit (PMU)**

**Stop Mode**

The objective of the Stop Mode is to provide a Low Power Mode where the data retention feature for the embedded MCU and the special function registers (SFRs). In the Stop Mode the core supply voltage VDDC switches from V<sub>DDCOUT</sub> to V<sub>DDCOUT\_Stop\_Red</sub> with the objective to reduce leakage current. During the Stop Mode the dynamic behavior (load jumps) of the PMU internally generated voltage supplies are limited. The corresponding limitation is given by the external buffer capacitor at the VDDC/VDDP pin. The figure below shows the Stop Mode entry sequence.

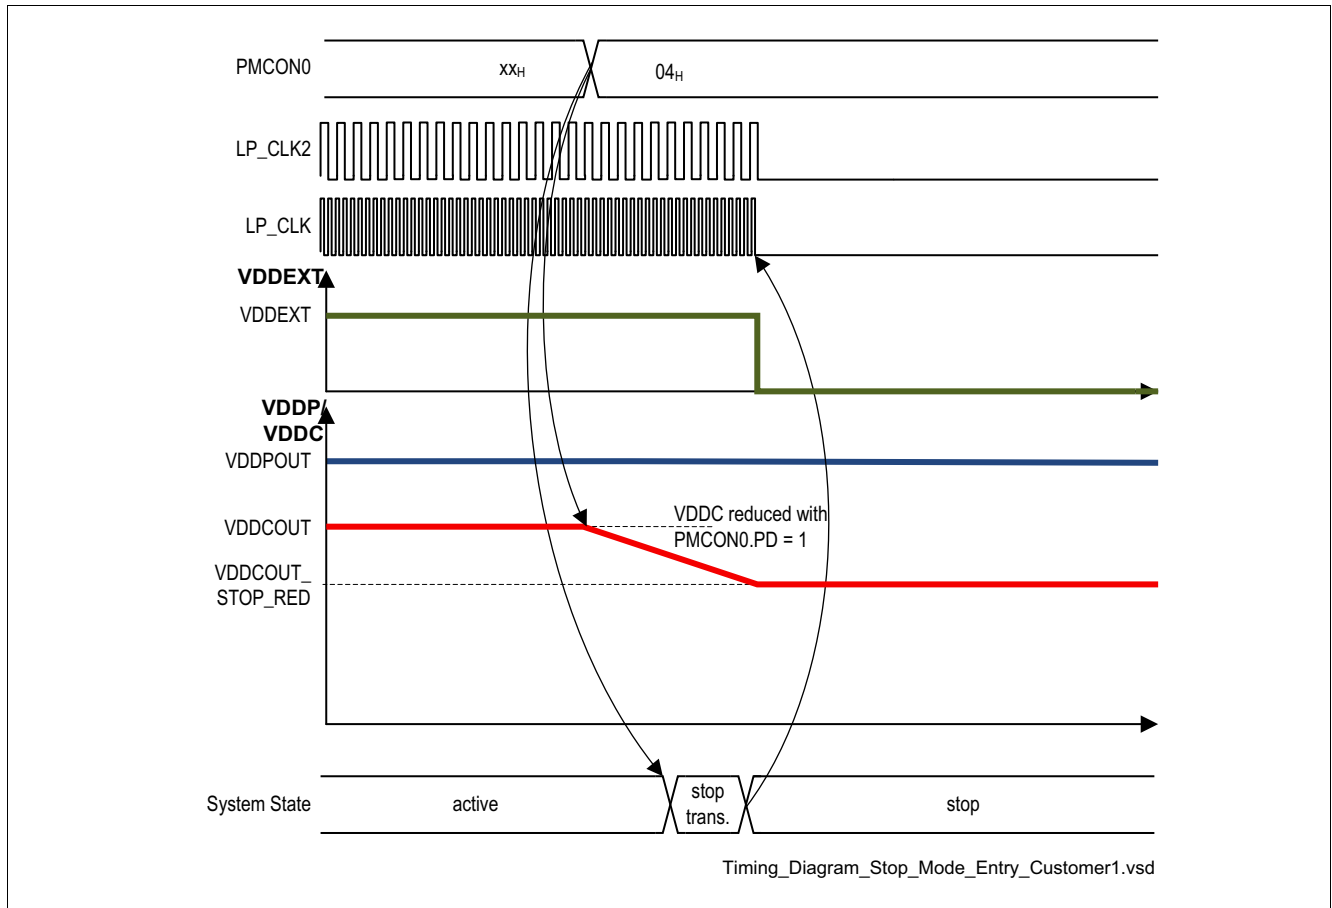

**Figure 5 Stop Mode Entry Timing**

The arrows in the diagram above display a causal connection between the various steps and not necessarily a voltage based connection.

The asynchronous wake-up works using a LIN message or an event (rising edge/falling edge) at the MON input. Stop Mode terminates by an event at one of the GPIO pins. The wake-up configuration of every MON and GPIO input is stored in the corresponding SFR. The configuration for the high-voltage input (MON) are used for Stop-exit and Sleep-exit (same SFR). The Stop Mode terminates by using one of the synchronous wake-up features. The synchronous wake-up features are separated in Cyclic Sense and wake-up after time-out (Cyclic Wake). Both of these wake-up procedures work similarly to the Sleep-exit. In Cyclic Sense mode, both the MON inputs as well as the GPIOs can be evaluated and a transition will cause a termination of the Stop Mode. The sensing period for MON inputs and GPIOs is generated with the same time base (typically 100 kHz). The sensing period is set in the **CNF\_CYC\_SENSE**. To bias the external load of the GPIOs, the supply voltage VDDP may switch on for the sensing time. Only during this sensing time the PMU evaluates the corresponding GPIO. In case of a valid wake-up signal the PMU goes to Active Mode and the application software takes control over the system. If no valid wake-up information is available, then the external supply VDDP switches off until the configured sensing period starts again.


## Power Management Unit (PMU)

### 5.3 Power Supply Generation Unit (PGU)

As shown in the diagram below the Power Supply Generation consists of the following modules:

#### Submodules of PGU are:

- **Power Down Supply:** independent analog supply voltage generation for Power Control Unit logic, for VDDP Regulator and for VDDC Regulator.
- **VPRE:** analog supply voltage pre-regulator. Purpose of this regulator is the power dissipation reduction for the following regulator stages.
- **VDDP:** 5V digital voltage regulator used for internal modules and all GPIOs.
- **VDDC:** 1.5V digital voltage regulator used for internal microcontroller modules and core logic.
- **PCU:** Power Control Unit responsible for supervising and controlling 5V regulator and 1.5V regulator.

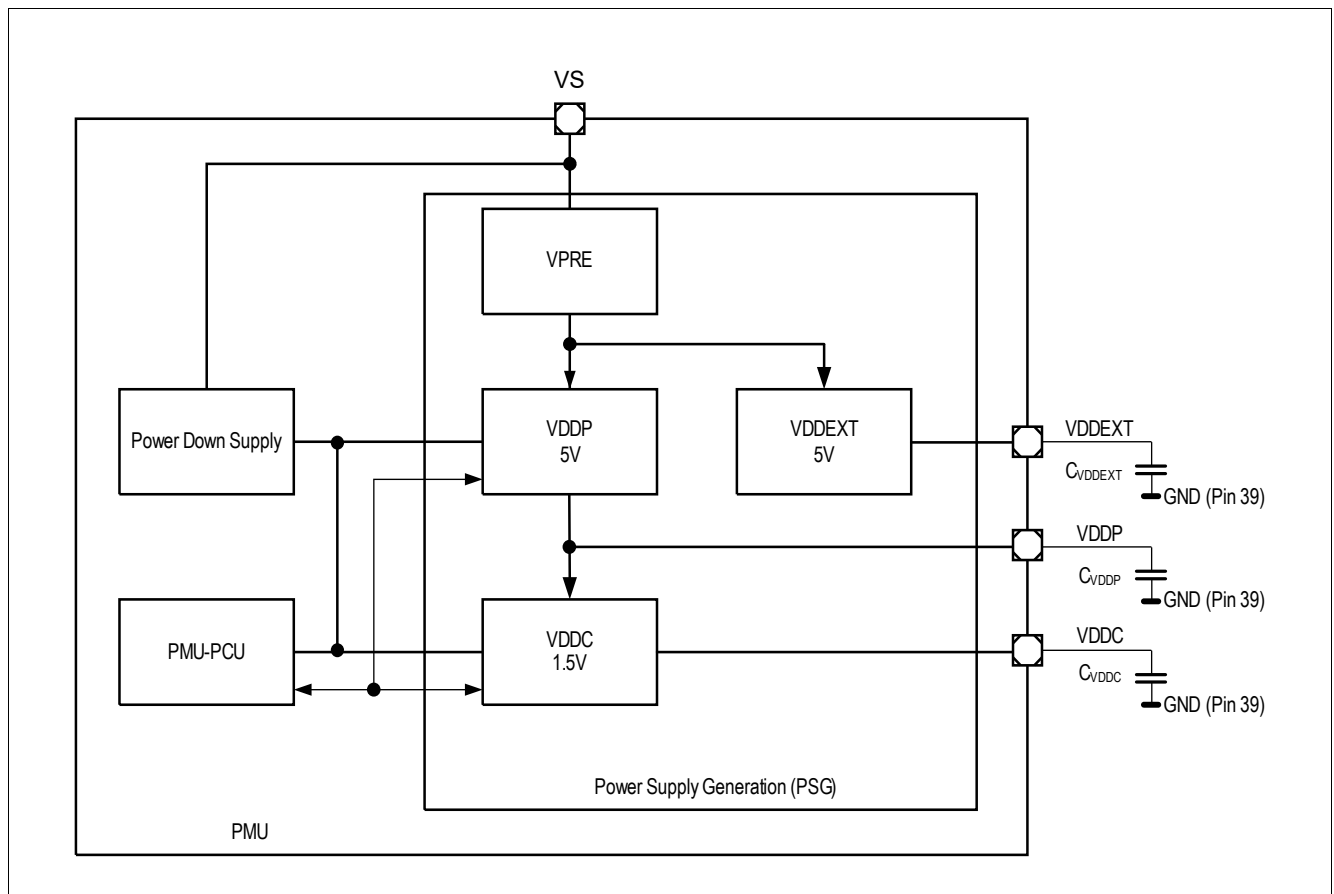

**Figure 6 Power Supply Generation Block Diagram**

## Power Management Unit (PMU)


### 5.3.1 Voltage Regulator 5.0V (VDDP)

This module represents the 5 V voltage regulator, which provides the pad supply for the parallel port pins and other 5 V analog functions (e.g. LIN Transceiver).

#### Features

- 5 V low-drop voltage regulator
- Overcurrent monitoring and shutdown with MCU signaling (interrupt)
- Overvoltage monitoring with MCU signaling (interrupt)
- Undervoltage monitoring with MCU signaling (interrupt)
- Undervoltage monitoring with reset (Undervoltage Reset,  $V_{DDPUV}$ )
- Pre-Regulator for VDDC Regulator
- GPIO Supply
- Pull Down Current Source at the output for Sleep Mode only (typ. 5 mA)

The output capacitor  $C_{VDDP}$  is mandatory to ensure proper regulator functionality.

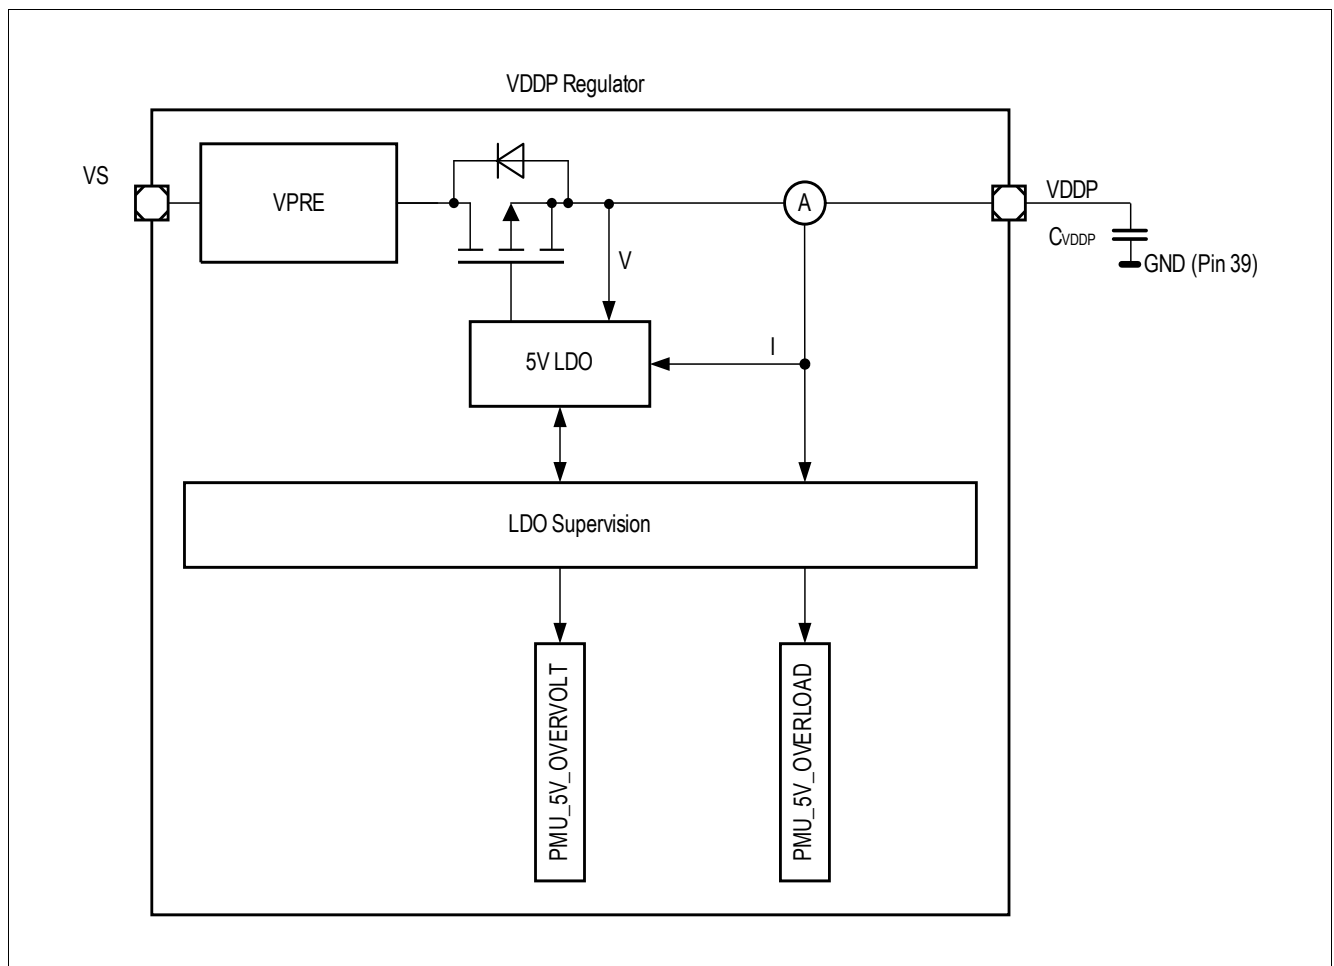

**Figure 7** Module Block Diagram of VDDP Voltage Regulator

## Power Management Unit (PMU)


### 5.3.2 Voltage Regulator 1.5V (VDDC)

This module represents the 1.5 V voltage regulator, which provides the supply for the microcontroller core, the digital peripherals and other internal analog 1.5 V functions (e.g. ADC2) of the chip. To further reduce the current consumption of the MCU during Stop Mode the output voltage can be lowered to  $V_{\text{DDCOUT\_Stop\_Red}}$ .

#### Features

- 1.5 V low-drop voltage regulator
- Overcurrent monitoring and shutdown with MCU signaling (interrupt)
- Overvoltage monitoring with MCU signaling (interrupt)
- Undervoltage monitoring with MCU signaling (interrupt)
- Undervoltage monitoring with reset
- Pull Down Current Source at the output for Sleep Mode only (typ. 100  $\mu\text{A}$ )

The output capacitor  $C_{\text{VDDC}}$  is mandatory to ensure a proper regulator functionality.

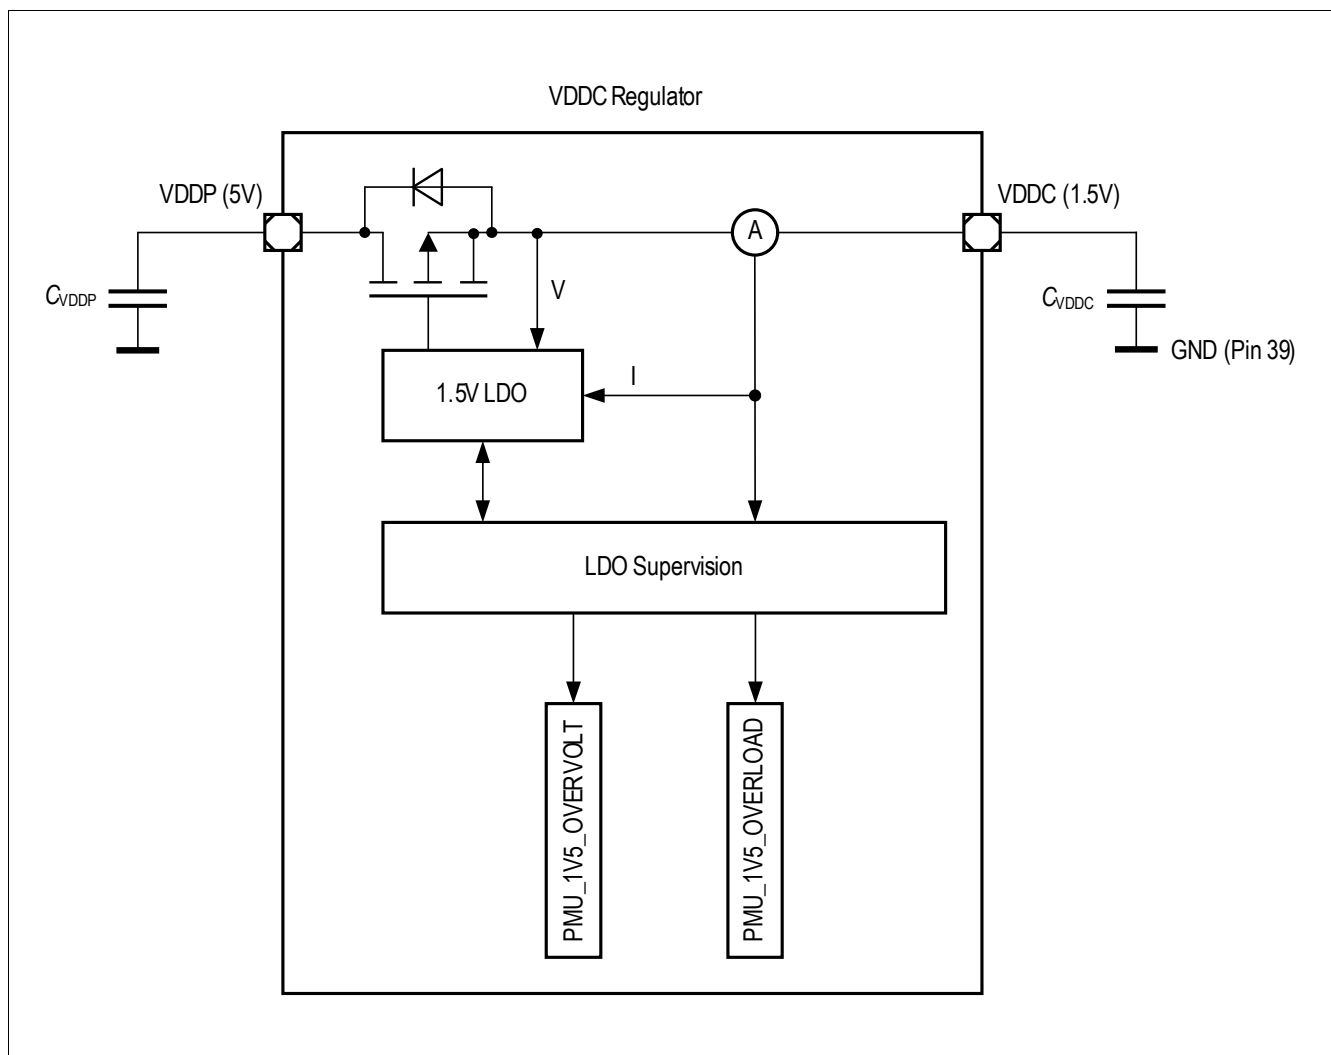

**Figure 8** Module Block Diagram of VDDC Voltage Regulator



## Power Management Unit (PMU)


### 5.3.3 External Voltage Regulator 5.0V (VDDEXT)

This module represents the 5 V voltage regulator, which serves as a supply for external circuits. It can be used e.g. to supply an external sensor, LEDs or potentiometers. VDDEXT can be used as reference for ADC3/4.<sup>1)</sup>

#### Features

- Switchable +5 V, low-drop voltage regulator
- Switch-on overcurrent blanking time in order to drive small capacitive loads
- Overcurrent monitoring and shutdown with MCU signaling (interrupt)
- Overvoltage monitoring with MCU signaling (interrupt)
- Undervoltage monitoring with MCU signaling (interrupt)
- Pull Down current source at the output for Sleep Mode only (typ. 100  $\mu$ A)
- Cyclic sense option together with GPIOs

The output capacitor  $C_{VDDEXT}$  is mandatory to ensure a proper regulator functionality.

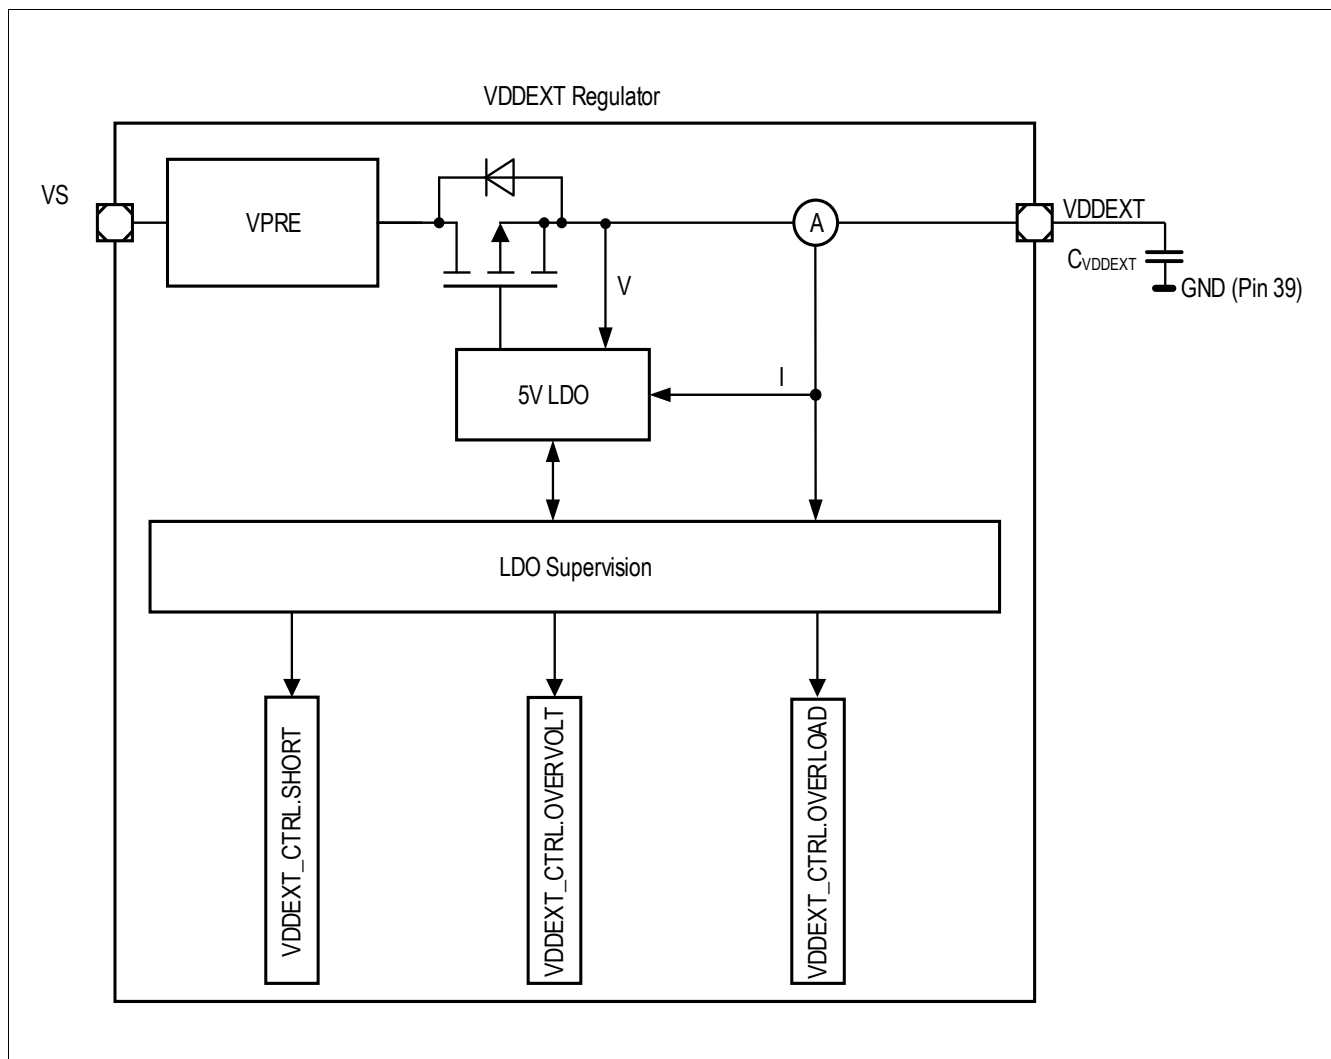

**Figure 9** Module Block Diagram of External Voltage Regulator

1) only for TLE9879-2QXA40 variant

---

## Power Management Unit (PMU)

VDDEXT provides three diagnostic features:

- VDDEXT Overvolt
- VDDEXT Overload
- VDDEXT Short

VDDEXT **Overvolt** detects a reverse supply of the VDDEXT above 5.4V, refer to datasheet for exact value. The flag **VDDEXT\_CTRL.OVERVOLT** signals the presents of a overvoltage condition on VDDEXT.

VDDEXT **Overload** is signalled if the current pulled out of VDDEXT is exceeding 50mA, refer to the datasheet for the exact value. The flag **VDDEXT\_CTRL.OVERLOAD** is set if the overload condition is present.

VDDEXT **Short** is detected by the undervoltage threshold. If the output voltage of the VDDEXT is dropping below the undervoltage threshold of 2.8V (exact value, please see the datasheet) due to too high current pulled out of VDDEXT the flag **VDDEXT\_CTRL.SHORT** is set. The VDDEXT will be switched off. In order to turn it on again, the VDDEXT has to be enabled again by writing **VDDEXT\_CTRL.ENABLE** to '1'.

*Note: If the VS supply is below 5V the VDDEXT operates in low-drop-out mode, the output voltage of VDDEXT follows the VS with a drop of 300..400mV (see datasheet for exact value). If the undervoltage threshold of VDDEXT is reached a **SHORT** will be signalled, even though it is not caused by a short but by an undervoltage. But the physical evaluation behind both is the same.*

All three diagnostic signals can issue an NMI. **VDDEXT\_CTRL.FAIL\_EN** has to be enabled in order to do so. The shared **NMICON.NMISUP** flag enables the corresponding NMI to signal the VDDEXT diagnosis.

## Power Management Unit (PMU)

### 5.3.4 PMU Register Overview

**Table 7 Register Address Space for PMU Registers**

Module	Base Address	End Address	Note
PMU	50004000 <sub>H</sub>	50004FFF <sub>H</sub>	Power Management Unit Registers

The registers are addressed wordwise.

### 5.3.5 Register Definition

**Table 8 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Register Definition, Power Supply Generation Register</b>			
<b>PMU_SUPPLY_STS</b>	Voltage Reg Status Register	004 <sub>H</sub>	00xx 00xx <sub>B</sub>
<b>Register Definition, VDDEXT Control Register</b>			
<b>VDDEXT_CTRL</b>	VDDEXT Control Register	008 <sub>H</sub>	xxxx 0000 <sub>B</sub>

The registers are addressed wordwise.

#### 5.3.5.1 Power Supply Generation Register

The following register is dedicated to control the voltage regulators VDDP, VDDC. It provides an overview about the status of the two voltage supplies.

##### Voltage Reg Status Register

The PMU\_SUPPLY\_STS register shows the overvoltage and overload condition of VDDP and VDDC. To use this information as interrupt sources it must be selected explicitly in this register. The register is reset by RESET\_TYPE\_0.

PMU_SUPPLY_STS	Offset	Reset Value
Voltage Reg Status Register	004 <sub>H</sub>	00xx 00xx <sub>B</sub>

## Power Management Unit (PMU)

7	6	5	4	3	2	1	0
Res	PMU_5V_FAIL_EN	PMU_5V_OVERLOAD	PMU_5V_OVERVOLT	Res	PMU_1V5_FAIL_EN	PMU_1V5_OVERLOAD	PMU_1V5_OVERVOLT
r	rw	r	r	r	rw	r	r

Field	Bits	Type	Description
Res	7	r	<b>Reserved</b> Always read as 0
PMU_5V_FAIL_EN	6	rw	<b>Enabling of VDDP status information as interrupt source</b> 0 <sub>B</sub> No interrupts are generated 1 <sub>B</sub> Interrupts are generated
PMU_5V_OVERLOAD	5	r	<b>Overload at VDDP regulator</b>  <i>Note: if this flag is set and an additional filter time of 290 us (typ.) is passed the system will be put to sleep mode</i>  0 <sub>B</sub> No overload 1 <sub>B</sub> Overload
PMU_5V_OVERVOLT	4	r	<b>Overvoltage at VDDP regulator</b> 0 <sub>B</sub> No overvoltage 1 <sub>B</sub> Overvoltage
Res	3	r	<b>Reserved</b> Always read as 0
PMU_1V5_FAIL_EN	2	rw	<b>Enabling of VDDC status information as interrupt source</b> 0 <sub>B</sub> No interrupts are generated 1 <sub>B</sub> Interrupts are generated
PMU_1V5_OVERLOAD	1	r	<b>Overload at VDDC regulator</b>  <i>Note: if this flag is set and an additional filter time of 290 us (typ.) is passed the system will be put to sleep mode</i>  0 <sub>B</sub> No overload 1 <sub>B</sub> Overload
PMU_1V5_OVERVOLT	0	r	<b>Overvoltage at VDDC regulator</b> 0 <sub>B</sub> No overvoltage 1 <sub>B</sub> Overvoltage

Power Management Unit (PMU)

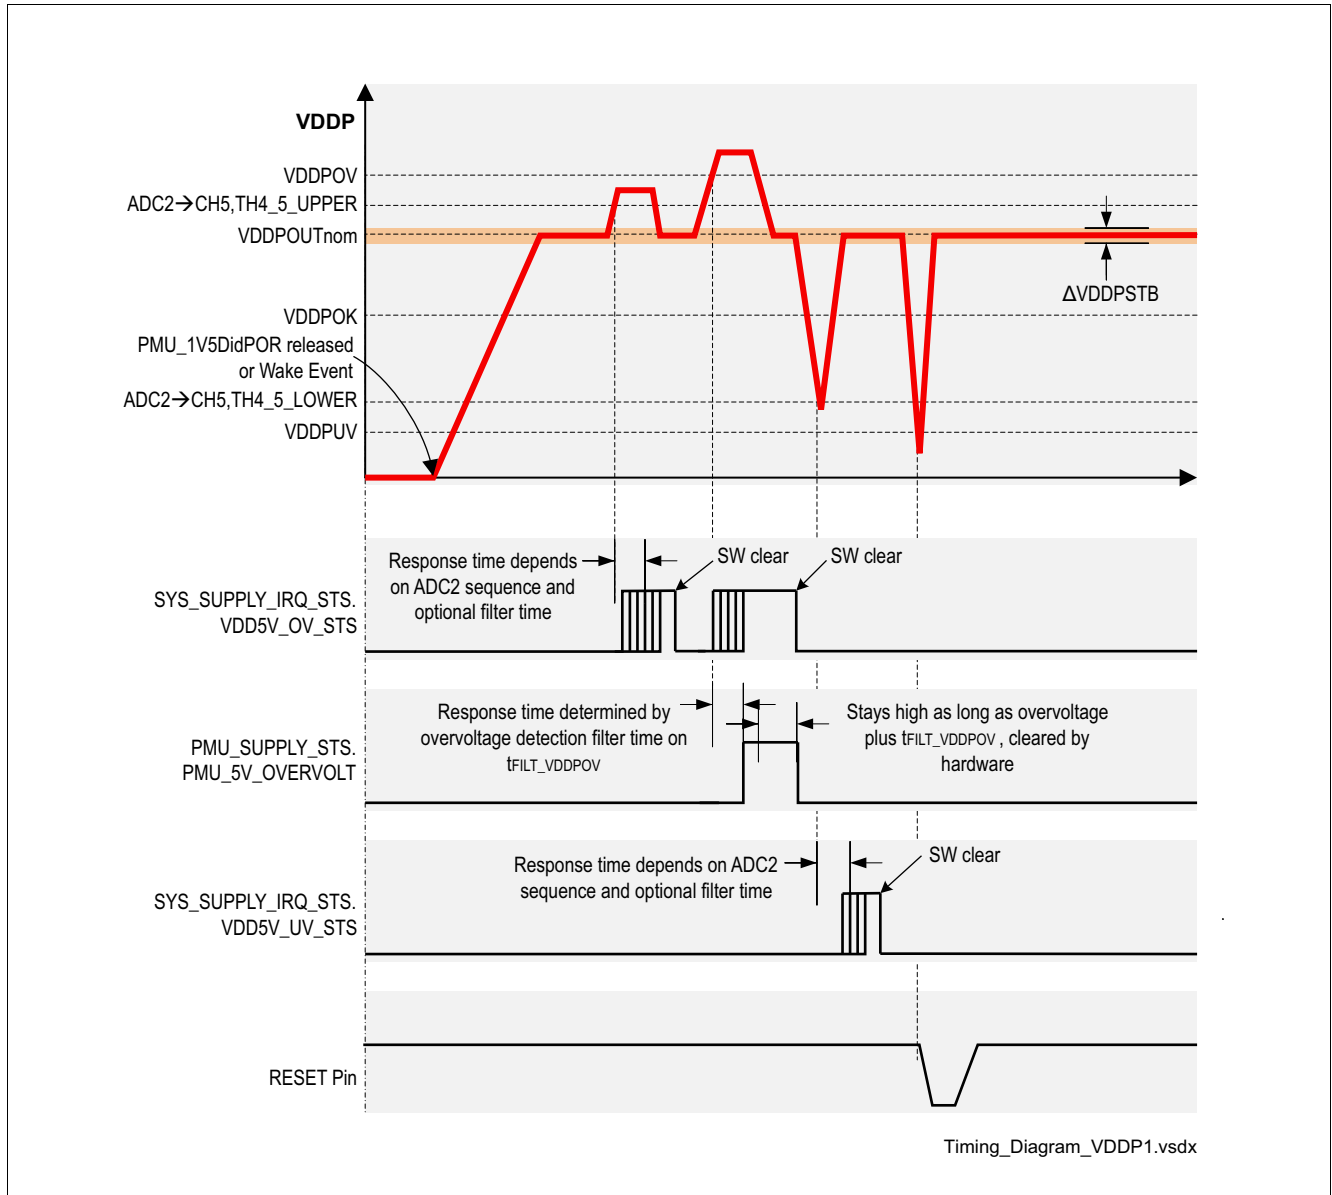


Figure 10 VDDP

Power Management Unit (PMU)

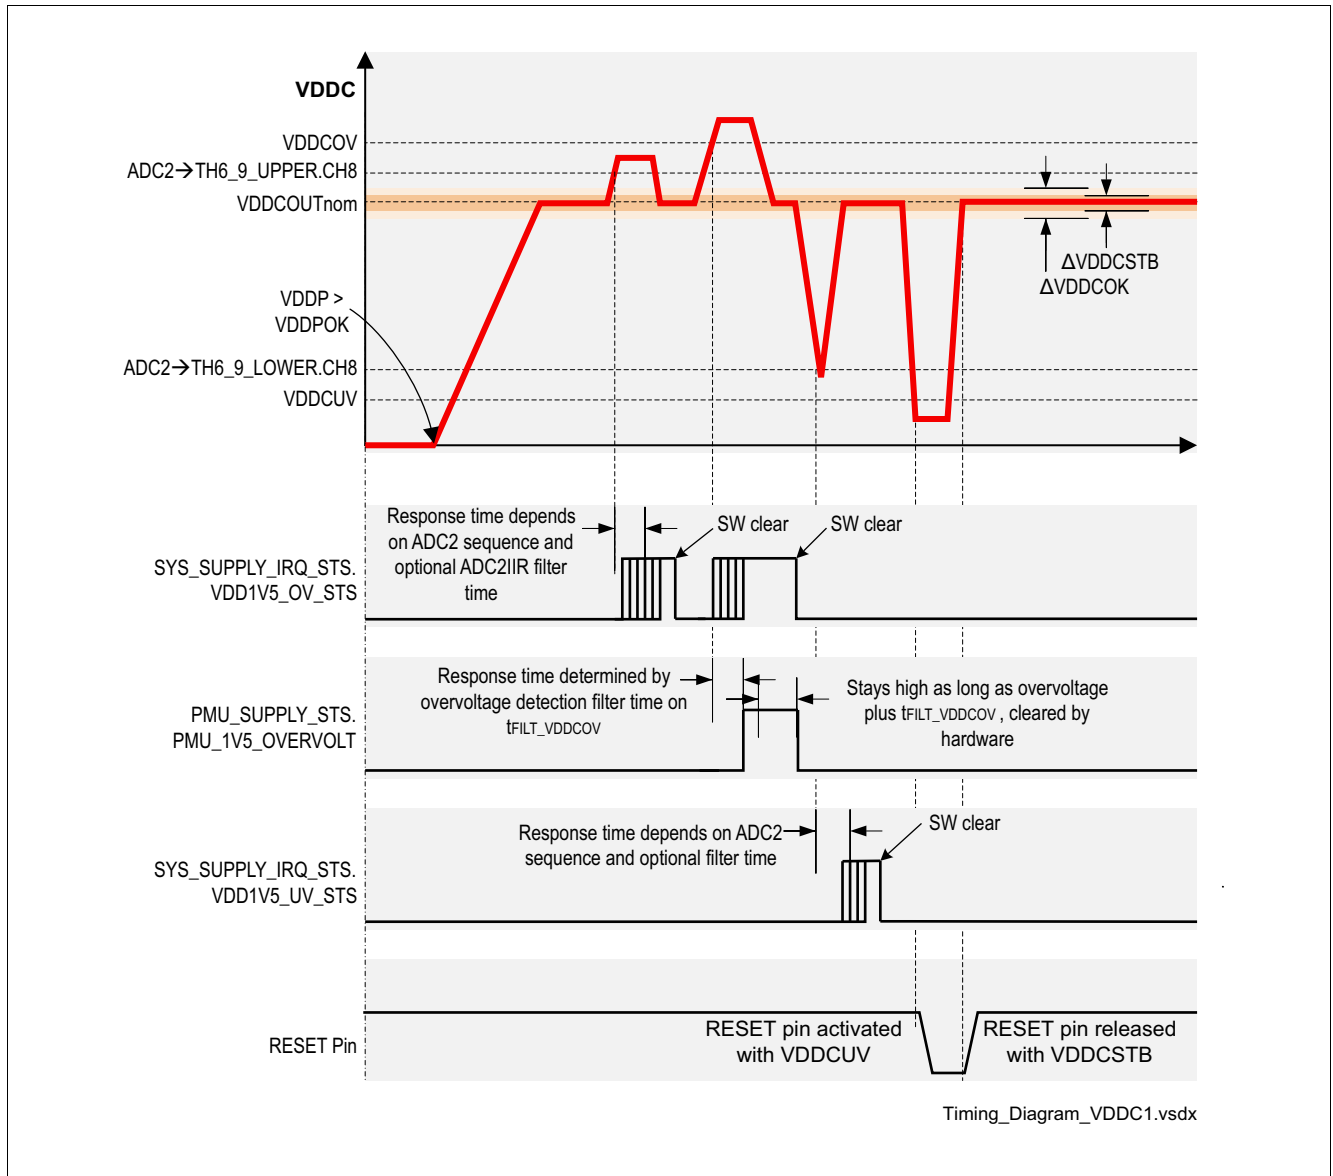


Figure 11 VDDC

## Power Management Unit (PMU)

### 5.3.5.2 VDDEXT Control Register

The VDDEXT can be fully controlled by the following SFR Register, including all diagnosis functions. There are two overvoltage-undervoltage ranges implemented (range 1 is  $V_{\text{DDEXT}} \pm 250$  mV, range 2 is  $V_{\text{DDEXT}} \pm 500$  mV) which serve as a supply prewarning. Both cases are indicated by the bits VDDEXT\_STABLE and VDDEXT\_OK.

#### VDDEXT Control

The register is reset by RESET\_TYPE\_3.

The status flag SHORT leads to a shutdown off VDDEXT. To re-enable VDDEXT the SHORT flag needs to be cleared.

<b>VDDEXT_CTRL</b>	<b>Offset</b>	<b>Reset Value</b>
<b>VDDEXT Control</b>	<b>008<sub>H</sub></b>	<b>xxxx 0000<sub>B</sub></b>

7	6	5	4	3	2	1	0
<b>STABLE</b>	<b>OK</b>	<b>OVERLOA D</b>	<b>OVERVOL T</b>	<b>SHORT</b>	<b>FAIL_EN</b>	<b>CYC_EN</b>	<b>ENABLE</b>
r	r	r	r	rwh	rw	rw	rw

Field	Bits	Type	Description
<b>STABLE</b>	7	r	<b>VDDEXT Supply works inside its specified range 1</b> $1_B$ VDDEXT Voltage inside of specified range $0_B$ VDDEXT Voltage outside of specified range
<b>OK</b>	6	r	<b>VDDEXT Supply works inside its specified range 2</b> $1_B$ VDDEXT in low drop mode $0_B$ VDDEXT not in low drop mode
<b>OVERLOAD</b>	5	r	<b>VDDEXT Supply Overload</b>  <i>Note: This flag is automatically cleared, if error condition is removed.</i>  $0_B$ VDDEXT not in overload condition $1_B$ VDDEXT in overload condition
<b>OVERVOLT</b>	4	r	<b>VDDEXT Supply Overvoltage</b>  <i>Note: This flag is automatically cleared, if error condition is removed.</i>  $0_B$ VDDEXT not in overvoltage condition $1_B$ VDDEXT in overvoltage condition

---

**Power Management Unit (PMU)**

Field	Bits	Type	Description
<b>SHORT</b>	3	rwh	<p><b>VDDEXT Supply Shorted Output</b></p> <p><i>Note: if this flag is set VDDEXT regulator is automatically switched off. To re-enable VDDEXT software must clear this flag. SHORT flag has RESET_TYPE_0.</i></p> <p>0<sub>B</sub> VDDEXT no short circuit 1<sub>B</sub> VDDEXT short circuit</p>
<b>FAIL_EN</b>	2	rw	<p><b>Enabling of VDDEXT Supply status information as interrupt source</b></p> <p>0<sub>B</sub> VDDEXT fail interrupts are disabled 1<sub>B</sub> VDDEXT fail Interrupts are enabled</p>
<b>CYC_EN</b>	1	rw	<p><b>VDDEXT Supply for Cyclic Sense Enable</b></p> <p><i>Note: To use VDDEXT Supply for cyclic sense the bits CYC_EN AND ENABLE must be set</i></p> <p>0<sub>B</sub> VDDEXT for cyclic sense disable 1<sub>B</sub> VDDEXT for cyclic sense enable</p>
<b>ENABLE</b>	0	rw	<p><b>VDDEXT Supply Enable</b></p> <p>0<sub>B</sub> VDDEXT Supply disabled 1<sub>B</sub> VDDEXT supply enabled</p>



---

## Power Management Unit (PMU)

### 5.4 Power Control Unit

The Power Control Unit is the controlling instance of the system Power supply Generation Unit (PGU). It offers important fail safe features, which are described in the following subchapters.

#### 5.4.1 Power Control Unit - Fail Safe Scenarios

The PMU handles several different failure scenarios, listed below and described in the following chapters:

- Fail safe mode (Sleep Mode) in case of power failure.
- Fail safe mode (Sleep Mode) in case of watchdog service failure.
- Fail safe mode (Sleep Mode) in case of overcurrent on voltage regulators VDDP or VDDC.
- 2 level monitoring (prewarning and reset) of voltage regulators output voltages (VDDP, VDDC, VDDEXT).
- Wake-Up from Stop Mode with cyclic sense in case of VDDEXT regulator failures.
- Wake-Up from Stop Mode in case of hardware reset on RESET pin.

##### 5.4.1.1 Power Supervision Function of PCU

The power supervision feature of the PCU is mainly responsible for monitoring the voltage regulators VDDP and VDDC. In case of voltage regulator malfunction, the PCU restarts the voltage regulators (VDDP and VDDC). Each time this happens the error counter “error\_supp” is incremented. If the counter reaches the value 5, the PCU supervision function will set the device into Sleep Mode. In this case the device can still be waked up by LIN and MON input.

After a wake-up, if the PMU can be successfully restarted and code execution will be possible, the user is able to determine the occurred failure scenario by checking the corresponding **SYS\_FAIL\_STS** register. In this case bit **SUPP\_TMOUT** is set.

If there is a short circuit at the VDDC/VDDP voltage regulator during startup, the reset of the embedded MCU is set and the system goes to startup mode. The error counter “error\_supp” is increased by one. After this the PCU itself tries to go to Active Mode again using the power-on sequence. If the short circuit still exists then the procedure is repeated. This procedure will run, as already described above, only 5 times. After reaching the value 5, the PCU sends the system into Sleep Mode.

If a successful startup after wake-up from Sleep Mode is possible, the user is able to verify the failure, by reading the **SUPP\_SHORT** flag in the **SYS\_FAIL\_STS** register.

---

## Power Management Unit (PMU)

### 5.4.1.2 Watchdog (WDT1) Fail Safe

The PCU supervises the failure information of the system watchdog (WDT1). In case the watchdog is not serviced or serviced in a wrong way (in the following denominated as “not serviced Watchdog”) the MCU is reset and the error counter “error\_wdt” is increased by one. The PMU itself stays in the Active Mode and after the reset the application software takes over the system control. If the software doesn’t service the system watchdog then the described procedure starts again. After the watchdog is not serviced five times during one Active Mode period the PMU sends the embedded system to Sleep Mode. The PMU detects the transition to the Sleep Mode as safety fallback and the Sleep Mode can be terminated by two ways: first by a LIN-wake or by a rising/falling edge at a MON pin, second cyclic wake is issued after a sleep time of 1 s. The error counter is reset when the system is sent to Sleep Mode or Stop Mode by a corresponding software command.

If the system can be successfully restarted, the cause of failure can be again checked by reading the **SYS\_FAIL\_STS** register. The bit **WDT1\_SEQ\_FAIL** signals the described failure.

### 5.4.1.3 Main Regulators Fail Safe

If one of the voltage regulators needs to deliver too much current, a stable operation of the supply voltage is not given. In this case the overcurrent detection of VDDP and VDDC will ensure that the system will enter Sleep Mode.

If the Overcurrent condition is gone, a wake-up can be generated, then the system will startup and work properly. Afterwards the corresponding failure flags **PMU\_1V5\_OVL** and **PMU\_5V\_OVL** can be checked.


### 5.4.1.4 VDDEXT Failure

If VDDEXT is used in combination with the GPIOs as a supply e.g. for the switches, there are several error cases possible, which are: Overvoltage, overload and short circuit to GND. Those error cases may lead to the generation of false wake-up events or to missed wake-up events. To avoid these scenarios, errors on the VDDEXT voltage regulator would automatically revive the system from Stop Mode. The errors are signalled in the **WAKE\_STS\_FAIL** register.

### 5.4.1.5 Wake-Up from Stop Mode with Reset Fail Safe

One fail safe measure to wake-up the embedded system from the Stop-Mode can be executed by hardware reset. If there is a reset request on the reset-pin then the PMU goes to Active Mode. Simultaneously, the embedded system gets a reset which is shown by forcing the bidirectional reset-pin. The reset-pin goes high again if the PMU releases the MCU reset. This event is shown in the reset status register as a hard-reset together with a wake-up reset. In case of a fail condition at one of the voltage regulators the PMU also goes to Active Mode. After that the PMU starts the supply fail-safe procedure which is described in the Active Mode section. The described sequence can be seen in the picture below.

Power Management Unit (PMU)

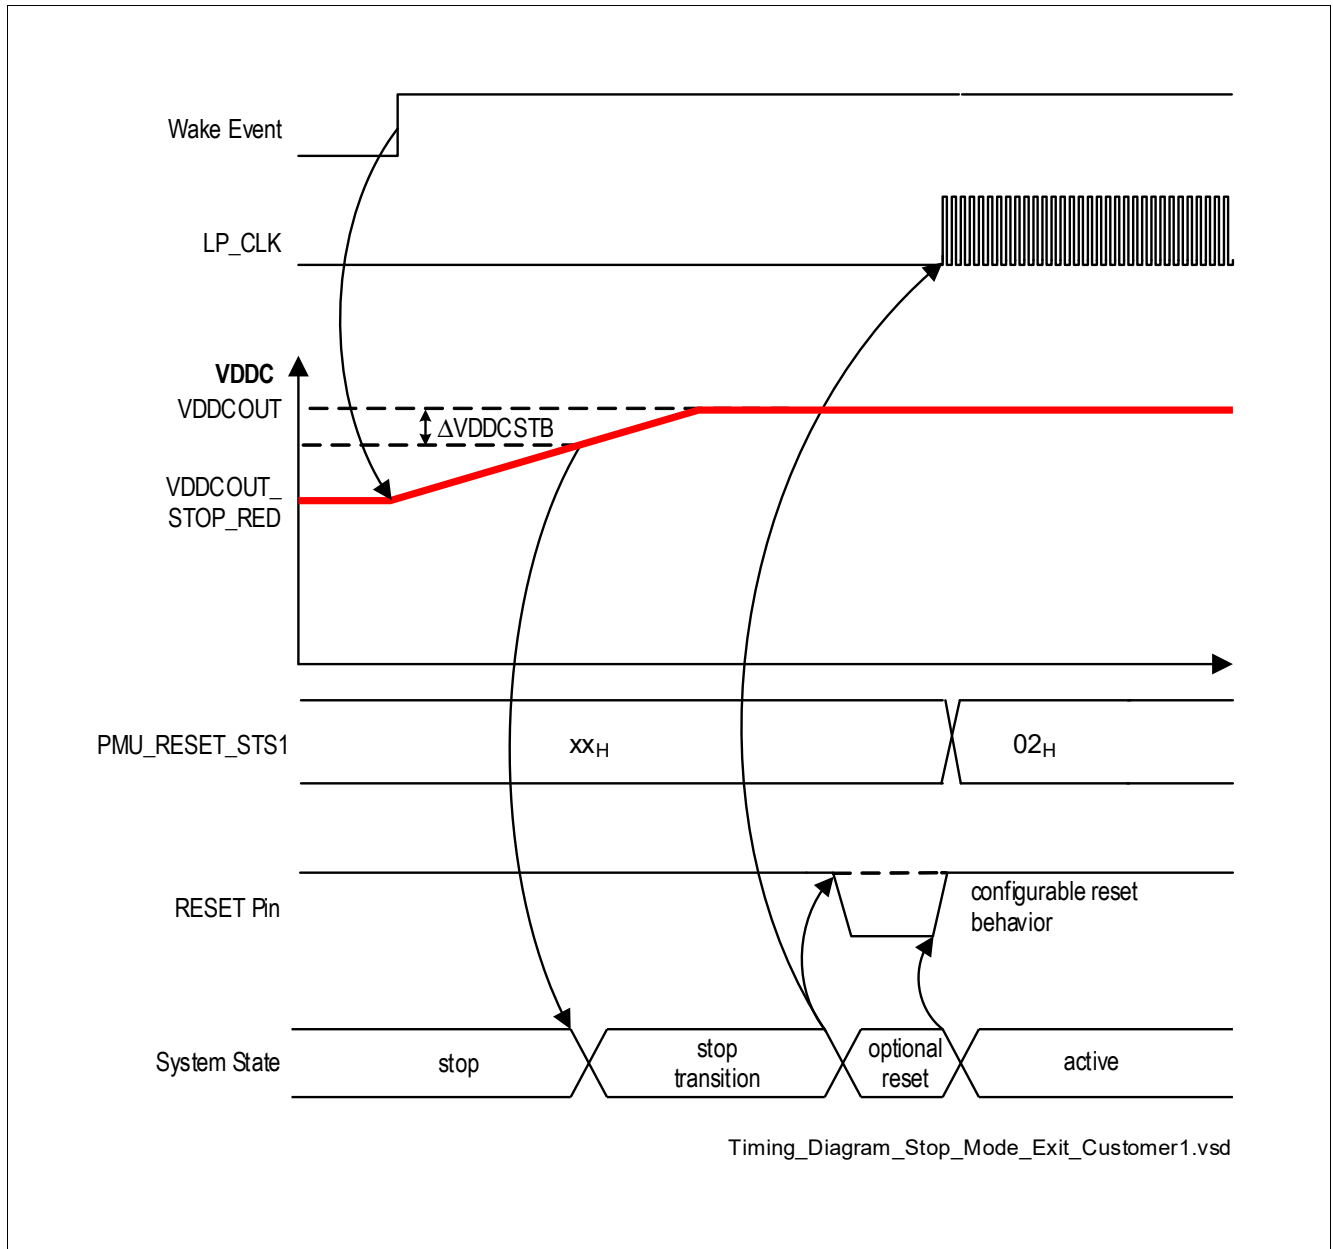

**Figure 12 Stop Mode Exit Timing**

The arrows in the diagram above display a causal connection between the various steps and not necessarily a voltage based connection.

## Power Management Unit (PMU)

### 5.4.2 Register Definition

**Table 9 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Register Definition, PMU System Fail Register</b>			
<b>SYS_FAIL_STS</b>	System Fail Status Register	070 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>Register Definition, PMU Wake Fail Register</b>			
<b>WAKE_STS_FAIL</b>	Wake Status Fail Register	080 <sub>H</sub>	0000 0000 <sub>B</sub>

The registers are addressed wordwise.

#### 5.4.2.1 PMU System Fail Register

This register is dedicated for the control of the PMU Peripherals

##### System Fail Status Register

The register is reset by RESET\_TYPE\_0.

Note: The register SYS\_FAIL\_STS is also cleared when **PMU\_RESET\_STS1.SYS\_FAIL** is cleared

SYS_FAIL_STS	Offset	Reset Value
System Fail Status Register	070 <sub>H</sub>	0000 0000 <sub>H</sub>

7	6	5	4	3	2	1	0
RES	WDT1_SEQ_FAIL	SYS_OT	RES	PMU_5V_OVL	PMU_1V5_OVL	SUPP_TM_OUT	SUPP_SH_OR
r	rwh	rwh	r	rwh	rwh	rwh	rwh

Field	Bits	Type	Description
RES	7	r	<b>Reserved</b> Always read as 0
WDT1_SEQ_FAIL	6	rwh	<b>External Watchdog (WDT1) Sequential Fail</b> Indicates that Watchdog is not serviced 5 times 0 <sub>B</sub> <b>No Fail</b> , System working properly 1 <sub>B</sub> <b>Sequential Watchdog Fail</b> , 5 consecutive watchdog fails
SYS_OT	5	rwh	<b>System Overtemperature Indication Flag</b> Indicates System Overtemperature Condition 0 <sub>B</sub> <b>No Overtemperature</b> , System ok 1 <sub>B</sub> <b>Overtemperature</b> , System Overtemperature

---

**Power Management Unit (PMU)**

Field	Bits	Type	Description
<b>RES</b>	4	r	<b>Reserved</b> Always read as 0
<b>PMU_5V_OVL</b>	3	rwh	<b>VDDP Overload Flag</b> Indicates Overload Condition at VDDP 0 <sub>B</sub> <b>No Overload</b> , VDDP ok 1 <sub>B</sub> <b>Overload</b> , VDDP Overload
<b>PMU_1V5_OVL</b>	2	rwh	<b>VDDC Overload Flag</b> Indicates Overload Condition at VDDC 0 <sub>B</sub> <b>No Overload</b> , VDDC ok 1 <sub>B</sub> <b>Overload</b> , Hall VDDC Overload
<b>SUPP_TMOUT</b>	1	rwh	<b>Supply Time Out</b> Indicates the status of the Main Supply (VDDP & VDDC) after a certain time of Power-on reset 0 <sub>B</sub> <b>Main Supply ok</b> , VDDP or VDDC are in expected range 1 <sub>B</sub> <b>Main Supply fail</b> , VDDP or VDDC do not have stable operating point
<b>SUPP_SHORT</b>	0	rwh	<b>Supply Short</b> Indicates the status of the Main Supply (VDDP & VDDC) after a certain time of Power-on reset 0 <sub>B</sub> <b>Main Supply ok</b> , VDDP or VDDC are in expected range 1 <sub>B</sub> <b>Main Supply short</b> , VDDP or VDDC do not have stable operating point

---

**Power Management Unit (PMU)**
**5.4.2.2 PMU Wake Fail Register**

This register is dedicated for the control of the PMU Peripherals

**Wake Status Fail Register**

The register is reset by RESET\_TYPE\_0.

<b>WAKE_STS_FAIL</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Wake Status Fail Register</b>	<b>080<sub>H</sub></b>	<b>0000 0000<sub>B</sub></b>

7	3	2	1	0
RES		VDDEXTS HORT	RES	SUPPFAI L
r		rwh	r	rwh

Field	Bits	Type	Description
<b>RES</b>	7:3	r	<b>Reserved</b> Always read as 0
<b>VDDEXTSHORT</b>	2	rwh	<b>Stop-Exit due to short circuit at the VDDEXT Supply</b> 0 <sub>B</sub> No short circuit 1 <sub>B</sub> Short circuit
<b>RES</b>	1	r	<b>Reserved</b> Always read as 0
<b>SUPPFAIL</b>	0	rwh	<b>Stop-Exit due to overvoltage at the VDDEXT Supply</b> 0 <sub>B</sub> No overvoltage 1 <sub>B</sub> Module suspend enabled

## Power Management Unit (PMU)

### 5.5 Wake-Up Management Unit (WMU)


#### 5.5.1 Functional Description

The Wake-Up Management Unit (WMU) is mainly responsible for handling the wake-up events on LIN, HV-Monitoring Inputs (MON), Hardware reset and all GPIOs belonging to Port 0 and Port 1. Following wake-up scenarios are possible:

- **Wake-Up over Port 0 and Port 1 pins:** they can be configured for rising edge triggered and falling edge triggered wake-up events. This configuration can be used to wake-up the device from normal Stop Mode and Stop Mode with cyclic sense option. To bias the GPIOs, VDDEXT as voltage source can be used. The wake-up feature from Sleep Mode in combination with GPIOs is not possible.
- **Wake-Up over Hardware reset pin:** It can be used to wake-up the device from Stop Mode. The wake-up feature from Sleep Mode is not possible.
- **Wake-Up over MON Pins:** the MON Pins can be configured for rising edge triggered and falling edge triggered wake-up events. This setup can be used to wake-up the device from Stop Mode with or without cyclic sense, but also a wake-up from Sleep Mode with or without cyclic sense is possible.
- **LIN:** is a normal wake-up source and has no configuration possibilities.
- **Wake-Up on VDDEXT fail from Stop Mode:** will be performed in case of VDDEXT failures described in Chapter [Power Control Unit - Fail Safe Scenarios](#).

Note:

1. Port 2 pins cannot invoke any wake-up.
2. None of the GPIOs is supplied during Sleep Mode, therefore wake-up is not possible through them.

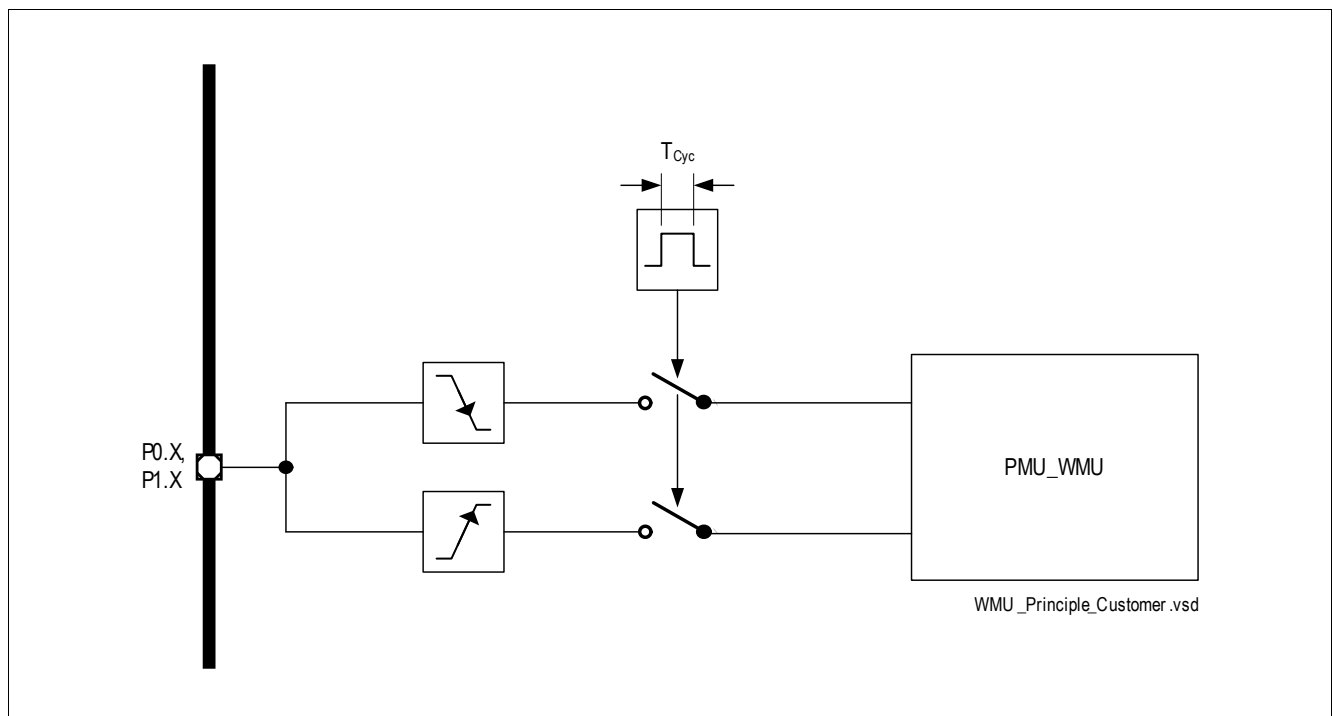

**Figure 13** Block Diagram of Wake-Up Management Unit in Cyclic Sense Mode with VDDEXT.

## Power Management Unit (PMU)

### 5.5.2 Register Definition

These registers are for wake-up control of all wake-up capable general purpose inputs outputs  
The WMU is fully controllable by the below listed SFR Registers.

**Table 10 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Register Definition, PMU Wake-Up Configuration Register</b>			
<b>WAKE_CONF_GPIO0_F ALL</b>	Wake Configuration GPIO Port 0 Falling Edge Register	0DC <sub>H</sub>	0000 0000 <sub>B</sub>
<b>WAKE_CONF_GPIO1_F ALL</b>	Wake Configuration GPIO Port 1 Falling Edge Register	0E8	0000 0000 <sub>B</sub>
<b>LIN_WAKE_EN</b>	LIN Wake Enable	050 <sub>H</sub>	0000 0000 <sub>B</sub>
<b>CNF_WAKE_FILTER</b>	PMU Wake-Up Timing Register	0AC <sub>H</sub>	0000 0000 <sub>B</sub>
<b>WAKE_CONF_GPIO0_R ISE</b>	Wake Configuration GPIO Port 0 Rising Edge Register	0D8 <sub>H</sub>	0000 0000 <sub>B</sub>
<b>WAKE_CONF_GPIO0_C YC</b>	Wake Port 0 Cycle Enabled Register	0E0 <sub>H</sub>	0000 0000 <sub>B</sub>
<b>WAKE_CONF_GPIO1_R ISE</b>	Wake Configuration GPIO Port 1 Rising Edge Register	0E4 <sub>H</sub>	0000 0000 <sub>B</sub>
<b>WAKE_CONF_GPIO1_C YC</b>	Wake Port 1 Cycle Enabled Register	0EC <sub>H</sub>	0000 0000 <sub>B</sub>
<b>Register Definition, PMU Wake-Up Status Register</b>			
<b>WAKE_STATUS</b>	Main Wake Status Register	000 <sub>H</sub>	00xx xxxx <sub>B</sub>
<b>WAKE_STS_MON</b>	Wake Source MON Input Register	084 <sub>H</sub>	0000 0000 <sub>B</sub>
<b>WAKE_STS_GPIO0</b>	Wake Status GPIO 0 Register	088 <sub>H</sub>	0000 0000 <sub>B</sub>
<b>WAKE_STS_GPIO1</b>	Wake Status GPIO 1 Register	08C <sub>H</sub>	0000 0000 <sub>B</sub>

The registers are addressed wordwise.



## Power Management Unit (PMU)

### 5.5.2.1 PMU Wake-Up Configuration Register

This register is dedicated for the control of the PMU Peripherals

#### Wake Configuration GPIO Port 0 Rising Edge Register

The register is reset by RESET\_TYPE\_3.

WAKE_CONF_GPIO0_RISE	Offset	Reset Value
Wake Configuration GPIO Port 0 Rising Edge Register	D8 <sub>H</sub>	0000 0000 <sub>B</sub>

7	5	4	3	2	1	0
RES		GPIO0_R I_4	GPIO0_R I_3	GPIO0_R I_2	GPIO0_R I_1	GPIO0_R I_0
r		rw	rw	rw	rw	rw

Field	Bits	Type	Description
RES	7:5	r	<b>Reserved</b> Always read as 0
GPIO0_RI_4	4	rw	<b>Port 0_4 Wake-Up on Rising Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO0_RI_3	3	rw	<b>Port 0_3 Wake-Up on Rising Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO0_RI_2	2	rw	<b>Port 0_2 Wake-Up on Rising Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO0_RI_1	1	rw	<b>Port 0_1 Wake-Up on Rising Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO0_RI_0	0	rw	<b>Port 0_0 Wake-Up on Rising Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled

## Power Management Unit (PMU)

### Wake Configuration GPIO Port 0 Falling Edge Register

The register is reset by RESET\_TYPE\_3.

WAKE_CONF_GPIO0_FALL	Offset	Reset Value
Wake Configuration GPIO Port 0 Falling Edge Register	DC <sub>H</sub>	0000 0000 <sub>B</sub>

7	5	4	3	2	1	0
RES		GPIO0_F A_4	GPIO0_F A_3	GPIO0_F A_2	GPIO0_F A_1	GPIO0_F A_0
r		rw	rw	rw	rw	rw

Field	Bits	Type	Description
RES	7:5	r	<b>Reserved</b> Always read as 0
GPIO0_FA_4	4	rw	<b>Port 0_4 Wake-Up on Falling Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO0_FA_3	3	rw	<b>Port 0_3 Wake-Up on Falling Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO0_FA_2	2	rw	<b>Port 0_2 Wake-Up on Falling Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO0_FA_1	1	rw	<b>Port 0_1 Wake-Up on Falling Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO0_FA_0	0	rw	<b>Port 0_0 Wake-Up on Falling Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled

## Power Management Unit (PMU)

### Wake Port 0 Cycle Enabled Register

The register is reset by RESET\_TYPE\_3.

WAKE\_CONF\_GPIO0\_CYC

Offset

Reset Value

Wake Port 0 Cycle Enabled Register

E0<sub>H</sub>

0000 0000<sub>B</sub>

7	5	4	3	2	1	0
RES		GPIO0_C YC_4	GPIO0_C YC_3	GPIO0_C YC_2	GPIO0_C YC_1	GPIO0_C YC_0
r		rw	rw	rw	rw	rw

Field	Bits	Type	Description
RES	7:5	r	<b>Reserved</b> Always read as 0
GPIO0_CYC_4	4	rw	<b>GPIO0_4 input for cycle sense enable</b> 1 <sub>B</sub> <b>ENABLE</b> , input for cycle sense enabled 0 <sub>B</sub> <b>DISABLE</b> , input for cycle sense disabled
GPIO0_CYC_3	3	rw	<b>GPIO0_3 input for cycle sense enable</b> 1 <sub>B</sub> <b>ENABLE</b> , input for cycle sense enabled 0 <sub>B</sub> <b>DISABLE</b> , input for cycle sense disabled
GPIO0_CYC_2	2	rw	<b>GPIO0_2 input for cycle sense enable</b> 1 <sub>B</sub> <b>ENABLE</b> , input for cycle sense enabled 0 <sub>B</sub> <b>DISABLE</b> , input for cycle sense disabled
GPIO0_CYC_1	1	rw	<b>GPIO0_1 input for cycle sense enable</b> 1 <sub>B</sub> <b>ENABLE</b> , input for cycle sense enabled 0 <sub>B</sub> <b>DISABLE</b> , input for cycle sense disabled
GPIO0_CYC_0	0	rw	<b>GPIO0_0 input for cycle sense enable</b> 1 <sub>B</sub> <b>ENABLE</b> , input for cycle sense enabled 0 <sub>B</sub> <b>DISABLE</b> , input for cycle sense disabled

## Power Management Unit (PMU)

### Wake Configuration GPIO Port 1 Rising Edge Register

The register is reset by RESET\_TYPE\_3.

WAKE_CONF_GPIO1_RISE	Offset	Reset Value
Wake Configuration GPIO Port 1 Rising Edge Register	E4 <sub>H</sub>	0000 0000 <sub>B</sub>

7	5	4	3	2	1	0
RES		GPIO1_RI_4	GPIO1_RI_3	GPIO1_RI_2	GPIO1_RI_1	GPIO1_RI_0
r		rw	rw	rw	rw	rw

Field	Bits	Type	Description
RES	7:5	r	<b>Reserved</b> Always read as 0
GPIO1_RI_4	4	rw	<b>Port 1_4 Wake-Up on Rising Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO1_RI_3	3	rw	<b>Port 1_3 Wake-Up on Rising Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO1_RI_2	2	rw	<b>Port 1_2 Wake-Up on Rising Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO1_RI_1	1	rw	<b>Port 1_1 Wake-Up on Rising Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO1_RI_0	0	rw	<b>Port 1_0 Wake-Up on Rising Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled

## Power Management Unit (PMU)

### Wake Configuration GPIO Port 1 Falling Edge Register

The register is reset by RESET\_TYPE\_3.

WAKE_CONF_GPIO1_FALL	Offset	Reset Value
Wake Configuration GPIO Port 1 Falling Edge Register	E8 <sub>H</sub>	0000 0000 <sub>B</sub>

7	5	4	3	2	1	0
RES		GPIO1_F A_4	GPIO1_F A_3	GPIO1_F A_2	GPIO1_F A_1	GPIO1_F A_0
r		rw	rw	rw	rw	rw

Field	Bits	Type	Description
RES	7:5	r	<b>Reserved</b> Always read as 0
GPIO1_FA_4	4	rw	<b>Port 1_4 Wake-Up on Falling Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO1_FA_3	3	rw	<b>Port 1_3 Wake-Up on Falling Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO1_FA_2	2	rw	<b>Port 1_2 Wake-Up on Falling Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO1_FA_1	1	rw	<b>Port 1_1 Wake-Up on Falling Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled
GPIO1_FA_0	0	rw	<b>Port 1_0 Wake-Up on Falling Edge enable</b> 1 <sub>B</sub> <b>ENABLE</b> , wake-up enabled 0 <sub>B</sub> <b>DISABLE</b> , wake-up disabled

## Power Management Unit (PMU)

### Wake Port 1 Cycle Enabled Register

The register is reset by RESET\_TYPE\_3.

WAKE\_CONF\_GPIO1\_CYC

Offset

Reset Value

Wake Port 1 Cycle Enabled Register

EC<sub>H</sub>

0000 0000<sub>B</sub>

7	5	4	3	2	1	0
RES		GPIO1_C YC_4	GPIO1_C YC_3	GPIO1_C YC_2	GPIO1_C YC_1	GPIO1_C YC_0
r		rw	rw	rw	rw	rw

Field	Bits	Type	Description
RES	7:5	r	<b>Reserved</b> Always read as 0
GPIO1_CYC_4	4	rw	<b>GPIO1_4 input for cycle sense enable</b> 1 <sub>B</sub> <b>ENABLE</b> , input for cycle sense enabled 0 <sub>B</sub> <b>DISABLE</b> , input for cycle sense disabled
GPIO1_CYC_3	3	rw	<b>GPIO1_3 input for cycle sense enable</b> 1 <sub>B</sub> <b>ENABLE</b> , input for cycle sense enabled 0 <sub>B</sub> <b>DISABLE</b> , input for cycle sense disabled
GPIO1_CYC_2	2	rw	<b>GPIO1_2 input for cycle sense enable</b> 1 <sub>B</sub> <b>ENABLE</b> , input for cycle sense enabled 0 <sub>B</sub> <b>DISABLE</b> , input for cycle sense disabled
GPIO1_CYC_1	1	rw	<b>GPIO1_1 input for cycle sense enable</b> 1 <sub>B</sub> <b>ENABLE</b> , input for cycle sense enabled 0 <sub>B</sub> <b>DISABLE</b> , input for cycle sense disabled
GPIO1_CYC_0	0	rw	<b>GPIO1_0 input for cycle sense enable</b> 1 <sub>B</sub> <b>ENABLE</b> , input for cycle sense enabled 0 <sub>B</sub> <b>DISABLE</b> , input for cycle sense disabled

## Power Management Unit (PMU)

### PMU Wake-Up Timing Register

These registers are for wake-up control of all wake-up capable general purpose inputs outputs

The register is reset by RESET\_TYPE\_2.

CNF_WAKE_FILTER	Offset	Reset Value
PMU Wake-Up Timing Register	0AC <sub>H</sub>	0000 0000 <sub>B</sub>

7	4	3	2	1	0
RES		CNF_GPIO_FT		CNF_MON_FT	CNF_LIN_FT
r		rw		rw	rw

Field	Bits	Type	Description
RES	7:4	r	<b>Reserved</b> Always read as 0.
CNF_GPIO_FT	3:2	rw	<b>Wake-Up Filter time for General Purpose IO</b> Selects the filter time for the Wake-Up 00 <sub>B</sub> <b>10_us</b> , 10 μs filter time 01 <sub>B</sub> <b>20_us</b> , 20 μs filter time 10 <sub>B</sub> <b>40_us</b> , 40 μs filter time 11 <sub>B</sub> <b>5_us</b> , 5 μs filter time
CNF_MON_FT	1	rw	<b>Wake-Up Filter time for Monitoring Inputs</b> Selects the filter time for the Wake-Up 0 <sub>B</sub> <b>20_us</b> , 20 μs filter time 1 <sub>B</sub> <b>40_us</b> , 40 μs filter time
CNF_LIN_FT	0	rw	<b>Wake-Up Filter time for LIN WAKE</b> Selects the filter time for the Wake-Up 0 <sub>B</sub> <b>30_us</b> , 30 μs filter time 1 <sub>B</sub> <b>50_us</b> , 50 μs filter time

---

**Power Management Unit (PMU)**
**LIN Wake Enable**

The register is reset by RESET\_TYPE\_2.

<b>LIN_WAKE_EN</b>	<b>Offset</b>	<b>Reset Value</b>
<b>LIN Wake Enable</b>	<b>050<sub>H</sub></b>	<b>0000 0000<sub>B</sub></b>



Field	Bits	Type	Description
<b>LIN_EN</b>	7	rw	<b>Lin Wake enable</b> 0 <sub>B</sub> <b>Disable</b> , 1 <sub>B</sub> <b>Enable</b> ,
<b>RES</b>	6:0	r	<b>Reserved</b> Always read as 0.



---

**Power Management Unit (PMU)**
**5.5.2.2 PMU Wake-Up Status Register**
**Main wake status register**

The register is reset by RESET\_TYPE\_0.

<b>WAKE_STATUS</b>	<b>Offset</b>	<b>Reset Value</b>
Main wake status register	000 <sub>H</sub>	00xx xxxx <sub>B</sub>

7	6	5	4	3	2	1	0
RES		FAIL	CYC_WAK E	GPIO1	GPIO0	MON_WAK E	LIN_WAK E
r		r	rhc	r	r	r	rhc


Field	Bits	Type	Description
<b>RES</b>	7:6	r	<b>Reserved</b> Always read as 0
<b>FAIL</b>	5	r	<b>Wake-Up after VDDEXT Fail</b> 0 <sub>B</sub> No Wake-up occurred 1 <sub>B</sub> Wake-up occurred
<b>CYC_WAKE</b>	4	rhc	<b>Wake-Up caused by Cyclic Wake</b>  <i>Note: This flag is cleared by read operation.</i>  0 <sub>B</sub> No Wake-up occurred 1 <sub>B</sub> Wake-up occurred
<b>GPIO1</b>	3	r	<b>Wake-Up via GPIO1 which is a logical OR combination of all Wake_STS_GPIO1 bits</b> 0 <sub>B</sub> No Wake-up occurred 1 <sub>B</sub> Wake-up occurred
<b>GPIO0</b>	2	r	<b>Wake-Up via GPIO0 which is a logical OR combination of all Wake_STS_GPIO0 bits</b> 0 <sub>B</sub> No Wake-up occurred 1 <sub>B</sub> Wake-up occurred
<b>MON_WAKE</b>	1	r	<b>Wake-Up via MON</b> 0 <sub>B</sub> No Wake-up occurred 1 <sub>B</sub> Wake-up occurred
<b>LIN_WAKE</b>	0	rhc	<b>Wake-Up via LIN- Message</b>  <i>Note: This flag is cleared by read operation.</i>  0 <sub>B</sub> No Wake-up occurred 1 <sub>B</sub> Wake-up occurred

---

**Power Management Unit (PMU)**
**Wake Source MON Input Register**

The register is reset by RESET\_TYPE\_0.

<b>WAKE_STS_MON</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Wake Source MON Input Register</b>	<b>084<sub>H</sub></b>	<b>0000 0000<sub>B</sub></b>

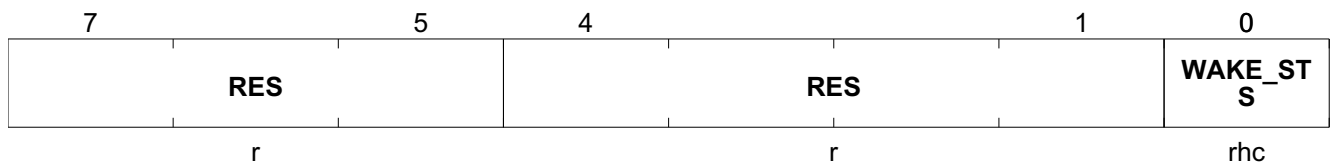

Field	Bits	Type	Description
RES	7:5	r	<b>Reserved</b> Always read as 0
RES	4:1	r	<b>Reserved</b> Always read as 0
WAKE_STS	0	rhc	<b>Status of MON</b>  <i>Note: This flag is cleared by read operation.</i>  0 <sub>B</sub> <b>No wake-up detected,</b> 1 <sub>B</sub> <b>Wake-up detected,</b>

## Power Management Unit (PMU)

### Wake Status GPIO 0 Register

The register is reset by RESET\_TYPE\_0.

WAKE_STS_GPIO0	Offset	Reset Value
Wake Status GPIO 0 Register	088 <sub>H</sub>	0000 0000 <sub>B</sub>

7	5	4	3	2	1	0
RES		GPIO0_S TS_4	GPIO0_S TS_3	GPIO0_S TS_2	GPIO0_S TS_1	GPIO0_S TS_0
r		rhc	rhc	rhc	rhc	rhc

Field	Bits	Type	Description
RES	7:5	r	<b>Reserved</b> Always read as 0
GPIO0_STS_4	4	rhc	<b>Status of GPIO0_4</b>  <i>Note: This flag is cleared by read operation.</i>  0 <sub>B</sub> <b>No wake-up detected,</b> 1 <sub>B</sub> <b>Wake-up detected,</b>
GPIO0_STS_3	3	rhc	<b>Status of GPIO0_3</b>  <i>Note: This flag is cleared by read operation.</i>  0 <sub>B</sub> <b>No wake-up detected,</b> 1 <sub>B</sub> <b>Wake-up detected,</b>
GPIO0_STS_2	2	rhc	<b>Status of GPIO0_2</b>  <i>Note: This flag is cleared by read operation.</i>  0 <sub>B</sub> <b>No wake-up detected,</b> 1 <sub>B</sub> <b>Wake-up detected,</b>
GPIO0_STS_1	1	rhc	<b>Status of GPIO0_1</b>  <i>Note: This flag is cleared by read operation.</i>  0 <sub>B</sub> <b>No wake-up detected,</b> 1 <sub>B</sub> <b>Wake-up detected,</b>
GPIO0_STS_0	0	rhc	<b>Status of GPIO0_0</b>  <i>Note: This flag is cleared by read operation.</i>  0 <sub>B</sub> <b>No wake-up detected,</b> 1 <sub>B</sub> <b>Wake-up detected,</b>

## Power Management Unit (PMU)

### Wake Status GPIO 1 Register

The register is reset by RESET\_TYPE\_0.

<b>WAKE_STS_GPIO1</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Wake Status GPIO 1 Register</b>	<b>08C<sub>H</sub></b>	<b>0000 0000<sub>B</sub></b>

7	5	4	3	2	1	0
RES		GPIO1_S TS_4	GPIO1_S TS_3	GPIO1_S TS_2	GPIO1_S TS_1	GPIO1_S TS_0
r		rhc	rhc	rhc	rhc	rhc

Field	Bits	Type	Description
<b>RES</b>	7:5	r	<b>Reserved</b> Always read as 0
<b>GPIO1_STS_4</b>	4	rhc	<b>Wake GPIO1_4</b>  <i>Note: This flag is cleared by read operation.</i>  0 <sub>B</sub> <b>No wake-up detected,</b> 1 <sub>B</sub> <b>Wake-up detected,</b>
<b>GPIO1_STS_3</b>	3	rhc	<b>Wake GPIO1_3</b>  <i>Note: This flag is cleared by read operation.</i>  0 <sub>B</sub> <b>No wake-up detected,</b> 1 <sub>B</sub> <b>Wake-up detected,</b>
<b>GPIO1_STS_2</b>	2	rhc	<b>Wake GPIO1_2</b>  <i>Note: This flag is cleared by read operation.</i>  0 <sub>B</sub> <b>No wake-up detected,</b> 1 <sub>B</sub> <b>Wake-up detected,</b>
<b>GPIO1_STS_1</b>	1	rhc	<b>Wake GPIO1_1</b>  <i>Note: This flag is cleared by read operation.</i>  0 <sub>B</sub> <b>No wake-up detected,</b> 1 <sub>B</sub> <b>Wake-up detected,</b>
<b>GPIO1_STS_0</b>	0	rhc	<b>Wake GPIO1_0</b>  <i>Note: This flag is cleared by read operation.</i>  0 <sub>B</sub> <b>No wake-up detected,</b> 1 <sub>B</sub> <b>Wake-up detected,</b>

---

## Power Management Unit (PMU)

### 5.6 Cyclic Management Unit (CMU)

#### 5.6.1 Functional Description

The cyclic management unit is responsible for controlling the timing sequence in cyclic sense or cyclic wake operation. The unit operates with the LP\_CLK2 clock.

#### 5.6.2 Cyclic Sense Mode

To select a dedicated GPIO0.x / GPIO1.x pin for cyclic sense mode, the bit GPIO0\_CYC\_x / GPIO1\_CYC\_x need be set in the corresponding **WAKE\_CONF\_GPIO0\_CYC** / **WAKE\_CONF\_GPIO1\_CYC** register.

In this configuration the wake-up information of this GPIO0.x / GPIO1.x pin is only accepted during the sensing time where the VDDEXT supply (internal VDDEXT\_CYC\_ON gating signal) is on (see [Figure 14](#)). The sensing time where the enable signal is active, will be set in the **CNF\_CYC\_SENSE** and **CNF\_CYC\_SAMPLE\_DEL-SFR**. The bits inside **CNF\_CYC\_SENSE** register are used to configure the dead time ( $T_{Dead}$ ). The **CNF\_CYC\_SAMPLE\_DEL** register is used to program the sample delay. Once the sample delay has elapsed the selected wake source is evaluated by the Wake-up Management Unit. If the status of the wake-up source has not changed since the last sampling, the PMU enters the power down period again, defined by the dead time. If the status of the wake-up source, sampled during the sensing time, has changed from the previous cycle, the device will wake up.

After a valid wake-up event the start-up sequence is similar to the asynchronous wake-up and the system enters the Start-up Mode automatically too. If the PMU detects a wake-up during Cyclic Sense then the enable signal of the voltage source (VDDEXT) stays active as long the application software doesn't disable this signal.

[Figure 14](#) illustrates the principle of the cyclic sense mode. Here the VDDEXT supply is used as voltage source together with a GPIO pin as a wake-up source. This can be applied to all GPIOs from Port 0 and Port 1.

Power Management Unit (PMU)

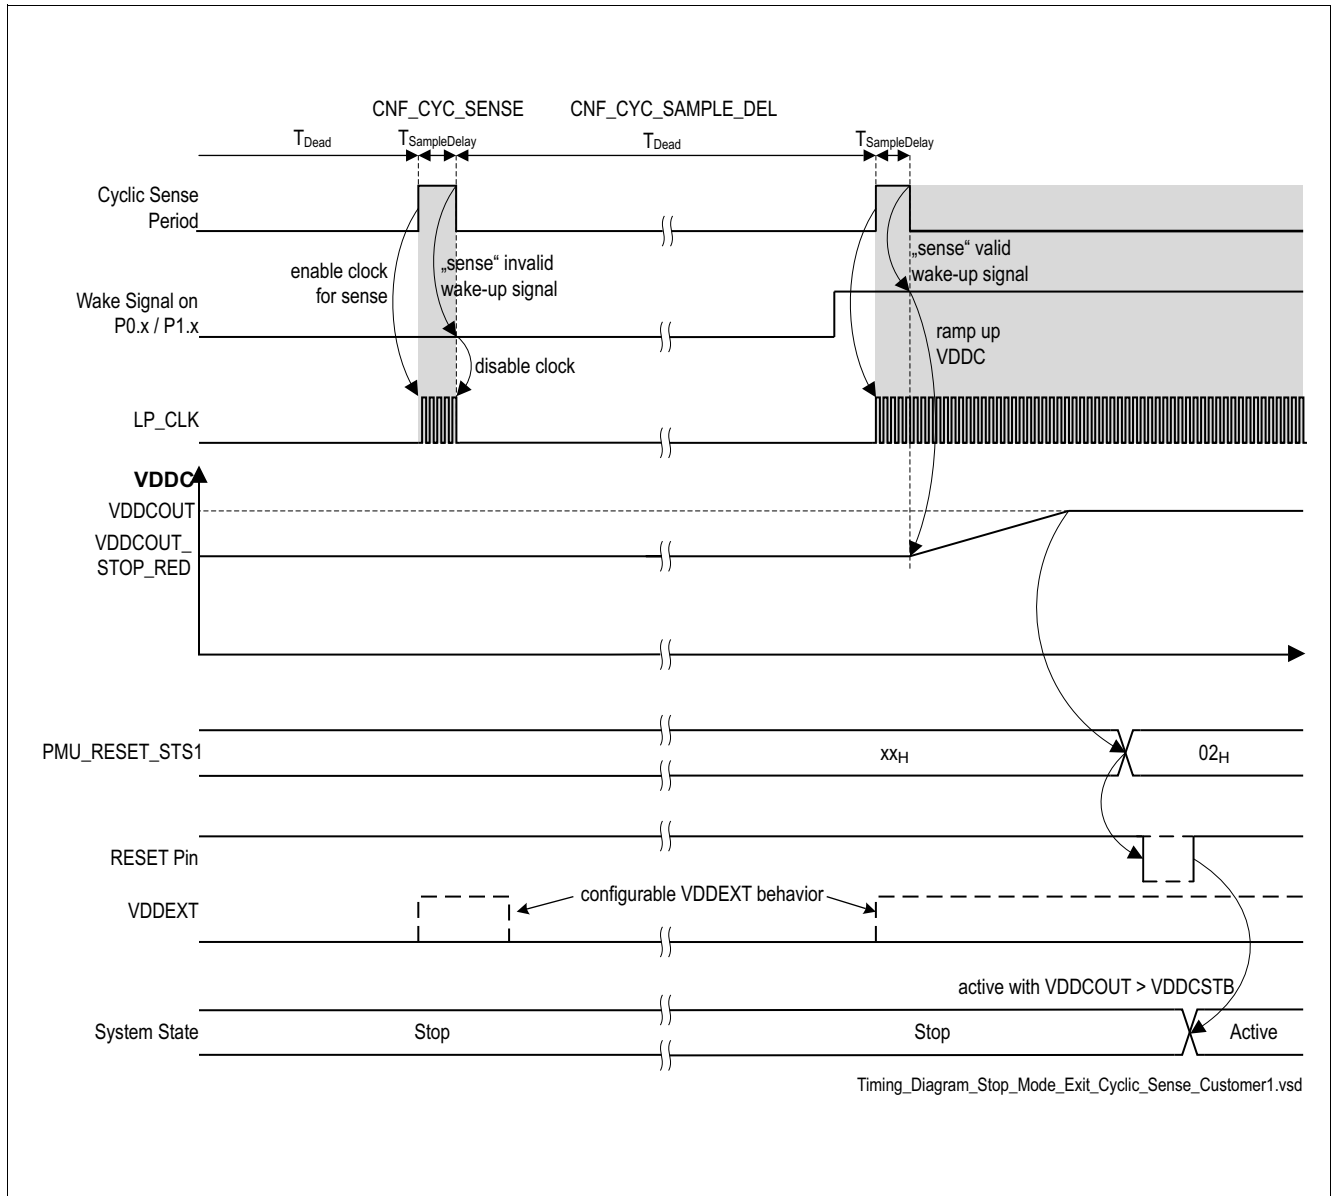


Figure 14 Timing Diagram for Cyclic Sense

The arrows in the diagram above display a causal connection between the various steps and not necessarily a voltage based connection.

Power Management Unit (PMU)

5.6.2.1 Configuration of Cyclic Sense Mode

The configuration of cyclic sense mode is shown in [Figure 15](#).

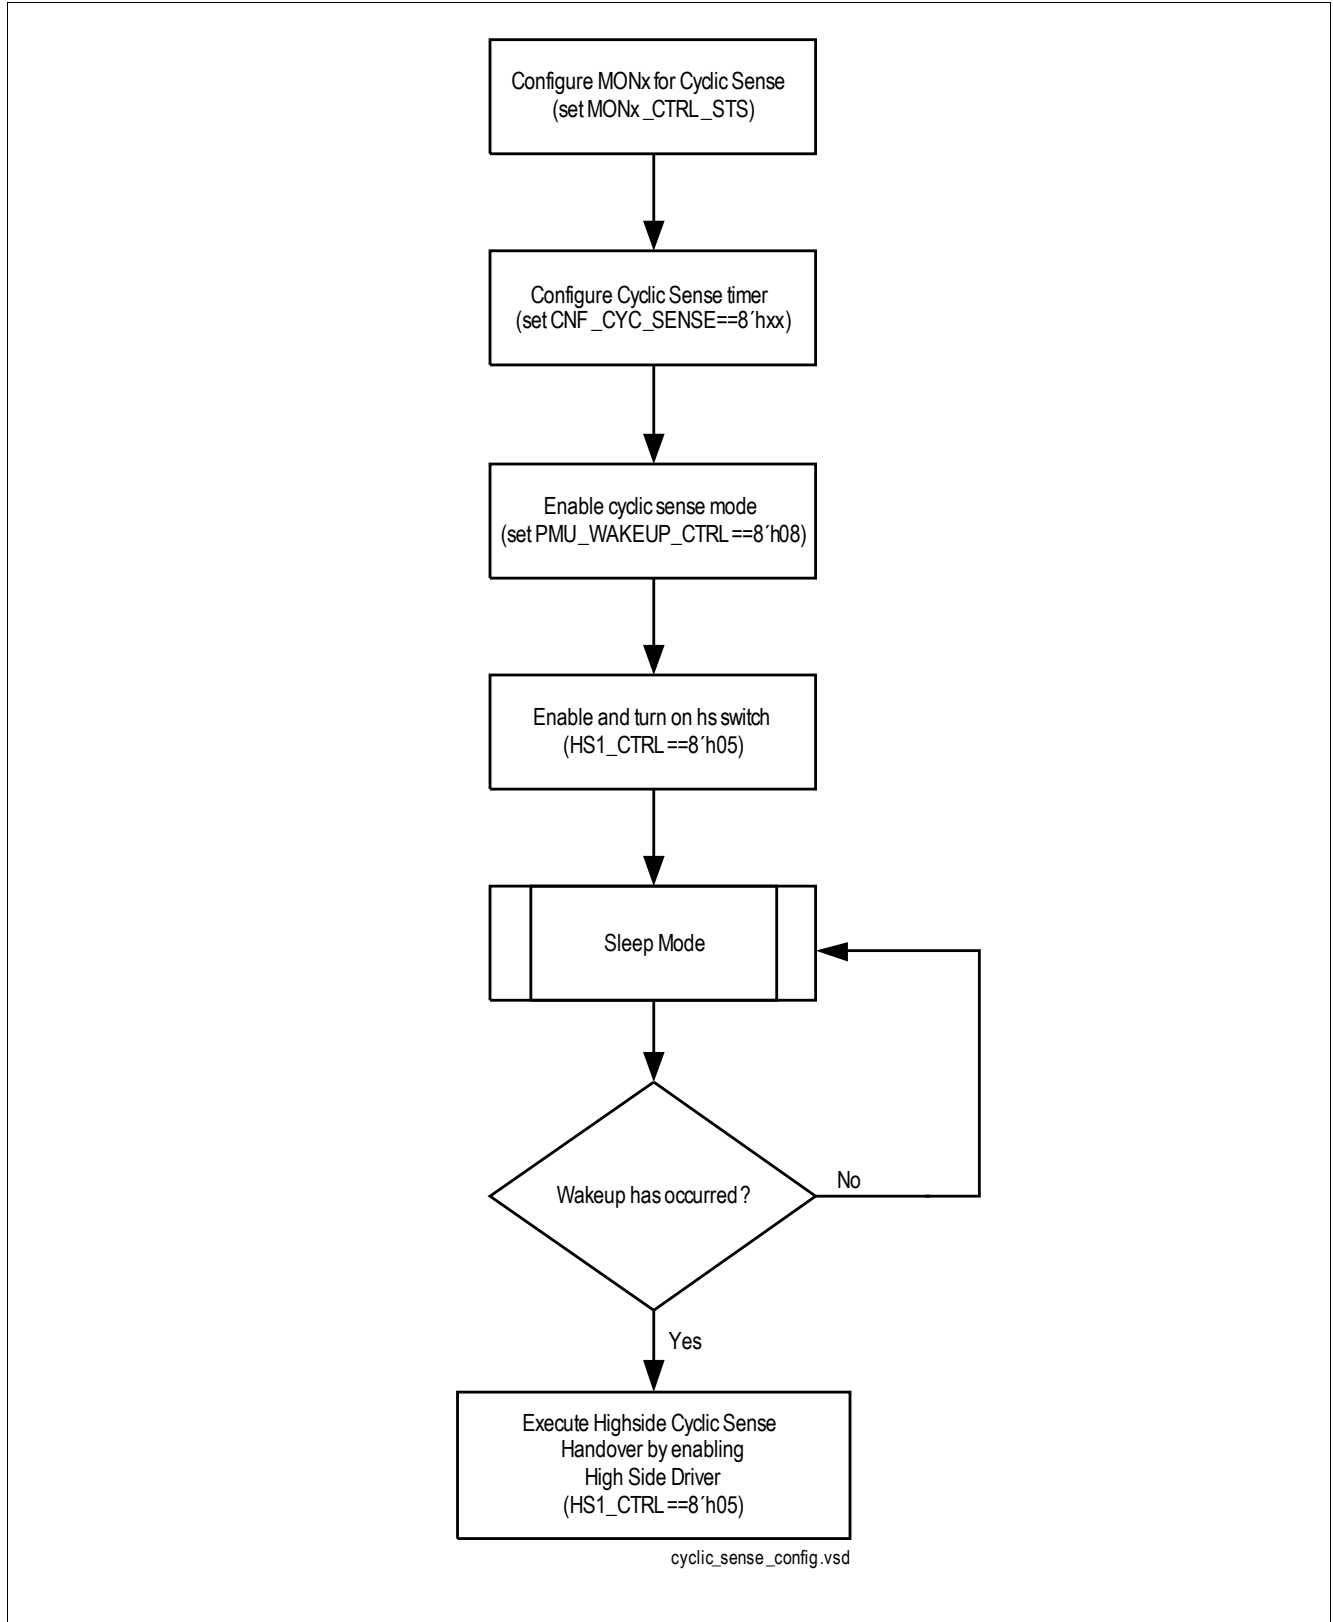


Figure 15 Configuration Flow of cyclic sense mode

---

**Power Management Unit (PMU)**
**5.6.3 Cyclic Wake Mode**

Cyclic Wake Mode provides a synchronous wake-up after a predefined time interval in Sleep Mode or Stop Mode. Once the time interval is elapsed the PMU enters the Startup Mode and proceeds to Active Mode where the software takes over the system control. The cyclic wake interval is set in the **CNF\_CYC\_WAKE-SFR**.

**5.6.4 Register Definition**
**Table 11 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Register Definition, Cyclic Wake Configuration Registers (CYCMU)</b>			
<b>CNF_PMU_SETTINGS</b>	PMU Settings Register	020 <sub>H</sub>	0000 0100 <sub>B</sub>
<b>CNF_CYC_SENSE</b>	Dead Time in Cyclic Sense Register	028 <sub>H</sub>	0000 0000 <sub>B</sub>
<b>CNF_CYC_WAKE</b>	Dead Time in Cyclic Wake Register	02C <sub>H</sub>	0011 0111 <sub>B</sub>
<b>CNF_CYC_SAMPLE_DEL</b>	Sample Delay in Cyclic Sense Register	030 <sub>H</sub>	0000 0000 <sub>B</sub>

The registers are addressed wordwise.



---

**Power Management Unit (PMU)**
**5.6.4.1 Cyclic Wake Configuration Registers (CYCMU)**
**PMU Settings Register**

The register is reset by RESET\_TYPE\_2.

**CNF\_PMU\_SETTINGS**
**Offset**
**Reset Value**
**PMU Settings Register**
**020<sub>H</sub>**
**0000 0100<sub>B</sub>**

7	6	5	4	3	2	1	0
EN_VDDE XT_OC_*	RES		RES	CYC_SEN SE_EN	CYC_WAK E_EN	EN_OV9_ N	WAKE_W_ RST
rw	r		r	rw	rw	rw	rw

Field	Bits	Type	Description
EN_VDDEXT_OC_OFF_N	7	rw	<b>Disabling VDDEXT Shutdown in Overload Condition</b> This bit enables the Hall Supply feature to be switched of in case of overload condition. 0 <sub>B</sub> Shutdown enabled 1 <sub>B</sub> Shutdown disabled
RES	6:5	r	<b>Reserved</b> Always read as 0
RES	4	r	<b>Reserved</b> Always read as 0
CYC_SENSE_EN	3	rw	<b>Enabling Cyclic Sense</b> This bit enables the cyclic sense feature for the power save modes. 0 <sub>B</sub> Cyclic Sense disabled 1 <sub>B</sub> Cyclic Sense enabled
CYC_WAKE_EN	2	rw	<b>Enabling Cyclic Wake</b> This bit enables the cyclic wake feature for the power save modes. 0 <sub>B</sub> Cyclic Wake disabled 1 <sub>B</sub> Cyclic Wake enabled
EN_OV9_N	1	rw	<b>Disables the reduction of the VDDC regulator output to V<sub>DDCOUT_Stop_Red</sub> during Stop-Mode</b> 0 <sub>B</sub> Output voltage reduction enabled 1 <sub>B</sub> Output voltage reduction disabled
WAKE_W_RST	0	rw	<b>Wake-Up with reset execution</b> Enables the Stop-Exit with reset execution 0 <sub>B</sub> Stop-Exit without reset execution 1 <sub>B</sub> Stop-Exit with reset execution

**Power Management Unit (PMU)**

**Dead Time in Cyclic Sense Register**

The register is reset by RESET\_TYPE2.


The dead time of Cyclic Sense will be configured in the CNF\_CYC\_SENSE register.

The following formula shows how the dead time for Cyclic Sense mode will be calculated:

$$4^{(E1E0)} \cdot (M3M2M1M0 + 1) \cdot 2ms$$

E1E0 represents the register flags CYC\_SENSE\_E01 and M3M2M1M0 represents the register flags CYC\_SENSE\_M03.

<b>CNF_CYC_SENSE</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Dead Time in Cyclic Sense Register</b>	<b>028<sub>H</sub></b>	<b>0000 0000<sub>B</sub></b>

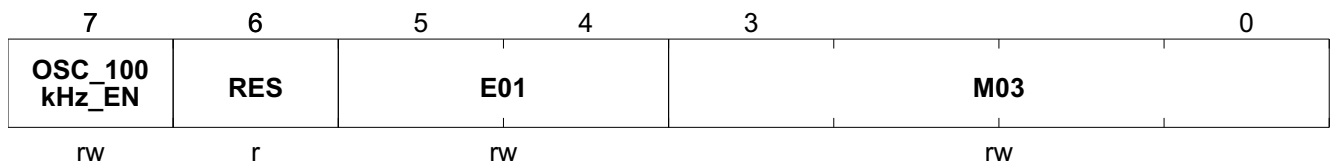

Field	Bits	Type	Description
<b>OSC_100kHz_EN</b>	7	rw	<b>100 kHz Oscillator Enable</b> Enables the 100 kHz Oscillator output from the PMU to be provided to Timer 3 0 <sub>B</sub> <b>DISABLE</b> , Oscillator is disabled 1 <sub>B</sub> <b>ENABLE</b> , Oscillator is enabled
<b>RES</b>	6	r	<b>Reserved</b> Always read as 0
<b>E01</b>	5:4	rw	<b>Exponent</b> 00 <sub>B</sub> Exponent value is 0 01 <sub>B</sub> Exponent value is 1 10 <sub>B</sub> Exponent value is 2 11 <sub>B</sub> Exponent value is 3
<b>M03</b>	3:0	rw	<b>Mantissa</b> Mantissa value is calculated as CYC_SENSE_M03 +1 0000 <sub>B</sub> Mantissa value is 1 1111 <sub>B</sub> Mantissa value is 16

**Power Management Unit (PMU)**

**Dead Time in Cyclic Wake Register**

The register is reset by RESET\_TYPE2.


The dead time of Cyclic Wake will be configured in the CNF\_CYC\_WAKE register.

The following formula shows how the dead time for Cyclic Wake mode will be calculated:

$$4^{(E1E0)} \cdot (M3M2M1M0 + 1) \cdot 2ms$$

E1E0 represents the register flags CYC\_WAKE\_E01 and M3M2M1M0 represents the register flags CYC\_WAKE\_M03.

CNF_CYC_WAKE	Offset	Reset Value
Dead Time in Cyclic Wake Register	02C <sub>H</sub>	0011 0111 <sub>B</sub>

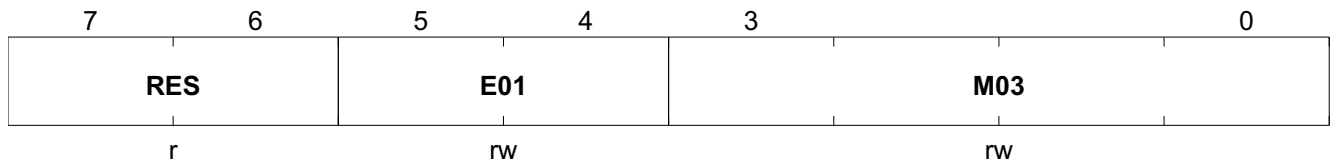

Field	Bits	Type	Description
<b>RES</b>	7:6	r	<b>Reserved</b> Always read as 0
<b>E01</b>	5:4	rw	<b>Exponent</b> 00 <sub>B</sub> Exponent value is 0 01 <sub>B</sub> Exponent value is 1 10 <sub>B</sub> Exponent value is 2 11 <sub>B</sub> Exponent value is 3
<b>M03</b>	3:0	rw	<b>Mantissa</b> Mantissa value is calculated as CYC_WAKE_M03 +1 0000 <sub>B</sub> Mantissa value is 1 1111 <sub>B</sub> Mantissa value is 16

**Power Management Unit (PMU)**


**Sample Delay in Cyclic Sense Register**

This register is reset by RESET\_TYPE\_2.

$$(M3M2M1M0 + 1) \cdot 10\mu s$$

M3M2M1M0 represents the register flags M03.

<b>CNF_CYC_SAMPLE_DEL</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Sample Delay in Cyclic Sense Register</b>	<b>030<sub>H</sub></b>	<b>0000 0000<sub>B</sub></b>

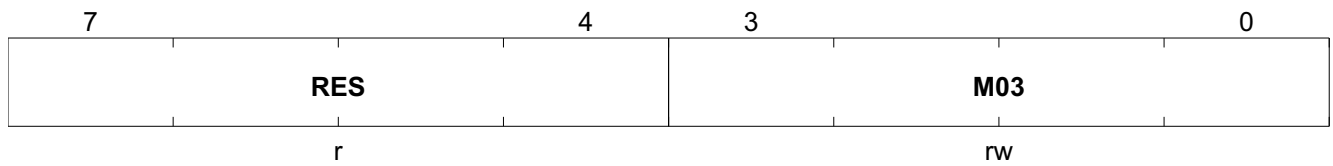

Field	Bits	Type	Description
<b>RES</b>	7:4	r	<b>Reserved</b> Always read as 0
<b>M03</b>	3:0	rw	<b>Mantissa</b> Mantissa value is calculated as: M03 0000 <sub>B</sub> variable value M3M2M1M0 is 0 1111 <sub>B</sub> variable value M3M3M1M0 is 15

---

**Power Management Unit (PMU)****5.7 Reset Management Unit (RMU)****5.7.1 Functional Description**

The Reset Management Unit (RMU) controls the reset behavior of the entire device. The master reset of the device is the power-on reset of the PMU itself. This reset is generated by the Power Down Supply and it is released when the battery voltage ( $V_s$ ) reaches the minimum supply voltage for Active Mode. Then the PMU starts the sequence to power up the supply generation module which ends with the release of the MCU reset. If this status is reached then the embedded system will work in Active Mode. This scenario is signalled by the PMU\_1V5DidPOR flag in the **PMU\_RESET\_STS1**. The figure below shows the power-on reset behavior.

Power Management Unit (PMU)


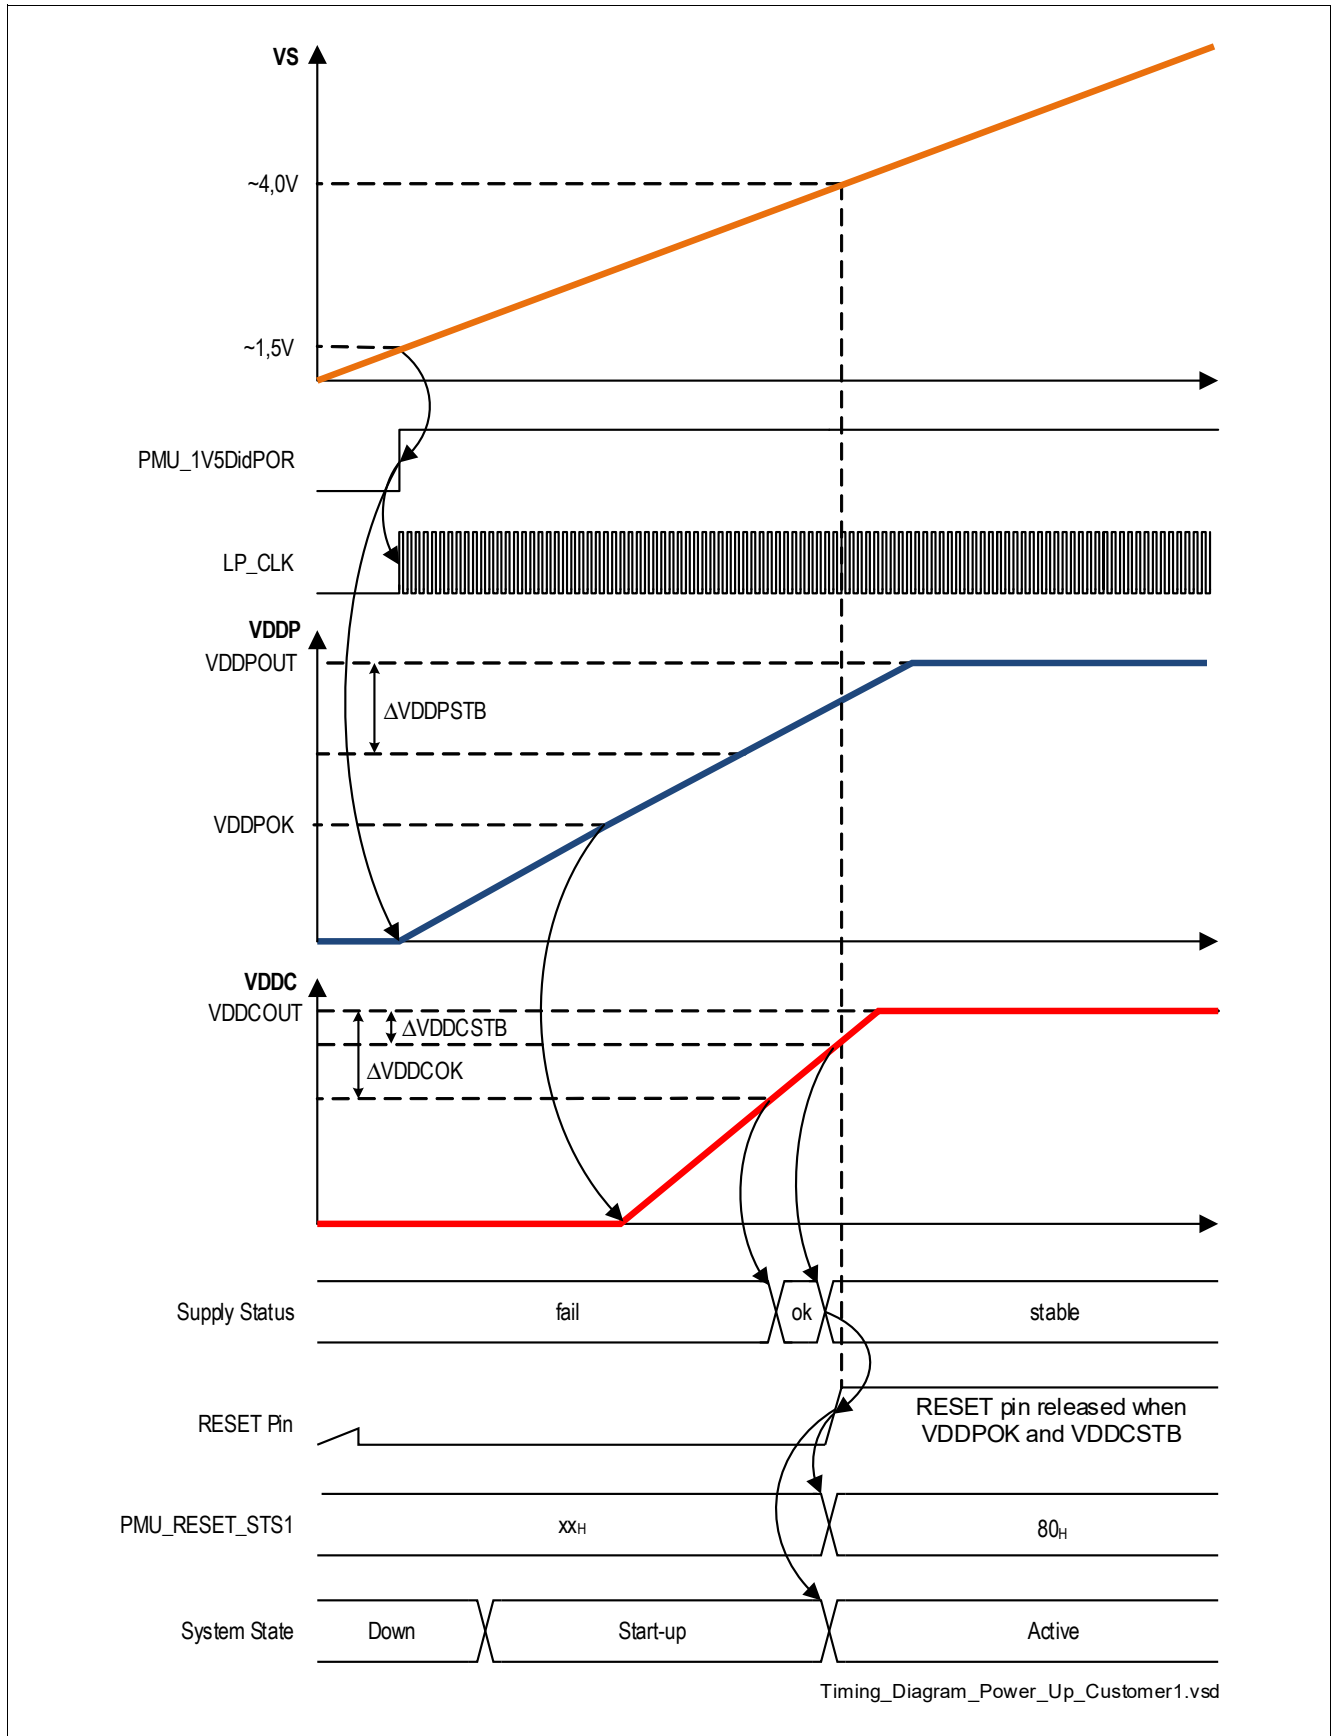


Figure 16 Power-On and Startup Behavior of Reset

**Power Management Unit (PMU)**

The arrows in the diagram above display a causal connection between the various steps and not necessarily a voltage based connection.

In case of a Sleep Mode exit a similar sequence like for battery ramp-up starts is used. If this sequence ends successfully then the PMU also releases the reset of the MCU. From the MCU point of view there is no difference to the battery ramp-up. Only inside of the RMU the identification bit **PMU\_SleepEx** is set instead of the power-on identification bit. The power down sequence looks as follows:

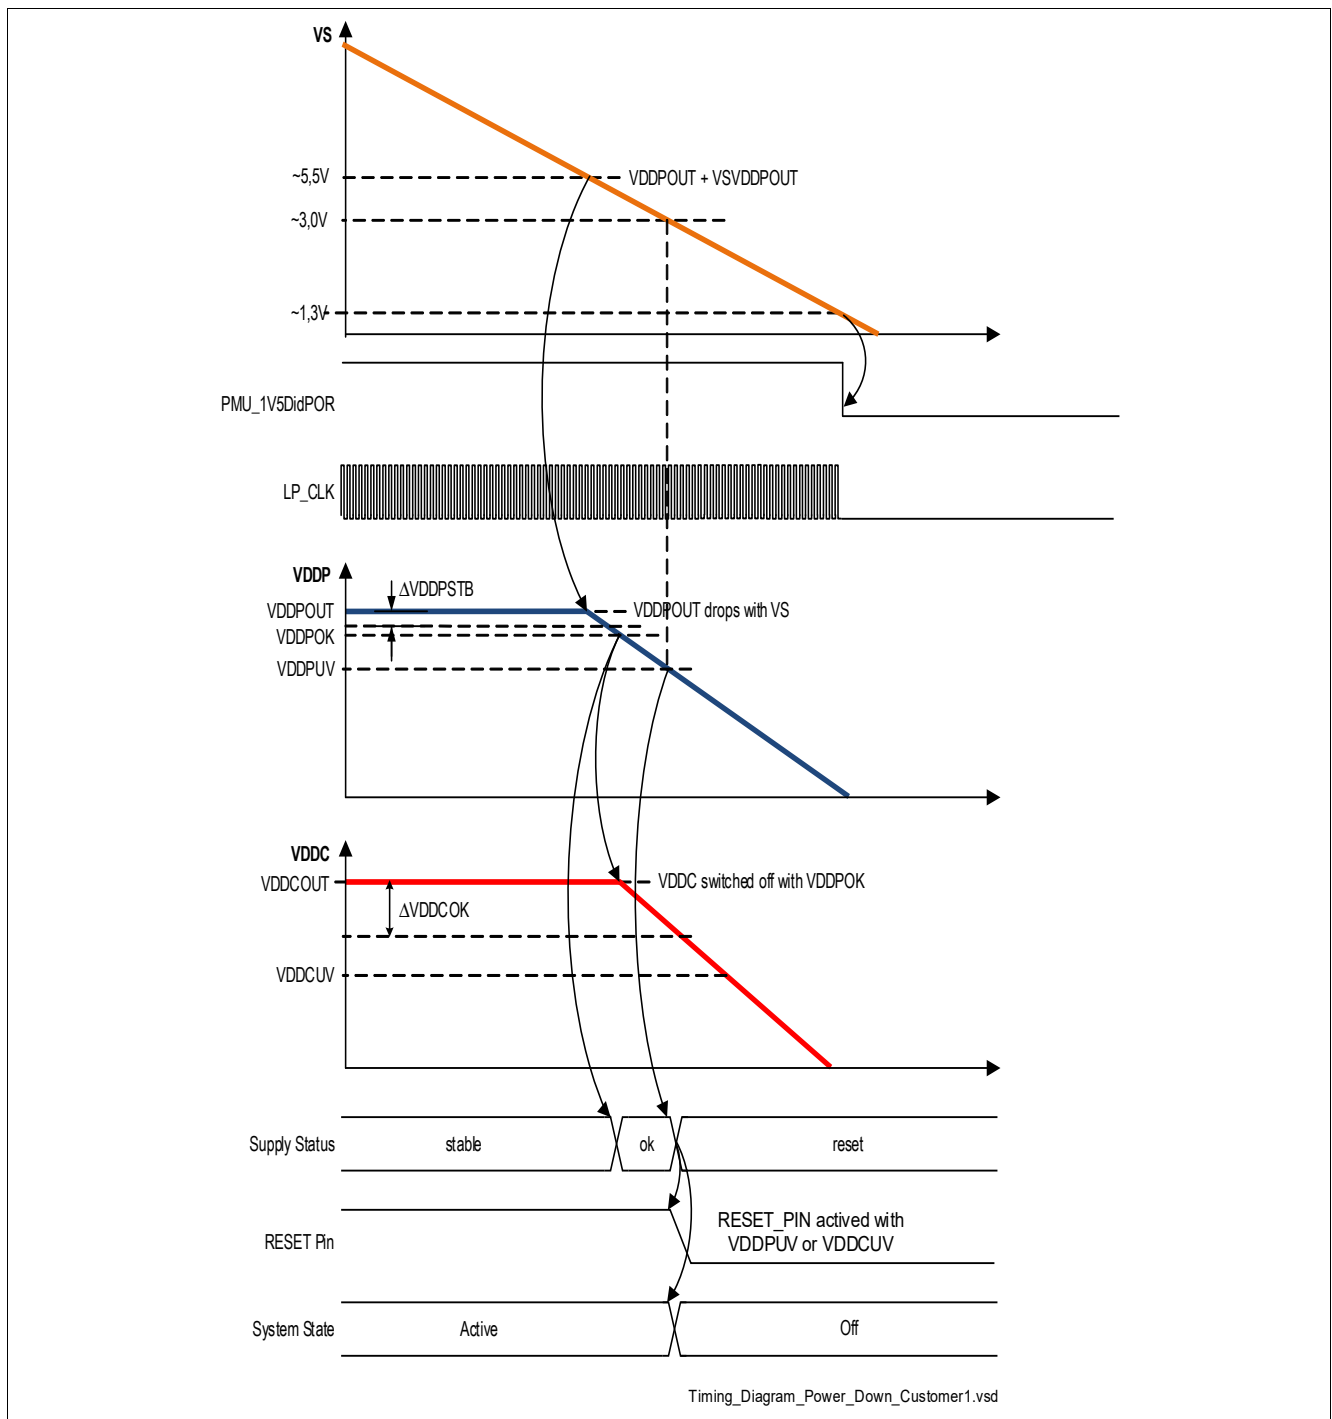

**Figure 17 Power-Down and Power Loss Sequence**

The arrows in the diagram above display a causal connection between the various steps and not necessarily a voltage based connection.

---

## Power Management Unit (PMU)

In the default configuration the wake-up from Stop Mode works without reset. To wake-up with reset the corresponding **SFR** bit WAKE\_W\_RST inside the **CNF\_PMU\_SETTINGS** register need be configured. With this configuration the wake-up signal sets the dedicated identification bit PMU\_WAKE which can be checked by the application software.

The third hardware related reset source is the pin-reset. The pin itself is supplied by the VDDP domain which is available in Active Mode and Stop Mode. Therefore the reset-pin can be used in Active Mode and Stop Mode only. Due to the bidirectional use of the pin itself the pin-reset request is gated during the execution of another reset request (e.g. soft-reset). For this purpose the pin-reset request must be stable for more than 500 ns (see **Figure 14**). In case of a pin-reset request during Stop Mode the PMU goes to Active Mode and sends the wake-up signal to the MCU. At this time the reset status register also gets an update by setting bit PMU\_PIN, which signals the described reset source. All other reset sources can only have an impact on the system behavior in Active Mode.

The reset request caused by a not served or wrongly served system watchdog, is also processed as a hardware related reset although this reset request is implicitly controlled by user software. The system watchdog only works in Active Mode. In this case it expects a periodic trigger (window watchdog) from the user software. If the trigger is missing then the PMU gets the signal that the watchdog was not serviced which sets the identification bit PMU\_ExtWDT from WDT1. After some clock cycles of the PMU internal oscillator LP\_CLK the PMU resets the MCU.

The software-reset and the reset request caused by the MCU internal watchdog are controlled explicitly by user software and can be used only in Active Mode. From the system point of view both of these reset sources have the lowest priority. The software related reset is executed within two MCU clock cycles. The system clock of the PMU works independently of the MCU clock. Due to these system conditions the PMU processes the software related resets asynchronously to its internal system clock. The software-reset is flagged by the PMU\_SOFT bit. The MCU internal watchdog is signalled by the PMU\_IntWDT bit. Both flags are located in the **PMU\_RESET\_STS2** register.

Another reset source is the PGU module. In case the main voltage regulators (VDDP and VDDC) will fail, the system will execute a system reset and enter Sleep Mode afterwards. This case is flagged by setting the indication bit SYS\_FAIL.

Reset types are combinations of the above described resets. The reset of an SFR register is depending on the corresponding reset type. Other registers (all SFRs except NMI status flags) are always reset independent of the reset type. The figure below shows this combination of resets.



**Power Management Unit (PMU)**

	SoC power-on	Sleep Mode Exit	Stop Mode Exit w/ Reset	Pin Reset	WDT1 wrong service	SOFT Reset	WDT (int.) timeout	PMU_FAIL (error_sup = 5)	WDT1_FAIL (error_wdt1 = 5)
RESET_TYPE_0	X								
RESET_TYPE_1	X							X	X
RESET_TYPE_2	X		X	X	X	X	X	X	X
RESET_TYPE_3	X	X	X	X	X	X	X	X	X
RESET_TYPE_4	X	X	X	X	X			X	X

SFR\_reset\_types\_customer.vsd

**Figure 18 Reset Types of SFRs provided by the RMU**

Out of these above listed resets mainly five reset types are derived:

- **RESET\_TYPE\_0** contains:
  - SoC power-on: PMU\_1V5DidPOR, this reset is issued when the power down supply detects undervoltage
- **RESET\_TYPE\_1** is an OR of:
  - SoC power-on: PMU\_1V5DidPOR, this reset is issued when the power down supply detects undervoltage
  - PMU\_FAIL: this reset is issued when the VDDC or VDDP supply have a consecutively failure the 5th time
  - WDT1\_FAIL: this reset is issued when the WDT1 is not triggered consecutively 5 times properly
- **RESET\_TYPE\_2** is an OR of:
  - SoC power-on: PMU\_1V5DidPOR, this reset is issued when the power down supply detects undervoltage
  - Pin Reset: PMU\_PIN, this reset is issued when the RESET-Pin is pulled down
  - WDT1 wrong service: PMU\_ExtWDT, this reset is issued if the WDT1 was serviced wrongly
  - WDT (int.) timeout: PMU\_IntWDT, this reset is issued by a wrong service of WDT (int.)
  - SOFT Reset: PMU\_SOFT, this reset is a software related reset, core reset
  - Stop Mode Exit w/ reset: PMU\_Wake, this reset is issued upon Stop Mode wake-up with reset
  - PMU\_FAIL: this reset is issued when the VDDC or VDDP supply have a consecutively failure the 5th time
  - WDT1\_FAIL: this reset is issued when the WDT1 is not triggered consecutively 5 times properly

---

**Power Management Unit (PMU)**

- **RESET\_TYPE\_3** is an OR of:
  - SoC power-on: PMU\_1V5DidPOR, this reset is issued when the power down supply detects undervoltage
  - Pin Reset: PMU\_PIN, this reset is issued when the RESET-Pin is pulled down
  - WDT1 wrong service: PMU\_ExtWDT, this reset is issued if the WDT1 was serviced wrongly
  - WDT (int.) timeout: PMU\_IntWDT, this reset is issued by a wrong service of WDT (int.)
  - SOFT Reset: PMU\_SOFT, this reset is a software related reset, core reset
  - Stop Mode Exit w/ reset: PMU\_Wake, this reset is issued upon Stop Mode wake-up with reset
  - Sleep Mode Exit: PMU\_SleepEx, this reset is issued upon Sleep Mode wake-up
  - PMU\_FAIL: this reset is issued when the VDDC or VDDP supply have a consecutively failure the 5th time
  - WDT1\_FAIL: this reset is issued when the WDT1 is not triggered consecutively 5 times properly
- **RESET\_TYPE\_4** is an OR of:
  - SoC power-on: PMU\_1V5DidPOR, this reset is issued when the power down supply detects undervoltage
  - Pin Reset: PMU\_PIN, this reset is issued when the RESET-Pin is pulled down
  - WDT1 wrong service: PMU\_ExtWDT, this reset is issued if the WDT1 was serviced wrongly
  - Stop Mode Exit w/ reset: PMU\_Wake, this reset is issued upon Stop Mode wake-up with reset
  - Sleep Mode Exit: PMU\_SleepEx, this reset is issued upon Sleep Mode wake-up
  - PMU\_FAIL: this reset is issued when the VDDC or VDDP supply have a consecutively failure the 5th time
  - WDT1\_FAIL: this reset is issued when the WDT1 is not triggered consecutively 5 times properly

Every register has its own reset type listed. In the Power Management Unit SFRs following reset types are used:

- RESET\_TYPE\_0
- RESET\_TYPE\_1
- RESET\_TYPE\_2
- RESET\_TYPE\_3
- RESET\_TYPE\_4

---

**Power Management Unit (PMU)**
**5.7.2 Register Definition**
**Table 12 Register Overview**


Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Register Definition, Reset Management Unit Registers (RMU)</b>			
<b>PMU_RESET_STS1</b>	Reset Status Hard Register	010 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>PMU_RESET_STS2</b>	Reset Status Soft Register	014 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CNF_RST_TFB</b>	Reset Blind Time Register	06C <sub>H</sub>	0000 0003 <sub>H</sub>

The registers are addressed wordwise.

**5.7.2.1 Reset Management Unit Registers (RMU)**
**Reset Blind Time Register**

The Reset Pin is a bidirectional signal. Every reset will be signaled on that pin for a few 100 ns. In order to avoid any reset deadlock situation there is a programmable reset blind time, where no hardware pin reset will be recognized. The reset blind time envelopes the phase, where the reset pin acts as an active reset output. The register is reset by RESET\_TYPE\_2.

<b>CNF_RST_TFB</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Reset Blind Time Register</b>	<b>06C<sub>H</sub></b>	<b>0000 0003<sub>H</sub></b>

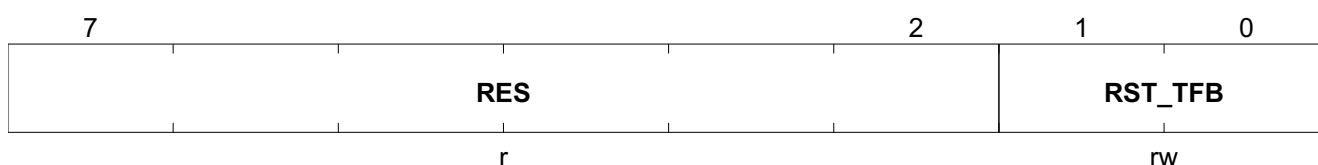

Field	Bits	Type	Description
<b>RES</b>	7:2	r	<b>Reserved</b> Always read as 0
<b>RST_TFB</b>	1:0	rw	<b>Reset Pin Blind Time Selection Bits</b> These bits select the blind time for the reset input sampling. 00 <sub>B</sub> <b>RST_TFB_0</b> , 0,5 μs typ. 01 <sub>B</sub> <b>RST_TFB_1</b> , 1 μs typ. 10 <sub>B</sub> <b>RST_TFB_2</b> , 5 μs typ. 11 <sub>B</sub> <b>RST_TFB_3</b> , 31 μs typ.

## Power Management Unit (PMU)

### Reset Status Hard Register

The PMU\_RESET\_STS1 register shows every executed reset request. The PMU writes the corresponding register bit of an executed reset. To clear the information of the PMU\_RESET\_STS1 register the user must overwrite the corresponding bit with a logic zero. The register is reset by RESET\_TYPE\_0.

<b>PMU_RESET_STS1</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Reset Status Hard Register</b>	<b>010<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

7	6	5	4	3	2	1	0
<b>PMU_1V5 DidPOR</b>	<b>PMU_PIN</b>	<b>PMU_Ext WDT</b>	<b>PMU_Clk WDT</b>	<b>PMU_LPR</b>	<b>PMU_Sle epEX</b>	<b>PMU_WAK E</b>	<b>SYS_FAI L</b>
rwh	rwh	rwh	rwh	rwh	rwh	rwh	rwh

Field	Bits	Type	Description
<b>PMU_1V5DidPOR</b>	7	rwh	<b>Power-On Reset Flag</b> 0 <sub>B</sub> No Power-On reset executed 1 <sub>B</sub> Power-On reset executed
<b>PMU_PIN</b>	6	rwh	<b>PIN-Reset Flag</b> 0 <sub>B</sub> No PIN-Reset executed 1 <sub>B</sub> PIN-Reset executed
<b>PMU_ExtWDT</b>	5	rwh	<b>External Watchdog (WDT1) Reset Flag</b> 0 <sub>B</sub> No External Watchdog reset executed 1 <sub>B</sub> External Watchdog reset executed
<b>PMU_ClkWDT</b>	4	rwh	<b>Clock Watchdog (CLKWDT) Reset Flag</b> 0 <sub>B</sub> No Clock Watchdog reset executed 1 <sub>B</sub> Clock Watchdog reset executed
<b>PMU_LPR</b>	3	rwh	<b>Low Priority Resets (see PMU_RESET_STS2)</b> 0 <sub>B</sub> Low Priority-Reset executed 1 <sub>B</sub> Low Priority executed
<b>PMU_SleepEX</b>	2	rwh	<b>Flag which indicates a reset caused by Sleep-Exit</b> 0 <sub>B</sub> No reset caused by Sleep-Exit executed 1 <sub>B</sub> Reset caused by Sleep-Exit executed
<b>PMU_WAKE</b>	1	rwh	<b>Flag which indicates a reset caused by Stop-Exit<sup>1)</sup></b>  <i>Note:</i> Stop-Exit with reset must be configured explicitly in the bit <b>CNF_PMU_SETTINGS.WAKE_W_RST</b>  0 <sub>B</sub> No reset caused by Stop-Exit executed 1 <sub>B</sub> Reset caused by Stop-Exit executed
<b>SYS_FAIL</b>	0	rwh	<b>Flag which indicates a reset caused by a System Fail reported in the corresponding Fail Register</b> 0 <sub>B</sub> No reset caused by System Fail executed 1 <sub>B</sub> Reset caused by System Fail executed

---

**Power Management Unit (PMU)**

- 1) Otherwise this flag is not set. The flag is always set in case of pin reset in Stop Mode (in combination with the flag PMU\_PIN).

## Power Management Unit (PMU)

### Reset Status Soft Register

The PMU\_RESET\_STS register shows every executed reset request. The PMU writes the corresponding register bit using settings of the asynchronously set input of the flip-flop. To clear the information of the PMU\_RESET\_STS register the user must overwrite the corresponding bit with a logic zero. The register is reset by RESET\_TYPE\_0.

Note: The register PMU\_RESET\_STS2 is also cleared when [PMU\\_RESET\\_STS1](#).PMU\_LPR is cleared.

**PMU\_RESET\_STS2** **Offset**  
**Reset Status Soft Register** **014<sub>H</sub>** **Reset Value**  
**0000 0000<sub>H</sub>**

7	3	2	1
<b>RES</b>		<b>LOCKUP</b>	<b>PMU_SOF T</b>
		<b>PMU_Int WDT</b>	
r		rwh	rwh

Field	Bits	Type	Description
<b>RES</b>	7:3	r	<b>Reserved</b> Always read as 0
<b>LOCKUP</b>	2	rwh	<b>Lockup-Reset Flag</b> 0 <sub>B</sub> No Lockup-Reset executed 1 <sub>B</sub> Lockup-Reset executed
<b>PMU_SOFT</b>	1	rwh	<b>Soft-Reset Flag</b> 0 <sub>B</sub> No Soft-Reset executed 1 <sub>B</sub> Soft-Reset executed
<b>PMU_IntWDT</b>	0	rwh	<b>Internal Watchdog Reset Flag</b> 0 <sub>B</sub> No Internal Watchdog reset executed 1 <sub>B</sub> Internal Watchdog reset executed

---

**Power Management Unit (PMU)**
**5.8 PMU Data Storage Area**
**5.8.1 Functional Description**

The PMU provides the possibility for the system to store data in registers which will retain their values, when the device is set to sleep mode. In sum there are 6 x 8 Bit available.

**5.8.2 Register Definition**
**Table 13 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Register Definition, Data Storage Registers</b>			
<b>GPUDATA00</b>	General Purpose User DATA0	0C0 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>GPUDATA01</b>	General Purpose User DATA1	0C4 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>GPUDATA02</b>	General Purpose User DATA2	0C8 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>GPUDATA03</b>	General Purpose User DATA3	0CC <sub>H</sub>	0000 0000 <sub>H</sub>
<b>GPUDATA04</b>	General Purpose User DATA4	0D0 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>GPUDATA05</b>	General Purpose User DATA5	0D4 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>SystemStartConfig</b>	System Startup Configuration	2D4 <sub>H</sub>	0000 0000 <sub>H</sub>


The registers are addressed wordwise.

---

**Power Management Unit (PMU)**
**5.8.2.1 Data Storage Registers**
**General Purpose User DATA0 Storage Register**

The register is reset by RESET\_TYPE\_1.

<b>GPUDATA00</b>	<b>Offset</b>	<b>Reset Value</b>
<b>General Purpose User DATA0</b>	<b>0C0<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

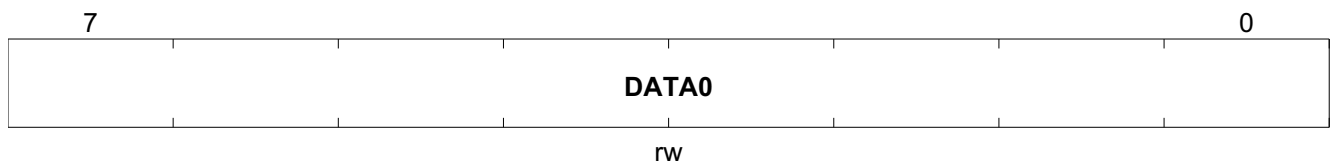


Field	Bits	Type	Description
<b>DATA0</b>	7:0	rw	<b>DATA0 Storage Byte</b> 1st byte of storage area

**General Purpose User DATA1 Storage Register**

The register is reset by RESET\_TYPE\_1.

<b>GPUDATA01</b>	<b>Offset</b>	<b>Reset Value</b>
<b>General Purpose User DATA1</b>	<b>0C4<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

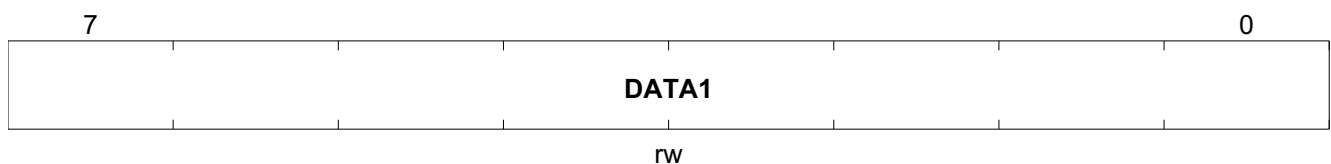

Field	Bits	Type	Description
<b>DATA1</b>	7:0	rw	<b>DATA1 Storage Byte</b> 2nd byte of storage area




**Power Management Unit (PMU)**

**General Purpose User DATA2 Storage Register**

The register is reset by RESET\_TYPE\_1.

<b>GPUDATA02</b>	<b>Offset</b>	<b>Reset Value</b>
<b>General Purpose User DATA2</b>	<b>0C8<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

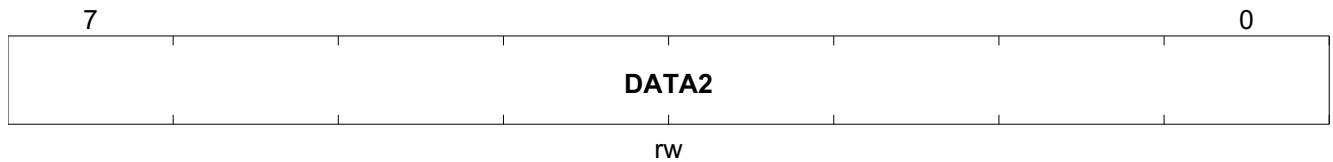


Field	Bits	Type	Description
DATA2	7:0	rw	DATA2 Storage Byte 3rd byte of storage area

**General Purpose User DATA3 Storage Register**

The register is reset by RESET\_TYPE\_1.

<b>GPUDATA03</b>	<b>Offset</b>	<b>Reset Value</b>
<b>General Purpose User DATA3</b>	<b>0CC<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

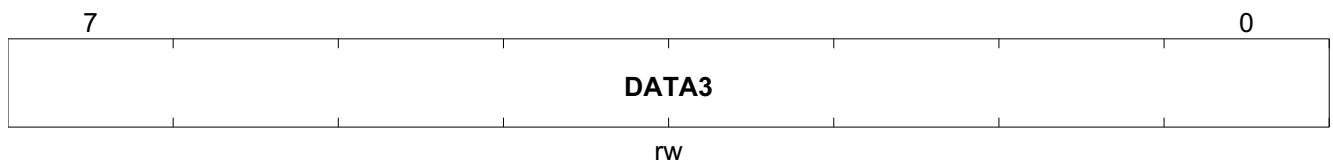


Field	Bits	Type	Description
DATA3	7:0	rw	DATA3 Storage Byte 4th byte of storage area

---

**Power Management Unit (PMU)**
**General Purpose User DATA4 Storage Register**

The register is reset by RESET\_TYPE\_1.

<b>GPUDATA04</b>	<b>Offset</b>	<b>Reset Value</b>
<b>General Purpose User DATA4</b>	<b>0D0<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

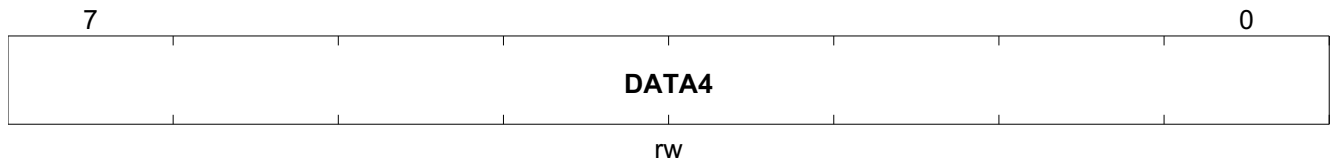


Field	Bits	Type	Description
<b>DATA4</b>	7:0	rw	<b>DATA4 Storage Byte</b> 5th byte of storage area

**General Purpose User DATA5 Storage Register**

The register is reset by RESET\_TYPE\_1.

<b>GPUDATA05</b>	<b>Offset</b>	<b>Reset Value</b>
<b>General Purpose User DATA5</b>	<b>0D4<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

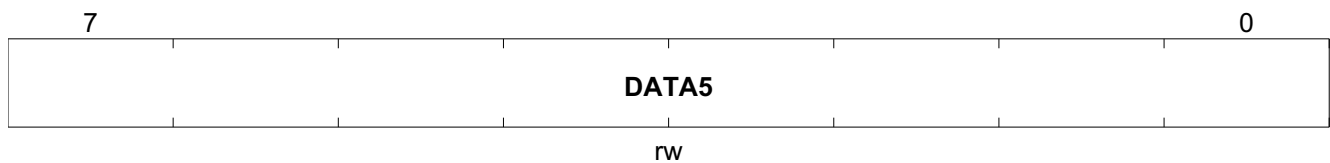

Field	Bits	Type	Description
<b>DATA5</b>	7:0	rw	<b>DATA5 Storage Byte</b> 6th byte of storage area

**Power Management Unit (PMU)**

**System Startup Configuration Register**

The register is reset by RESET\_TYPE\_1.

<b>SystemStartConfig</b>	<b>Offset</b>	<b>Reset Value</b>
<b>System Startup Configuration Register</b>	<b>2D4<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>



Field	Bits	Type	Description
<b>RES</b>	7:1	rw	<b>Free for use</b> Always read back what was written in before
<b>MBIST_EN</b>	0	rw	<b>System Startup Configuration Bit for RAM MBIST at Sleep Mode exit</b> 0 <sub>B</sub> No MBIST executed at Sleep Mode exit 1 <sub>B</sub> MBIST executed at Sleep Mode exit

## Power Management Unit (PMU)

### 5.9 Register Access Hints

Some registers in the PMU module are clocked with the MI\_CLK. Write operations will be delayed by one MI\_CLK cycle.

For handling the clearing of interrupt status flags special care might be necessary. Under certain coding constellations an extra write access to the interrupt clear flag will be necessary to add the extra MI\_CLK cycle.

In case of interrupt status clear, two use cases in the software can be considered:

1. the writing to the interrupt clear flag and the reading of the corresponding interrupt status flag are having some other code in between
2. the writing to the interrupt clear flag and the reading of the corresponding interrupt status flag are placed in code right behind each other, with no code in between

#### Use Case 1 - Example, no extra write attempt to the interrupt clear register required

```
/* clearing of VDDEXT Short Error interrupt status flag */
PMU->VDDEXT_CTRL.bit.SHORT = 1;
/* some other code is placed here */
...
/* reading of VDDEXT Short Error interrupt status flag */
if ( PMU->VDDEXT_CTRL.bit.SHORT == 1 )
{
    /* some user code here */
}
```

In this example, between the interrupt clear register write and the corresponding status register read, sufficient time is ensured, as some C code (at least one C instruction) is placed in between.

#### Use Case 2- Example, one extra write attempt to the interrupt clear register required

```
/* clearing of VDDEXT Short Error interrupt status flag */
PMU->VDDEXT_CTRL.bit.SHORT = 1;
/* place another interrupt status flag clear attempt to add an extra MI_CLK cycle*/
PMU->VDDEXT_CTRL.bit.SHORT = 0;
/* reading of VDDEXT Short Error interrupt status flag */
if ( PMU->VDDEXT_CTRL.bit.SHORT == 1 )
{
    /* some user code here */
}
```

In this example, between the interrupt clear register write and the corresponding status register read, another interrupt clear register write is placed. In order to add another MI\_CLK cycle and ensure that the first interrupt status flag write attempt has reached the interrupt status register before it will be read again in the if clause right after it. Without this extra clear attempt the following interrupt status flag read might still reflect the interrupt status set.

An extra instruction gives the first clear attempt at least one MI\_CLK cycle of time. Any other C instruction might be sufficient as well. Using the same interrupt clear write again is proposed. This access cannot be eliminated by the compiler by optimization.

Executing the second interrupt clear write with a '0' is recommended, as so, no functional effect to the register takes place.

---

**Power Management Unit (PMU)****5.9.1 Register List**

This chapter lists the registers in the PMU for which the described proposals apply to:

- [VDDEXT\\_CTRL](#)
- [SYS\\_FAIL\\_STS](#)

## **6 System Control Unit - Digital Modules (SCU-DM)**

### **6.1 Features**

- Flexible clock configuration features
- Reset management of all system resets
- System modes control for all power modes (active mode, stop mode, sleep mode)
- Interrupt enabling for many system peripherals
- General purpose input output control
- Debug mode control of system peripherals

### **6.2 Introduction**

The System Control Unit (SCU) supports all central control tasks in the TLE987x. The SCU is made up of the following sub-modules:

- Clock System and Control (see [Section 6.3 on Page 91](#))
- Reset Control (see [Section 6.4 on Page 120](#))
- Power Management (see [Section 6.5 on Page 125](#))
- Interrupt Management (see [Section 6.6 on Page 130](#))
- General Port Control (see [Section 6.7 on Page 143](#))
- Flexible Peripheral Management (see [Section 6.8 on Page 154](#))
- Module Suspend Control (see [Section 6.9 on Page 156](#))
- Watchdog Timer (see [Section 6.10 on Page 158](#))
- Error Detection and Correction in Data Memory (see [Section 6.11 on Page 164](#))
- Miscellaneous Control (see [Section 6.12 on Page 167](#))

The mapping of all registers is detailed in [Section 6.2.2 on Page 88](#)

System Control Unit - Digital Modules (SCU-DM)

6.2.1 Block Diagram

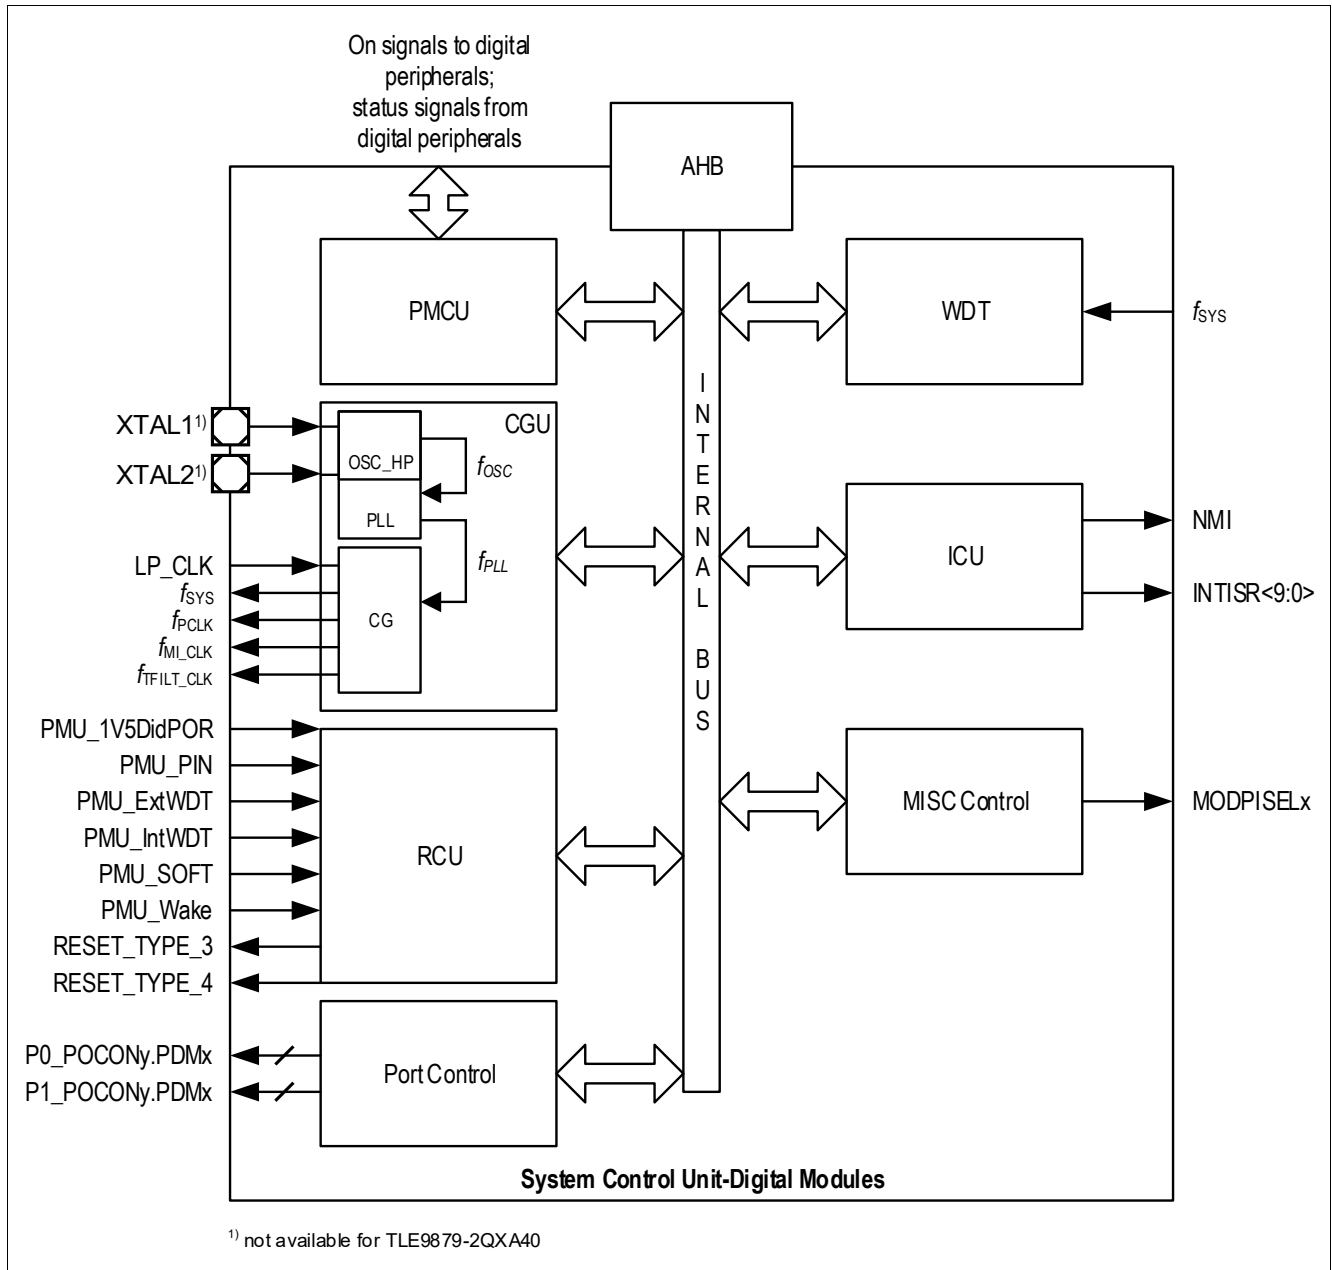


Figure 19 System Control Unit - Digital Modules Block Diagram

**AHB (Advanced High-Performance Bus)**

**PMCU (Power Module Control Unit)**

**WDT (Watchdog Timer in SCU-DM)**

- $f_{SYS}$  System clock

## System Control Unit - Digital Modules (SCU-DM)

### CGU (Clock Generation Unit)

- $f_{SYS}$  System clock
- $f_{PCLK}$  Peripheral clock
- $f_{MI\_CLK}$  Measurement interface clock
- $f_{TFILT\_CLK}$  Analog module filter clock
- LP\_CLK Clock source for all PMU submodules and WDT1

### ICU (Interrupt Control Unit)

- NMI (Non-Maskable Interrupt)
- INTISR<15,13:4,1,0> External interrupt signals

### RCU (Reset Control Unit)

- PMU\_1V5DidPOR Undervoltage reset of power down supply
- PMU\_PIN Reset generated by reset pin
- PMU\_ExtWDT WDT1 reset
- PMU\_IntWDT WDT (SCU) reset
- PMU\_SOFT Software reset
- PMU\_Wake Sleep Mode/Stop Mode exit with reset
- RESET\_TYPE\_3 Peripheral reset (contains all resets)
- RESET\_TYPE\_4 Peripheral reset (without SOFT and WDT reset)

### Port Control

- P0\_POCONy.PDMx driver strength control
- P1\_POCONy.PDMx driver strength control

### MISC Control

- MODPISELx Mode selection registers for UART (source section) and Timer (trigger or count selection)

## 6.2.2 SCU Register Overview

This chapter contains an overview of all SCU Registers.

### 6.2.2.1 Register Map

There are two SCU kernels in the TLE987x, namely SCU1 and SCU2. SCU1 is dedicated for LIN transmission. SCU2 is dedicated for external UART communication.

**Table 15** lists the addresses of the SCU SFRs.

**Table 14** shows the SCU module base addresses.

**Table 14 Register Address Space**

Module	Base Address	End Address	Note
SCU	5000 5000 <sub>H</sub>	5000 5FFF <sub>H</sub>	



## System Control Unit - Digital Modules (SCU-DM)

Table 15 Register Overview SCU Module

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>IRCON0</b>	Interrupt Request Register 0	004 <sub>H</sub>	<b>368</b>
<b>IRCON1</b>	Interrupt Request Register 1	008 <sub>H</sub>	<b>370</b>
<b>IRCON2</b>	Interrupt Request Register 2	00C <sub>H</sub>	<b>371</b>
<b>IRCON3</b>	Interrupt Request Register 3	010 <sub>H</sub>	<b>372</b>
<b>IRCON4</b>	Interrupt Request Register 4	014 <sub>H</sub>	<b>373</b>
<b>NMISR</b>	NMI Status Register	018 <sub>H</sub>	<b>380</b>
<b>IEN0</b>	Interrupt Enable Register 0	01C <sub>H</sub>	<b>364</b>
<b>NMICON</b>	NMI Control Register	024 <sub>H</sub>	<b>365</b>
<b>EXICON0</b>	External Interrupt Control Register 0	028 <sub>H</sub>	<b>367</b>
<b>IRCON0CLR</b>	Interrupt Control 0 Clear Register	02C <sub>H</sub>	<b>369</b>
<b>MODIEN1</b>	Peripheral Interrupt Enable Register 1	030 <sub>H</sub>	<b>133</b>
<b>MODIEN2</b>	Peripheral Interrupt Enable Register 2	034 <sub>H</sub>	<b>134</b>
<b>MODIEN3</b>	Peripheral Interrupt Enable Register 3	038 <sub>H</sub>	<b>135</b>
<b>MODIEN4</b>	Peripheral Interrupt Enable Register 4	03C <sub>H</sub>	<b>135</b>
<b>PMCON0</b>	Power Mode Control Register 0	040 <sub>H</sub>	<b>129</b>
<b>PLL_CON</b>	PLL Control Register	044 <sub>H</sub>	<b>106</b>
<b>CMCON1</b>	Clock Control Register 1	048 <sub>H</sub>	<b>108</b>
<b>CMCON2</b>	Clock Control Register 2	04C <sub>H</sub>	<b>110</b>
<b>WDTCON</b>	Watchdog Timer Control Register	050 <sub>H</sub>	<b>162</b>
<b>APCLK_CTRL1</b>	Analog Peripheral Clock Control 1 Register	054 <sub>H</sub>	<b>112</b>
<b>APCLK1</b>	Analog Peripheral Clock Register 1	058 <sub>H</sub>	<b>115</b>
<b>APCLK2</b>	Analog Peripheral Clock Register 2	05C <sub>H</sub>	<b>116</b>
<b>PMCON1</b>	Peripheral Management Control Register 1	060 <sub>H</sub>	<b>154</b>
<b>PMCON2</b>	Peripheral Management Control Register 2	064 <sub>H</sub>	<b>155</b>
<b>APCLK_CTRL2</b>	Analog Peripheral Clock Control 2 Register	06C <sub>H</sub>	<b>114</b>
<b>SYSCON0</b>	System Control Register 0	070 <sub>H</sub>	<b>111</b>
<b>WDTREL</b>	Watchdog Timer Reload Register	078 <sub>H</sub>	<b>161</b>
<b>WDTWINB</b>	Watchdog Window-Boundary Count	07C <sub>H</sub>	<b>163</b>
<b>WDTL</b>	Watchdog Timer, Low Byte	080 <sub>H</sub>	<b>163</b>
<b>WDTH</b>	Watchdog Timer, High Byte	084 <sub>H</sub>	<b>163</b>
<b>ID</b>	Identity Register	0A8 <sub>H</sub>	<b>172</b>
<b>PASSWD</b>	Password Register	0AC <sub>H</sub>	<b>167</b>
<b>OSC_CON</b>	OSC Control Register	0B0 <sub>H</sub>	<b>104</b>
<b>COCON</b>	Clock Output Control Register	0B4 <sub>H</sub>	<b>118</b>
<b>MODPISEL</b>	Peripheral Input Select Register	0B8 <sub>H</sub>	<b>143</b>
<b>MODPISEL1</b>	Peripheral Input Select Register 1	0BC <sub>H</sub>	<b>144</b>
<b>MODPISEL2</b>	Peripheral Input Select Register 2	0C0 <sub>H</sub>	<b>145</b>

## System Control Unit - Digital Modules (SCU-DM)

Table 15 Register Overview SCU Module

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>MODPISEL3</b>	Peripheral Input Select Register 3	0C4 <sub>H</sub>	<b>146</b>
<b>MODSUSP1</b>	Module Suspend Control Register 1	0C8 <sub>H</sub>	<b>156</b>
<b>MODSUSP2</b>	Module Suspend Control Register 2	0CC <sub>H</sub>	<b>157</b>
<b>GPT12PISEL</b>	GPT12 Peripheral Input Select Register	0D0 <sub>H</sub>	<b>153</b>
<b>EDCCON</b>	Error Detection and Correction Control Register	0D4 <sub>H</sub>	<b>164</b>
<b>EDCSTAT</b>	Error Detection and Correction Status Register	0D8 <sub>H</sub>	<b>165</b>
<b>MEMSTAT</b>	Memory Status Register	0DC <sub>H</sub>	<b>175</b>
<b>NVM_PROT_STS</b>	NVM Protection Status Register	0E0 <sub>H</sub>	<b>170</b>
<b>MEM_ACC_STS</b>	Memory Access Status Register	0E4 <sub>H</sub>	<b>171</b>
<b>P0_POCON0</b>	Port Output Control Register	0E8 <sub>H</sub>	<b>147</b>
<b>P0_POCON1</b>	Port Output Control Register	0EC <sub>H</sub>	<b>148</b>
<b>P0_POCON2</b>	Port Output Control Register	0F0 <sub>H</sub>	<b>149</b>
<b>TCCR</b>	Temperature Compensation Control Register	0F4 <sub>H</sub>	<b>152</b>
<b>P1_POCON0</b>	Port Output Control Register	0F8 <sub>H</sub>	<b>150</b>
<b>P1_POCON1</b>	Port Output Control Register	0FC <sub>H</sub>	<b>151</b>
<b>P1_POCON2</b>	Port Output Control Register	100 <sub>H</sub>	<b>152</b>
<b>DMAIEN1</b>	DMA Interrupt Enable Register 1	144 <sub>H</sub>	<b>138</b>
<b>DMAIEN2</b>	DMA Interrupt Enable Register 2	148 <sub>H</sub>	<b>139</b>
<b>DMASRCSEL</b>	DMA Source Selection Register	14C <sub>H</sub>	<b>140</b>
<b>DMAIRC1</b>	DMA Interrupt Control Register 1	154 <sub>H</sub>	<b>376</b>
<b>DMAIRC2</b>	DMA Interrupt Control Register 2	158 <sub>H</sub>	<b>378</b>
<b>GPT12IEN</b>	GPT12 Interrupt Enable Register	15C <sub>H</sub>	<b>136</b>
<b>GPT12IRC</b>	Timer and Counter Control/Status Register	160 <sub>H</sub>	<b>374</b>
<b>IRCON1CLR</b>	Interrupt Request 1 Clear Register	178 <sub>H</sub>	<b>370</b>
<b>IRCON2CLR</b>	Interrupt Request 2 Clear Register	17C <sub>H</sub>	<b>371</b>
<b>DMASRCSEL2</b>	DMA Source Selection Register 2	180 <sub>H</sub>	<b>141</b>
<b>DMAIRC1CLR</b>	DMA interrupt Control 1 Clear Register	184 <sub>H</sub>	<b>377</b>
<b>DMAIRC2CLR</b>	DMA Interrupt Control 2 Clear Register	188 <sub>H</sub>	<b>379</b>
<b>IRCON3CLR</b>	Interrupt Request 3 Clear Register	190 <sub>H</sub>	<b>372</b>
<b>IRCON4CLR</b>	Interrupt Request 4 Clear Register	194 <sub>H</sub>	<b>373</b>
<b>DMASRCCLR</b>	DMA Source Selection Clear Register	198 <sub>H</sub>	<b>141</b>

## System Control Unit - Digital Modules (SCU-DM)


### 6.3 Clock Generation Unit

The Clock Generation Unit (CGU) enables a flexible clock generation for TLE987x. During user program execution, the frequency can be modified to optimize the performance/power consumption ratio, allowing power consumption to be adapted to the actual application state.

The CGU in the TLE987x consists of one oscillator circuit (OSC\_HP), a Phase-Locked Loop (PLL) module with an internal oscillator (OSC\_PLL), and a Clock Control Unit (CCU). The CGU can convert a low-frequency input/external clock signal to a high-frequency internal clock.

The system clock  $f_{SYS}$  is generated from of the following selectable clocks:

- PLL clock output  $f_{PLL}$
- Direct clock from oscillator OSC\_HP  $f_{OSC}$
- Low precision clock  $f_{LP\_CLK}$  (HW-enabled for startup after reset and during power-down wake-up sequence)

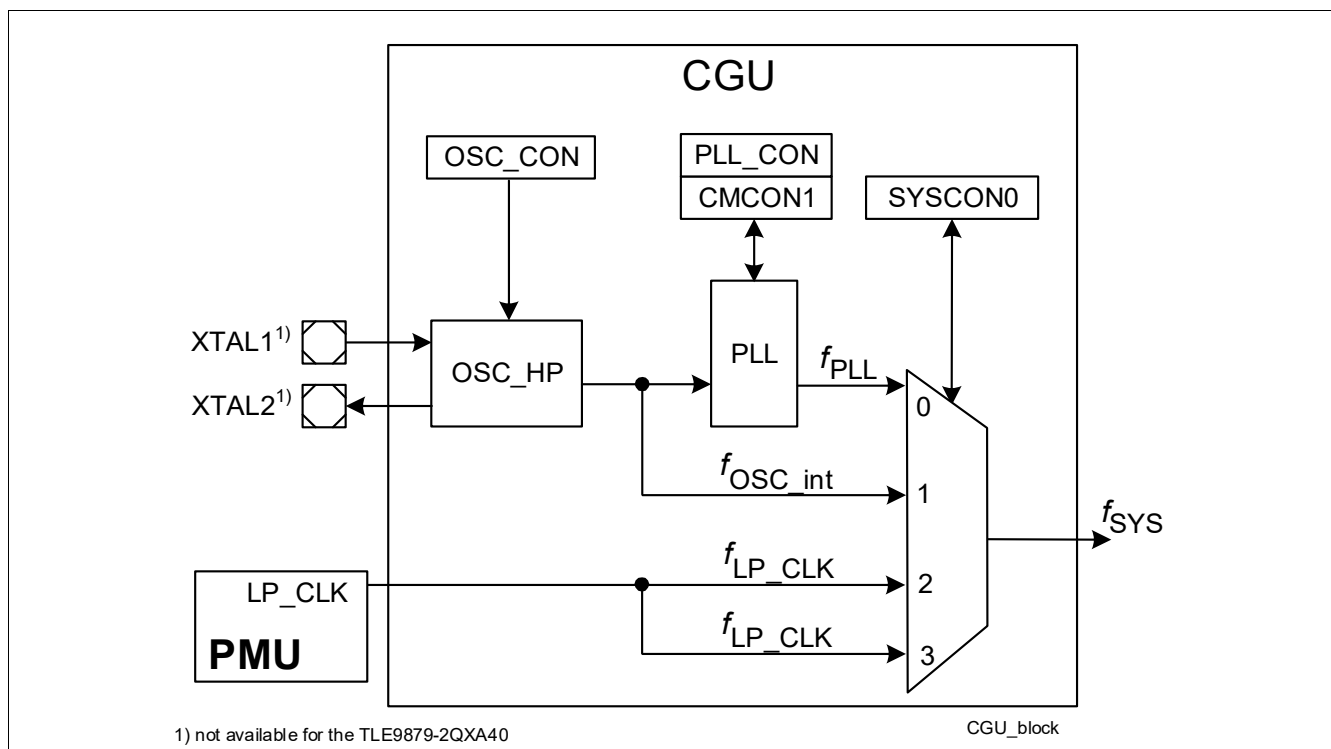

**Figure 20** Clock Generation Unit Block Diagram

The following sections describe the different parts of the CGU.

#### 6.3.1 Low Precision Clock

The clock source LP\_CLK is a low-precision RC oscillator (LP-OSC) with a nominal frequency of 18 MHz that is enabled by hardware as an independent clock source for the TLE987x startup after reset and during the power-down wake-up sequence.  $f_{LP\_CLK}$  is not user configurable.

#### 6.3.2 High Precision Oscillator Circuit (OSC\_HP)

The high precision oscillator circuit, designed to work with both an external crystal oscillator or an external stable clock source, consists of an inverting amplifier with XTAL1 as the input, and XTAL2 as the output.

**Figure 21** shows the recommended external circuitry for both operating modes, External Crystal Mode and External Input Clock Mode.

## System Control Unit - Digital Modules (SCU-DM)

### 6.3.2.1 External Input Clock Mode

When supplying the clock signal directly, not using an external crystal and bypassing the oscillator, the input frequency needs to be equal or greater than 4 MHz if the PLL VCO part is used.


When using an external clock signal it must be connected to XTAL1. XTAL2 is left open (unconnected).

### 6.3.2.2 External Crystal Mode

When using an external crystal, its frequency can be within the range of 4 MHz to 25 MHz. An external oscillator load circuitry must be used, connected to both pins, XTAL1 and XTAL2. It normally consists of the two load capacitances  $C_1$  and  $C_2$ . A series damping resistor could be required for some crystals. The exact values and the corresponding operating ranges depend on the crystal and have to be determined and optimized in cooperation with the crystal vendor using the negative resistance method. The following load cap values can be used as starting point for the evaluation:

**Table 16 External CAP Capacitors**

Fundamental Mode Crystal Frequency (approx., MHz)	Load Caps $C_1, C_2$ (pF)
4	33
8	18
12	12
16	10
20	10
25	8

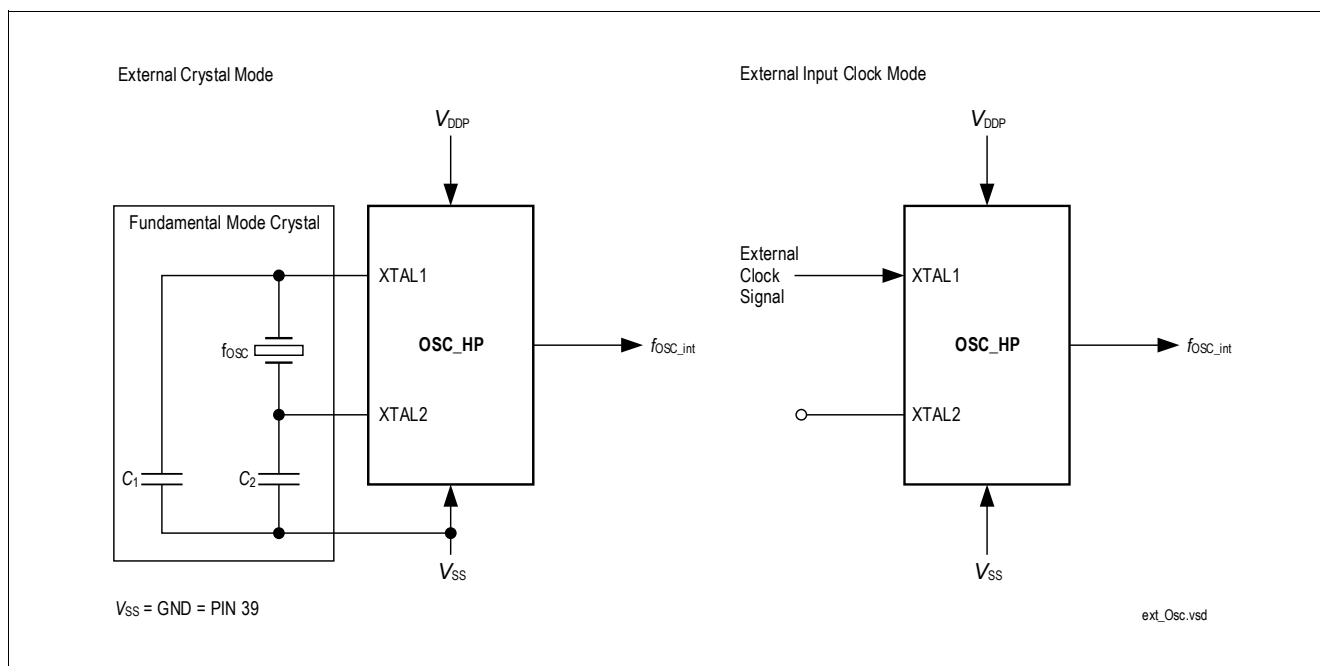

**Figure 21 TLE987x External Circuitry for the OSC\_HP, XTAL not available for TLE9879-2QXA40**

---

**System Control Unit - Digital Modules (SCU-DM)****6.3.3 Phase-Locked Loop (PLL) Module**

This section describes the TLE987x PLL module.

The clock  $f_{PLL}$  is generated in one of the following PLL configured modes:

- Prescaler Mode, also called VCO Bypass Mode
- Normal Mode
- Freerunning Mode

**6.3.3.1 Features**

Following is an overview of the PLL features/functions:

- Programmable clock generation PLL
- Loop filter
- Input frequency:  $f_{OSC}$  (see data sheet for values)
- VCO frequency:  $f_{VCO} = f_{VCO-1}$ , or  $f_{VCO-1}$  (selectable by range **CMCON1.VCOSEL**, see data sheet for values)
- VCO lock detection
- Oscillator run detection
- Output frequency:  $f_{PLL}$  (see data sheet for values)
- Provided: Fixed input divider **P** = 1
- Provided: 4-bit feedback divider **N**
- Provided: 2-bit output divider **K2** and 1-bit output divider **K1**
- Oscillator Watchdog
- Prescaler Mode
- Freerunning Mode
- Normal Mode
- Sleep Mode, also automatically activated during device power-save mode
- Glitchless switching between both K-Dividers
- Glitchless switching between Normal Mode and Prescaler Mode
- Internal Oscillator for oscillator watchdog
- Internal Oscillator as clock source - CGU Oscillator, typical 5 MHz

System Control Unit - Digital Modules (SCU-DM)

6.3.3.2 PLL Functional Description

The following figure shows the PLL block structure.

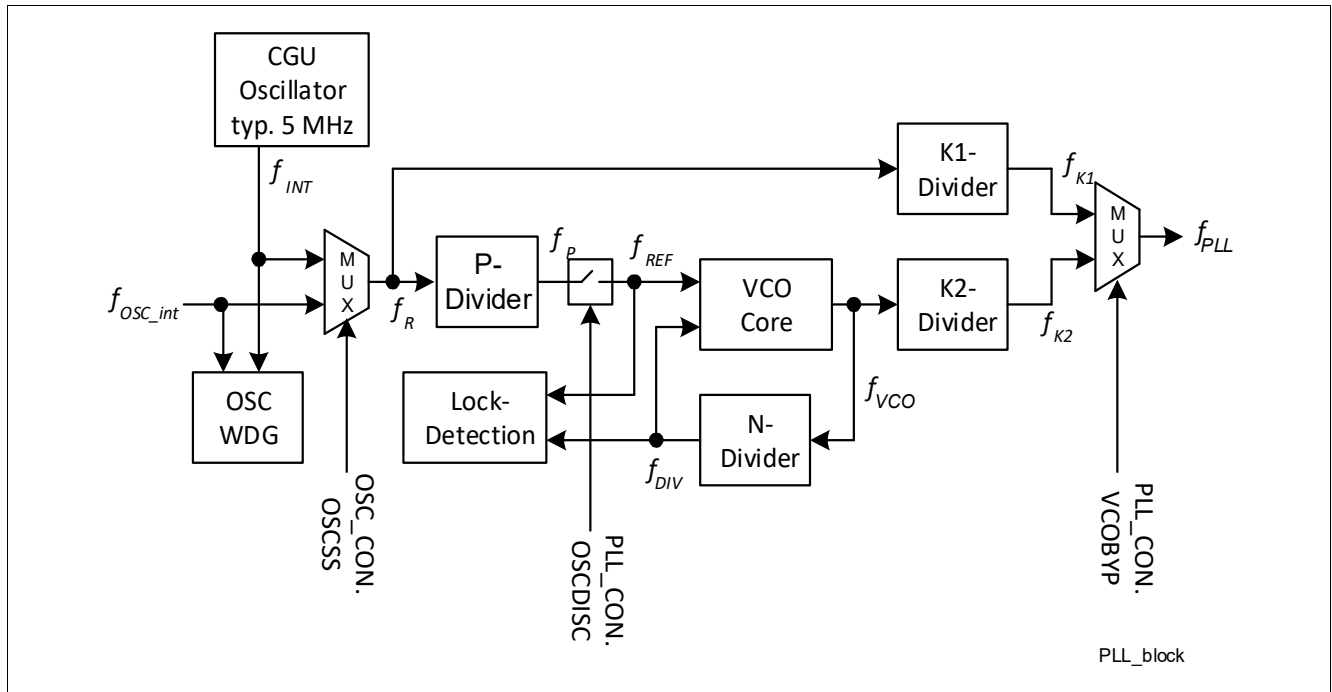


Figure 22 PLL Block Diagram

The reference frequency  $f_R$  can be selected to be taken either from the internal oscillator  $f_{INT}$  or from an external clock source  $f_{OSC\_int}$ .

The PLL uses up to three dividers to manipulate the reference frequency in a configurable way. Each of the three dividers can be bypassed corresponding to the PLL operating mode (based on  $f_{PLL}$ ):

- Bypassing P, N and K2 dividers; this defines the Prescaler Mode
- Bypassing K1 divider; this defines the Normal Mode
- Bypassing K1 divider and ignoring the P divider; this defines the Freerunning Mode

Table 17 shows the selectable clock source options.

Table 17 Clock Option Selection

VCOBYP	OSCDISC	Mode Selected
0	0	Normal Mode
1	x	Prescaler Mode
0	1	Freerunning Mode

Normal Mode

In Normal Mode the reference frequency  $f_R$  is divided down by a factor P, multiplied by a factor N and then divided down by a factor K2.

The output frequency is given by:

$$f_{PLL} = \frac{N}{P \cdot K2} \cdot f_R \tag{6.1}$$

## System Control Unit - Digital Modules (SCU-DM)

The Normal Mode is selected by the following settings

- PLL\_CON.VCOBYP = 0
- PLL\_CON.OSCDISC = 0

The Normal Mode is active when

- PLL\_CON.VCOBYP = 0
- PLL\_CON.OSCDISC = 0
- PLL\_CON.LOCK = 1

If  $f_{PLL}$  is selected as the clock source for system frequency  $f_{SYS}$ , the user should enable PLL in normal mode as default.

*Note: The result of  $f_R$  times N-factor must be within the VCO Range, the VCO Range selection has to be adjusted accordingly.*

### Prescaler Mode (VCO Bypass Mode)

In Prescaler Mode the reference frequency  $f_R$  is only divided down by a factor K1.

The output frequency is given by

$$f_{PLL} = \frac{f_R}{K1} \quad (6.2)$$

The Prescaler Mode is selected by the following settings

- PLL\_CON.VCOBYP = 1
- PLL\_CON.OSCDISC = X

The Prescaler Mode is active when

- PLL\_CON.VCOBYP = 1
- PLL\_CON.OSCDISC = X
- OSC\_CON.OSC2L = 0 if  $f_{OSC\_int}$  is provided as  $f_R$  (OSC\_CON.OSCSS = 01B)

### Freerunning Mode

In Freerunning Mode the base frequency output of the Voltage Controlled Oscillator (VCO)  $f_{VCObase}$  is only divided down by a factor K2.

The output frequency is given by

$$f_{PLL} = \frac{f_{VCObase}}{K2} \quad (6.3)$$

The Freerunning Mode is enabled by the following settings/conditions

- PLL\_CON.VCOBYP = 0 and PLL\_CON.LOCK = 0

or

- PLL\_CON.VCOBYP = 1 and OSC\_CON.OSCSS = 1 and OSC\_CON.OSC2L = 1

or

- PLL\_CON.VCOBYP = 0 and PLL\_CON.OSCDISC = 1

The Freerunning Mode is active when

- PLL\_CON.VCOBYP = 0
- PLL\_CON.OSCDISC = 1
- PLL\_CON.LOCK = 0

## System Control Unit - Digital Modules (SCU-DM)

### General Configuration Overview

The divider values and all necessary other values can be configured via the PLL configuration registers.

In TLE987x, the P factor is fixed to 1. **Table 18** gives the valid output frequency range for the P divider dependent on  $f_R$  frequency range:

**Table 18 P-Divider Factor = 1**

P	$f_p$ for $f_R =$				
	4 MHz	5 MHz	10 MHz	16 MHz	25 MHz
1	4	5	10	16	not allowed

Note: Of course the whole range in between two  $f_R$  columns in the above table is allowed. E.g. for a range  $f_R = 10$  to 16,  $f_p = 10$  to 16 MHz.

The P-divider output frequency  $f_p$  is fed to the Voltage Controlled Oscillator (VCO). The VCO is a part of PLL with a feedback path. A divider in the feedback path (N divider) divides the VCO frequency. The  $f_{VCO}$  range is defined by configuration of VCOSSEL.

**Table 19 VCO Range**

VCOSSEL	$f_{VCOmin}$	$f_{VCOmax}$	$f_{VCObase}^{1)}$	Unit
0	48	112	approx. max. 38	MHz
1	96	160	approx. max. 76	MHz

1)  $f_{VCObase}$  is the free running operation frequency of the PLLVCO, when no input reference clock is available.

The following table shows the possible N loop division rates and gives the valid output frequency range for  $f_{REF}$  depending on N and the VCO frequency range:

**Table 20 N Loop Division Rates**

N	$f_{DIV}$ for $f_{VCO} =$					
	48	72	96	112	136	160
8	6.00	9.00	12.00	14.00	not allowed <sup>1)</sup>	
9	5.33	8.00	10.66	12.44	15.11	not allowed <sup>1)</sup>
10	4.80	7.20	9.60	11.20	13.60	16.00
11	4.36	6.54	8.72	10.18	12.36	14.54
12	4.00	6.00	8.00	9.33	11.33	13.33
13	not allowed <sup>1)</sup>	5.54	7.38	8.62	10.46	12.31
14 ...17		...	...	...	...	...
18		4.00	5.33	6.22	7.55	8.88
19	not allowed <sup>1)</sup>		5.05	5.89	7.16	8.42
20 ...23			...	...	...	...
24			4.00	4.66	5.66	6.66



## System Control Unit - Digital Modules (SCU-DM)

**Table 20 N Loop Division Rates (cont'd)**

N	$f_{DIV}$ for $f_{VCO} =$					
	48	72	96	112	136	160
25	not allowed <sup>1)</sup>			4.48	5.44	6.40
26 ...27				...	...	...
28				4.00	4.86	5.71

1) Values in this range are only allowed in Freerunning Mode, but have no impact there.

*Note:* The whole range in between two  $f_{VCO}$  columns in the above table is allowed.

The N-divider output frequency  $f_{DIV}$  is then compared with  $f_{REF}$  in the phase detector logic, within the VCO logic. The phase detector determines the difference between the two clock signals and accordingly controls the output frequency of the VCO,  $f_{VCO}$ .

*Note:* Due to this operation, the VCO clock of the PLL has a frequency which is a multiple of  $f_{DIV}$ . The factor for this is controlled through the value applied to the N-divider in the feedback path. For this reason this factor is often called a multiplier, although it actually controls division.

The output frequency of the VCO,  $f_{VCO}$ , is divided by K2 to provide the final desired output frequency  $f_{PLL}$ . **Table 21** shows the output frequency range depending on the K2 divisor and the VCO frequency range:

**Table 21 K2 Divisor Table**

K2	$f_{PLL}$ for $f_{VCO} =$						Duty Cycle [%]
	48	72	96	112	136	160	
2	24.0	36.0	48.0	56.0	68.0	80.0	50
3	16.0	24.0	32.0	37.3	45.3	53.3	46 - 54
4	12.0	18.0	24.0	28.0	34.0	40.0	50
5	9.6	14.4	19.2	22.4	27.2	32.0	48.5 - 51.5

### Notes

1. The whole range in between two  $f_{VCO}$  columns in the above table is allowed.
2. For divider factors that cause duty cycles far off of 50%, not only the cycle time has to be checked, but also the minimum clock pulse width.

For the K1-divider the same table is valid as for the K2-divider. The only difference is that not  $f_{VCO}$  is used as reference,  $f_R$  is used instead.

## System Control Unit - Digital Modules (SCU-DM)

**Table 22 K1 Divisor Table**

K1	$f_{PLL}$ for $f_R =$			Duty Cycle [%]
	5	8	16	
1	5.0	8.0	16.0	40 - 60
2	2.5	4.0	8.0	50

For different source oscillator, the selection of  $f_{PLL} = 24$  MHz or 40 MHz is shown in [Table 23](#).

**Table 23 System Frequency**

$f_{PLL}$ Selected	Oscillator	$f_{Osc}$	N	P	K	Actual $f_{SYS}$
40 MHz	On-chip	5 MHz	16	1	2	40 MHz
	External	10 MHz	8	1	2	40 MHz
		8 MHz	10	1	2	40 MHz
24 MHz	On-chip	5 MHz	24	1	5	24 MHz
	External	12 MHz	8	1	4	24 MHz
		8 MHz	12	1	4	24 MHz
		6 MHz	12	1	3	24 MHz

For the TLE987x, the value of P is fixed to 1. In order to obtain the required  $f_{PLL}$ , the values of VCOSEL, N and K can be chosen respectively by the bits VCOSEL, NDIV and KDIV (either K2DIV or K1DIV) for different oscillator input frequency.

### 6.3.3.3 Oscillator Watchdog

The oscillator watchdog monitors the external incoming clock  $f_{OSC\_int}$ . Only incoming frequencies that are too low (below 300 kHz) to enable a stable operation of the VCO circuit are detected.

As reference clock the internal oscillator (OSC\_PLL) frequency  $f_{INT}$  is used and therefore the internal oscillator must be put into operation.

By setting bit OSC\_CON.OSCWDTRST the detection can be restarted without a reset of the complete PLL. The detection status output is only valid after some cycles of  $f_{INT}$ .

### 6.3.3.4 PLL VCO Lock Detection

The PLL has a lock detection that supervises the VCO part of the PLL in order to differentiate between stable and instable VCO circuit behavior. The lock detector marks the VCO circuit and therefore the output  $f_{VCO}$  of the VCO as instable if the two inputs  $f_{REF}$  and  $f_{DIV}$  differ too much. Changes in one or both input frequencies below a level are not marked by a loss of lock because the VCO can handle such small changes without any problem for the system. [Table 24](#) shows values below that the lock is not lost for different input values.

## System Control Unit - Digital Modules (SCU-DM)

**Table 24 Loss of VCO Lock Definition**

Maximum Allow Changing		
$\frac{df_{DIV}}{dt}$ for $f_{REF} =$ (6.4)		
<b>4 MHz</b>	<b>10 MHz</b>	<b>16 MHz</b>
≤ 0.6 kHz/μs	≤ 3.7 kHz/μs	≤ 9.5 kHz/μs
<b>20 MHz</b>	<b>25 MHz</b>	<b>40 MHz</b>
≤ 14.9 kHz/μs	≤ 23.2 kHz/μs	≤ 59.5 kHz/μs

### 6.3.3.5 Internal Oscillator (OSC\_PLL)

The PLL internal oscillator is used for two different purposes:

#### Operating the Oscillator Watchdog

The input frequency for the PLL direct from OSC\_HP (XTAL), is supervised using the OSC\_PLL as reference frequency. For more information see [Section 6.3.3.3](#).

#### Providing a Input Clock to the PLL

The OSC\_PLL can be used as input clock for all PLL modes. This is controlled and configured via OSC\_CON.OSCSS.

OSC\_PLL operates at a nominal frequency of typ. 5 MHz.

### 6.3.3.6 Switching PLL Parameters

The following restriction applies when changing PLL parameters via the PLL\_CON register:

- Prescaler Mode (VCO bypass) may be enabled at any time, however, it has to be ensured that the maximum operating frequency of the device (see data sheet) will not be exceeded.
- Before switching NDIV, the Prescaler Mode has to be selected.
- VCOSEL and KDIV may be switched at any time, however, it has to be ensured that the maximum operating frequency of the device will not be exceeded.
- Only one parameter should be switched at one register write operation.
- Before switching the input clock source via OSC\_CON.OSCSS, the Prescaler Mode has to be selected. Due to a following potential oscillator watchdog event, the PLL may switch to Freerunning Mode. The procedure to set up the PLL in normal operation follows that as stated in [Section 6.3.3.8](#).
- Before deselecting the Prescaler Mode, the RESLD bit has to be set and then the LOCK flag has to be checked. Only when the LOCK flag is set again, the Prescaler Mode may be deselected.
- Before changing VCOSEL, the Prescaler Mode must be selected.

### 6.3.3.7 Oscillator Watchdog Event or PLL Loss of Lock Detection

In case of detection of too low frequency of the external clock source  $f_{OSC\_int}$ , the OSC-Too-Low flag (OSC\_CON.OSC2L) is set. If enabled by NMICON.NMIOWD, a trap request to the CPU is activated correspondingly only in either of these two cases:

1. When PLL is in Prescaler Mode and OSCSS = 01 selecting  $f_{OSC\_int}$  as PLL input clock source and SYSCON0.SYSCLKSEL selects PLL clock output as the system frequency, or
2. When SYSCON0.SYSCLKSEL selects  $f_{OSC\_int}$  as the system frequency.

## System Control Unit - Digital Modules (SCU-DM)

If either of these two cases is true and the OSC2L condition is set, the OWD NMI flag FNMIOWD in NMISR is set.

*Note: Do not restart the oscillator watchdog detection by setting bit OSC\_CON.OSCWDTRST while PLL is in Prescaler Mode, as the detection status (OSC\_CON.OSC2L) takes some time to be stable.*

An oscillator watchdog event normally leads to a following PLL loss-of-lock detection.

If PLL is not the system clock source (SYSCON0.SYSCLKSEL deselects PLL or PLL is in Prescaler Mode) when the loss-of-lock is detected, only the lock flag is reset (PLL\_CON.LOCK = 0). No loss-of-lock NMI is generated and no further action is taken. Otherwise if PLL is selected as clock source for system frequency and VCOBYP = 0, the PLL loss-of-lock NMI flag FNMIPLL in NMISR is set. If enabled by NMICON.NMIPLL, an NMI trap request to the CPU is activated. In addition, the lock flag is reset. Note that in the first place, the LOCK flag has to be set first before a loss-of-lock NMI request is generated. This avoids a potential PLL loss-of-lock NMI request after device power-on reset.

On an oscillator watchdog event (when PLL is in Prescaler Mode and external clock (OSC\_HP) is selected as PLL clock input) or on PLL loss-of-lock detection (when PLL is in Normal Mode), the PLL will be switched to run in the Freerunning Mode on the VCO base frequency divided by K2, which is enforced by hardware until the Prescaler Mode is (re-)selected.

Due to the above, the PLL shall only run in Prescaler Mode when changing the PLL configuration or switching between PLL operation modes.

### 6.3.3.8 Oscillator Watchdog Event or Loss of Lock Recovery

In case of oscillator watchdog NMI, user software can first check if the PLL remains locked. If not, the clock system can be reconfigured again by executing the following sequence as the OWD NMI routine:

1. Restart the oscillator watchdog detection by setting bit OSC\_CON.OSCWDTRST
2. Wait until OSC\_CON.OSC2L is clear
3. When bit OSC\_CON.OSC2L is cleared, then
  - a) Select the Prescaler Mode (PLL\_CON.VCOBYP = 1)
  - b) Set the restart lock detection bit PLL\_CON.RESLD = 1
  - c) Wait until the PLL VCO part becomes locked (PLL\_CON.LOCK = 1)
  - d) When the LOCK is set again, the Prescaler Mode can be deselected (PLL\_CON.VCOBYP = 0) and normal PLL operation is resumed.
4. Clear the OWD NMI flag FNMIOWD.


In the general case of PLL loss-of-lock or to re-configure the PLL settings, user software can try to configure the clock system again by executing the following sequence:

1. If input clock source is from XTAL ( $f_{\text{OSC\_int}}$  from OSC\_HP), ensure the input frequency is above threshold by checking OSC\_CON.OSC2L.
2. The Prescaler Mode has to be selected (PLL\_CON.VCOBYP = 1)
3. If desired, (re-)configure the PLL divider settings.
4. Set the restart lock detection bit PLL\_CON.RESLD = 1
5. Wait until the PLL VCO part becomes locked (PLL\_CON.LOCK = 1)
6. When the LOCK is set again, the Prescaler Mode can be deselected (PLL\_CON.VCOBYP = 0) and normal PLL operation is resumed.
7. Clear the PLL loss-of-lock NMI flag FNMIPLL.

## System Control Unit - Digital Modules (SCU-DM)

### 6.3.4 Clock Control Unit

The Clock Control Unit (CCU) receives the clock from the PLL  $f_{PLL}$ , or the external input clock  $f_{OSC\_int}$ , or the low-precision input clock  $f_{LP\_CLK}$ . The system frequency is derived from one of these clock sources.

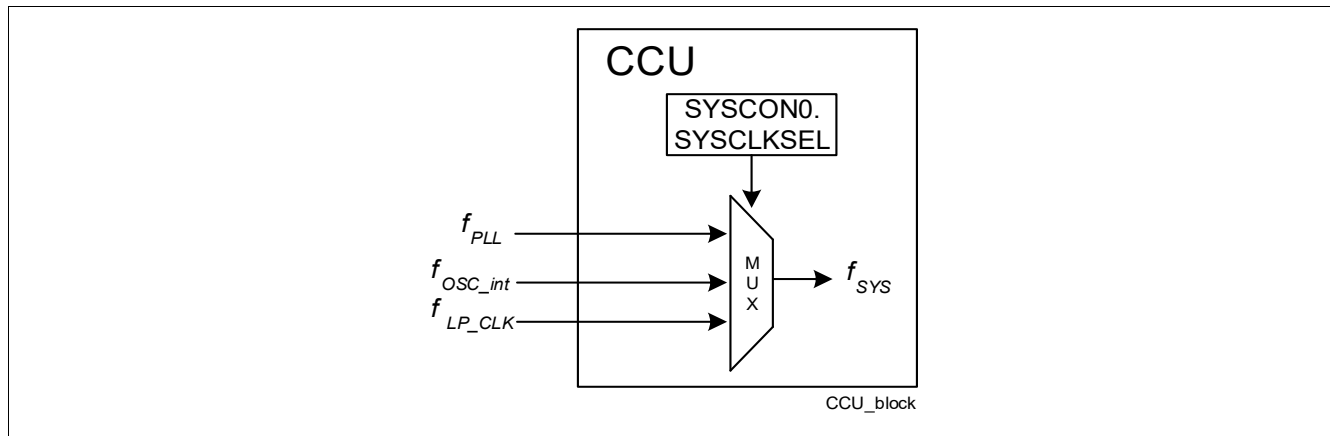

**Figure 23** Clock Inputs to Clock Control Unit

The CCU generates all necessary clock signals within the microcontroller from the system clock. It consists of:

- Clock slow down circuitry
- Centralized enable/disable circuit for clock control

In normal running mode, the main module frequencies (synchronous unless otherwise stated) are as follows:

- System frequency,  $f_{SYS}$  = up to 40 MHz (measurement interface clock MI\_CLK is derived from this clock)
- CPU clock (CCLK, SCLK) = up to 40 MHz (divide-down of NVM access clock)
- NVM access clock (NVMACCCLK) = up to 40 MHz
- Peripheral clock (PCLK, PCLK2, NVMCLK) = up to 40 MHz (equals CPU clock; must be same or higher)

Some peripherals are clocked by PCLK, others clocked by PCLK2 and the NVM is clocked by both NVMCLK and NVMACCCLK. During normal running mode, PCLK = PCLK2 = NVMCLK = CCLK. On wake-up from power-down mode, PCLK2 is restored similarly like NVMCLK, whereas PCLK is restored only after PLL is locked.

For optimized NVM access (read/write) with reduced wait state(s) and with respect to system requirements on CPU operational frequency, bit field NVMCLKFAC is provided for setting the frequency factor between the NVM access clock NVMACCCLK and the CPU clock CCLK. For details, refer to the separate NVM documentation.

For the slow down mode, the operating frequency is reduced using the slow down circuitry with clock divider setting at the bit field CLKREL. Bit field CLKREL is only effective when slow down mode is enabled via SFR bit PMCON0.SD bit. Note that the slow down setting of bit field CLKREL correspondingly reduces the NVMACCCLK clock. Slow down setting does not influence the erase and write cycles for the NVM.

System Control Unit - Digital Modules (SCU-DM)

6.3.4.1 Clock Tree

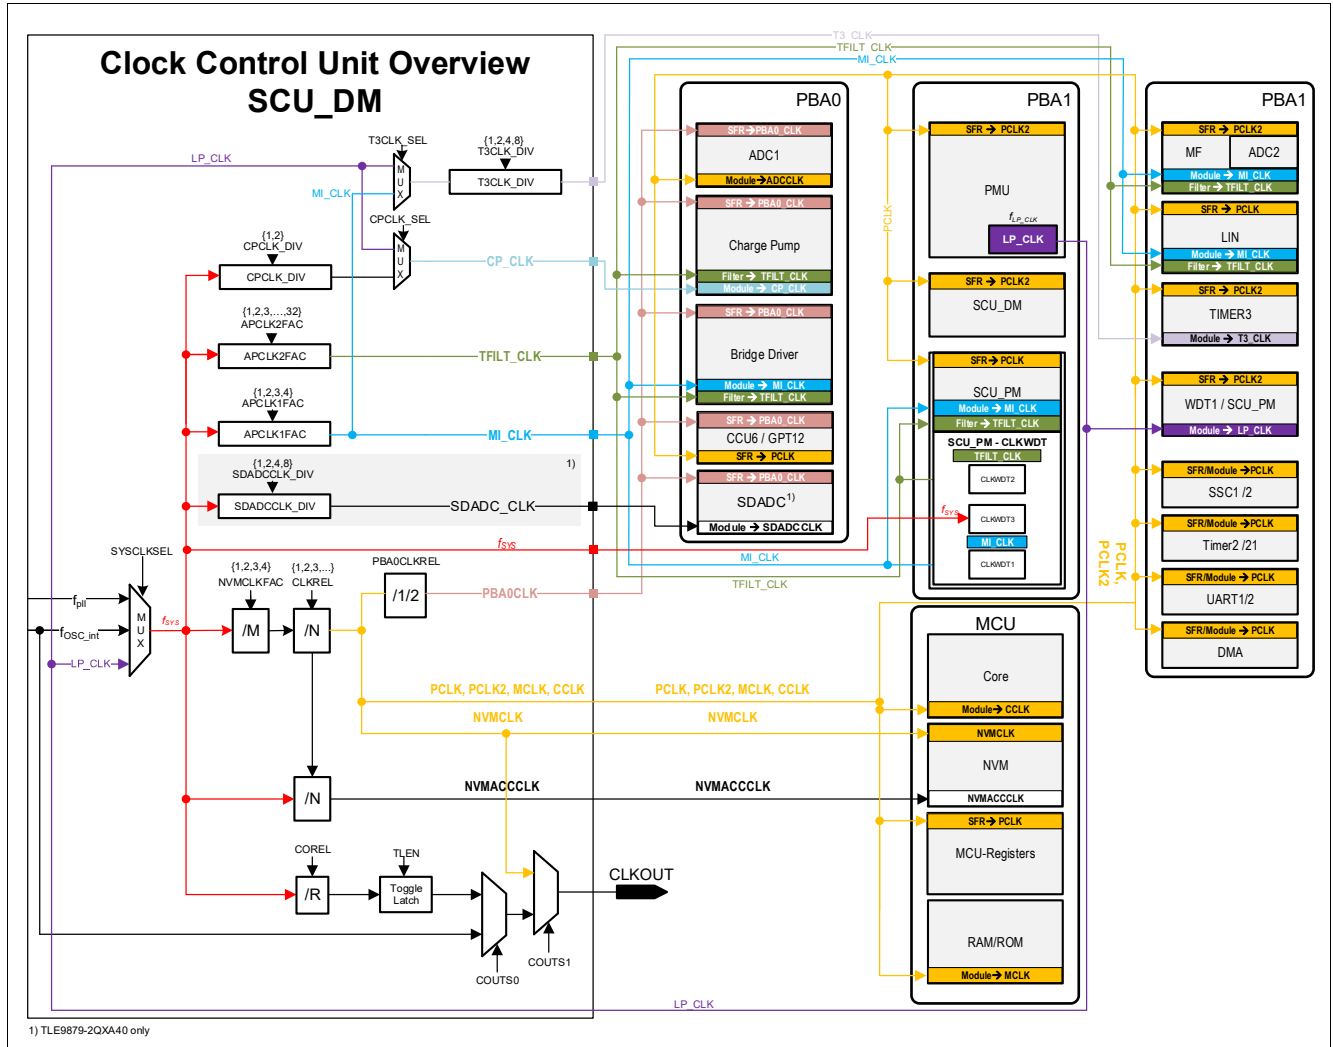


Figure 24 Clock Tree

---

**System Control Unit - Digital Modules (SCU-DM)****6.3.4.2 Startup Control for System Clock**

Typically when the TLE987x starts up after reset, the LP\_CLK is selected by hardware to provide the system frequency  $f_{SYS}$ . CPU runs based on this system frequency during startup operation by boot firmware (unless otherwise specified and configured by firmware). Meanwhile, the system clock input is switched to the PLL output. With user boot configuration, the PLL is configured with internal oscillator (5 MHz) as input, by default. User code can modify the default PLL configuration as required.

The exception to the above is with resets that do not reset the clock system, which are watchdog timer (WDT) reset and soft reset. With these resets, the previous user configuration of PLL and clock system is retained across the reset.

*Note:* In the event the PLL fails to lock during startup operation, the LP\_CLK continues to provide the system clock input. The system clock input source is indicated by the register bit field `SYSCON0.SYSCLKSEL`.

**6.3.5 External Clock Output**

An external clock output is provided as CLKOUT. This output clock can be enabled/disabled via bit `COCON.EN`. One of three clock sources ( $f_{CCLK}$  or  $f_{SYS}/n$  or  $f_{OSC\_int}$ ) can be selected for output, configured via bit fields `COCON.COUTS1` and `COUTS0`.

If `COUTS1 = 0` (independent on `COUTS0`), the output clock is  $f_{CCLK}$ . Otherwise, if `COUTS0 = 0`, the output clock is from oscillator output frequency; if `COUTS0 = 1`, the clock output frequency is chosen by the bit field `COREL` which selects the  $n$  divider factor on  $f_{SYS}$ . Under this selection, the clock output frequency can further be divided by 2 using a toggle latch (`TLEN = 1`), the resulting output frequency has 50% duty cycle.

**6.3.6 CGU Registers**

The registers of the clock generation unit for PLL and oscillator control are not affected by the watchdog timer (WDT) reset and soft reset. Therefore the system clock configuration and frequency is maintained across these types of reset.

Unless otherwise stated, the reset value as stated for the following registers apply only with Power-On reset, Brown-Out reset, Hard reset, WDT1 reset or Wake-up reset.

## System Control Unit - Digital Modules (SCU-DM)

### 6.3.6.1 PLL Oscillator Register

These registers control the setting and trimming of OSC\_PLL, the power down of XTAL (OSC\_HP) and the control and status monitor of oscillator watchdog.

Register OSC\_CON is being initialized by the BootROM during the bootup process to a value of 98<sub>H</sub>

#### OSC\_CON

##### OSC Control Register

(0B0<sub>H</sub>)

Reset Value: 10<sub>H</sub>

7	6	5	4	3	2	1	0
<b>OSCTRIM_8</b>	<b>Res</b>	<b>Res</b>	<b>XPD</b>	<b>OSC2L</b>	<b>OSCWDTRST</b>	<b>OSCSS</b>	
rw	r	r	rw	rh	rwh	rw	

Field	Bits	Type	Description
<b>OSCTRIM_8</b>	7	rw	<p><b>OSC_PLL Trim Configuration Bit [8]</b></p> <p>This bit field enables the trimming for the OSC_PLL. User should always set this bit with any write. This bit is a protected bit. When the Protection Scheme is activated, this bit cannot be written directly. For more information on Protection Scheme, see <a href="#">Section 6.12</a>.</p>
<b>Res</b>	6	r	<p><b>Reserved</b></p> <p>This bit field is always read as zero.</p>
<b>Res</b>	5	r	<p><b>Reserved</b></p> <p>This bit field is always read as zero.</p>
<b>XPD</b>	4	rw	<p><b>XTAL (OSC_HP) Power Down Control</b></p> <p>0<sub>B</sub> XTAL (OSC_HP) is not powered down. 1<sub>B</sub> XTAL (OSC_HP) is powered down.</p> <p>The XPD bit is a protected bit. When the Protection Scheme is activated, this bit cannot be written directly. For more information on Protection Scheme, see <a href="#">Section 6.12</a>.</p> <p><i>Note: When XPD is set, switch of clock source to internal oscillator has to be done asynchronous.</i></p>



## System Control Unit - Digital Modules (SCU-DM)

Field	Bits	Type	Description
<b>OSC2L</b>	3	rh	<p><b>OSC-Too-Low Condition Flag</b></p> <p>The Oscillator Watchdog monitors the <math>f_{\text{OSC\_int}}</math>.</p> <p>0<sub>B</sub> <math>f_{\text{OSC\_int}}</math> is above threshold.  1<sub>B</sub> <math>f_{\text{OSC\_int}}</math> is below threshold.</p> <p>On OSC-too-low detection (OSC2L: 0 → 1) and VCOBYP = 1 and OSCSS = 01, PLL switches to freerunning mode.</p> <p>On above condition, and when <math>f_{\text{OSC\_int}}</math> is selected as the system clock source, hardware switches the system clock source to PLL (<b>SYSCON0.SYSCLKSEL</b> is also updated).</p> <p><i>Note:</i> OWD NMI request is activated on OSC-too-low condition only in two cases: 1) when VCOBYP = 1 and OSCSS = 01 and SYSCLKSEL selects PLL clock as system clock source; 2) when SYSCLKSEL selects <math>f_{\text{OSC\_int}}</math> as system clock source.</p>
<b>OSCDTRST</b>	2	rwh	<p><b>Oscillator Watchdog Reset</b></p> <p>Setting this bit will reset the OSC2L status flag to 1 and restart the oscillator detection. This bit will be automatically reset to 0 and thus always be read back as 0.</p> <p>0<sub>B</sub> No effect.  1<sub>B</sub> Reset OSC2L flag and restart the oscillator watchdog of the PLL.</p>
<b>OSCSS</b>	1:0	rw	<p><b>Oscillator Source Select</b></p> <p>00<sub>B</sub> PLL internal oscillator OSC_PLL (<math>f_{\text{INT}}</math>) is selected synchronously as <math>f_{\text{R}}</math>.  01<sub>B</sub> XTAL (<math>f_{\text{OSC}}</math> from OSC_HP) is selected synchronously as <math>f_{\text{R}}</math>.  10<sub>B</sub> PLL internal oscillator OSC_PLL (<math>f_{\text{INT}}</math>) is selected asynchronously as <math>f_{\text{R}}</math>.  11<sub>B</sub> PLL internal oscillator OSC_PLL (<math>f_{\text{INT}}</math>) is selected asynchronously as <math>f_{\text{R}}</math>.</p> <p>The OSCSS bit is a protected bit. When the Protection Scheme is activated, this bit cannot be written directly. For more information on Protection Scheme, see <b>Section 6.12</b>.</p> <p><i>Note:</i> Synchronous switching of clock source to internal oscillator is not possible when XPD = 1 or no external clock is available (check bit OSC2L).</p> <p><i>Note:</i> Use the 1X option only when the external clock is not available.</p>

This register OSC\_CON is reset by RESET\_TYPE\_4.

## System Control Unit - Digital Modules (SCU-DM)

### 6.3.6.2 PLL Registers

These registers control the PLL configuration or settings.

Register PLL\_CON is being initialized by the BootROM during the bootup process to a value of 61<sub>H</sub>.

#### PLL\_CON

##### PLL Control Register

(044<sub>H</sub>)

Reset Value: 64<sub>H</sub>

7	6	5	4	3	2	1	0
<b>NDIV</b>				<b>VCOBYP</b>	<b>OSCDISC</b>	<b>RESLD</b>	<b>LOCK</b>
rw				rwh	rwh	rwh	r

Field	Bits	Type	Description
<b>NDIV</b>	7:4	rw	<p><b>PLL N-Divider</b></p> <p>0000<sub>B</sub> N = 8            0001<sub>B</sub> N = 9            0010<sub>B</sub> N = 10            0011<sub>B</sub> N = 12            0100<sub>B</sub> N = 14            0101<sub>B</sub> N = 15            0110<sub>B</sub> N = 16            0111<sub>B</sub> N = 18            1000<sub>B</sub> N = 20            1001<sub>B</sub> N = 21            1010<sub>B</sub> N = 22            1011<sub>B</sub> N = 24            1100<sub>B</sub> N = 25            1101<sub>B</sub> N = 26            1110<sub>B</sub> N = 27            1111<sub>B</sub> N = 28</p> <p>The NDIV bit is a protected bit. When the Protection Scheme is activated, this bit cannot be written directly. For more information on Protection Scheme, see <a href="#">Section 6.12</a>.</p>
<b>VCOBYP</b>	3	rwh	<p><b>PLL VCO Bypass Mode Select</b></p> <p>0<sub>B</sub> Normal (or freerunning) operation (default)            1<sub>B</sub> Prescaler Mode; VCO is bypassed (PLL output clock is derived from input clock divided by K1-divider)</p> <p>This bit is cleared by hardware when PLL switches to freerunning mode.            When the bit value changes from 0 to 1, bit OSDISC = 0.</p>
<b>OSCDISC</b>	2	rwh	<p><b>Oscillator Disconnect</b></p> <p>0<sub>B</sub> Oscillator is connected to the PLL            1<sub>B</sub> Oscillator is disconnected to the PLL.</p> <p>By default after power-on reset, PLL is running in Freerunning Mode (oscillator is disconnected).</p>

## System Control Unit - Digital Modules (SCU-DM)

Field	Bits	Type	Description
<b>RESLD</b>	1	rwh	<p><b>Restart Lock Detection</b></p> <p>Setting this bit will reset the PLL lock status flag and restart the lock detection. This bit will be automatically reset to 0 and thus always be read back as 0.</p> <p>0<sub>B</sub> No effect. 1<sub>B</sub> Reset lock flag and restart lock detection.</p>
<b>LOCK</b>	0	r	<p><b>PLL Lock Status Flag</b></p> <p>0<sub>B</sub> The frequency difference of <math>f_{REF}</math> and <math>f_{DIV}</math> is greater than allowed. The VCO part of the PLL can not lock on a target frequency. 1<sub>B</sub> The frequency difference of <math>f_{REF}</math> and <math>f_{DIV}</math> is small enough to enable a stable VCO operation.</p> <p><b>Notes</b></p> <ol style="list-style-type: none"> <li>1. In case of a loss of VCO lock the <math>f_{VCO}</math> goes to the upper boundary of the selected VCO band if the reference clock input is greater as expected.</li> <li>2. In case of a loss of VCO lock the <math>f_{VCO}</math> goes to the lower boundary of the selected VCO band if the reference clock input is lower as expected.</li> <li>3. On loss-of-lock detection (LOCK: 1 → 0) and when VCOBYP = 0, PLL switches to freerunning mode.</li> <li>4. Loss-of-lock NMI request is activated only on loss-of-lock detection when VCOBYP = 0 and SYSCON0.SYSCLKSEL selects PLL clock as system frequency.</li> </ol>

The register PLL\_CON is reset by RESET\_TYPE\_4.

## System Control Unit - Digital Modules (SCU-DM)

## CMCON1

## Clock Control Register 1

(048<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>VCOSEL</b>	<b>K1DIV</b>	<b>K2DIV</b>		<b>CLKREL</b>			
rw	rw	rw		rw			

Field	Bits	Type	Description
<b>VCOSEL</b>	7	rw	<b>VCOSEL Setting</b> 0 <sub>B</sub> VCOSEL = 0 1 <sub>B</sub> VCOSEL = 1
<b>K1DIV</b>	6	rw	<b>PLL K1-Divider</b> 0 <sub>B</sub> K1 = 2 1 <sub>B</sub> K1 = 1 The K1DIV bit is a protected bit. When the Protection Scheme is activated, this bit cannot be written directly. For more information on Protection Scheme, see <a href="#">Section 6.12</a> .
<b>K2DIV</b>	5:4	rw	<b>PLL K2-Divider</b> 00 <sub>B</sub> K2 = 2 01 <sub>B</sub> K2 = 3 10 <sub>B</sub> K2 = 4 11 <sub>B</sub> K2 = 5 The K2DIV bit is a protected bit. When the Protection Scheme is activated, this bit cannot be written directly. For more information on Protection Scheme, see <a href="#">Section 6.12</a> .  <i>Note: Depending on VCOSEL, the user has to set the K2-divider factor large enough to ensure the PLL output frequency in freerunning mode is never higher than that specified for the device.</i>

## System Control Unit - Digital Modules (SCU-DM)

Field	Bits	Type	Description
CLKREL	3:0	rw	<p><b>Slow Down Clock Divider for <math>f_{\text{CLK}}</math> Generation</b></p> <p>0000<sub>B</sub> <math>f_{\text{sys}}</math></p> <p>0001<sub>B</sub> <math>f_{\text{sys}}/2</math></p> <p>0010<sub>B</sub> <math>f_{\text{sys}}/3</math></p> <p>0011<sub>B</sub> <math>f_{\text{sys}}/4</math></p> <p>0100<sub>B</sub> <math>f_{\text{sys}}/8</math></p> <p>0101<sub>B</sub> <math>f_{\text{sys}}/16</math></p> <p>0110<sub>B</sub> <math>f_{\text{sys}}/24</math></p> <p>0111<sub>B</sub> <math>f_{\text{sys}}/32</math></p> <p>1000<sub>B</sub> <math>f_{\text{sys}}/48</math></p> <p>1001<sub>B</sub> <math>f_{\text{sys}}/64</math></p> <p>1010<sub>B</sub> <math>f_{\text{sys}}/96</math></p> <p>1011<sub>B</sub> <math>f_{\text{sys}}/128</math></p> <p>1100<sub>B</sub> <math>f_{\text{sys}}/192</math></p> <p>1101<sub>B</sub> <math>f_{\text{sys}}/256</math></p> <p>1110<sub>B</sub> <math>f_{\text{sys}}/384</math></p> <p>1111<sub>B</sub> <math>f_{\text{sys}}/512</math></p> <p>This setting is effective only when the device is enabled in Slow Down Mode.</p> <p><i>Note:</i> <math>f_{\text{SYS}}</math> is further divided by the NVMCLKFAC factor to generate <math>f_{\text{CLK}}</math></p>

The register CMCON1 is reset by RESET\_TYPE\_4.

---

**System Control Unit - Digital Modules (SCU-DM)**
**CMCON2****Clock Control Register 2****(04C<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>							<b>PBA0CLKREL</b>
r							rw

Field	Bits	Type	Description
<b>Res</b>	7:1	r	<b>Reserved</b> This bit field is always read as zero.
<b>PBA0CLKREL</b>	0	rw	<b>PBA0 Clock Divider</b> This Flag configures the PBA0 clock divider. 0 <sub>B</sub> divide by 1 1 <sub>B</sub> divide by 2 The PBA0CLKREL bit is a protected bit. When the Protection Scheme is activated, this bit cannot be written directly. For more information on Protection Scheme, see <a href="#">Section 6.12</a> .

The register CMCON2 is reset by RESET\_TYPE\_4.

## System Control Unit - Digital Modules (SCU-DM)

### 6.3.6.3 System Clock Control Registers

The clock source for the system is selected via register SYSCON0.

Register SYSCON0 is being initialized by the BootROM during the bootup process to a value of 00<sub>H</sub>.

#### SYSCON0

##### System Control Register 0

(070<sub>H</sub>)

Reset Value: C0<sub>H</sub>

7	6	5	4	3	2	1	0
<b>SYSCLKSEL</b>		<b>NVMCLKFAC</b>		<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>Res</b>
rw		r		r	r	r	r

Field	Bits	Type	Description
<b>SYSCLKSEL</b>	7:6	rw	<p><b>System Clock Select</b></p> <p>This bit field defines the clock source that is used as system clock for the system operation.</p> <p>00<sub>B</sub> The PLL clock output signal <math>f_{PLL}</math> is used</p> <p>01<sub>B</sub> The direct clock input from <math>f_{OSC\_int}</math> is used</p> <p>10<sub>B</sub> The direct low-precision clock input from <math>f_{LP\_CLK}</math> is used.</p> <p>11<sub>B</sub> The direct low-precision clock input from <math>f_{LP\_CLK}</math> is used.</p> <p><i>Note:</i> In normal application, it is expected that the system is running on the PLL clock output.</p>
<b>NVMCLKFAC</b>	5:4	r	<p><b>NVM Access Clock Factor</b></p> <p>This bit field defines the factor by which the system clock is divided down, with respect to the synchronous NVMACCCLK clock.</p> <p>00<sub>B</sub> Divide by 1</p> <p>01<sub>B</sub> Divide by 2</p> <p>10<sub>B</sub> Divide by 3</p> <p>11<sub>B</sub> Divide by 4</p> <p><i>Note:</i> Note: Can only be changed via dedicated BootROM routine.</p>
<b>Res</b>	3, 2, 1, 0	r	<p><b>Reserved</b></p> <p>Returns 0 if read; should be written with 0.</p>

**Table 25 Reset Value of Register SYSCON0**

Reset Source	Reset Value
Power-On Reset/Brown-out Reset/WDT1 Reset/Wake-up Reset/Hardware Reset	C0 <sub>H</sub>
Watchdog Timer Reset/Soft Reset	U0 <sub>H</sub> (U = unchanged)

This register SYSCON0 is reset by RESET\_TYPE\_4.

## System Control Unit - Digital Modules (SCU-DM)

### 6.3.6.4 Analog Peripherals Clock Control Registers

The clock frequency for the analog modules is selected via register APCLK1 and APCLK2. The APCLK1 is used as operating clock for all analog peripherals. For this reason it is important to always adapt the Analog Peripherals Clock Control Register settings to the required frequency range, if the system clock is changed.

Register APCLK\_CTRL1 is being initialized by the BootROM during the bootup process to a value of 05<sub>H</sub>.

#### APCLK\_CTRL1

#### Analog Peripheral Clock Control 1 Register

(054<sub>H</sub>)Reset Value: 30<sub>H</sub>

7	6	5	4	3	2	1	0
<b>CPCLK_DIV</b>	<b>CPCLK_SEL</b>	<b>BGCLK_DIV</b>	<b>BGCLK_SEL</b>	<b>CLKWDT_IE</b>	<b>T3CLK_SEL</b>	<b>APCLK_SET</b>	<b>PLL_LOCK</b>
rw	rw	rw	rw	rw	rw	rwh1	r

Field	Bits	Type	Description
<b>CPCLK_DIV</b>	7	rw	<b>Charge Pump Clock Divider</b> This Flag configures the charge pump clock divider. 0 <sub>B</sub> divide by 2 1 <sub>B</sub> divide by 1 The CPCLK_DIV bit is a PASSWD protected bit.
<b>CPCLK_SEL</b>	6	rw	<b>Charge Pump Clock Selection</b> This Flag selects the charge pump clock. 0 <sub>B</sub> LP_CLK is selected 1 <sub>B</sub> f <sub>sys</sub> is selected The CPCLK_SEL bit is a PASSWD protected bit. Note: If SYSCLKSEL[1] = '1' the default CPCLK_SEL = "0" (LP_CLK) is taken
<b>BGCLK_DIV</b>	5	rw	<b>Bandgap Clock Divider</b> This Flag configures the bandgap clock divider. 0 <sub>B</sub> divide by 2 1 <sub>B</sub> divide by 1 The BGCLK_DIV bit is a PASSWD protected bit.
<b>BGCLK_SEL</b>	4	rw	<b>Bandgap Clock Selection</b> This Flag selects the bandgap clock. 0 <sub>B</sub> LP_CLK is selected 1 <sub>B</sub> f <sub>sys</sub> is selected The BGCLK_SEL bit is a PASSWD protected bit. Note: If SYSCLKSEL[1] = '1' the default BGCLK_SEL = "0" (LP_CLK) is taken
<b>CLKWDT_IE</b>	3	rw	<b>Clock Watchdog Interrupt Enable</b> 0 <sub>B</sub> Interrupt disabled 1 <sub>B</sub> Interrupt enabled The CLKWDT_IE bit is a PASSWD protected bit.
<b>T3CLK_SEL</b>	2	rw	<b>Timer 3 Clock Selection</b> This Flag selects the Timer 3 clock. 0 <sub>B</sub> LP_CLK is selected 1 <sub>B</sub> MI_CLK is selected The T3CLK_SEL bit is a PASSWD protected bit.



---

**System Control Unit - Digital Modules (SCU-DM)**

Field	Bits	Type	Description
<b>APCLK_SET</b>	1	rwh1	<b>Set and Overtake Flag for Clock Settings</b> This Flag makes the APCLK1, APCLK2, T3CLK_DIV and SDADCCLK_DIV <sup>1)</sup> settings valid. 0 <sub>B</sub> Clock Settings are ignored (previous values are hold) 1 <sub>B</sub> Clock Settings are overtaken Note: APCLK_SET is cleared by hardware once the clock setting are overtaken
<b>PLL_LOCK</b>	0	r	<b>PLL Lock Indicator</b> 0 <sub>B</sub> locked 1 <sub>B</sub> not locked

1) only for TLE9879-2QXA40 variant

**Table 26 Reset Value of Register APCLK\_CTRL1**

Reset Source (RESET_TYPE_4)	Reset Value
Power-On Reset/Brown-out Reset/WDT1 Reset/Wake-up Reset/Hardware Reset	50 <sub>H</sub>
Watchdog Timer Reset/Soft Reset	UU <sub>H</sub> (U = unchanged)


This register APCLK\_CTRL1 is reset by RESET\_TYPE\_4.

The clock source for the analog modules is selected via register APCLK1 and APCLK2.

## System Control Unit - Digital Modules (SCU-DM)

## APCLK\_CTRL2

Analog Peripheral Clock Control 2 Register

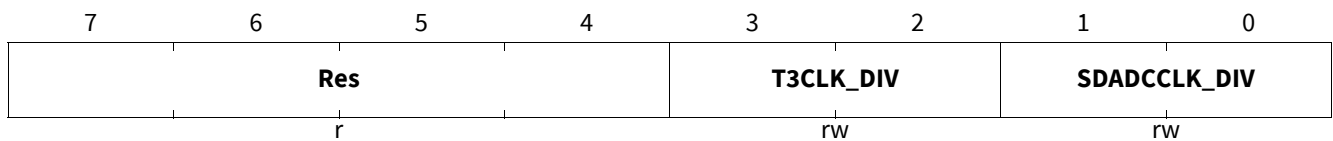(06C<sub>H</sub>)Reset Value: 01<sub>H</sub>

Field	Bits	Type	Description
<b>Res</b>	7:4	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>T3CLK_DIV</b>	3:2	rw	<b>Timer 3 Clock Divider</b> This Flag configures the Timer 3 clock divider. 00 <sub>B</sub> divide by 1 01 <sub>B</sub> divide by 2 10 <sub>B</sub> divide by 4 11 <sub>B</sub> divide by 8 The T3CLK_DIV bit is a PASSWD protected bit.
<b>SDADCCLK_DIV</b>	1:0	rw	<b>SDADC Clock Divider<sup>1)</sup></b> This Flag configures the SDADC clock divider. 00 <sub>B</sub> divide by 1 01 <sub>B</sub> divide by 2 10 <sub>B</sub> divide by 4 11 <sub>B</sub> divide by 8 The SDADCCLK_DIV is not a protected bit

1) only for TLE9879-2QXA40 variant

**Table 27** Reset Value of Register APCLK\_CTRL2

Reset Source (RESET_TYPE_4)	Reset Value
Power-On Reset/Brown-out Reset/WDT1 Reset/Wake-up Reset/Hardware Reset	01 <sub>H</sub>
Watchdog Timer Reset/Soft Reset	UU <sub>H</sub> (U = unchanged)

This register APCLK\_CTRL2 is reset by RESET\_TYPE\_4.

## System Control Unit - Digital Modules (SCU-DM)

The clock source for the analog modules is selected via register APCLK1 and APCLK2.

Register APCLK1 is being initialized by the BootROM during the bootup process to a value of 01<sub>H</sub>

### APCLK1

#### Analog Peripheral Clock Register 1

(058<sub>H</sub>)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
APCLK3SCLR	APCLK3STS	APCLK1STS		Res	APCLK1SCLR	APCLK1FAC	
w	r	r		r	w	rw	

Field	Bits	Type	Description
<b>APCLK3SCLR</b>	7	w	<b>Analog Peripherals Clock Status Clear</b> This bit field is used for APCLK3 Status Clear.
<b>APCLK3STS</b>	6	r	<b>fSYS Loss of Clock Status</b> This bit field indicate the loss of fSYS clock status. 0 <sub>B</sub> No loss of fSYS clock 1 <sub>B</sub> Loss of fSYS clock occurred
<b>APCLK1STS</b>	5:4	r	<b>Analog Peripherals Clock Status</b> This bit field reflects the analog peripheral clock source status that is used as system clock for the analog module operation. 00 <sub>B</sub> The MI_CLK clock is in the required range 01 <sub>B</sub> The MI_CLK clock exceeds the higher limit 10 <sub>B</sub> The MI_CLK clock exceeds the lower limit 11 <sub>B</sub> The MI_CLK clock is not inside the specified limit. The implemented clock watchdog (see <a href="#">Chapter 7</a> ) is monitoring the frequency of the analog subsystem. If the clock is not inside the required range, a system reset will be issued.  <i>Note: The functionality of the analog modules can only be guaranteed, if their clock is in the required range.</i>
<b>Res</b>	3	r	<b>Reserved</b> Always read as zero.
<b>APCLK1SCLR</b>	2	w	<b>Analog Peripherals Clock Status Clear</b> This bit field is used for APCLK1 Status Clear.
<b>APCLK1FAC</b>	1:0	rw	<b>Analog Module Clock Factor</b> This bit field defines the factor by which the system clock is divided down, with respect to the synchronous MI_CLK clock. 00 <sub>B</sub> Divide by 1 01 <sub>B</sub> Divide by 2 10 <sub>B</sub> Divide by 3 11 <sub>B</sub> Divide by 4 The APCLKFAC bit is not a protected bit. This setting is only effective when APCLK_SET = 1. Note: If SYSCLKSEL[1] = '1' (LP_CLK) the default APCLK1FAC = "00" is taken (divide by 1)

## System Control Unit - Digital Modules (SCU-DM)

**Table 28** Reset Value of Register APCLK1

Reset Source (RESET_TYPE_4)	Reset Value
Power-On Reset/Brown-out Reset/WDT1 Reset/Wake-up Reset/Hardware Reset	00 <sub>H</sub>
Watchdog Timer Reset/Soft Reset	UU <sub>H</sub> (U = unchanged)

This register APCLK1 is reset by RESET\_TYPE\_4.

The clock source for the analog modules is selected via register APCLK1 and APCLK2.

Register APCLK2 is being initialized by the BootROM during the bootup process to a value of 13<sub>H</sub>

### APCLK2

#### Analog Peripheral Clock Register 2

(05C<sub>H</sub>)

Reset Value: 08<sub>H</sub>

7	6	5	4	3	2	1	0
APCLK2SCLR		APCLK2STS		APCLK2FAC			
w		r		rw			

Field	Bits	Type	Description
APCLK2SCLR	7	w	<b>Analog Peripherals Clock Status Clear</b> This bit field is used for APCLK2 Status Clear.
APCLK2STS	6:5	r	<b>Analog Peripherals Clock Status</b> This bit field reflects the analog peripheral clock source status that is used as system clock for the analog module operation. 00 <sub>B</sub> The TFILT_CLK clock is in the required range 01 <sub>B</sub> The TFILT_CLK clock exceeds the higher limit 10 <sub>B</sub> The TFILT_CLK clock exceeds the lower limit 11 <sub>B</sub> The TFILT_CLK clock is not inside the specified limit. The implemented clock watchdog ( <b>see Chapter SCU_PM</b> ) is monitoring the frequency of the analog subsystem. If the clock is not inside the required range, a system reset will be issued.  <i>Note:</i> The functionality of the analog modules can only be guaranteed, if their clock is in the required range.

## System Control Unit - Digital Modules (SCU-DM)

Field	Bits	Type	Description
<b>APCLK2FAC</b>	4:0	rw	<p><b>Slow Down Clock Divider for TFILT_CLK Generation</b></p> <p>00000<sub>B</sub> <math>f_{sys}</math>            00001<sub>B</sub> <math>f_{sys}/2</math>            00010<sub>B</sub> <math>f_{sys}/3</math>            00011<sub>B</sub> <math>f_{sys}/4</math>            00100<sub>B</sub> <math>f_{sys}/5</math>            00101<sub>B</sub> <math>f_{sys}/6</math>            00110<sub>B</sub> <math>f_{sys}/7</math>            00111<sub>B</sub> <math>f_{sys}/8</math>            01000<sub>B</sub> <math>f_{sys}/9</math>            01001<sub>B</sub> <math>f_{sys}/10</math>            01010<sub>B</sub> <math>f_{sys}/11</math>            01011<sub>B</sub> <math>f_{sys}/12</math>            .            .            .            .            .            .            11110<sub>B</sub> <math>f_{sys}/31</math>            11111<sub>B</sub> <math>f_{sys}/32</math></p> <p>This setting is effective only when the APCLK_SET = 1.</p> <p><b>Notes</b></p> <ol style="list-style-type: none"> <li>1. If SYSCLKSEL[1] = '1' (LP_CLK) the default APCLK2FAC = 8 is taken</li> <li>2. <math>f_{sys}</math> is further divided by the APCLK2FAC factor to generate TFILT_CLK. The clock should be always at 2 MHz.</li> </ol>

**Table 29 Suggested Value for APCLK2**

Clock Frequency	APCLK2FAC
18 MHz (lp_clk)	08 <sub>H</sub> (default)
20 MHz (Pll clk)	09 <sub>H</sub>
24 MHz (Pll clk)	0B <sub>H</sub>
40 MHz (Pll clk)	13 <sub>H</sub>

**Table 30 Reset Value of Register APCLK2**

Reset Source (RESET_TYPE_4)	Reset Value
Power-On Reset/Brown-out Reset/WDT1 Reset/Wake-up Reset/Hardware Reset	0B <sub>H</sub>
Watchdog Timer Reset/Soft Reset	UU <sub>H</sub> (U = unchanged)

This register APCLK2 is reset by RESET\_TYPE\_4.

## System Control Unit - Digital Modules (SCU-DM)

### 6.3.6.5 External Clock Control Register

This register controls the setting of external clock for CLKOUT.

#### COCON

#### Clock Output Control Register

(0B4<sub>H</sub>)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>EN</b>	<b>COUTS1</b>	<b>TLEN</b>	<b>COUTS0</b>	<b>COREL</b>			
rw	rw	rw	rw	rw			

Field	Bits	Type	Description
<b>EN</b>	7	rw	<b>CLKOUT Enable</b> 0 <sub>B</sub> No external clock signal is provided 1 <sub>B</sub> The configured external clock signal is provided
<b>COUTS1</b>	6	rw	<b>Clock Out Source Select Bit 1</b> 0 <sub>B</sub> $f_{\text{CLK}}$ is selected. 1 <sub>B</sub> Based on setting of COUTS0.
<b>TLEN</b>	5	rw	<b>Toggle Latch Enable</b> Enable this bit if 50% duty cycle is desired on CLKOUT. This bit is only applicable when both COUTS1 and COUTS0 are set to 1. 0 <sub>B</sub> Toggle Latch is disabled. Clock output frequency is chosen by the bit field COREL. 1 <sub>B</sub> Toggle Latch is enabled. Clock output frequency is half of the frequency that is chosen by the bit field COREL. The resulting output frequency has 50% duty cycle.
<b>COUTS0</b>	4	rw	<b>Clock Out Source Select Bit 0</b> This bit is effective only if COUTS1 is set to 1. 0 <sub>B</sub> Oscillator output frequency is selected. 1 <sub>B</sub> Clock output frequency is chosen by the bit field COREL.
<b>COREL</b>	3:0	rw	<b>Clock Output Divider</b> 0000 <sub>B</sub> $f_{\text{sys}}$ 0001 <sub>B</sub> $f_{\text{sys}}/2$ 0010 <sub>B</sub> $f_{\text{sys}}/3$ 0011 <sub>B</sub> $f_{\text{sys}}/4$ 0100 <sub>B</sub> $f_{\text{sys}}/6$ 0101 <sub>B</sub> $f_{\text{sys}}/8$ 0110 <sub>B</sub> $f_{\text{sys}}/10$ 0111 <sub>B</sub> $f_{\text{sys}}/12$ 1000 <sub>B</sub> $f_{\text{sys}}/14$ 1001 <sub>B</sub> $f_{\text{sys}}/16$ 1010 <sub>B</sub> $f_{\text{sys}}/18$ 1011 <sub>B</sub> $f_{\text{sys}}/20$ 1100 <sub>B</sub> $f_{\text{sys}}/24$ 1101 <sub>B</sub> $f_{\text{sys}}/32$ 1110 <sub>B</sub> $f_{\text{sys}}/36$ 1111 <sub>B</sub> $f_{\text{sys}}/40$

---

**System Control Unit - Digital Modules (SCU-DM)**

This register COCON is reset by RESET\_TYPE\_4.

---

**System Control Unit - Digital Modules (SCU-DM)****6.4 Reset Control**

This section describes the types of reset and the effects of each reset on the TLE987x.

**6.4.1 Types of Reset**

The following reset types are recognized by the TLE987x:

- Power-on reset
  - Requested asynchronously and released by supply voltage  $V_S$  reaching the upper threshold. Indication is a direct analysis of  $V_S$  undervoltage.
- Brown-out reset
  - Is not differentiated by system with power-on reset.
- Wake-up reset
  - Requested asynchronously by wake-up event during power save mode.
- Hardware reset
  - Requested asynchronously by event on external reset input (pin).
- WDT1 reset
  - Activated asynchronously by WDT1 reset event, see [Watchdog Timer \(WDT1\)](#).
- WDT reset
  - Requested by WDT reset event, [Watchdog Timer](#).
- Soft reset
  - Requested synchronously by soft reset event.

**6.4.2 Overview**

When the TLE987x is first powered up or with brown-out condition triggered by supply voltage input(s) going below the threshold, proper voltage thresholds must be reached before the MCU system starts operation with the release of the MCU, CPU and NVM resets. With all resets (except soft and SCU watchdog timer (WDT) resets), the boot configuration is latched. The CPU starts to execute from the Boot ROM firmware with the release of MCU reset.

If the system is in Stop Mode, it is possible to wake-up with reset. Wake-up reset is basically equivalent to power-on reset except that it is a ‘warm’ reset and certain registers are maintained across the reset. A wake-up via hard reset pin while in Stop Mode is effected as wake-up reset.

The hardware reset function via pin can be used anytime to restart the system.

The external watchdog timer (WDT1) can trigger a WDT1 reset on the system, if the WDT1 is serviced wrongly, e.g. if it overflows, or being serviced in the closed window part.

Likewise, the SCU watchdog timer (WDT) can trigger a watchdog timer reset on the system if the timer is not refreshed before it overflows.

Soft reset can be triggered by application software where applicable.

Note that the boot configuration is only latched with the power-on, brown-out, WDT1, wake-up and hardware resets.



## System Control Unit - Digital Modules (SCU-DM)

### 6.4.3 Module Reset Behavior

**Table 31** gives an overview on how the various modules or functions of the TLE987x are affected with respect to the reset type. A “n” means that the module/function is reset to its default state. Refer to **Table 33** for effective reset as priority.

**Table 31 Effect of Reset on Modules/Functions**

Module/ Function	Power-On/ Brown-Out Reset	Wake-up Reset <sup>1)</sup>	Hardware Reset <sup>1)</sup>	WDT1 Reset <sup>1)</sup>	WDT Reset	Soft Reset <sup>2)</sup>
<b>CPU Core</b>	n	n	n	n	n	n
<b>SCU</b>	n except reset indication bit	n except indication bits	n except reset indication bit	n except reset indication bit	n except certain status bits <sup>3)</sup>	n except certain status bits <sup>3)</sup>
<b>Peripherals</b>	n	n	n	n	n	n
<b>Debug System</b>	n	n	n	n	n	n
<b>Port Control</b>	n	n	n	n	n	n
<b>FW Startup Execution</b>	Executes all INIT	Sleep: Executes all INIT	Executes most INIT	Executes most INIT	Skips not required INIT	Skips not required INIT
<b>On-Chip Static RAM</b>	Initialized to 0	Sleep: Initialized to 0; Stop: Not affected <sup>4)</sup>	Not affected <sup>4)5)</sup>	Not affected <sup>4)5)</sup>	Not affected <sup>4)</sup>	Not affected <sup>4)</sup>
<b>Memory Extension Stack RAM</b>	Affected	Affected	Affected	Affected	Affected	Affected
<b>NVM</b>	n	n	n	n	n except MapRAM	n except MapRAM
<b>Clock System incl. PLL</b>	n	n	n	n	Not affected <sup>6)</sup>	Not affected <sup>6)</sup>

1) MCU sub-system: Hardware reset, WDT1 reset and wake-up reset (from Stop Mode or Sleep Mode) are generally HW-equivalent to power-on/brown-out reset, any exceptions are mainly due to power-on reset being a ‘cold’ start.

2) Soft Reset can be set by CPU\_AIRCR.[SYSRESETREQ](#)

3) These bits include the reset requestor indication bit, the last power-on/brown-out/WDT1/wake-up reset latched boot configuration, and NMI status flags e.g. NMISR.

4) Not affected = Reset has no direct effect on RAM contents.

5) If the reset happens during a write to SRAM, the byte in the targeted write address may be corrupted.

6) All configuration including trim settings.

---

**System Control Unit - Digital Modules (SCU-DM)****6.4.4 Functional Description of Reset Types**

This section describes the definition and controls depending on the reset source.

**6.4.4.1 Power-On / Brown-out Reset**

Power-on reset is the highest level reset whereby the whole system is powered up and reset. Brown-out reset occurs when any required voltage drops below its minimum threshold.

In user mode, the system clock is switched to the PLL output at the defined frequency of the device.

**6.4.4.2 Wake-up Reset**

Wake-up reset occurs due to enabled event on defined functional input pins leading to reset of device while the device was in power-save mode. Wake-up reset from Sleep Mode and Stop Mode is differentiated by respective indicator bits. In case of wake-up from Sleep Mode, reset is always effected.

Wake-up reset has the next highest priority after power-on/brown-out reset.

In user mode, the system clock is switched to the PLL output at the defined frequency of the device.

**6.4.4.3 Hardware Reset**

Hardware reset is requested asynchronously by event on external RESET (low active) input pin, and has the next highest priority after wake-up reset.

In case of hardware reset is activated while the device is in power-save mode, this is effectively a wake-up reset.

In user mode, the system clock is switched to the PLL output at the defined frequency of the device.

For details of programming the filter time of the external RESET (low active) input pin see the corresponding reset pin blind time register, [CNF\\_RST\\_TFB](#).

**6.4.4.4 WDT1 Reset**

WDT1 reset occurs due to WDT1 timer overflow or when servicing in a closed window, and has the next highest priority after hardware reset.

In user mode, the system clock is switched to the PLL output at the defined frequency of the device.

**6.4.4.5 WDT / Soft Reset**

WDT reset occurs due to WDT timer overflow; Soft reset occurs due to software set of the soft reset request bit. These two resets are at the same priority level (same effect on system) and has the lowest priority level. With these resets, the device continues running on the previous clock system configuration.

## System Control Unit - Digital Modules (SCU-DM)

## 6.4.5 Reset Register Description

## RSTCON

## Reset Control Register

(068<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>LOCKUP_EN</b>	<b>Res</b>						<b>LOCKUP</b>
rw	r						rw

Field	Bits	Type	Description
<b>LOCKUP_EN</b>	7	rw	<b>Lockup Reset Enable Flag</b> 0 <sub>B</sub> Lockup is disabled. 1 <sub>B</sub> Lockup is enabled. The LOCKUP_EN bit is a protected bit. When the Protection Scheme is activated, this bit cannot be written directly. For more information on Protection Scheme, see <a href="#">Section 6.12</a> .
<b>Res</b>	6:1	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>LOCKUP</b>	0	rw	<b>Lockup Flag</b> 0 <sub>B</sub> Lockup Status not active. 1 <sub>B</sub> Lockup Status active. The LOCKUP bit is a protected bit. When the Protection Scheme is activated, this bit cannot be written directly. For more information on Protection Scheme, see <a href="#">Section 6.12</a> .

This register RSTCON is reset by RESET\_TYPE\_3.

**Note:**        **The Lockup reset is a reset provided by the ARM Core. The effect of the Lockup reset is the same as for a software reset.**

The registers PMU\_RESET\_STS1 and PMU\_RESET\_STS2 are located in PMU, see [PMU\\_RESET\\_STS1](#) and [PMU\\_RESET\\_STS2](#). The register should retain its value across all resets until power is not available. In case of power-on reset, only PMU\_1V5DidPOR bit is set.

**Table 32     Reset Value of Register PMU\_RESET\_STS1 (SFR)**

Reset Source	Reset Value
Stop Mode Wake-up Reset	0000 0010 <sub>B</sub>
Stop Mode Wake-up via Hardware Reset	0100 0010 <sub>B</sub>
Sleep Wake-up Reset	0000 0100 <sub>B</sub>
Soft Reset	0000 1000 <sub>B</sub>
WDT Reset	0001 0000 <sub>B</sub>
WDT1 Reset	0010 0000 <sub>B</sub>

## System Control Unit - Digital Modules (SCU-DM)

**Table 32** Reset Value of Register PMU\_RESET\_STS1 (SFR) (cont'd)

Reset Source	Reset Value
Hardware Reset (reset pin)	0100 0000 <sub>B</sub>
Power-On Reset/Brown-out Reset	1000 0000 <sub>B</sub>

### Possible Combination of Reset Sources

**Table 33** lists all possible combinations of reset status bits being set in the TLE987x. A “x” means that the corresponding reset has occurred.

**Table 33** Effective Reset with Combination of Reset Sources

Effective Reset	Power-on/Brown-out Reset	Wake-up Reset		Hardware Reset (reset pin)	WDT1 Reset	WDT Reset	Soft Reset
		Sleep Mode	Stop Mode				
Power-on	x	x	x	x	x	x	x
Wake-up from Sleep Mode	–	x	–	x	x	x	–
Wake-up from Stop Mode	–	–	x	x	x	x	–
Hardware (reset pin)	–	–	–	x	x	x	x
WDT1	–	–	–	–	x	x	x
WDT	–	–	–	–	–	x	–
Software	–	–	–	–	–	–	x
WDT & Software	–	–	–	–	–	x	x

### 6.4.6 Booting Scheme

After any power-on reset, brown-out reset, hardware reset, WDT1 reset or wake-up reset, the pins TMS, P0.0, P0.2 together choose different modes. **Table 34** shows the boot selection options available in the TLE987x.

**Table 34** TLE987x Boot Options

TMS/SWD	P0.0	P0.2	MODE
0	x	x	User Mode / BSL Mode
1	1	0	Debug Mode with Serial Wire (SW) port

## System Control Unit - Digital Modules (SCU-DM)

### 6.5 Power Management

This section describes the features and functionality provided for power management of the device.


#### 6.5.1 Overview

The TLE987x power-management system allows software to configure the various processing units so that they automatically adjust to draw the minimum necessary power for the application.

There are four power modes: Active Mode, Slow Down Mode, Stop Mode and Sleep Mode, as shown in [Figure 25](#). Sleep Mode is a special case which can only be exited with a system reset.

The operation of the system components in each of these states can be configured by software. The power modes provide flexible reduction of power consumption through a combination of techniques, including:

- Stopping the CPU clock
- Stopping the clocks of other system components individually
- Clock-speed reduction of some peripheral components
- Power-down of the entire system with fast restart capability
- Reducing or removing the power supply to power domains

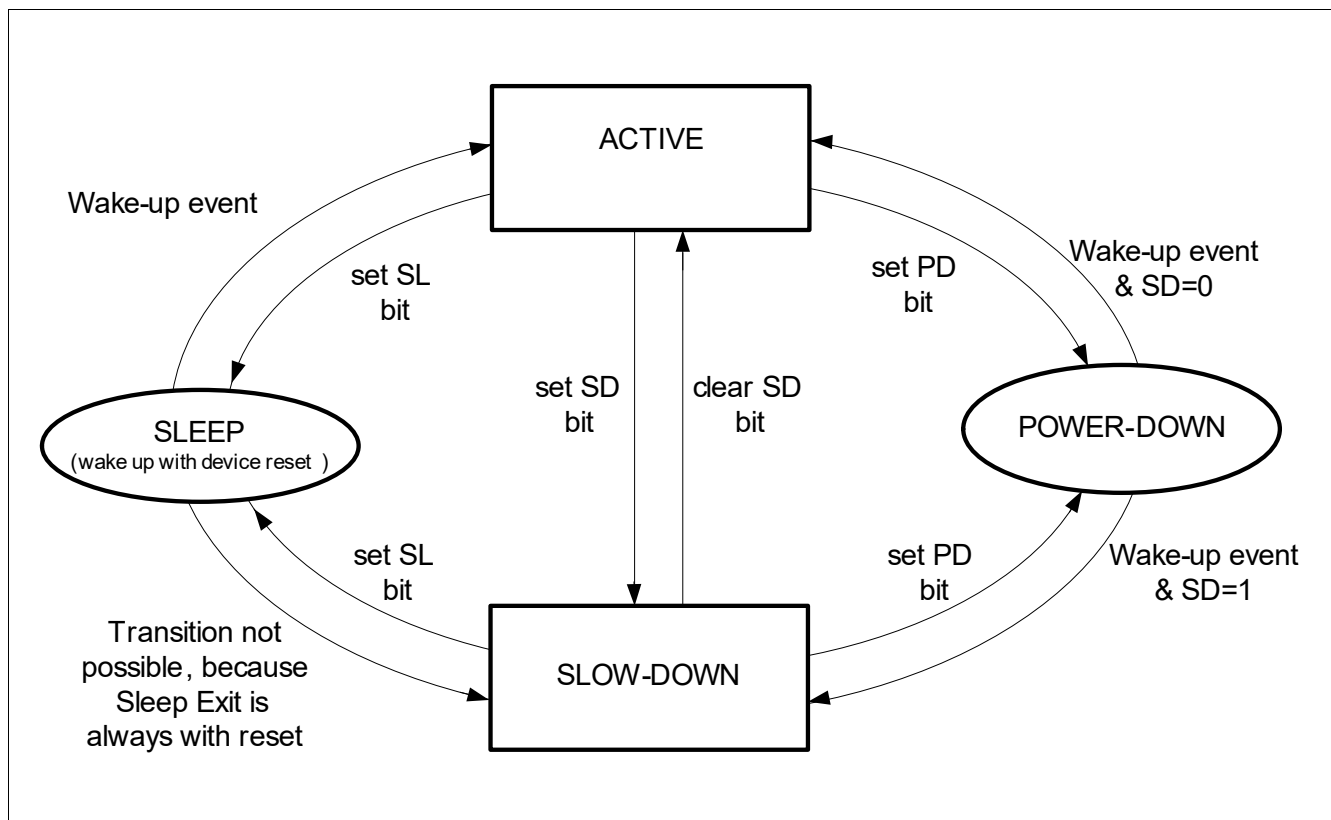

**Figure 25 Transition between Various Modes of Operation (without reset)**

In Slow Down Mode, the clock generation unit is instructed to reduce its clock frequency so that the clock to the system, i.e. core and peripherals, will be divided by a programmable factor.

In Stop Mode, the clock is turned off. Hence, it cannot be awakened by an interrupt or the Watchdog Timer. It will be awakened only when it receives an external wake-up signal or reset signal. The application must be prepared that the TLE987x is served with one of these signals. A wake-up circuit is used to detect enabled wake-up signal(s) and activate the Stop Mode wake-up. During Stop Mode, this circuit remains active.

---

## System Control Unit - Digital Modules (SCU-DM)

In Sleep Mode, the power supply to the whole MCU subsystem is removed. On detection of wake-up event, a system reset is generated, the MCU is reset to default configuration and then restart operation is initialized. The priority for entry to the power-save modes starting from the highest is Sleep Mode, Stop Mode, then Slow Down Mode.

### 6.5.2 Functional Description

This section describes the power-save modes, their operations, and entry and exit. It also describes the respective behavior of TLE987x system components.

#### 6.5.2.1 Slow Down Mode

The Slow Down Mode is used to reduce the power consumption by decreasing the internal clock in the device. The Slow Down Mode is activated by setting the bit SD in SFR **PMCON0**. The bit field **CMCON1.CLKREL** is used to select different slow down frequencies. The CPU and peripherals are clocked at this lower frequency. The Slow Down Mode is terminated by clearing bit SD.


#### 6.5.2.2 Stop Mode

In the Stop Mode, the NVM is put into NVM shutdown mode (analog and digital parts except MapRAM shut down). The 5 V (VDDP) power supply to the analog modules ADC and PLL & internal oscillator is not removed. The MCU digital parts and the NVM MapRAM are powered by the  $V_{DDCOU\!T}$  (VDDC) regulator (supplying  $V_{DDCOU\!T\_Stop\_Red}$  in this mode). All functions of the microcontroller are stopped while the contents of the NVM, on-chip RAM and the SFRs are maintained. As for the external ports, all digital pads are still powered.

In Stop Mode, the clock is turned off. Hence, the system cannot be awakened by an interrupt or the Watchdog Timer. It will be awakened only when it receives an external wake-up signal (with or without a following system reset) or with reset by asserting the hard reset pin.

Software requests Stop Mode by setting the bit **PMCON0.PD** to 1. In addition to this Flag the **WFI** or **WFE** instruction has to be executed. As soon as the controller has finished its currently executed interrupt task it will enter the Stop Mode. **Figure 26** below shows the correct sequence to enter Stop Mode:

## System Control Unit - Digital Modules (SCU-DM)

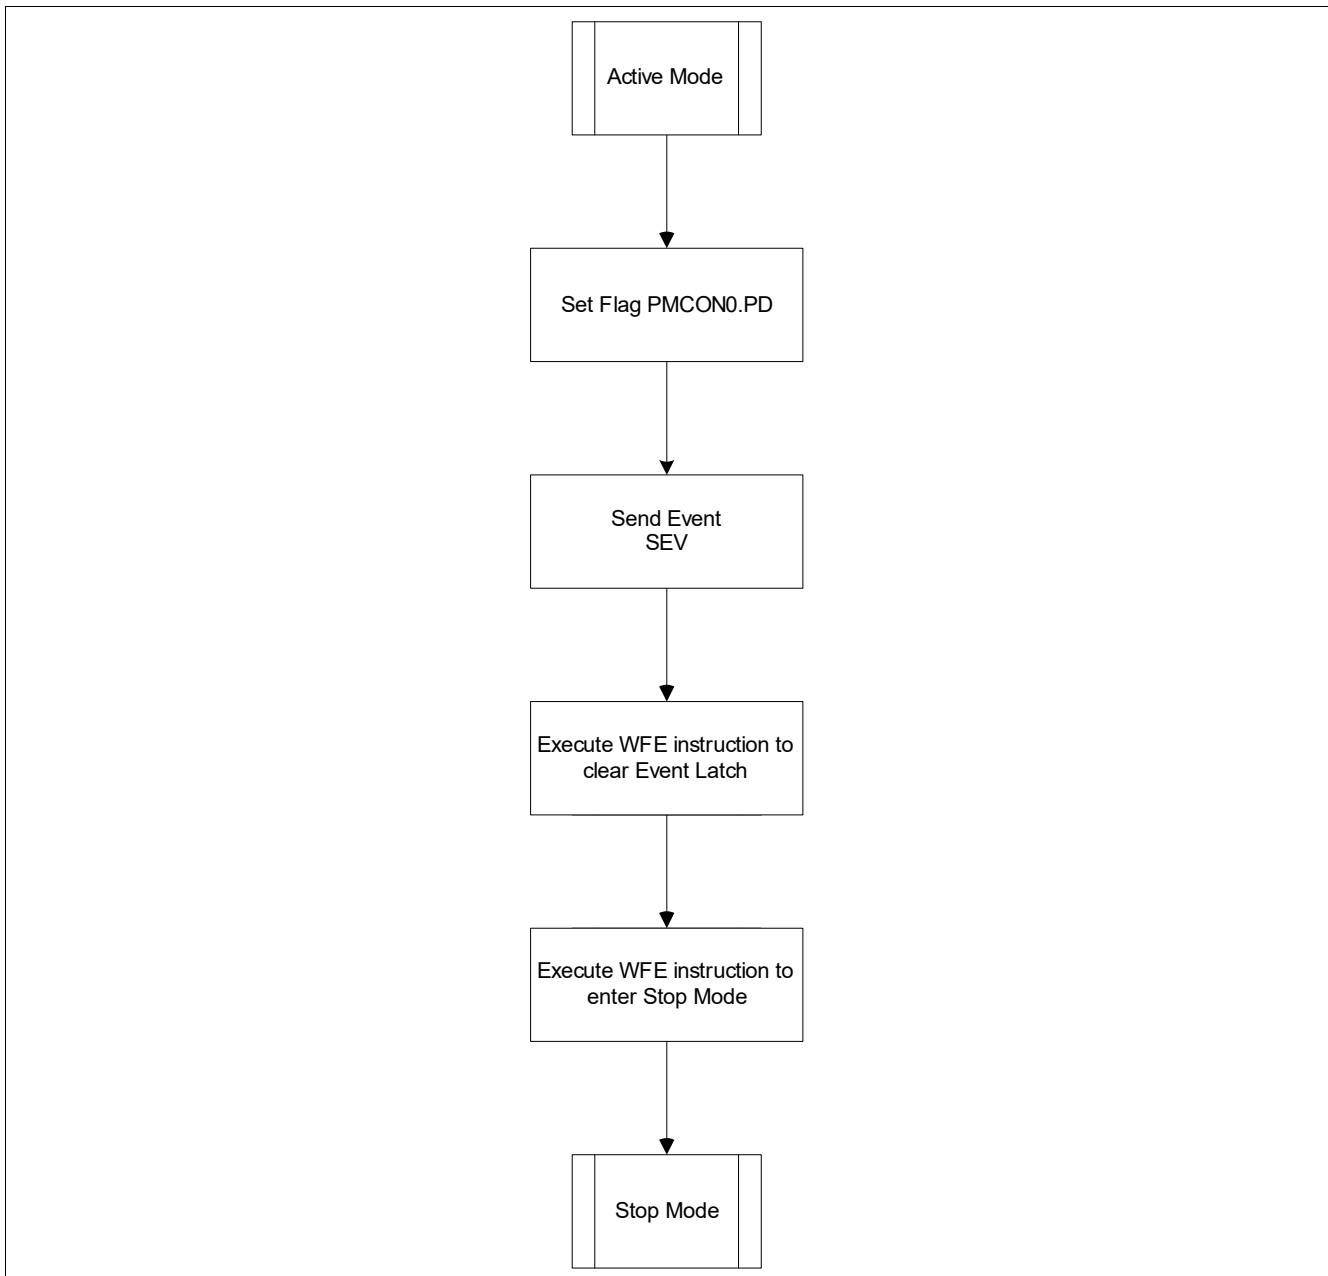

**Figure 26 Stop Mode Entry Programming Sequence**

### Exiting Stop Mode

Stop Mode can be exited by active edge on the enabled wake-up pin(s) or by asserting the hard reset pin.

The wake-up circuitry will perform a sequence of predefined actions such as restoring all supply voltages, restoring modules to operational mode including the oscillator and PLL. On PLL lock (stable PLL clock the user configuration is restored), peripheral clock gating .CPU clock gating is removed and the CPU starts to run from the instruction following the one that sets the PD bit. It is required by the user code to insert three NOP instructions following the one that sets the PD bit.

**Note:** **If user has selected the PLL output as system clock (typical use case), but lock status of the PLL cannot be achieved, the PLL will enter freerunning mode and software execution will be continued in PLL freerunning mode.**

---

## System Control Unit - Digital Modules (SCU-DM)

### Usage of ARM Core low power modes for stop mode

The ARM Core provides two low power modes, which are called Sleep and Deep sleep. For system stop mode the Deep Sleep mode of the core is used. To enable the deep sleep mode the System Control Register at address E000ED10<sub>H</sub> has to be written. Another way of entering Deep Sleep mode is to execute two dedicated mode change instructions:

- **WFI**
- **WFE**

When the controller enters stop mode via WFI instruction, it executes the lowest priority pending interrupt and after that enters sleep mode. This feature is not recommended to be used for normal operation using stop mode, because the controller would only operate interrupt triggered.

When the WFE instruction is used, the controller starts to operate triggered by an external event. If the CPU will be woken up by this external event, it stays in thread mode and continues to execute the code before it entered stop mode.

This is the recommended procedure to enter stop mode.

### 6.5.2.3 Sleep Mode

In the Sleep Mode, the supply to the whole MCU subsystem including the ADC, PLL and NVM is removed. The wake-up detection circuitry remains supplied. Only contents of non-volatile memory are retained. As for the external ports, only the wake-up pads are still powered. The supply to ADC pads is removed.

Sleep Mode is always exited with a system reset, which is triggered by active edge on the enabled wake-up pin(s). It is not possible to exit Sleep Mode by asserting the hard reset pin as the digital 5 V pads will not be powered.

Software requests Sleep Mode by setting the bit PMCON0.SL to 1.

#### Exiting Sleep Mode

Sleep Mode can only be exited with a system reset, triggered by active edge on the enabled wake-up pin(s).



## System Control Unit - Digital Modules (SCU-DM)

## 6.5.3 Register Description

## PMCON0

## Power Mode Control Register 0

(040<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>SD</b>	<b>PD</b>	<b>SL</b>	<b>XTAL_ON</b>
r	r	r	r	rw	rwh1	rwh1	rw

Field	Bits	Type	Description
<b>Res</b>	7:4	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>SD</b>	3	rw	<b>Slow Down Mode Enable. Active High.</b> Setting this bit will cause the chip to go into slow down mode. Reset by user. The SD bit is a protected bit. When the Protection Scheme is activated, this bit cannot be written directly. For more information on Protection Scheme, see <a href="#">Section 6.12</a> .
<b>PD</b>	2	rwh1	<b>Stop Mode Enable. Active High.</b> Setting this bit will cause the chip to go into a Stop Mode. Reset by wake-up circuit. The PD bit is a protected bit. When the Protection Scheme is activated, this bit cannot be written directly. For more information on Protection Scheme, see <a href="#">Section 6.12</a> .
<b>SL</b>	1	rwh1	<b>Sleep Mode Enable. Active High.</b> Setting this bit will cause the chip to go into Sleep Mode. Reset by wake-up circuit. The SL bit is a protected bit. When the Protection Scheme is activated, this bit cannot be written directly. For more information on Protection Scheme, see <a href="#">Section 6.12</a> .
<b>XTAL_ON</b>	0	rw	<b>OSC_HP Operation in Stop Mode</b> 0 <sub>B</sub> OSC_HP (XTAL) will be suspended by hardware in Stop Mode. 1 <sub>B</sub> OSC_HP (XTAL) continues to operate in Stop Mode, if enabled by <a href="#">OSC_CON.XPD</a> . This provides the user the option to reduce the power consumption in the Stop Mode. It must be noted that the startup time of OSC_HP can be in the range of some milliseconds. Alternatively for fast wake-up from Stop Mode while avoiding this power consumption, the user can selectively enable internal oscillator as clock source and disable OSC_HP before entering Stop Mode.

## System Control Unit - Digital Modules (SCU-DM)


### 6.6 Interrupt Management

This section describes the management of interrupts by the system control unit.

#### 6.6.1 Overview

The Interrupt Management sub-module in the SCU controls the non-core-generated interrupt requests to the core. The core has one non-maskable interrupt (NMI) node and in total 16 maskable interrupt nodes.

**Figure 27** shows the block diagram of the Interrupt Management sub-module.

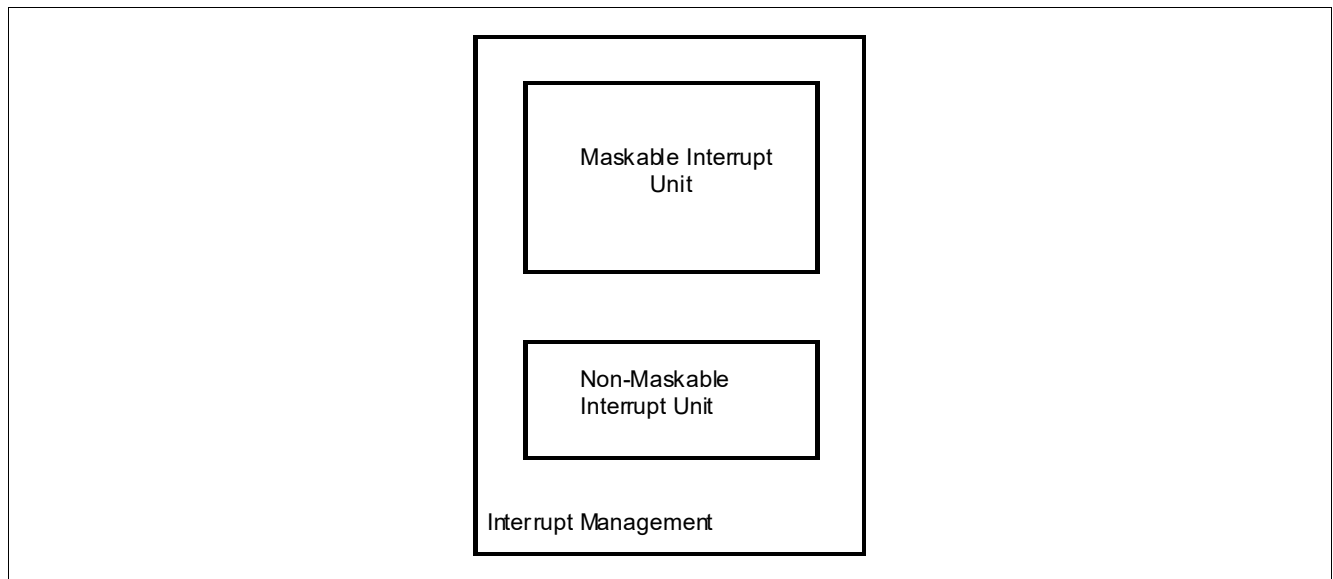

**Figure 27** Interrupt Management Block Diagram


The non-maskable interrupt unit controls the NMI requests. An incoming NMI request is not maskable and in this sense, differs from the regular interrupts. In addition, an NMI request always has the highest priority to be serviced. In the TLE987x, eight different sources can generate an NMI: watchdog timer prewarning, PLL loss-of-lock, oscillator watchdog event, NVM map error, Memory ECC error, NVM operation complete, Debug Mode user IRAM event and supply prewarning. Some NMI sources can be triggered by one of several events. These NMI sources are ORed to generate an NMI interrupt directly to the core. The triggering NMI sources/events are indicated in the NMI Status Register (NMISR), and in some cases the event flags are located in the peripheral register. The NMI node source control can be configured via the NMI Control Register (NMICON).

There are generally 3 types of maskable inputs into the core: internal, external and extended interrupts. The maskable interrupt unit will generate the respective interrupt node request to the core and will maintain corresponding SCU flags and control. In general, to support all types of peripheral interrupts, an interrupt node of the core may be shared among several interrupt sources.

## System Control Unit - Digital Modules (SCU-DM)

### 6.6.1.1 External Interrupts

The generation of an interrupt request from an external source by edge detection in the SCU is shown in **Figure 28**. External interrupts can be positive, negative or double edge triggered. Register EXICON0 specifies the active edge for the external interrupt.

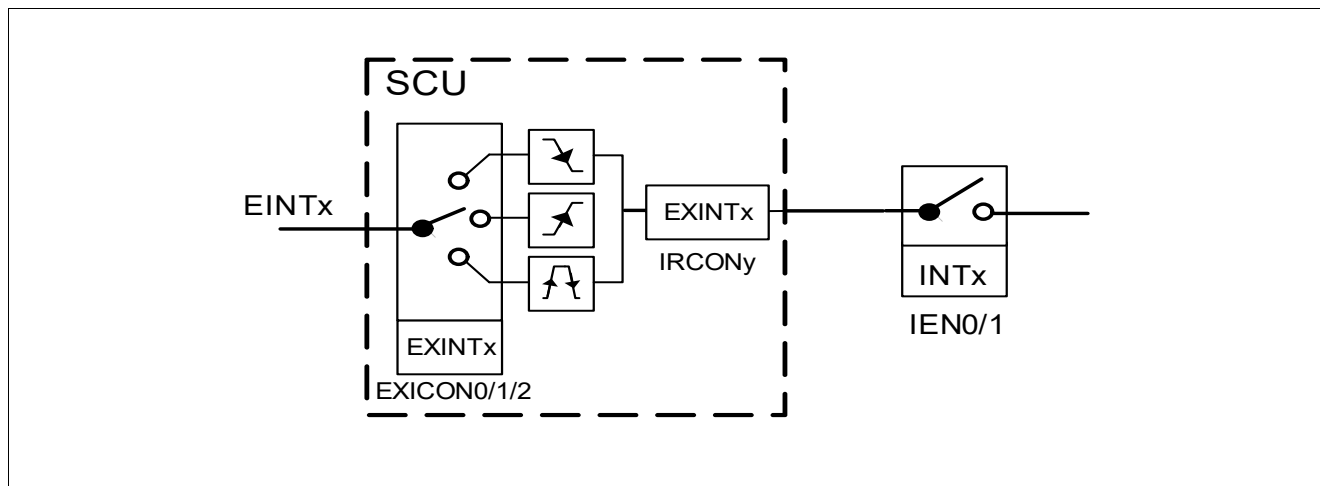

**Figure 28** Interrupt Request Generation of External Interrupts

### 6.6.1.2 Extended Interrupts

Extended interrupts are for non-core on-chip peripherals for core-external trigger of interrupt requests to the core. There are nine such interrupts.

Interrupt signals from such on-chip peripherals are pulse triggered and active for two clock cycles. These interrupt signals belonging to the same interrupt node will be latched as one direct interrupt request to the core. IRCONx (where x = 0-1, 3-4) or peripheral registers hold the interrupt event flags for these extended and external interrupt events. Corresponding bits in the Interrupt Enable Registers (IEN) within the core may block or transfer these interrupt requests to the core interrupt controller. An enabled interrupt request is acknowledged when the core vectors to the interrupt routine. The software routine should clear the interrupt flags in the IRCONx registers.

As there are more peripheral interrupts than interrupt nodes supported by the core, some interrupts are multiplexed to the same interrupt node. Where possible and necessary, critical peripheral interrupts (e.g. SSC) have their own dedicated interrupt node.

## System Control Unit - Digital Modules (SCU-DM)

### 6.6.2 Interrupt Node Assignment

**Table 35** shows the interrupt node assignment for TLE987x.

**Table 35 NMI**

Interrupt Node	Vector Address	Assignment for TLE987x
NMI	0000 <sub>H</sub>	Watchdog Timer, PLL, NVM Operation Complete, CLKWDT, Oscillator Watchdog, NVM map error, ECC error, Pre-Warn SUPP, Pre-Warn TEMP

**Table 36 Interrupt Vector Table**

Service Request	Node ID	Description
GPT1	0	GPT1 interrupt (T2-T4)
GPT2	1	GPT2 interrupt (T5-T6, CAPIN)
MU- ADC8/T3	2	Measurement Unit, VBG, SDADC <sup>1)</sup> , Timer3, BEMF
ADC1	3	ADC1 interrupt / VREF5V Overload / VREF5V OV/UV, 10-bit ADC
CCU0	4	CCU6 node 0 interrupt
CCU1	5	CCU6 node 1 interrupt
CCU2	6	CCU6 node 2 interrupt
CCU3	7	CCU6 node 3 interrupt
SSC1	8	SSC1 interrupt (receive, transmit, error)
SSC2	9	SSC2 interrupt (receive, transmit, error)
UART1	10	UART1 (ASC-LIN) interrupt (receive, transmit), Timer2, linsync1, LIN
UART2	11	UART2 interrupt (receive, transmit), Timer21, External interrupt (EINT2)
EXINT0	12	External interrupt (EINT0), MON
EXINT1	13	External interrupt (EINT1)
BDRV/CP	14	Bridge Driver / Charge Pump
DMA	15	DMA Controller

1) only for TLE9879-2QXA40 variant

## System Control Unit - Digital Modules (SCU-DM)

### 6.6.3 Interrupt Related Registers

Several interrupt related registers are located in the SCU.

#### 6.6.3.1 Interrupt Event Enable Control

The two interrupt events of UART and three interrupt events of SSC module are of interrupt structure 1 which is described in [Chapter 12.3.2](#). As there is no enable/disable bit(s) for these interrupt events within the module, bits are defined in the SCU register MODIEN1 and MODIEN2 for this purpose.

Register MODIEN1 is being initialized by the BootROM during the bootup process to a value of 00<sub>H</sub>

Register MODIEN2 is being initialized by the BootROM during the bootup process to a value of 00<sub>H</sub>

#### MODIEN1

##### Peripheral Interrupt Enable Register 1

(030<sub>H</sub>)

Reset Value: C7<sub>H</sub>

7	6	5	4	3	2	1	0
<b>TIEN1</b>	<b>RIEN1</b>	<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>RIREN1</b>	<b>TIREN1</b>	<b>EIREN1</b>
rw	rw	r	r	r	rw	rw	rw

Field	Bits	Type	Description
<b>TIEN1</b>	7	rw	<b>UART 1 Transmit Interrupt Enable</b> 0 <sub>B</sub> Transmit interrupt is disabled 1 <sub>B</sub> Transmit interrupt is enabled
<b>RIEN1</b>	6	rw	<b>UART 1 Receive Interrupt Enable</b> 0 <sub>B</sub> Receive interrupt is disabled 1 <sub>B</sub> Receive interrupt is enabled
<b>Res</b>	5:3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>RIREN1</b>	2	rw	<b>SSC 1 Receive Interrupt Enable</b> 0 <sub>B</sub> Receive interrupt is disabled 1 <sub>B</sub> Receive interrupt is enabled
<b>TIREN1</b>	1	rw	<b>SSC 1 Transmit Interrupt Enable</b> 0 <sub>B</sub> Transmit interrupt is disabled 1 <sub>B</sub> Transmit interrupt is enabled
<b>EIREN1</b>	0	rw	<b>SSC 1 Error Interrupt Enable</b> 0 <sub>B</sub> Error interrupt is disabled 1 <sub>B</sub> Error interrupt is enabled

## System Control Unit - Digital Modules (SCU-DM)

## MODIEN2

## Peripheral Interrupt Enable Register 2

(034<sub>H</sub>)Reset Value: C7<sub>H</sub>

7	6	5	4	3	2	1	0
<b>TIEN2</b>	<b>RIEN2</b>	<b>EXINT2_EN</b>	<b>Res</b>		<b>RIREN2</b>	<b>TIREN2</b>	<b>EIREN2</b>
rw	rw	rw	r		rw	rw	rw

Field	Bits	Type	Description
<b>TIEN2</b>	7	rw	<b>UART 2 Transmit Interrupt Enable</b> 0 <sub>B</sub> Transmit interrupt is disabled 1 <sub>B</sub> Transmit interrupt is enabled
<b>RIEN2</b>	6	rw	<b>UART 2 Receive Interrupt Enable</b> 0 <sub>B</sub> Receive interrupt is disabled 1 <sub>B</sub> Receive interrupt is enabled
<b>EXINT2_EN</b>	5	rw	<b>External Interrupt 2 Enable</b> 0 <sub>B</sub> External interrupt is disabled 1 <sub>B</sub> External interrupt is enabled
<b>Res</b>	4:3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>RIREN2</b>	2	rw	<b>SSC 2 Receive Interrupt Enable</b> 0 <sub>B</sub> Receive interrupt is disabled 1 <sub>B</sub> Receive interrupt is enabled
<b>TIREN2</b>	1	rw	<b>SSC 2 Transmit Interrupt Enable</b> 0 <sub>B</sub> Transmit interrupt is disabled 1 <sub>B</sub> Transmit interrupt is enabled
<b>EIREN2</b>	0	rw	<b>SSC 2 Error Interrupt Enable</b> 0 <sub>B</sub> Error interrupt is disabled 1 <sub>B</sub> Error interrupt is enabled

## System Control Unit - Digital Modules (SCU-DM)

**MODIEN3****Peripheral Interrupt Enable Register 3****(038<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>		<b>MONSTS</b>	<b>MONIE</b>		<b>Res</b>		<b>IE0</b>
r		r	rw		r		rw

Field	Bits	Type	Description
<b>Res</b>	7:6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>MONSTS</b>	5	r	<b>MON Input Status</b> 0 <sub>B</sub> Status zero 1 <sub>B</sub> Status one
<b>MONIE</b>	4	rw	<b>MON Interrupt Enable</b> 0 <sub>B</sub> disabled 1 <sub>B</sub> enabled
<b>Res</b>	3:1	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>IE0</b>	0	rw	<b>External Interrupt Enable</b> 0 <sub>B</sub> disabled 1 <sub>B</sub> enabled

**MODIEN4****Peripheral Interrupt Enable Register 4****(03C<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
			<b>Res</b>				<b>IE1</b>
			r				rw

Field	Bits	Type	Description
<b>Res</b>	7:1	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>IE1</b>	0	rw	<b>External Interrupt Enable</b> 0 <sub>B</sub> disabled 1 <sub>B</sub> enabled

## System Control Unit - Digital Modules (SCU-DM)

Register GPT12IEN is being initialized by the BootROM during the bootup process to a value of 00<sub>H</sub>

### GPT12IEN

#### GPT12 Interrupt Enable Register

(15C<sub>H</sub>)

Reset Value: 3F<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>		<b>CRIE</b>	<b>T6IE</b>	<b>T5IE</b>	<b>T4IE</b>	<b>T3IE</b>	<b>T2IE</b>
r		rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Res</b>	7:6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>CRIE</b>	5	rw	<b>General Purpose Timer 12 Capture and Reload Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>T6IE</b>	4	rw	<b>General Purpose Timer 12 T6 Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>T5IE</b>	3	rw	<b>General Purpose Timer 12 T5 Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>T4IE</b>	2	rw	<b>General Purpose Timer 12 T4 Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>T3IE</b>	1	rw	<b>General Purpose Timer 12 T3 Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>T2IE</b>	0	rw	<b>General Purpose Timer 12 T2 Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled

#### Other Interrupt Related Registers

The following interrupt related registers are located in the SCU:

- NMICON
- NMISR
- IRCON0, IRCON1, IRCON2, IRCON3, IRCON4
- EXICON0
- MODIEN1, MODIEN2

All registers, except MODIENx, are described in the Interrupt System [Chapter 12.5](#).



---

**System Control Unit - Digital Modules (SCU-DM)****6.6.3.2 DMA Interrupt Event Enable and Select Control**

The integrated DMA Controller has 14 dedicated interrupt sources. They are:

**DMA Interrupt Sources**

- 10-bit ADC Programmed Sequencer Sequence done
- 10-bit ADC Single Sequence done
- SSC Transmit Request
- SSC Receive Request
- ADC1-CH1
- ADC1-CH2
- ADC1-CH3
- ADC1-CH4
- ADC1-CH5
- ADC1-CH6
- ADC1-CH7, CCU T12\_ZM
- ADC1-CH8, CCU T12\_PM
- Timer 3 , GPT12-T3
- SDADC<sup>1)</sup>

All DMA related interrupt enable registers are described below.

---

1) for TLE9879-2QXA40 only

## System Control Unit - Digital Modules (SCU-DM)

## DMAIEN1

## DMA Interrupt Enable Register 1

(144<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>CH8IE</b>	<b>CH7IE</b>	<b>CH6IE</b>	<b>CH5IE</b>	<b>CH4IE</b>	<b>CH3IE</b>	<b>CH2IE</b>	<b>CH1IE</b>
rw	rw	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>CH8IE</b>	7	rw	<b>DMA Channel 11 Interrupt Enable (ADC1 Channel 7)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>CH7IE</b>	6	rw	<b>DMA Channel 10 Interrupt Enable (ADC1 Channel 6)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>CH6IE</b>	5	rw	<b>DMA Channel 9 Interrupt Enable (ADC1 Channel 5)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>CH5IE</b>	4	rw	<b>DMA Channel 8 Interrupt Enable (ADC1 Channel 4)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>CH4IE</b>	3	rw	<b>DMA Channel 7 Interrupt Enable (ADC1 Channel 3)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>CH3IE</b>	2	rw	<b>DMA Channel 6 Interrupt Enable (ADC1 Channel 2)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>CH2IE</b>	1	rw	<b>DMA Channel 5 Interrupt Enable (ADC1 Channel 1)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>CH1IE</b>	0	rw	<b>DMA Channel 4 Interrupt Enable (ADC1 Channel 0)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled

## System Control Unit - Digital Modules (SCU-DM)

## DMAIEN2

## DMA Interrupt Enable Register 2

(148<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>SDADCIE</b>	<b>GPT12IE</b>	<b>SSCRXIE</b>	<b>SSCTXIE</b>	<b>TRSEQ2RDYIE</b>	<b>TRSEQ1RDYIE</b>	<b>TRERRIE</b>
r	r	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Res</b>	7	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>SDADCIE</b>	6	rw	<b>DMA SDADC Transfer Interrupt Enable<sup>1)</sup></b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>GPT12IE</b>	5	rw	<b>DMA Channel 12 Interrupt Enable (GPT12/Timer3)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>SSCRXIE</b>	4	rw	<b>DMA Channel 3 Interrupt Enable (SSCx Receive)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>SSCTXIE</b>	3	rw	<b>DMA Channel 2 Interrupt Enable (SSCx Transmit)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>TRSEQ2RDYIE</b>	2	rw	<b>DMA Channel 1 Interrupt Enable (ADC1 ESM)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>TRSEQ1RDYIE</b>	1	rw	<b>DMA Channel 0 Interrupt Enable (ADC1 Sequence)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>TRERRIE</b>	0	rw	<b>DMA Transfer Error Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled

1) for TLE9879-2QXA40 only

## System Control Unit - Digital Modules (SCU-DM)

## DMASRCSEL

## DMA Source Selection Register

(14C<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>GPT12_T3</b>	<b>SSCRX</b>	<b>SSCTX</b>	<b>Res</b>	<b>T12PM_DMAE N</b>	<b>T12ZM_DMAE N</b>	<b>SSCRXSRCSE L</b>	<b>SSCTXSRCSE L</b>
r	r	r	r	rw	rw	rw	rw

Field	Bits	Type	Description
<b>GPT12_T3</b>	7	r	<b>DMA Channel 12 Request (GPT12E, Timer3)</b> 0 <sub>B</sub> GPT12_T3 Transfer DMA Request not present 1 <sub>B</sub> GPT12_T3 Transfer DMA Request present
<b>SSCRX</b>	6	r	<b>DMA Channel 3 Request (SSCx Receive)</b> 0 <sub>B</sub> SSC Receive DMA Request not present 1 <sub>B</sub> SSC Receive DMA Request present
<b>SSCTX</b>	5	r	<b>DMA Channel 2 Request (SSCx Transmit)</b> 0 <sub>B</sub> SSC Transmit DMA Request not present 1 <sub>B</sub> SSC Transmit DMA Request present
<b>Res</b>	4	r	<b>Reserved</b> Note: Should be written with zero
<b>T12PM_DMAEN</b>	3	rw	<b>CC6_T12_PM (Period Match) DMA muxer, DMA channel 11</b> 0 <sub>B</sub> ADC1 Channel 7 used as trigger for DMA Channel 11 1 <sub>B</sub> CCU6 T12_PM used as trigger for DMA channel 11
<b>T12ZM_DMAEN</b>	2	rw	<b>CC6_T12_ZM (Zero Match) DMA muxer, DMA Channel 9</b> 0 <sub>B</sub> ADC1 Channel 5 used as trigger for DMA Channel 9 1 <sub>B</sub> CCU6 T12_ZM used as trigger for DMA Channel 9
<b>SSCRXSRCSEL</b>	1	rw	<b>SSCx Receive Source Select</b> 0 <sub>B</sub> SSC1 Receive as DMA input is enabled 1 <sub>B</sub> SSC2 Receive as DMA input is enabled
<b>SSCTXSRCSEL</b>	0	rw	<b>SSCx Transmit Source Select</b> 0 <sub>B</sub> SSC1 Transmit as DMA input is enabled 1 <sub>B</sub> SSC2 Transmit as DMA input is enabled

## System Control Unit - Digital Modules (SCU-DM)

## DMASRCCLR

## DMA Source Selection Clear Register

(198<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
GPT12_T3C	SSCRXC	SSCTXC	Res				
w	w	w	r				

Field	Bits	Type	Description
GPT12_T3C	7	w	<b>DMA Channel 12 Transmit Request Clear (GPT12E, Timer3)</b> 0 <sub>B</sub> GPT12_T3 Transfer DMA Request not cleared 1 <sub>B</sub> GPT12_T3 Transfer DMA Request cleared
SSCRXC	6	w	<b>DMA Channel 3 Request Clear (SSCx Receive)</b> 0 <sub>B</sub> SSC Receive DMA Request not cleared 1 <sub>B</sub> SSC Receive DMA Request cleared
SSCTXC	5	w	<b>DMA Channel 2 Request Clear (SSCx Transmit)</b> 0 <sub>B</sub> SSC Transmit DMA Request not cleared 1 <sub>B</sub> SSC Transmit DMA Request cleared
Res	4:0	r	<b>Reserved</b> Note: Should be written with zero

## DMASRCSEL2

## DMA Source Selection Register 2

(180<sub>H</sub>)Reset Value: 00<sub>H</sub>


7	6	5	4	3	2	1	0
Res						GPT12_DMAEN	
r						rw	

Field	Bits	Type	Description
Res	7:2	r	<b>Reserved</b> Note: Should be written with zero
GPT12_DMAEN	1:0	rw	<b>DMA Channel 12 trigger mux select (GPT12E, Timer3)</b> Note: Do not change DMA Channel 12 muxer if DMA Channel 12 is enabled in DMA Controller 00 <sub>B</sub> Timer3 triggers DMA Channel 12 01 <sub>B</sub> GPT12 T3 triggers DMA Channel 12 10 <sub>B</sub> Timer3 or CCU6 T12_ZM triggers DMA Channel 12 11 <sub>B</sub> GPT12 T3 or CCU6 T12_ZM triggers DMA Channel 12

**System Control Unit - Digital Modules (SCU-DM)**

**6.6.4 Implementation of DMA Request inside the SCU**

The DMA requests of SSC Transmit, SSC Receive and GPT12 have to be implemented as shown in the figure below on the example of the SSC transmit request. The Request Source of GPT12 is not multiplexed. The request has to be set by the corresponding interrupt request signal and hold until the corresponding dma\_active signal goes to high. The reset of the corresponding request source flag is only done when the source is selected by the corresponding select signal:

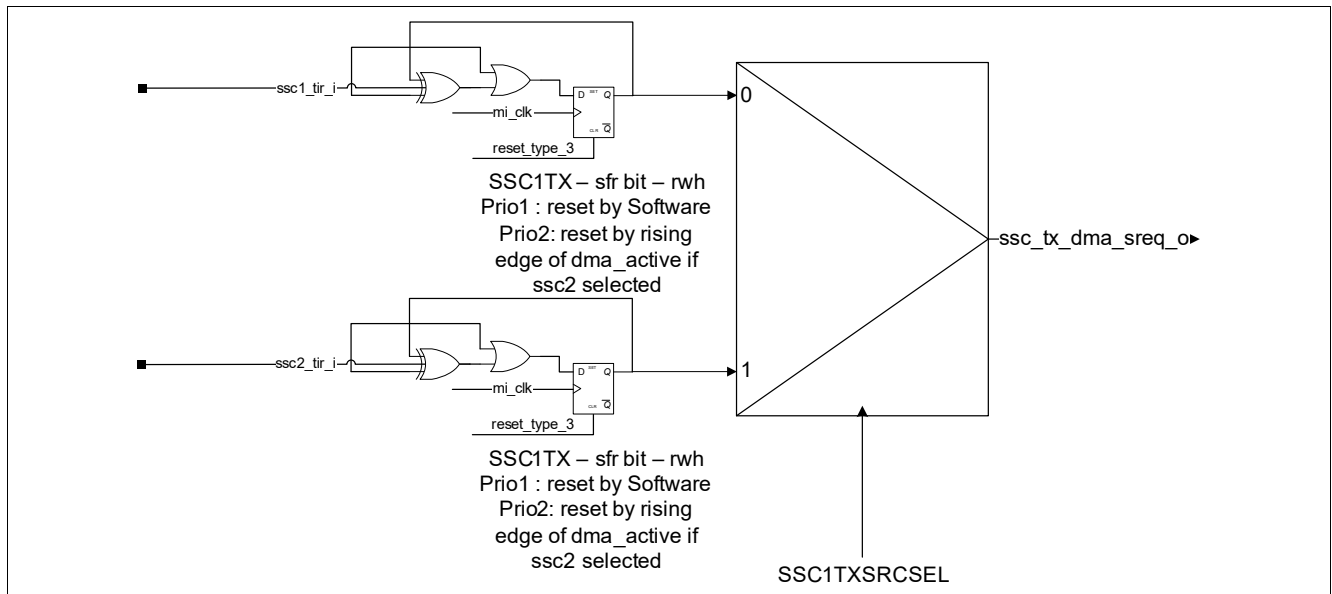

**Figure 29 Implementation of DMA Request Generation and Selection by SCU**

**6.6.5 NMI Event Flags Handling**

Each NMI event and status flag is retained across these resets: 1) WDT reset, 2) soft reset. Specifically, these include all the flags of NMISR register: FNMIWDT, FNMIPLL, FNMINVM, FNMIOT, FNMIOWD, FNMIMAP and indirectly, FNMI ECC and FNMI SUP. In the case of watchdog resets, the requestor can be identified via the reset indicator bits WDT1RST and WDTRST. The ECC NMI is indicated by the respective event flags of SFR EDCSTAT.IRDBE, XRDBE and NVMDBE. Likewise, the supply prewarning NMI and MI\_CLK WDT NMI is indicated by the respective event flags located in **Chapter 7, SCU\_PM**.

These NMI event and status flags are otherwise reset to default value with all other resets i.e. power-on, brown-out, hardware, WDT1 (except WDT1 reset) and wakeup reset.

## System Control Unit - Digital Modules (SCU-DM)

### 6.7 General Port Control

The SCU contains control registers for the selection of:

- alternate input functions of UART, Timers and External Interrupts ([Section 6.7.1](#))
- port output driver strength and temperature compensation ([Section 6.7.2](#))

For functional description of GPIO ports, refer to [Chapter 14](#).

#### 6.7.1 Input Pin Function Selection

MODPISELx registers control the selection of the input pin functions. For UART, the selection of the RXD line also enables the corresponding TXD line.

#### MODPISEL

##### Peripheral Input Select Register

(0B8<sub>H</sub>)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>U_TX_CONDIS</b>	<b>URIOS1</b>	<b>EXINT2IS</b>		<b>EXINT1IS</b>		<b>EXINT0IS</b>	
rw	rw	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>U_TX_CONDIS</b>	7	rw	<p><b>UART1 TxD Connection Disable</b></p> <p>0<sub>B</sub> UART1-TxD1 Output routed to LIN Transmitter</p> <p>1<sub>B</sub> UART1-TxD1 Output is disconnected from LIN Transmitter Transceiver TxD Input is routed to P0.1</p> <p><i>Note:</i> To select TXD_1 as the UART1 output on P0.1, the Port ALTSELx registers need to be configured additionally.</p>
<b>URIOS1</b>	6	rw	<p><b>UART1 Input/Output Select</b></p> <p>0<sub>B</sub> UART1 Receiver Input RxD1 is routed to LIN Receiver</p> <p>1<sub>B</sub> UART1 Receiver Input RxD1 is routed to P1.4</p> <p><i>Note:</i> To select RxD output of the Transmitter on P1.4, the Port ALTSELx registers need to be configured additionally.</p>
<b>EXINT2IS</b>	5:4	rw	<p><b>External Interrupt 2 Input Select</b></p> <p>00<sub>B</sub> n.u.</p> <p>01<sub>B</sub> External Interrupt Input EXINT2_1 is selected (P1.4)</p> <p>10<sub>B</sub> External Interrupt Input EXINT2_2 is selected (P0.4)</p> <p>11<sub>B</sub> External Interrupt Input EXINT2_3 is selected (P0.0)</p>
<b>EXINT1IS</b>	3:2	rw	<p><b>External Interrupt 1 Input Select</b></p> <p>00<sub>B</sub> External Interrupt Input EXINT1_0 is selected (P1.1)</p> <p>01<sub>B</sub> External Interrupt Input EXINT1_1 is selected (P1.3)</p> <p>10<sub>B</sub> External Interrupt Input EXINT1_2 is selected (P1.0)</p> <p>11<sub>B</sub> External Interrupt Input EXINT1_3 is selected (P2.4)</p>

**System Control Unit - Digital Modules (SCU-DM)**

Field	Bits	Type	Description
<b>EXINT0IS</b>	1:0	rw	<b>External Interrupt 0 Input Select</b> 00 <sub>B</sub> External Interrupt Input EXINT0_0 is selected (P2.0) 01 <sub>B</sub> External Interrupt Input EXINT0_1 is selected (P1.2) 10 <sub>B</sub> External Interrupt Input EXINT0_2 is selected (P0.1) 11 <sub>B</sub> External Interrupt Input EXINT0_3 is selected (P2.3)

**MODPISEL1**
**Peripheral Input Select Register 1**
**(0BC<sub>H</sub>)**
**Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>T21EXCON</b>	<b>T2EXCON</b>	<b>RES</b>		<b>RES</b>		<b>GPT12CAPINB</b>	
rw	rw	r		r		rw	

Field	Bits	Type	Description
<b>T21EXCON</b>	7	rw	<b>Timer 21 External Input Control</b> 0 <sub>B</sub> Timer 21 Input T21EX is selected by bit field MODPISEL2.T2EXIS 1 <sub>B</sub> Timer 21 Input T21EX is connected to signal CCU6.COUT60 (Ch0)
<b>T2EXCON</b>	6	rw	<b>Timer 2 External Input Control</b> 0 <sub>B</sub> Timer 2 Input T2EX is selected by bit field MODPISEL2.T2EXIS 1 <sub>B</sub> Timer 2 Input T2EX is connected to signal CCU6.CC60 (Ch0)
<b>RES</b>	5:4	r	<b>Reserved</b> Returns 0 if read; should be written with 0
<b>RES</b>	3:1	r	<b>Reserved</b> Returns 0 if read; should be written with 0
<b>GPT12CAPINB</b>	0	rw	<b>GPT12 CAPINB Input Control</b> set GPT12E-> <b>PISEL</b> .ISCAPIN = 1 0 <sub>B</sub> GPT12 CAPINB Input is connected to P0.3 1 <sub>B</sub> GPT12 CAPINB Input is connected to BEMF comparator output. See <a href="#">TRIM_BEMFx.BEMF_GPT_CAPIN_SEL</a>



## System Control Unit - Digital Modules (SCU-DM)

## MODPISEL2

## Peripheral Input Select Register 2

(0C0<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>T21EXIS</b>		<b>T2EXIS</b>		<b>T21IS</b>		<b>T2IS</b>	
rw		rw		rw		rw	

Field	Bits	Type	Description
<b>T21EXIS</b>	7:6	rw	<p><b>Timer 21 External Input Select</b></p> <p>00<sub>B</sub> Timer 21 Input T21EX_0 (P0.2) is selected            01<sub>B</sub> Timer 21 Input T21EX_1 (P1.4) is selected            10<sub>B</sub> Timer 21 Input T21EX_2 (P2.3) is selected            11<sub>B</sub> Timer 21 Input T21EX_3 (P1.2) is selected</p> <p><i>Note:</i> This selection takes effect only when MODPISEL1.T21EXCON = 0.</p>
<b>T2EXIS</b>	5:4	rw	<p><b>Timer 2 External Input Select</b></p> <p>00<sub>B</sub> Timer 2 Input connected to the integrated LIN Transceiver            01<sub>B</sub> Timer 2 Input T2EX_1 (P1.2) is selected            Others: Reserved</p> <p><i>Note:</i> This selection takes effect only when MODPISEL1.T2EXCON = 0.</p>
<b>T21IS</b>	3:2	rw	<p><b>Timer 21 Input Select</b></p> <p>00<sub>B</sub> Timer 21 Input T21_0 (P0.1) is selected            01<sub>B</sub> Timer 21 Input T21_1 (P1.1) is selected            10<sub>B</sub> Timer 21 Input T21_2 (P0.4) is selected            11<sub>B</sub> Reserved</p>
<b>T2IS</b>	1:0	rw	<p><b>Timer 2 Input Select</b></p> <p>00<sub>B</sub> Timer 2 Input T2_0 (P0.0) is selected            01<sub>B</sub> Timer 2 Input T2_1 (P2.5) is selected            Others: Reserved</p>

---

**System Control Unit - Digital Modules (SCU-DM)**
**MODPISEL3****Peripheral Input Select Register 3****(0C4<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>	<b>URIOS2</b>				<b>Res</b>		
r	rw				r		

Field	Bits	Type	Description
<b>Res</b>	7	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>URIOS2</b>	6	rw	<b>UART2 Input/Output Select</b> 0 <sub>B</sub> UART2 Receiver Input RXD2_0 (P1.2) and Transmitter Output TXD2_0 (P1.1) is selected 1 <sub>B</sub> UART2 Receiver Input RXD2_1 (P2.5) and Transmitter Output TXD2_1 (P1.3) is selected  <i>Note:        To select TXD2_1 as the Transmitter output, the Port ALTSELx registers need to be configured additionally.</i>
<b>Res</b>	5:0	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

## System Control Unit - Digital Modules (SCU-DM)

### 6.7.2 Port Output Control

Px\_POCONy registers control the output driver strength for each of the bidirectional port pins through the bit field PDMn, where x denotes the port number and n denotes the pin number.

#### P0\_POCON0

#### Port Output Control Register

(0E8<sub>H</sub>)

Reset Value: 44<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>PDM1</b>			<b>Res</b>	<b>PDM0</b>		
r	rw			r	rw		

Field	Bits	Type	Description
<b>Res</b>	7	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>PDM1</b>	6:4	rw	<b>P0.1 Port Driver Mode</b> Code Driver Strength <sup>1)</sup> and Edge Shape <sup>2)</sup> 000 <sub>B</sub> Not used 001 <sub>B</sub> Not used 010 <sub>B</sub> Not Used 011 <sub>B</sub> Weak driver 100 <sub>B</sub> Medium driver 101 <sub>B</sub> Medium driver 110 <sub>B</sub> Medium driver 111 <sub>B</sub> Weak driver
<b>Res</b>	3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>PDM0</b>	2:0	rw	<b>P0.0 Port Driver Mode</b> Code Driver Strength <sup>1)</sup> and Edge Shape <sup>2)</sup> 000 <sub>B</sub> Strong driver and sharp edge mode 001 <sub>B</sub> Strong driver and medium edge mode 010 <sub>B</sub> Strong driver and soft edge mode 011 <sub>B</sub> Weak driver 100 <sub>B</sub> Medium driver 101 <sub>B</sub> Medium driver 110 <sub>B</sub> Medium driver 111 <sub>B</sub> Weak driver

1) Defines the current the respective driver can deliver to the external circuitry.

2) Defines the switching characteristics to the respective new output driver. This also influences the peak currents through the driver when producing an edge, i.e. when changing the output level.

---

**System Control Unit - Digital Modules (SCU-DM)**
**P0\_POCON1****Port Output Control Register****(0EC<sub>H</sub>)****Reset Value: 44<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>	<b>PDM3</b>			<b>Res</b>	<b>PDM2</b>		
r	rw			r	rw		

Field	Bits	Type	Description
<b>Res</b>	7	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>PDM3</b>	6:4	rw	<b>P0.3 Port Driver Mode</b> Code Driver Strength <sup>1)</sup> and Edge Shape <sup>2)</sup> 000 <sub>B</sub> Not used 001 <sub>B</sub> Not used 010 <sub>B</sub> Not Used 011 <sub>B</sub> Weak driver 100 <sub>B</sub> Medium driver 101 <sub>B</sub> Medium driver 110 <sub>B</sub> Medium driver 111 <sub>B</sub> Weak driver
<b>Res</b>	3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>PDM2</b>	2:0	rw	<b>P0.2 Port Driver Mode</b> Code Driver Strength <sup>1)</sup> and Edge Shape <sup>2)</sup> 000 <sub>B</sub> Strong driver and sharp edge mode 001 <sub>B</sub> Strong driver and medium edge mode 010 <sub>B</sub> Strong driver and soft edge mode 011 <sub>B</sub> Weak driver 100 <sub>B</sub> Medium driver 101 <sub>B</sub> Medium driver 110 <sub>B</sub> Medium driver 111 <sub>B</sub> Weak driver

1) Defines the current the respective driver can deliver to the external circuitry.

2) Defines the switching characteristics to the respective new output driver. This also influences the peak currents through the driver when producing an edge, i.e. when changing the output level.

---

**System Control Unit - Digital Modules (SCU-DM)**
**P0\_POCON2****Port Output Control Register****(0F0<sub>H</sub>)****Reset Value: 44<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>		<b>Res</b>		<b>Res</b>		<b>PDM4</b>	
r		r		r		rw	

Field	Bits	Type	Description
<b>Res</b>	7	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>Res</b>	6:4	r	<b>Reserved</b> Returns "100" if read; should be written with "100".
<b>Res</b>	3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>PDM4</b>	2:0	rw	<b>P0.4 Port Driver Mode</b> Code Driver Strength <sup>1)</sup> and Edge Shape <sup>2)</sup> 000 <sub>B</sub> Not used 001 <sub>B</sub> Not used 010 <sub>B</sub> Not Used 011 <sub>B</sub> Weak driver 100 <sub>B</sub> Medium driver 101 <sub>B</sub> Medium driver 110 <sub>B</sub> Medium driver 111 <sub>B</sub> Weak driver

1) Defines the current the respective driver can deliver to the external circuitry.

2) Defines the switching characteristics to the respective new output driver. This also influences the peak currents through the driver when producing an edge, i.e. when changing the output level.

## System Control Unit - Digital Modules (SCU-DM)

## P1\_POCON0

## Port Output Control Register

(0F8<sub>H</sub>)Reset Value: 44<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>PDM1</b>			<b>Res</b>	<b>PDM0</b>		
r	rw			r	rw		

Field	Bits	Type	Description
<b>Res</b>	7	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>PDM1</b>	6:4	rw	<b>P1.1 Port Driver Mode</b> Code Driver Strength <sup>1)</sup> and Edge Shape <sup>2)</sup> 000 <sub>B</sub> Not used 001 <sub>B</sub> Not used 010 <sub>B</sub> Not Used 011 <sub>B</sub> Weak driver 100 <sub>B</sub> Medium driver 101 <sub>B</sub> Medium driver 110 <sub>B</sub> Medium driver 111 <sub>B</sub> Weak driver
<b>Res</b>	3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>PDM0</b>	2:0	rw	<b>P1.0 Port Driver Mode</b> Code Driver Strength <sup>1)</sup> and Edge Shape <sup>2)</sup> 000 <sub>B</sub> Not used 001 <sub>B</sub> Not used 010 <sub>B</sub> Not Used 011 <sub>B</sub> Weak driver 100 <sub>B</sub> Medium driver 101 <sub>B</sub> Medium driver 110 <sub>B</sub> Medium driver 111 <sub>B</sub> Weak driver

1) Defines the current the respective driver can deliver to the external circuitry.

2) Defines the switching characteristics to the respective new output driver. This also influences the peak currents through the driver when producing an edge, i.e. when changing the output level.

## System Control Unit - Digital Modules (SCU-DM)

## P1\_POCON1

## Port Output Control Register

(0FC<sub>H</sub>)Reset Value: 44<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>PDM3</b>			<b>Res</b>	<b>PDM2</b>		
r	rw			r	rw		

Field	Bits	Type	Description
<b>Res</b>	7	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>PDM3</b>	6:4	rw	<b>P1.3 Port Driver Mode</b> Code Driver Strength <sup>1)</sup> and Edge Shape <sup>2)</sup> 000 <sub>B</sub> Strong driver and sharp edge mode 001 <sub>B</sub> Strong driver and medium edge mode 010 <sub>B</sub> Strong driver and soft edge mode 011 <sub>B</sub> Weak driver 100 <sub>B</sub> Medium driver 101 <sub>B</sub> Medium driver 110 <sub>B</sub> Medium driver 111 <sub>B</sub> Weak driver
<b>Res</b>	3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>PDM2</b>	2:0	rw	<b>P1.2 Port Driver Mode</b> Code Driver Strength <sup>1)</sup> and Edge Shape <sup>2)</sup> 000 <sub>B</sub> Not used 001 <sub>B</sub> Not used 010 <sub>B</sub> Not Used 011 <sub>B</sub> Weak driver 100 <sub>B</sub> Medium driver 101 <sub>B</sub> Medium driver 110 <sub>B</sub> Medium driver 111 <sub>B</sub> Weak driver


1) Defines the current the respective driver can deliver to the external circuitry.

2) Defines the switching characteristics to the respective new output driver. This also influences the peak currents through the driver when producing an edge, i.e. when changing the output level.

## System Control Unit - Digital Modules (SCU-DM)

### P1\_POCON2

#### Port Output Control Register

(100<sub>H</sub>)Reset Value: 04<sub>H</sub>


Field	Bits	Type	Description
Res	7:3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
PDM4	2:0	rw	<b>P1.4 Port Driver Mode</b> Code Driver Strength <sup>1)</sup> and Edge Shape <sup>2)</sup> 000 <sub>B</sub> Strong driver and sharp edge mode 001 <sub>B</sub> Strong driver and medium edge mode 010 <sub>B</sub> Strong driver and soft edge mode 011 <sub>B</sub> Weak driver 100 <sub>B</sub> Medium driver 101 <sub>B</sub> Medium driver 110 <sub>B</sub> Medium driver 111 <sub>B</sub> Weak driver

- 1) Defines the current the respective driver can deliver to the external circuitry.
- 2) Defines the switching characteristics to the respective new output driver. This also influences the peak currents through the driver when producing an edge, i.e. when changing the output level.

The TCCR register controls the temperature compensation of all the output port pins with strong drivers, i.e. on a device level. The TCCR register has no effect on output port pins that operate in the weak and medium driver modes.

### TCCR

#### Temperature Compensation Control Register

(0F4<sub>H</sub>)Reset Value: 03<sub>H</sub>


Field	Bits	Type	Description
Res	7:2	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
TCC	1:0	rw	<b>Temperature Compensation Control</b> The slew rate of the output driver is kept stable over the selected temperature range: 00 <sub>B</sub> $T_J$ : -40 °C to 0 °C 01 <sub>B</sub> $T_J$ : 0 °C to 40 °C 10 <sub>B</sub> $T_J$ : 40 °C to 80 °C 11 <sub>B</sub> $T_J$ : 80 °C to 150 °C



---

**System Control Unit - Digital Modules (SCU-DM)**
**6.7.3 GPT12 T3IN/T4IN Input Pin Function Selection**

GPT12PISEL registers control the selection of the input pin functions of T3INB and T4IND in GPT12.

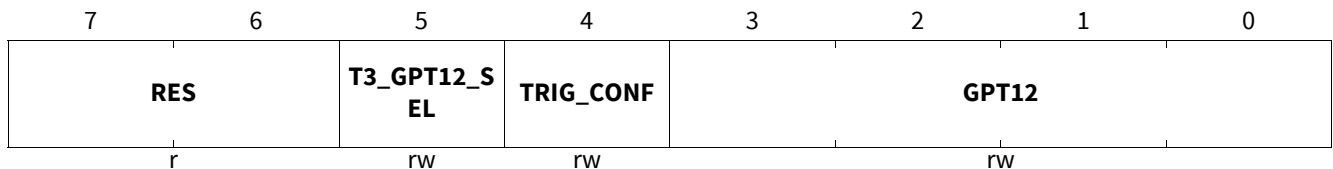**GPT12PISEL**
**GPT12 Peripheral Input Select Register**
**(0D0<sub>H</sub>)**
**Reset Value: 00<sub>H</sub>**


Field	Bits	Type	Description
<b>Res</b>	7:6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>T3_GPT12_SEL</b>	5	rw	<b>CCU6_INT_SEL.</b> 0 <sub>B</sub> CCU6_INT is triggered by Timer 3 1 <sub>B</sub> CCU6_INT is triggered by GPT12PISEL.GPT12.
<b>TRIG_CONF</b>	4	rw	<b>CCU6 Trigger Configuration.</b> 0 <sub>B</sub> Trigger is just for one measurement (default) 1 <sub>B</sub> Trigger is present until next input edge (selected by GPT12) - continuous measurement.
<b>GPT12</b>	3:0	rw	<b>GPT12 TIN3B / TIN4D Input Select</b> 0000 <sub>B</sub> CC60 0001 <sub>B</sub> CC61 0010 <sub>B</sub> CC62 0011 <sub>B</sub> T12 ZM. 0100 <sub>B</sub> T12 PM. 0101 <sub>B</sub> T12 CM0. 0110 <sub>B</sub> T12 CM1. 0111 <sub>B</sub> T12 CM2. 1000 <sub>B</sub> T13 PM. 1001 <sub>B</sub> T13 ZM. 1010 <sub>B</sub> T13 CM. 1011 <sub>B</sub> any positive or negative edge on CC60/61/62. 1100 <sub>B</sub> RES. 1101 <sub>B</sub> RES. 1110 <sub>B</sub> RES. 1111 <sub>B</sub> RES.

## System Control Unit - Digital Modules (SCU-DM)

### 6.8 Flexible Peripheral Management

The Flexible Peripheral Management sub-module provides the system designer greater control on the operational status of each individual digital peripheral. Peripherals which are not required for a particular functionality can be disabled by programming the assigned register bits which would gate off the clock inputs. This would further reduce overall power consumption of the microcontroller.

Each register bit controls one peripheral. When this bit is set, the request signal to gate the peripheral clock is activated. The peripheral will then synchronize the gating off of the clock to the peripheral.

#### 6.8.1 Peripheral Management Registers

##### PMCON1

**Peripheral Management Control Register 1 (060<sub>H</sub>)** **Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
Res	Res	GPT12_DIS	T2_DIS	CCU6_DIS	SSC1_DIS	ADC1_DIS	
r	r	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
Res	7:6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
Res	5	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
GPT12_DIS	4	rw	<b>General Purpose Timer 12 Disable Request. Active high.</b> 0 <sub>B</sub> GPT12 is in normal operation. (default) 1 <sub>B</sub> Request to disable the GPT12.
T2_DIS	3	rw	<b>T2 Disable Request. Active high.</b> 0 <sub>B</sub> T2 is in normal operation. (default) 1 <sub>B</sub> Request to disable the T2.
CCU6_DIS	2	rw	<b>CCU6 Disable Request. Active high.</b> 0 <sub>B</sub> CCU6 is in normal operation. (default) 1 <sub>B</sub> Request to disable the CCU6.
SSC1_DIS	1	rw	<b>SSC1 Disable Request. Active high.</b> 0 <sub>B</sub> SSC1 is in normal operation. (default) 1 <sub>B</sub> Request to disable the SSC1.
ADC1_DIS	0	rw	<b>ADC1 Disable Request. Active high.</b> 0 <sub>B</sub> ADC1 is in normal operation. (default) 1 <sub>B</sub> Request to disable the ADC1.

---

**System Control Unit - Digital Modules (SCU-DM)**
**PMCON2****Peripheral Management Control Register 2****(064<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
Res	T3_DIS	Res	T21_DIS	Res	SSC2_DIS	Res	
r	rw	r	rw	r	rw	r	

Field	Bits	Type	Description
Res	7:6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
T3_DIS	5	rw	<b>T3 Disable Request. Active high.</b> 0 <sub>B</sub> T3 is in normal operation. (default) 1 <sub>B</sub> Request to disable the T3.
Res	4	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
T21_DIS	3	rw	<b>T21 Disable Request. Active high.</b> 0 <sub>B</sub> T21 is in normal operation. (default) 1 <sub>B</sub> Request to disable the T21.
Res	2	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
SSC2_DIS	1	rw	<b>SSC2 Disable Request. Active high.</b> 0 <sub>B</sub> SSC2 is in normal operation. (default) 1 <sub>B</sub> Request to disable the SSC2.
Res	0	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

## System Control Unit - Digital Modules (SCU-DM)

### 6.9 Module Suspend Control

When the On-Chip Debug Support (Debug Mode) is in Monitor Mode (halted\_o from ARM debug), timers in certain modules in TLE987x can be suspended based on the settings of their corresponding module suspend bits in register MODSUSP. When suspended, only the timer stops counting as the counter input clock is gated off. The module is still clocked so that module registers are accessible.

#### MODSUSP1

##### Module Suspend Control Register 1

(0C8<sub>H</sub>)

Reset Value: 81<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>T21_SUSP</b>	<b>Res</b>	<b>GPT12_SUSP</b>	<b>T2_SUSP</b>	<b>T13SUSP</b>	<b>T12SUSP</b>	<b>WDTSUSP</b>
r	rw	r	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Res</b>	7	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>T21_SUSP</b>	6	rw	<b>Timer21 Debug Suspend Bit</b> 0 <sub>B</sub> Timer21 will not be suspended. 1 <sub>B</sub> Timer21 will be suspended.
<b>Res</b>	5	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>GPT12_SUSP</b>	4	rw	<b>GPT12 Debug Suspend Bit</b> 0 <sub>B</sub> GPT12 will not be suspended. 1 <sub>B</sub> GPT12 will be suspended.
<b>T2_SUSP</b>	3	rw	<b>Timer2 Debug Suspend Bit</b> 0 <sub>B</sub> Timer2 will not be suspended. 1 <sub>B</sub> Timer2 will be suspended.
<b>T13SUSP</b>	2	rw	<b>Timer 13 Debug Suspend Bit</b> 0 <sub>B</sub> Timer 13 in Capture/Compare Unit will not be suspended. 1 <sub>B</sub> Timer 13 in Capture/Compare Unit will be suspended. When suspended, additionally the T13 PWM output is set to inactive level.
<b>T12SUSP</b>	1	rw	<b>Timer 12 Debug Suspend Bit</b> 0 <sub>B</sub> Timer 12 in Capture/Compare Unit will not be suspended. 1 <sub>B</sub> Timer 12 in Capture/Compare Unit will be suspended. When suspended, additionally the T12 PWM outputs are set to inactive level and capture inputs are disabled.
<b>WDTSUSP</b>	0	rw	<b>SCU Watchdog Timer Debug Suspend Bit</b> 0 <sub>B</sub> WDT will not be suspended. 1 <sub>B</sub> WDT will be suspended.

---

**System Control Unit - Digital Modules (SCU-DM)**
**MODSUSP2****Module Suspend Control Register 2****(0CC<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>					<b>ADC1_SUSP</b>	<b>MU_SUSP</b>	<b>T3_SUSP</b>
r					rw	rw	rw

Field	Bits	Type	Description
<b>Res</b>	7:3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>ADC1_SUSP</b>	2	rw	<b>ADC1 Unit Debug Suspend Bit</b> 0 <sub>B</sub> ADC1 will not be suspended. 1 <sub>B</sub> ADC1 will be suspended.
<b>MU_SUSP</b>	1	rw	<b>Measurement Unit Debug Suspend Bit</b> 0 <sub>B</sub> MU will not be suspended. 1 <sub>B</sub> MU will be suspended.
<b>T3_SUSP</b>	0	rw	<b>Timer 3 Debug Suspend Bit</b> 0 <sub>B</sub> Timer 3 will not be suspended. 1 <sub>B</sub> Timer 3 will be suspended.

## 6.10 Watchdog Timer

There are two watchdog timers in the system: SCU Watchdog Timer (WDT) within TLE987x, and external watchdog timer (WDT1). The description in this section refers to the SCU WDT.

The Watchdog Timer is a sub-module in the System Control Unit (SCU). The Watchdog Timer (WDT) provides a highly reliable and secure way to detect and recover from software or hardware failures. The WDT helps to abort an accidental malfunction of the TLE987x in a user-specified time period. When enabled, the WDT will cause the TLE987x system to be reset if the WDT is not serviced within a user-programmable time period. The CPU must service the WDT within this time interval to prevent the WDT from causing a TLE987x system reset. Hence, routine service of the WDT confirms that the system is functioning properly.

The WDT is by default disabled.

In debug mode, the WDT is default suspended and stops counting (its debug suspend bit is default set i.e., **MODSUSP1**.WDTSUSP = 1. Therefore during debugging, there is no need to refresh the WDT. Refer to [Section 6.9](#).


### Features

- 16-bit Watchdog Timer
- Programmable reload value for upper 8 bits of timer
- Programmable window boundary
- Selectable input frequency of  $f_{PCLK}/2$  or  $f_{PCLK}/128$

## System Control Unit - Digital Modules (SCU-DM)

### 6.10.1 Functional Description

The Watchdog Timer is a 16-bit timer, which is incremented by a count rate of  $f_{PCLK}/2$  or  $f_{PCLK}/128$ . This 16-bit timer is realized as two concatenated 8-bit timers. The upper 8 bits of the Watchdog Timer can be preset to a user-programmable value via a watchdog service access in order to vary the watchdog expire time. The lower 8 bits are reset on each service access. **Figure 30** shows the block diagram of the watchdog timer unit.

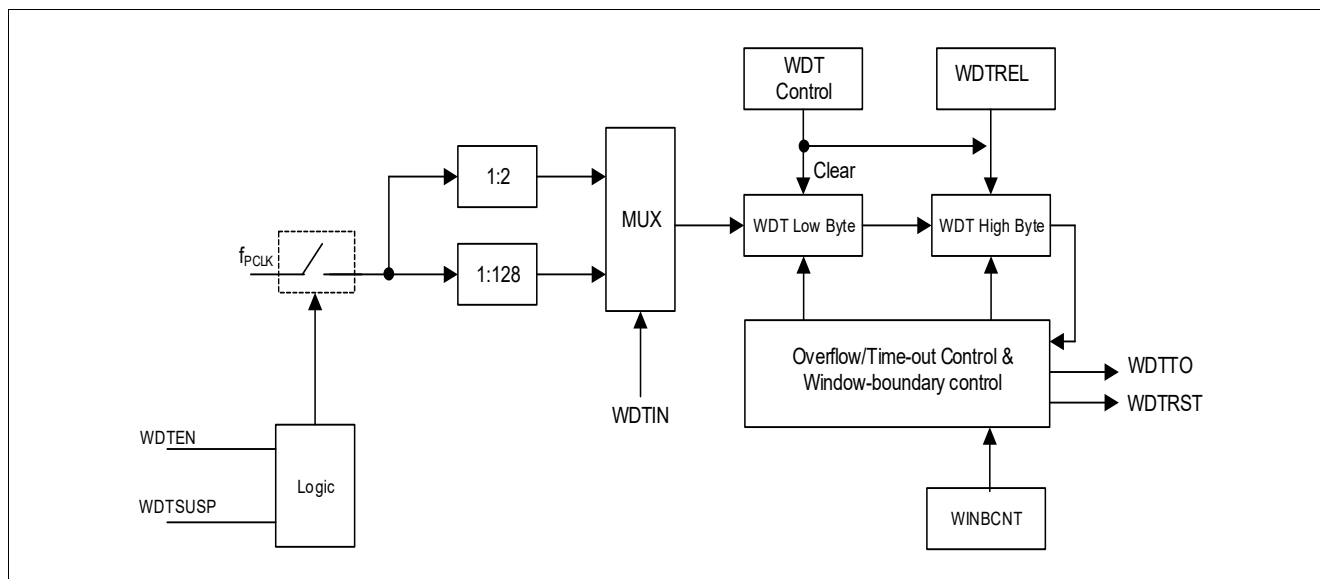

**Figure 30** WDT Block Diagram

If the Watchdog Timer is enabled by setting bit WDTEN to 1, the timer is set to a user-defined start value and begins counting up. It must be serviced before the counter overflows. Servicing is performed through refresh. This reloads the timer with the start value, and normal operation continues.

If the WDT is not serviced before the timer overflows, a system malfunction is assumed and normal mode is terminated. A Watchdog Timer NMI request (WDTTO) is asserted and Prewarning is entered. The Prewarning lasts for  $30H$  counts. During the Prewarning period, refreshing of the Watchdog Timer is ignored and the Watchdog Timer cannot be disabled. A reset (WDRST) of the TLE987x is imminent and can no longer be stopped. If refresh happens at the same time an overflow occurs, Watchdog Timer will not go into Prewarning period.

The Watchdog Timer must be serviced periodically so that its count value will not overflow. Servicing the Watchdog Timer clears the low byte and reloads the high byte with the preset value in bit field WDTREL. Servicing the Watchdog Timer also clears the bit WDRST.

The Watchdog Timer has a 'programmable window boundary', it disallows refresh during the Watchdog Timer's count-up. A Refresh during this window-boundary will cause the Watchdog Timer to activate WDRST. The window boundary is from  $0000H$  to  $(WDTWINB,00H)$ . This feature can be enabled by WINBEN.

After being serviced, the Watchdog Timer continues counting up from the value  $(\langle WDTREL \rangle * 2^8)$ . The time period for an overflow of the Watchdog Timer is programmable in two ways:


- **the input frequency** to the Watchdog Timer can be selected via bit WDTIN in register WDTCON to be either  $f_{PCLK}/2$  or  $f_{PCLK}/128$ .
- **the reload value** WDTREL for the high byte of WDT can be programmed in register WDTREL.

**System Control Unit - Digital Modules (SCU-DM)**

The period  $P_{WDT}$  between servicing the Watchdog Timer and the next overflow can be determined by the following formula:

$$P_{WDT} = \frac{2^{(1+WDTIN \times 6)} \times (2^{16} - WDTREL \times 2^8)}{f_{PCLK}} \tag{6.5}$$

If the Window-Boundary Refresh feature of the Watchdog Timer is enabled, the period  $P_{WDT}$  between servicing the Watchdog Timer and the next overflow is shortened if  $WDTWINB$  is greater than  $WDTREL$ . See also [Figure 31](#). This period can be calculated by the same formula by replacing  $WDTREL$  with  $WDTWINB$ . In order for this feature to be useful,  $WDTWINB$  cannot be smaller than  $WDTREL$ .

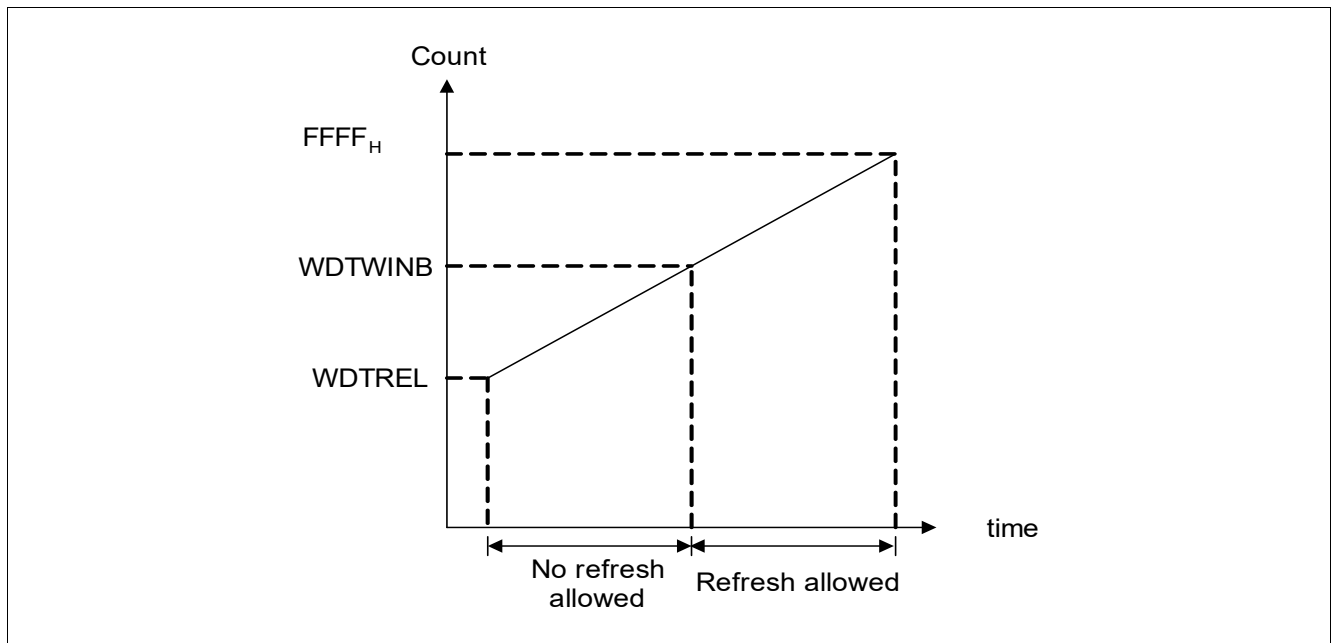

**Figure 31 Watchdog Timer Timing Diagram**

The following table lists the possible ranges for the watchdog time which can be achieved using a certain module clock. Some numbers are rounded to 3 significant digits.

**Table 37 Watchdog Time Ranges**

Reload Value in WDTREL	Prescaler for $f_{PCLK}$					
	2 (WDTIN = 0)			128 (WDTIN = 1)		
	40 MHz	20 MHz	13.3 MHz	40 MHz	20 MHz	13.3 MHz
FF <sub>H</sub>	12.8 μs	25.6 μs	38.4 μs	0.82 ms	1.64 ms	2.46 ms
7F <sub>H</sub>	1.65 ms	3.30 ms	4.95 ms	106 ms	211 ms	317 ms
00 <sub>H</sub>	3.28 ms	6.55 ms	9.83 ms	210 ms	419 ms	629 ms

**Notes**


1. For safety reasons, the user is advised to rewrite *WDTCON* each time before the Watchdog Timer is serviced.
2. The Watchdog Timer can be suspended when Debug Mode enters Monitor Mode and has the Debug-Suspend signal activated, provided the respective suspend bit, *WDTSUSP* in SFR *SCU\_MODSUSP*, is set. See [Section 6.9](#).



---

**System Control Unit - Digital Modules (SCU-DM)**
**6.10.2 Register Description**

The current count value of the Watchdog Timer is contained in the Watchdog Timer Register WDT, which is a non-bit-addressable read-only register. The operation of the Watchdog Timer is controlled by its bit-addressable Watchdog Timer Control Register WDTCN. WDTREL register specifies the reload value for the high byte of the timer. WDTWINB specifies Watchdog Window-Boundary count value.

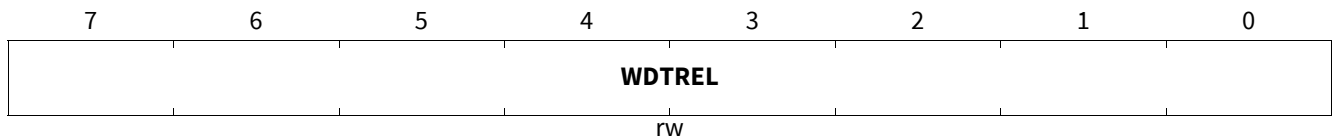**WDTREL**
**Watchdog Timer Reload Register**
**(078<sub>H</sub>)**
**Reset Value: 00<sub>H</sub>**


Field	Bits	Type	Description
<b>WDTREL</b>	7:0	rw	<b>Watchdog Timer Reload Value</b> (for the high byte of WDT)

## System Control Unit - Digital Modules (SCU-DM)

## WDTCON


## Watchdog Timer Control Register

(050<sub>H</sub>)Reset Value: 00<sub>H</sub>


7	6	5	4	3	2	1	0
Res		WINBEN	WDTPR	Res	WDTEN	WDTRS	WDTIN
r		rw	rh	r	rw	rwh	rw

Field	Bits	Type	Description
<b>Res</b>	7:6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>WINBEN</b>	5	rw	<b>Watchdog Window-Boundary Enable</b> 0 <sub>B</sub> Watchdog Window-Boundary feature is disabled. (default) 1 <sub>B</sub> Watchdog Window-Boundary feature is enabled.
<b>WDTPR</b>	4	rh	<b>Watchdog Prewarning Mode Flag</b> 0 <sub>B</sub> Normal mode (default after reset) 1 <sub>B</sub> The Watchdog is operating in Prewarning Mode This bit is set to 1 when a Watchdog error is detected. The Watchdog Timer has issued an NMI trap and is in Prewarning Mode. A reset of the chip occurs after the prewarning period has expired.
<b>Res</b>	3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>WDTEN</b>	2	rw	<b>WDT Enable</b> 0 <sub>B</sub> WDT is disabled 1 <sub>B</sub> WDT is enabled WDTEN is a protected bit. If the Protection Scheme is activated then this bit cannot be written directly. For more information on Protection Scheme, see <a href="#">Section 6.12</a> .  <i>Note: Clearing WDTEN bit to 0 during Prewarning Mode (WDTPR = 1) has no effect.</i>
<b>WDTRS</b>	1	rwh	<b>WDT Refresh Start</b> Active high. Set to start refresh operation on the watchdog timer. Cleared automatically by hardware after it is set by software.
<b>WDTIN</b>	0	rw	<b>Watchdog Timer Input Frequency Selection</b> 0 <sub>B</sub> Input frequency is $f_{PCLK}/2$ 1 <sub>B</sub> Input frequency is $f_{PCLK}/128$


---

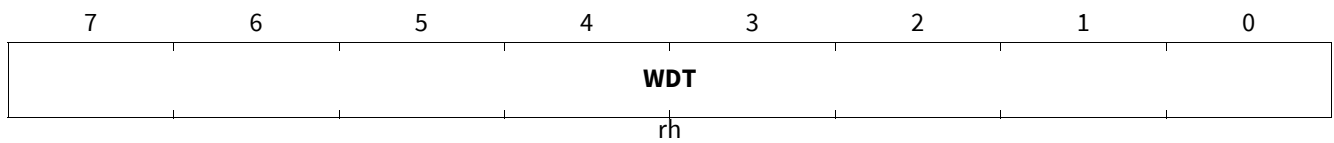**System Control Unit - Digital Modules (SCU-DM)**
**WDTL****Watchdog Timer, Low Byte****(080<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

Field	Bits	Type	Description
<b>WDT</b>	7:0	rh	<b>Watchdog Timer Current Value</b>

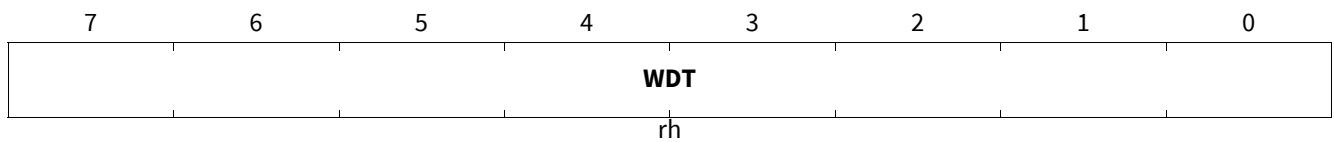**WDTH****Watchdog Timer, High Byte****(084<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

Field	Bits	Type	Description
<b>WDT</b>	7:0	rh	<b>Watchdog Timer Current Value</b>

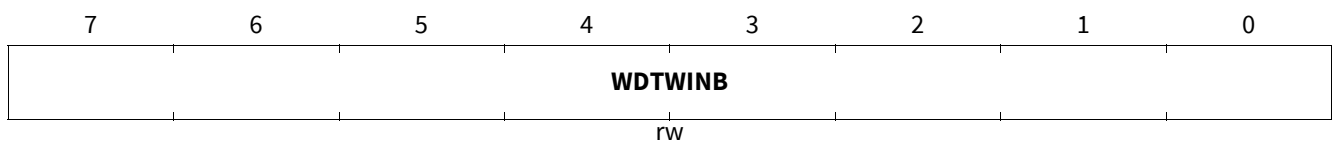**WDTWINB****Watchdog Window-Boundary Count****(07C<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

Field	Bits	Type	Description
<b>WDTWINB</b>	7:0	rw	<b>Watchdog Window-Boundary Count Value</b> This value is programmable. Within this Window-Boundary range from 0000 <sub>H</sub> to (WDTWINB, 00 <sub>H</sub> ), the WDT cannot do a Refresh, else it will cause a WDTRST to be asserted. WDTWINB is matched to WDTH.

## System Control Unit - Digital Modules (SCU-DM)

### 6.11 Error Detection and Correction Control for Memories

This section defines the registers used for error detection and correction control of memories – namely RAM and NVM, which support this function.

#### 6.11.1 Error Detection and Correction Control Register

The EDCCON register determines the generation of an NMI due to double bit ECC error when reading these memories.

#### EDCCON

##### Error Detection and Correction Control Register (0D4<sub>H</sub>)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>				<b>Res</b>	<b>NVMIE</b>	<b>Res</b>	<b>RIE</b>
r				r	rw	r	rw

Field	Bits	Type	Description
<b>Res</b>	7:4	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>Res</b>	3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>NVMIE</b>	2	rw	<b>NVM Double Bit ECC Error Interrupt Enable</b> 0 <sub>B</sub> No NMI is generated when a double bit ECC error occurs reading NVM. 1 <sub>B</sub> An NMI is generated when a double bit ECC error occurs reading NVM.
<b>Res</b>	1	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>RIE</b>	0	rw	<b>RAM Double Bit ECC Error Interrupt Enable</b> 0 <sub>B</sub> No NMI is generated when a double bit ECC error occurs reading RAM. 1 <sub>B</sub> An NMI is generated when a double bit ECC error occurs reading RAM.

---

**System Control Unit - Digital Modules (SCU-DM)**
**6.11.2 Error Detection and Correction Status Register**

The EDCSTAT register contains the status flags of ECC errors when reading these memories.

This register EDCSTAT is reset by RESET\_TYPE\_4.

**EDCSTAT**
**Error Detection and Correction Status Register, (0D8<sub>H</sub>)**
**Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>RSBE</b>	<b>Res</b>	<b>NVMDBE</b>	<b>Res</b>	<b>RDBE</b>
r	r	r	r	r	r	r	r

Field	Bits	Type	Description
<b>Res</b>	7	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>Res</b>	6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>Res</b>	5	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>RSBE</b>	4	r	<b>RAM Single Bit Error</b> This bit is set by hardware and can be cleared only by software. 0 <sub>B</sub> No single bit error on RAM has occurred. 1 <sub>B</sub> A single bit error on RAM has occurred.
<b>Res</b>	3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>NVMDBE</b>	2	r	<b>NVM Double Bit Error</b> This bit is set by hardware and can be cleared only by software. 0 <sub>B</sub> No double bit error on NVM has occurred. 1 <sub>B</sub> A double bit error on NVM has occurred.
<b>Res</b>	1	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>RDBE</b>	0	r	<b>RAM Double Bit Error</b> This bit is set by hardware and can be cleared only by software. 0 <sub>B</sub> No double bit error on RAM has occurred. 1 <sub>B</sub> A double bit error on RAM has occurred.

---

**System Control Unit - Digital Modules (SCU-DM)**
**EDCSCLR****Error Detection and Correction Status Clear Register(10C<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>RSBEC</b>	<b>Res</b>	<b>NVMBEC</b>	<b>Res</b>	<b>RDBEC</b>
r	r	r	w	r	w	r	w

Field	Bits	Type	Description
<b>Res</b>	7	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>Res</b>	6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>Res</b>	5	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>RSBEC</b>	4	w	<b>RAM Single Bit Error Clear</b> This bit is set by software and can be cleared only by hardware. 0 <sub>B</sub> A single bit error on RAM is not cleared. 1 <sub>B</sub> A single bit error on RAM is cleared.
<b>Res</b>	3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>NVMBEC</b>	2	w	<b>NVM Double Bit Error Clear</b> This bit is set by software and can be cleared only by hardware. 0 <sub>B</sub> A double bit error on NVM is not cleared. 1 <sub>B</sub> A double bit error on NVM is cleared.
<b>Res</b>	1	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>RDBEC</b>	0	w	<b>RAM Double Bit Error Clear</b> This bit is set by software and can be cleared only by hardware. 0 <sub>B</sub> A double bit error on RAM is not cleared. 1 <sub>B</sub> A double bit error on RAM is cleared.

## System Control Unit - Digital Modules (SCU-DM)

### 6.12 Miscellaneous Control

This module consists of the Bit-Protection Scheme and general system control SFRs.

#### 6.12.1 Bit Protection Register

The Bit-Protection Scheme disallows direct software writing of selected bits (i.e. Protected bits) by the SFR PASSWD. When the bit field MODE is 11<sub>B</sub>, writing 10011<sub>B</sub> to the bit field PASS opens access to writing of all protected bits and writing 10101<sub>B</sub> to the bit field PASS closes access to writing of all protected bits. Note that access is opened for maximum 32 CCLKs if the “close access” password is not written. If “open access” password is written again before the end of 32 CCLK cycles, there will be a recount of 32 CCLK cycles.

*Note: Due to the fact that the write access to a register unlocked by the access to PASSWD is granted only for 32 clock cycles, it is recommended to disable interrupts before and reenable them afterwards again. In case an interrupt is issued right after the register write access has been opened the 32 clock cycles will be past if the interrupt returns and the write access to the desired register is blocked again. For those registers which do only hold PASSWD protected bits a write access to a locked register will cause a Hard Fault exception.*

#### PASSWD

##### Password Register

(0AC<sub>H</sub>)

Reset Value: 07<sub>H</sub>

7	6	5	4	3	2	1	0
<b>PASS</b>					<b>PROTECT_S</b>	<b>MODE</b>	
wh					rh	rw	

Field	Bits	Type	Description
<b>PASS</b>	7:3	wh	<b>Password Bits</b> The Bit-Protection Scheme only recognizes three patterns. 11000 <sub>B</sub> Enables writing of the bit field MODE. 10011 <sub>B</sub> Opens access to writing of all protected bits. 10101 <sub>B</sub> Closes access to writing of all protected bits.
<b>PROTECT_S</b>	2	rh	<b>Bit-Protection Signal Status Bit</b> This bit shows the status of the protection. 0 <sub>B</sub> Software is able to write to all protected bits. 1 <sub>B</sub> Software is unable to write to any protected bits.
<b>MODE</b>	1:0	rw	<b>Bit-Protection Scheme Control Bit</b> 00 <sub>B</sub> Scheme Disabled 11 <sub>B</sub> Scheme Enabled (default) Others: Scheme Enabled These two bits cannot be written directly. To change the value between 11 <sub>B</sub> and 00 <sub>B</sub> , the bit field PASS must be written with 11000 <sub>B</sub> , only then the MODE[1:0] will be registered.

The PASSWD register and the registers which contain protected bits are located in page 2 of the SCU SFR address map. The list of protected bits is shown in [Table 38](#).

---

**System Control Unit - Digital Modules (SCU-DM)**
**Table 38 List of Protected Bits**

<b>Register</b>	<b>Bit Field</b>
<b>SYSCON0</b>	NVMCLKFAC
	SYSCLKSEL
<b>OSC_CON</b>	OSCSS
	XPD
<b>OSC_CON</b>	OSCTRIM8
<b>PLL_CON</b>	NDIV
<b>CMCON1</b>	K1DIV
	K2DIV
<b>CMCON2</b>	PBA0CLKREL
<b>PMCON0</b>	SL
	PD
	SD
<b>WDTCON</b>	WDTEN
<b>APCLK_CTRL1</b>	CPCLK_DIV
	CPCLK_SEL
	BGCLK_DIV
	BGCLK_SEL
	T3CLK_SEL
<b>TRIM_DRVx</b>	all bits



## System Control Unit - Digital Modules (SCU-DM)

### 6.12.2 System Control and Status Registers

The system startup status register provides information to the user about the system initialization with the user programmable 100 TP Page at startup. This register is written by firmware. The user application needs to check the SYS\_STARTUP\_SYS.MRAMINITSTS in order to check the consistency of the Data Flash mapping. Only if no failure is signaled then data flash write/erase operations can be safely performed. In case of failure a reset can be issued in order to start the Service Algorithm to try to fix the integrity issue inside the data flash, if the MRAMINITSTS is still flagged afterwards the data flash sector has to be reinitialized by performing a SECTOR\_ERASE.

Furthermore the user shall check the MEMSTAT register as a result feedback from the Service Algorithm.

#### SYS\_STARTUP\_STS

##### System Startup Status Register

(074<sub>H</sub>)

Reset Value: 40<sub>H</sub>

7	6	5	4	3	2	1	0
Res	Res	Res	Res	Res	PG+_CHKS_E RR	MRAMINITST S	INIT_FAIL
r	r	r	r	r	rwp	rwp	rwp

Field	Bits	Type	Description
Res	7:3	r	<b>Reserved</b> This bit field is always read as zero.
PG100TP_CHKS_ERR	2	rwp	<b>100 TP Page Checksum Error</b> Initialization of trimming parameters from NVM failed, default values out of Boot-ROM are used because of checksum error.
MRAMINITSTS	1	rwp	<b>Map RAM Initialization Status</b> This bit reflects the status of Map RAM initialization. 0: no fail = Map RAM initialization was successful. 1: fail = Map RAM initialization was not successful.
INIT_FAIL	0	rwp	<b>Initialization at startup failed</b> This bit is a logical OR between PLL_LOCK failure, Map RAM initialization failure and trimming values checksum error. 0: no error= no initialization error at startup. 1: error= initialization error at startup.

**SYS\_STARTUP\_STS** contains the main system control and status bits.

## System Control Unit - Digital Modules (SCU-DM)

This register is reset by **RESET\_TYPE\_4**. It reflects the NVM Protection Status. It is written by firmware. In order to modify this register the PASSWD open pass phrase has to be written before.

Register NVM\_PROT\_STS is being initialized by the BootROM during the bootup process to a value of 0F<sub>H</sub>

### NVM\_PROT\_STS

#### NVM Protection Status Register

(0E0<sub>H</sub>)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0	
Res	Res	Res	Res	NVMPROTSTS				
		r			rwp			

Field	Bits	Type	Description
Res	7:4	r	<b>Reserved</b> This bit field is always read as zero.
NVMPROTSTSL_3	3	rwp	<b>NVM Protection Status Register Low Flags</b> 0 <sub>B</sub> The data in sectors of the linearly mapped area can not be read 1 <sub>B</sub> The data in sectors of the linearly mapped area can be read
NVMPROTSTSL_2	2	rwp	<b>NVM Protection Status Register Low Flags</b> 0 <sub>B</sub> The data in sectors of the non-linearly mapped area can not be read 1 <sub>B</sub> The data in sectors of the non-linearly mapped area can be read
NVMPROTSTSL_1	1	rwp	<b>NVM Protection Status Register Low Flags</b> 0 <sub>B</sub> The data in sectors of the linearly mapped area can not be changed 1 <sub>B</sub> The data in sectors of the linearly mapped area can be changed
NVMPROTSTSL_0	0	rwp	<b>NVM Protection Status Register Low Flags</b> 0 <sub>B</sub> The data in sectors of the non-linearly mapped area can not be changed 1 <sub>B</sub> The data in sectors of the non-linearly mapped area can be changed

## System Control Unit - Digital Modules (SCU-DM)

## MEM\_ACC\_STS

## Memory Access Status Register

(0E4<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
Res	RAM_PROT_E RR	ROM_ADDR_ ERR	ROM_PROT_ ERR	NVM_SFR_AD DR_ERR	NVM_SFR_PR OT_ERR	NVM_ADDR_E RR	NVM_PROT_E RR
r				rh			

Field	Bits	Type	Description
Res	7	r	<b>Reserved</b> This bit field is always read as zero.
RAM_PROT_ERR	6	rh	<b>RAM Access Protection</b> 0 <sub>B</sub> No Protection error 1 <sub>B</sub> Protection error
ROM_ADDR_ERR	5	rh	<b>ROM Address Protection</b> 0 <sub>B</sub> No Protection error 1 <sub>B</sub> Protection error
ROM_PROT_ERR	4	rh	<b>ROM Access Protection</b> 0 <sub>B</sub> No Protection error 1 <sub>B</sub> Protection error
NVM_SFR_ADDR_ERR	3	rh	<b>NVM SFR Address Protection</b> 0 <sub>B</sub> No Protection error 1 <sub>B</sub> Protection error
NVM_SFR_PROT_ERR	2	rh	<b>NVM SFR Access Protection</b> 0 <sub>B</sub> No Protection error 1 <sub>B</sub> Protection error
NVM_ADDR_ERR	1	rh	<b>NVM Address Protection</b> 0 <sub>B</sub> No Protection error 1 <sub>B</sub> Protection error
NVM_PROT_ERR	0	rh	<b>NVM Access Protection</b> 0 <sub>B</sub> No Protection error 1 <sub>B</sub> Protection error

This register MEM\_ACC\_STS is reset by RESET\_TYPE\_3. It reflects the Memory Access Status of all System Memories. Software can only clear this register.

**System Control Unit - Digital Modules (SCU-DM)**


The Identity Register identifies the product and versioning.

**ID**

**Identity Register**

(0A8<sub>H</sub>)

Reset Value: 82<sub>H</sub>

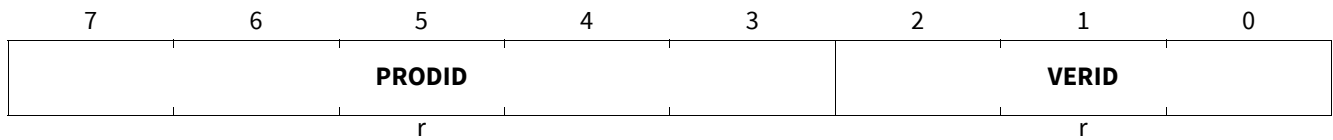

Field	Bits	Type	Description
<b>PRODID</b>	7:3	r	<b>Product ID</b> 10000 <sub>B</sub>
<b>VERID</b>	2:0	r	<b>Version ID</b> Defines the stepping code of the device. 001 <sub>B</sub> 010 <sub>B</sub>

## System Control Unit - Digital Modules (SCU-DM)

The Memory Status Register can be used in two ways. Upon the completion of the Boot ROM startup following a reset, the register stores the NVM initialization status. Subsequently, the register can be used by the user code to store the status of the NVM program and emergency program operation status.


For Boot ROM to indicate NVM initialization status upon completion of startup:

The MEMSTAT register provides the return value of the Service Algorithm, which might get executed during start-up, to the user application. Due to the double-function of the MEMSTAT register it is recommended to clear the MEMSTAT register after evaluation and before any NVM firmware function is called. If the MEMSTAT register holds the value 0x00 then the Service Algorithm was not executed at all. Otherwise the bitfield SASTATUS informs the user application about the result of the corrective actions performed by the Service Algorithm.

In case the Service Algorithm was executed successfully (SASTATUS=0b01) then the user must expect that the Service Algorithm did fix some data flash integrity issue by erasing an erroneous data flash page. Therefore the user shall check the availability of the expected data flash pages. If an expected page was erased by the Service Algorithm due to some failure in the data flash page control information a reading of this page would trigger a NMIMAP. The user can use this information to reconstruct the content of the missing data flash page.

### MEMSTAT

**Memory Status Register RESET\_TYPE\_3 (0DC<sub>H</sub>)** **Reset Value: 00<sub>H</sub>**

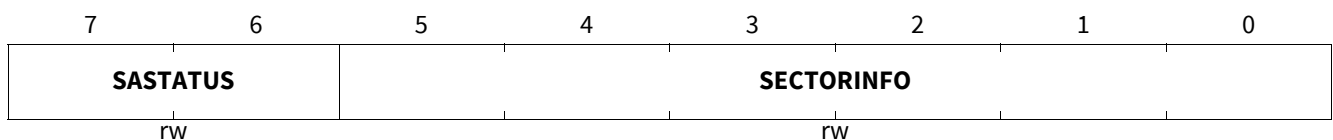

Field	Bits	Type	Description
<b>SASTATUS</b>	7:6	rw	<p><b>Service Algorithm Status</b></p> <p>00<sub>B</sub> Depending on SECTORINFO, there are two possible outcomes: For SECTORINFO = 00<sub>H</sub>, NVM initialization is successful and no SA is executed. For SECTORINFO = values other than 00<sub>H</sub>, SA execution is successful and up to one map error is fixed.</p> <p>01<sub>B</sub> SA execution is successful. One mapping error is fixed.</p> <p>10<sub>B</sub> SA execution is not successful. Map error exists in one sector.</p> <p>11<sub>B</sub> SA execution is not successful. At least one sector failed (this includes also the case where a sector is repaired but another sector is still failing).</p>
<b>SECTORINFO</b>	5:0	rw	<p><b>Sector Information</b></p> <p>01<sub>H</sub> to 10<sub>H</sub>, which represent the different sector addresses. For values not within this range, the data will be considered invalid. Once the SA has been executed, regardless of the execution status, the last accessed sector information will be stored here.</p> <p>00<sub>H</sub> Service Algorithm was not executed, mapping consistent</p> <p>09<sub>H</sub> 36KB flash derivate</p> <p>0C<sub>H</sub> 48KB flash derivate</p> <p>10<sub>H</sub> 64KB flash derivate</p> <p>20<sub>H</sub> 128KB flash derivate</p>

---

**System Control Unit - Digital Modules (SCU-DM)**

*Note: If the MEMSTAT[7] is '1' then the Service Algorithm was not able to resolve an existing data integrity issue inside the data flash. It is recommended to perform a reset of the device in order to give the Service Algorithm another try. If also that one fails, MEMSTAT[7] = '1', then a reinitialization of the data flash by performing a SECTOR\_ERASE is recommended.*

---

**System Control Unit - Digital Modules (SCU-DM)**

For user code to indicate the NVM program and emergency program operation status:

**MEMSTAT****Memory Status Register****(0DC<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>						<b>EMPROP</b>	<b>NVMPROP</b>
rw						rw	rw

Field	Bits	Type	Description
<b>Res</b>	7:2	rw	<b>Reserved Bits</b> Should be written with 0.
<b>EMPROP</b>	1	rw	<b>Emergency Program Operation Status Bit</b> This bit is used to store the status of the emergency program operation. 0 <sub>B</sub> No emergency program operation is requested. 1 <sub>B</sub> An emergency program operation is requested.
<b>NVMPROP</b>	0	rw	<b>NVM Program Operation Status Bit</b> This bit is used to store the status of the NVM program operation. 0 <sub>B</sub> No NVM program operation is started. 1 <sub>B</sub> An NVM program operation is started.

## System Control Unit - Digital Modules (SCU-DM)

### 6.13 Register Access Hints

Some registers in the SCU module are clocked with the MI\_CLK. Write operations will be delayed by one MI\_CLK cycle.

For handling the clearing of interrupt status flags special care might be necessary. Under certain coding constellations an extra write access to the interrupt clear flag will be necessary to add the extra MI\_CLK cycle.

In case of interrupt status clear, two use cases in the software can be considered:

1. the writing to the interrupt clear flag and the reading of the corresponding interrupt status flag are having some other code in between
2. the writing to the interrupt clear flag and the reading of the corresponding interrupt status flag are placed in code right behind each other, with no code in between

#### Use Case 1 - Example, no extra write attempt to the interrupt clear register required

```
/* clearing of RAM Double Bit Error interrupt status flag */
SCU->EDCSCLR.bit.RDBEC = 1;
/* some other code is placed here */
...
/* reading of RAM Double Bit Error interrupt status flag */
if ( SCU->EDCSTAT.bit.RDBE == 1 )
{
    /* some user code here */
}
```

In this example, between the interrupt clear register write and the corresponding status register read, sufficient time is ensured, as some C code (at least one C instruction) is placed in between.

#### Use Case 2- Example, one extra write attempt to the interrupt clear register required

```
/* clearing of RAM Double Bit Error interrupt status flag */
SCU->EDCSCLR.bit.RDBEC = 1;
/* place another interrupt status flag clear attempt to add an extra MI_CLK cycle*/
SCU->EDCSCLR.bit.RDBEC = 0;
/* reading of RAM Double Bit Error interrupt status flag */
if ( SCU->EDCSTAT.bit.RDBE == 1 )
{
    /* some user code here */
}
```

In this example, between the interrupt clear register write and the corresponding status register read, another interrupt clear register write is placed. In order to add another MI\_CLK cycle and ensure that the first interrupt status flag write attempt has reached the interrupt status register before it will be read again in the if clause right after it. Without this extra clear attempt the following interrupt status flag read might still reflect the interrupt status set.

An extra instruction gives the first clear attempt at least one MI\_CLK cycle of time. Any other C instruction might be sufficient as well. Using the same interrupt clear write again is proposed. This access cannot be eliminated by the compiler by optimization.

Executing the second interrupt clear write with a '0' is recommended, as so, no functional effect to the register takes place.



---

**System Control Unit - Digital Modules (SCU-DM)****6.13.1 Register List**

This chapter lists the registers in the SCU for which the described proposals apply to:

- **APCLK1**
- **APCLK2**
- **EDCSCLR**
- **NMICLR**

## System Control Unit - Power Modules (SCU-PM)

# 7 System Control Unit - Power Modules (SCU-PM)


## 7.1 Features

- Clock Watchdog Unit (CWU): supervision of all clocks with NMI signaling relevant to power modules
- Interrupt Control Unit (ICU): all interrupt flags and status flags with system relevance
- Power Control Unit (PCU): takes over control when device enters and exits Sleep and Stop Mode
- External Watchdog (WDT1): independent system watchdog for monitoring system activity

## 7.2 Introduction

### 7.2.1 Block Diagram

The System Control Unit of the power modules consists of the sub-modules in the figure shown below:

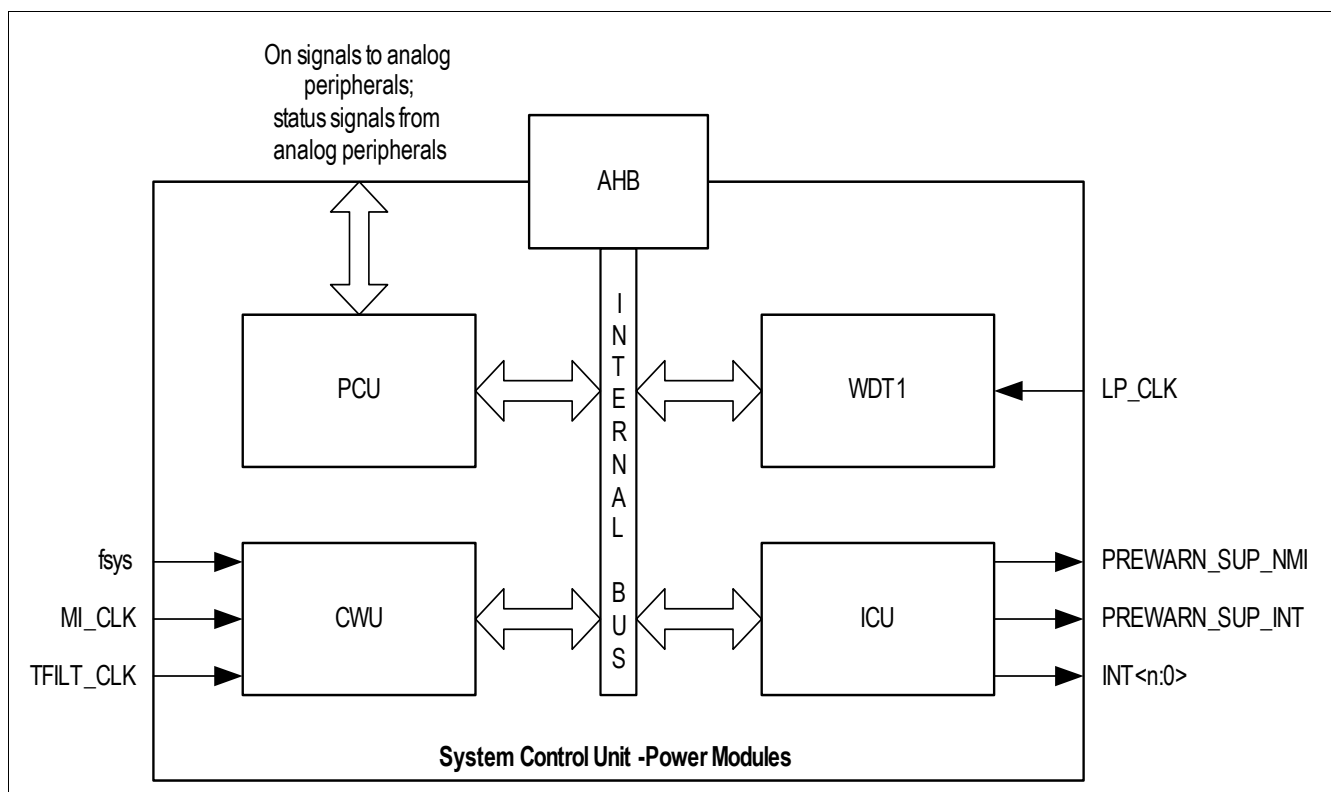

**Figure 32** Block diagram of System Control Unit - Power Modules

### AHB (Advanced High-Performance Bus)

### CWU (Clock Watchdog Unit)

- $f_{sys}$  system frequency: PLL output
- MI\_CLK measurement interface clock (analog clock): derived from  $f_{sys}$  using division factors 1/2/3/4
- TFILT\_CLK clock used for digital filters: derived from  $f_{sys}$  using configurable division factors

## System Control Unit - Power Modules (SCU-PM)

### WDT1 (System Watchdog)

- LP\_CLK clock source for all PMU submodules and WDT1

### ICU (Interrupt Control Unit)

- PREWARN\_SUP\_NMI supply prewarning NMI request
- PREWARN\_SUP\_INT supply prewarning interrupt
- grouping of peripheral interrupts for external interrupt nodes:
  - grouping single peripheral interrupts for interrupt node INT<2> (Measurement Unit (MU))
  - grouping single peripheral interrupts for interrupt node INT<3> (ADC1-VAREF)
  - grouping single peripheral interrupts for interrupt node INT<10> (UART1-LIN Transceiver)
  - grouping single peripheral interrupts for interrupt node INT<14> (Bridge Driver)

## 7.3 Clock Watchdog Unit (CWU)

There are two clock watchdogs available. One main purpose of them, is to monitor the derived switched capacitor clocks, which are used for analog module operation. If the clocks are not in the required range, a proper functionality of those modules is not given.

The following chapter describes the functionality and the configuration possibilities of these clock watchdogs.


### 7.3.1 Fail Safe Functionality of Clock Generation Unit (Clock Watchdog)

The Clock Generation Unit provides also fail safe functionalities, which are related to the input clock, the generated clocks and the clock settings. Those are:

- **MI\_CLK** and **TFILT\_CLK** are out of Range: MI Clock settings for  $f_{sys}$ , MI\_CLK and TFILT\_CLK Clock settings are out of required range and as a result the analog functionalities cannot be guaranteed. This failure triggers the clock watchdog NMI. The current status can be seen in the corresponding registers APCLK1 (in SCU) for the **MI\_CLK** and APCLK2 (in SCU) for the **TFILT\_CLK**.
- **Loss of clock:** When there is a loss of clock in the system, there is no possibility for the software to react upon this situation, like to enter a fail safe mode or switch to another backup clock source. For this purpose there is a clock watchdog implemented in the system which monitors the  $f_{sys}$  and in case of this emergency situation, disables all critical system functions, which are:
  - Bridge Driver and Charge Pump
  - LIN

As shown in [Figure 33](#) all analog clocks are derived from **MI\_CLK**. This clock structure requires to place a monitor on this clock, because  $f_{sys}$  and therefore **MI\_CLK** are adjustable in a wide range (see also Chapter **System Control Unit - CGU**). As an important clock, also the TFILT\_CLK is monitored by a clock watchdog. This clock watchdogs have an adjustable lower and upper limits including hysteresis. The placement of the clock watchdogs in the clock structure is sketched below:

## System Control Unit - Power Modules (SCU-PM)

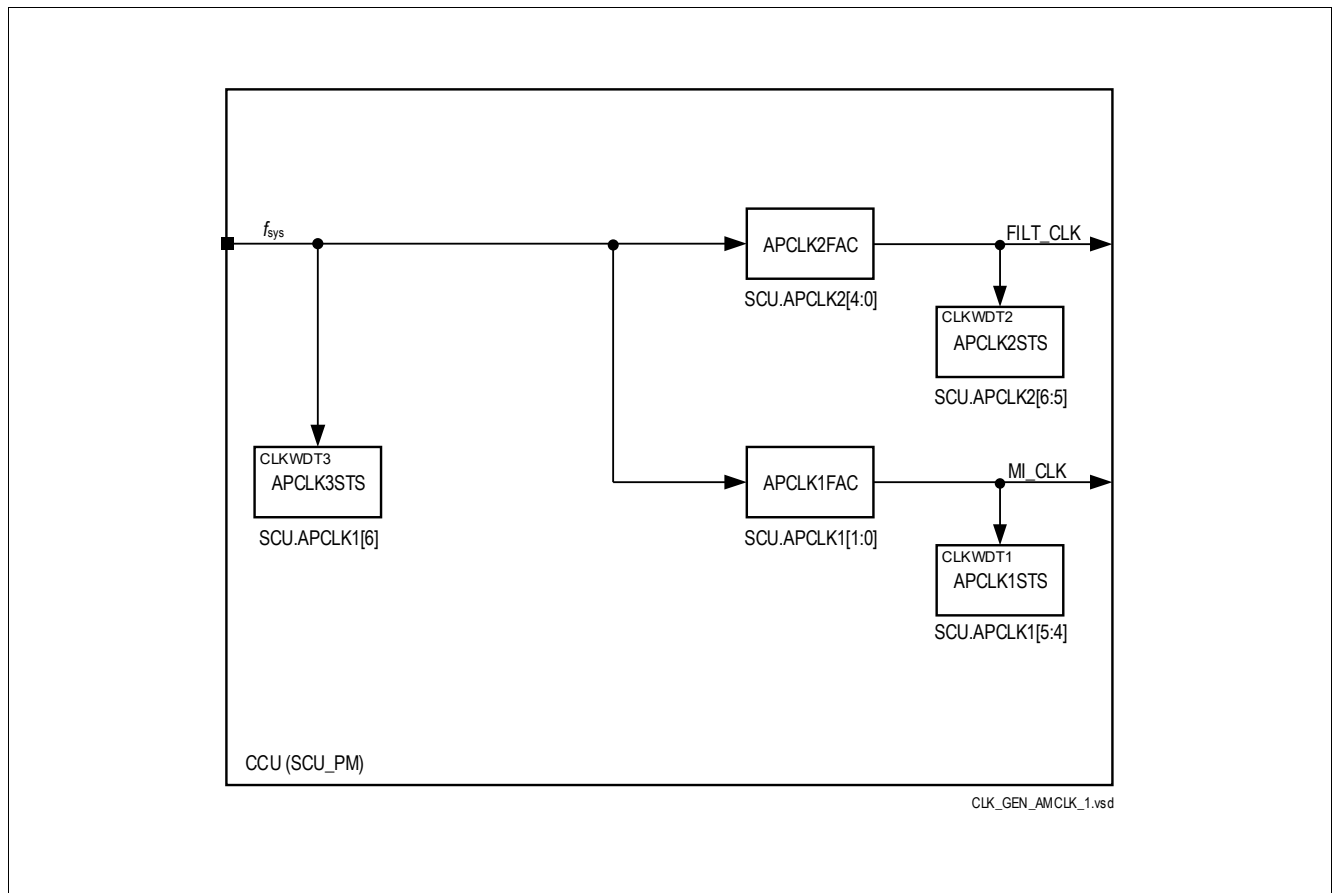

**Figure 33** Block diagram of CGU including Clock Watchdogs

### 7.3.1.1 Functional Description of Clock Watchdog Module

The clock watchdog module consists of a counter. This counter monitors the number of system clocks within a defined time window. The duration of the time window is defined by a clock (**LP\_CLK**), which is independent from the monitored system clock (**MI\_CLK**). If the required number of clock cycles is not reached within this time window an clock watchdog NMI will be issued.

In case the clock watchdog NMI will be issued, indicating that the clock is not within the required frequency range, then the user has different options to overcome this situation:

- stay on mi\_clk but reconfigure PLL to re-gain the required clock frequency. This would be the most time consuming measure to avoid emergency shutdown of the above listed modules.
- switch to divider factors 2, 3 and 4 to try to come back to specified frequency range.
- switch to LP\_CLK, which also can be divided by factor 2, 3 and 4. This is the fastest option which allows the user to operate with a well defined backup clock rate. After this has been done the user can start investigating the rootcause of the issued clock watchdog NMI, while operating on **LP\_CLK**.

The register chapter below includes all necessary flags for setting up the analog module clock and monitoring its status during operation.

---

**System Control Unit - Power Modules (SCU-PM)**
**7.3.2 Clock Generation Unit Register**

The analog module clock generation unit is fully controllable by the register described in this chapter.

**Table 39** shows the module base addresses.

**Table 39 Register Address Space**

Module	Base Address	End Address	Note
SCUPM	50006000 <sub>H</sub>	50006FFF <sub>H</sub>	SCU_PM

**Table 40 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Clock Generation Unit Register</b>			
<b>AMCLK_FREQ_STS</b>	Analog Module Clock Frequency Status Register	00 <sub>H</sub>	00xx xxxx 00xx xxxx <sub>B</sub>
<b>AMCLK_CTRL</b>	Analog Module Clock Control Register	04 <sub>H</sub>	0000 0001 <sub>H</sub>
<b>AMCLK_TH_HYS</b>	Analog Module Clock Limit Register	0C <sub>H</sub>	D4E1 94B3 <sub>H</sub>
<b>STCALIB</b>	System Tick Calibration Register	6C <sub>H</sub>	0000 0000 <sub>H</sub>


The registers are addressed wordwise.

**System Control Unit - Power Modules (SCU-PM)**

**Analog Clock Frequency Status Register**

The register is reset by RESET\_TYPE\_4.

<b>AMCLK_FREQ_STS</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Analog Module Clock Frequency Status Register</b>	<b>00<sub>H</sub></b>	<b>00xx xxxx 00xx xxxx<sub>B</sub></b>

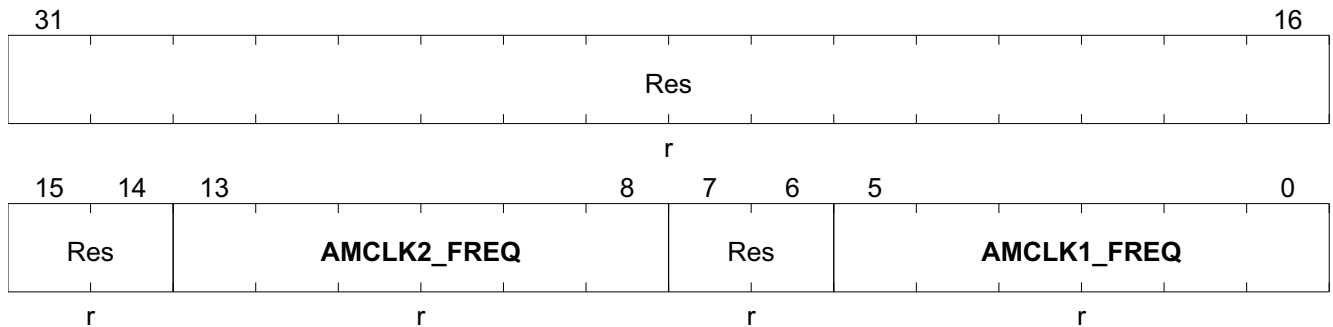


Field	Bits	Type	Description
<b>Res</b>	31:16	r	<b>Reserved</b> Always read as 0
<b>Res</b>	15:14	r	<b>Reserved</b> Always read as 0
<b>AMCLK2_FREQ</b>	13:8	r	<b>Current frequency of Analog Module Clock 2 (TFILT_CLK)</b> $AMCLK2\_FREQ = (256 * TFILT\_CLK) / LP\_CLK$
<b>Res</b>	7:6	r	<b>Reserved</b> Always read as 0
<b>AMCLK1_FREQ</b>	5:0	r	<b>Current frequency of Analog Module Clock System Clock (MI_CLK)</b> $AMCLK1\_FREQ = (32 * MI\_CLK) / LP\_CLK$

**System Control Unit - Power Modules (SCU-PM)**

**Analog Clock Frequency Control Register**

The register is reset by RESET\_TYPE\_4.

<b>AMCLK_CTRL</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Analog Module Clock Control Register</b>	<b>04<sub>H</sub></b>	<b>0000 0001<sub>H</sub></b>

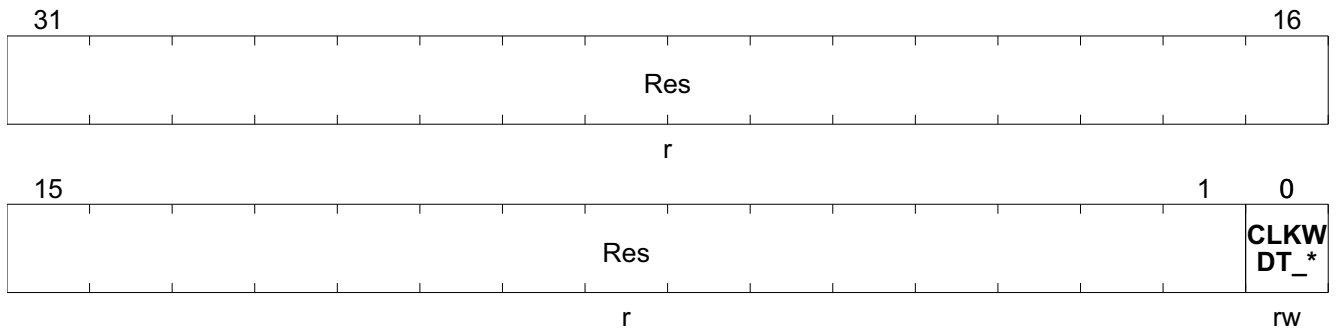

Field	Bits	Type	Description
<b>Res</b>	31:1	r	<b>Reserved</b> Always read as 0
<b>CLKWDT_PD_N</b>	0	rw	<b>Clock Watchdog Powerdown</b> 0 <sub>B</sub> <b>DISABLE</b> , Clock Watchdog disabled 1 <sub>B</sub> <b>ENABLE</b> , Clock Watchdog enabled

## System Control Unit - Power Modules (SCU-PM)

### Analog Module Clock Limit Register

The register is reset by RESET\_TYPE\_4.

**AMCLK\_TH\_HYS**


**Offset**

**Reset Value**

**Analog Module Clock Limit Register**

**0C<sub>H</sub>**

**D4E1 94B3<sub>H</sub>**

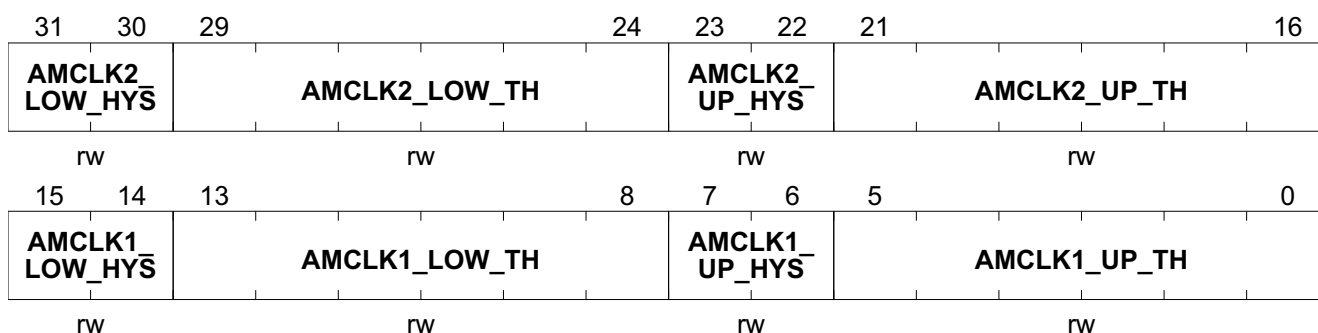

Field	Bits	Type	Description
<b>AMCLK2_LOW_HYS</b>	31:30	rw	<b>Analog Module Clock 2 (TFILT_CLK) Lower Hysteresis</b>
<b>AMCLK2_LOW_TH</b>	29:24	rw	<b>Analog Module Clock 2 (TFILT_CLK) Lower Limit Threshold</b> $TFILT\_CLK\_LOW\_TH = (AMCLK2\_LOW\_TH * LP\_CLK) / 256$
<b>AMCLK2_UP_HYS</b>	23:22	rw	<b>Analog Module Clock 2 (TFILT_CLK) Upper Hysteresis</b>
<b>AMCLK2_UP_TH</b>	21:16	rw	<b>Analog Module Clock 2 (TFILT_CLK) Upper Limit Threshold</b> $TFILT\_CLK\_UP\_TH = (AMCLK2\_UP\_TH * LP\_CLK) / 256$
<b>AMCLK1_LOW_HYS</b>	15:14	rw	<b>Analog Module Clock 1 (MI_CLK) Lower Hysteresis</b>
<b>AMCLK1_LOW_TH</b>	13:8	rw	<b>Analog Module Clock 1 (MI_CLK) Lower Limit Threshold</b> $MI\_CLK\_LOW\_TH = (AMCLK1\_LOW\_TH * LP\_CLK) / 32$
<b>AMCLK1_UP_HYS</b>	7:6	rw	<b>Analog Module Clock 1 (MI_CLK) Upper Hysteresis</b>
<b>AMCLK1_UP_TH</b>	5:0	rw	<b>Analog Module Clock 1 (MI_CLK) Upper Limit Threshold</b> $MI\_CLK\_UP\_TH = (AMCLK1\_UP\_TH * LP\_CLK) / 32$




**System Control Unit - Power Modules (SCU-PM)**

**System Tick Calibration Register**

The register is reset by RESET\_TYPE\_4.

<b>STCALIB</b>	<b>Offset</b>	<b>Reset Value</b>
<b>System Tick Calibration Register</b>	<b>6C<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

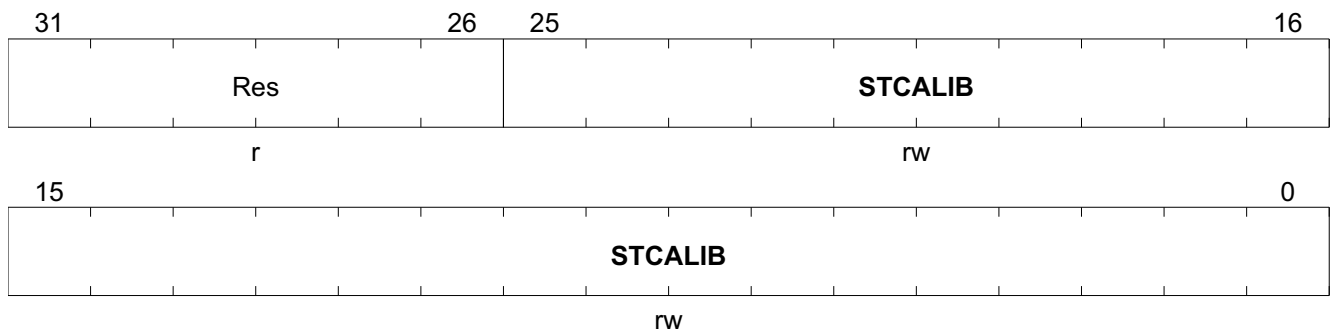

Field	Bits	Type	Description
<b>Res</b>	31:26	r	<b>Reserved</b> Always read as 0
<b>STCALIB</b>	25:0	rw	<b>System Tick Calibration</b>  [25]: Noref [24] Skew [23:0] Reload value to use for 10ms (100 Hz) timing STCALIB[23:0] = HCLK (in Hz) / 100 Hz - 1, e.g. 0x7A11F

## System Control Unit - Power Modules (SCU-PM)

### 7.4 Interrupt Control Unit (ICU)

The Subblock Interrupt Control Unit (ICU) of the System Control Unit - Power Modules (SCU\_PM) is responsible for controlling and generating all analog peripheral relevant interrupts. Those analog interrupts are presented to the NVIC nodes 13-24 and NMI. Those are:

- **PREWARN\_SUP\_NMI:** combines all supply relevant interrupts to NMI.
- **Analog Module Interrupts:** combines all analog modules related interrupts.


The following two chapters describe the structure of the interrupt nodes.

#### 7.4.1 Structure of PREWARN\_SUP\_NMI

This interrupt groups all system supply relevant interrupts. They can be divided into two groups:

- **voltages monitored by the Measurement Unit.** The supply voltages VS, VDDP and VDDC are monitored by the Measurement Unit. The Measurement Unit can be seen as an independent monitoring instance of the PMU, with independent reference voltage and supply voltage.
- **voltages monitored by measurement functions of the PMU:** The PMU itself is checking its output voltages. Here failures due to undervoltage (overload), overvoltage and overcurrent can be detected.

The following figure shows the structure of the **PREWARN\_SUP**:

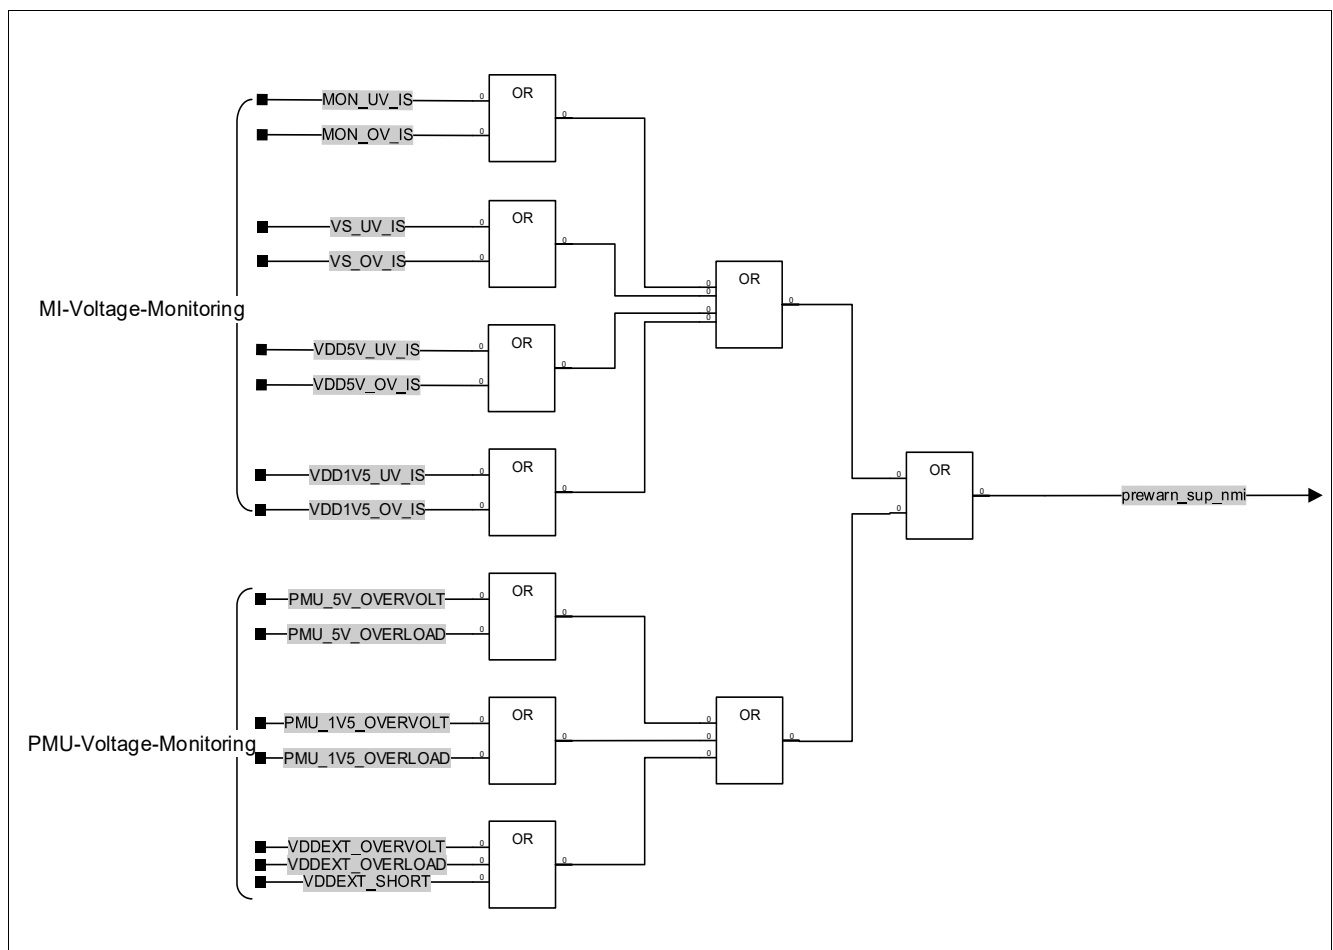

**Figure 34** Structure of PREWARN\_SUP

All PREWARN\_SUP related flags are grouped in register **SYS\_SUPPLY\_IRQ\_STS**. All measurement interface related flags are edge triggered. Therefore each IRQ\_STS register has also an STS register where the current supply status can be monitored.

## System Control Unit - Power Modules (SCU-PM)

### 7.4.2 Interrupt Control Unit Status Register

All analog modules interrupt functionality is described in this chapter.

**Table 41 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Interrupt Control Unit Status Register, Interrupt Control Unit Status Overview Register</b>			
<b>SYS_ISCLR</b>	System Interrupt Status Clear	14 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>SYS_IS</b>	System Interrupt Status	18 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>SYS_SUPPLY_IRQ_STS</b>	System Supply Interrupt Status	1C <sub>H</sub>	0000 0000 <sub>H</sub>
<b>SYS_SUPPLY_IRQ_CLR</b>	System Supply Interrupt Status Clear	24 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>BDRV_ISCLR</b>	Bridge Driver Interrupt Status Clear	54 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>BDRV_IS</b>	Bridge Driver Interrupt Status	58 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>Interrupt Control Unit Status Register, Interrupt Control Unit - Interrupt Enable Register</b>			
<b>SYS_SUPPLY_IRQ_CTRL</b>	System Supply Interrupt Control	20 <sub>H</sub>	0000 00FF <sub>H</sub>
<b>SYS_IRQ_CTRL</b>	System Interrupt Control	28 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>BDRV_IRQ_CTRL</b>	Bridge Driver Interrupt Control	5C <sub>H</sub>	0000 0000 <sub>H</sub>

The registers are addressed wordwise.

#### 7.4.2.1 Interrupt Control Unit Status Overview Register

Due to the large variety of diagnosis possibilities of TLE987x, the system offers several overview registers, to help the user finding the right source of interrupt. Those registers are described in this sub-chapter.

#### Overview Register, Switches Interrupt Status Register and System Supply Interrupt Status Register

- **SYS\_SUPPLY\_IRQ\_STS**: Flags for Under- and Overvoltage detection for all system relevant supplies. These Interrupts are edge triggered Interrupts.
- **SYS\_IS**: Interrupts for Analog Modules.

**System Control Unit - Power Modules (SCU-PM)**

**System Interrupt Status**

The register is reset by RESET\_TYPE\_4.

**SYS\_IS** **Offset**  
**System Interrupt Status** **18<sub>H</sub>** **Reset Value**  
**0000 0000<sub>H</sub>**

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Res	PHW_ZCH*	PHW_ZCL*	PHV_ZCH*	PHV_ZCL*	PHU_ZCH*	PHU_ZCL*	ADC4_EO*	ADC3_EO*	PHW_ZCH*	PHW_ZCL*	PHV_ZCH*	PHV_ZCL*	PHU_ZCH*	PHU_ZCL*	
r	r	r	r	r	r	r	r	r	r	r	r	r	r	r	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ADC2_ES*	VREF_5V_*	VREF_5V_*	VREF_5V_*	REFB_G_U*	REFB_G_L*	SYS_OT_*	SYS_OTW*	PMU_OT_*	PMU_OTW*	Res	Res	LIN_TMO*	LIN_OT_*	LIN_OC_*	
r	r	r	r	r	r	r	r	r	r	r	r	r	r	r	

Field	Bits	Type	Description
<b>Res</b>	31:30	r	<b>Reserved</b> Always read as 0
<b>PHW_ZCHI_STS</b>	29	r	<b>Phase W Zero Crossing Comparator High Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one status set
<b>PHW_ZCLOW_STS</b>	28	r	<b>Phase W Zero Crossing Comparator Low Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one status set
<b>PHV_ZCHI_STS</b>	27	r	<b>Phase V Zero Crossing Comparator High Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one status set
<b>PHV_ZCLOW_STS</b>	26	r	<b>Phase V Zero Crossing Comparator Low Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one status set
<b>PHU_ZCHI_STS</b>	25	r	<b>Phase U Zero Crossing Comparator High Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one status set
<b>PHU_ZCLOW_STS</b>	24	r	<b>Phase U Zero Crossing Comparator Low Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one status set
<b>ADC4_EOC_IS</b>	23	r	<b>ADC4 EOC Interrupt Status<sup>1)</sup></b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set
<b>ADC3_EOC_IS</b>	22	r	<b>ADC3 EOC Interrupt Status<sup>1)</sup></b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set

## System Control Unit - Power Modules (SCU-PM)

Field	Bits	Type	Description
PHW_ZCHI_IS	21	r	<b>Phase W Zero Crossing Comparator High Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set
PHW_ZCLOW_IS	20	r	<b>Phase W Zero Crossing Comparator Low Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set
PHV_ZCHI_IS	19	r	<b>Phase V Zero Crossing Comparator High Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set
PHV_ZCLOW_IS	18	r	<b>Phase V Zero Crossing Comparator Low Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set
PHU_ZCHI_IS	17	r	<b>Phase U Zero Crossing Comparator High Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set
PHU_ZCLOW_IS	16	r	<b>Phase U Zero Crossing Comparator Low Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set
ADC2_ESM_IS	15	r	<b>ADC2 Exceptional Sequence Measurement Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set
VREF5V_OVL_IS	14	r	<b>VREF5V Overload Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set
VREF5V_UPTH_IS	13	r	<b>VREF5V ADC1 Reference Overvoltage (ADC2, Channel 6) Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set
VREF5V_LOWTH_IS	12	r	<b>VREF5V ADC1 Reference Undervoltage (ADC2, Channel 6) Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set
REFBG_UPTHWARN_IS	11	r	<b>8-Bit ADC2 Reference Overvoltage (ADC2, Channel 7) interrupt status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set
REFBG_LOTHWARN_IS	10	r	<b>8-Bit ADC2 Reference Undervoltage (ADC2, Channel 7) interrupt status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set
SYS_OT_IS	9	r	<b>System Overtemperature Shutdown (ADC2, Channel 9) interrupt status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , at least one interrupt status set

---

**System Control Unit - Power Modules (SCU-PM)**

Field	Bits	Type	Description
<b>SYS_OTWARN_IS</b>	8	r	<b>System Overtemperature Prewarning (ADC2, Channel 9) interrupt status</b> $0_B$ <b>INACTIVE</b> , no interrupt status set $1_B$ <b>ACTIVE</b> , at least one interrupt status set
<b>PMU_OT_IS</b>	7	r	<b>PMU Regulator Overtemperature Shutdown (ADC2, Channel 9) interrupt status</b> $0_B$ <b>INACTIVE</b> , no interrupt status set $1_B$ <b>ACTIVE</b> , at least one interrupt status set
<b>PMU_OTWARN_IS</b>	6	r	<b>PMU Regulator Overtemperature Prewarning (ADC2, Channel 9) interrupt status</b> $0_B$ <b>INACTIVE</b> , no interrupt status set $1_B$ <b>ACTIVE</b> , at least one interrupt status set
<b>Res</b>	5:3	r	<b>Reserved</b> Always read as 0
<b>LIN_TMOUT_IS</b>	2	r	<b>LIN TXD timeout</b> $0_B$ <b>INACTIVE</b> , no interrupt status set $1_B$ <b>ACTIVE</b> , LIN TXD timeout occurred
<b>LIN_OT_IS</b>	1	r	<b>LIN Overtemperature interrupt status</b> $0_B$ <b>INACTIVE</b> , no interrupt status set $1_B$ <b>ACTIVE</b> , LIN Overtemperature occurred
<b>LIN_OC_IS</b>	0	r	<b>LIN Overcurrent interrupt status</b> $0_B$ <b>INACTIVE</b> , no interrupt status set $1_B$ <b>ACTIVE</b> , at least one interrupt status set

1) This bit is only valid for TLE9879-2QXA40; Reserved for other variants, read as 0.

**System Control Unit - Power Modules (SCU-PM)**

**System Interrupt Status Clear**

The register is reset by RESET\_TYPE\_3.

**SYS\_ISCLR** **Offset**  
**System Interrupt Status Clear** **14<sub>H</sub>** **Reset Value**  
**0000 0000<sub>H</sub>**

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Res		PHW_ZCH*	PHW_ZCL*	PHV_ZCH*	PHV_ZCL*	PHU_ZCH*	PHU_ZCL*	ADC4_EO*	ADC3_EO*	PHW_ZCH*	PHW_ZCL*	PHV_ZCH*	PHV_ZCL*	PHU_ZCH*	PHU_ZCL*
r		w	w	w	w	w	w	w	w	w	w	w	w	w	w
15	14	13	12	11	10	9	8	7	6	5		3	2	1	0
ADC2_ES*	VREF_5V_*	VREF_5V_*	VREF_5V_*	REFB_G_U*	REFB_G_L*	SYS_OT_*	SYS_OTW*	PMU_OT_*	PMU_OTW*		Res		LIN_TMO*	LIN_OT_*	LIN_OC_*
w	w	w	w	w	w	w	w	w	w		r		w	w	w

Field	Bits	Type	Description
<b>Res</b>	31:30	r	<b>Reserved</b> Always read as 0
<b>PHW_ZCHI_SCLR</b>	29	w	<b>Phase W Zero Crossing Comparator High Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>PHW_ZCLOW_SCLR</b>	28	w	<b>Phase W Zero Crossing Comparator Low Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>PHV_ZCHI_SCLR</b>	27	w	<b>Phase V Zero Crossing Comparator High Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>PHV_ZCLOW_SCLR</b>	26	w	<b>Phase V Zero Crossing Comparator Low Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>PHU_ZCHI_SCLR</b>	25	w	<b>Phase U Zero Crossing Comparator High Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>PHU_ZCLOW_SCLR</b>	24	w	<b>Phase U Zero Crossing Comparator Low Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>ADC4_EOC_ICLR</b>	23	w	<b>ADC4 EOC Interrupt Status<sup>1)</sup></b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>ADC3_EOC_ICLR</b>	22	w	<b>ADC3 EOC Interrupt Status<sup>1)</sup></b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag

## System Control Unit - Power Modules (SCU-PM)

Field	Bits	Type	Description
PHW_ZCHI_ICLR	21	w	<b>Phase W Zero Crossing Comparator High Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
PHW_ZCLOW_ICLR	20	w	<b>Phase W Zero Crossing Comparator Low Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
PHV_ZCHI_ICLR	19	w	<b>Phase V Zero Crossing Comparator High Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
PHV_ZCLOW_ICLR	18	w	<b>Phase V Zero Crossing Comparator Low Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
PHU_ZCHI_ICLR	17	w	<b>Phase U Zero Crossing Comparator High Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
PHU_ZCLOW_ICLR	16	w	<b>Phase U Zero Crossing Comparator Low Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
ADC2_ESM_ICLR	15	w	<b>ADC2 Exceptional Sequence Measurement Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
VREF5V_OVL_ICLR	14	w	<b>VREF5V Overload Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
VREF5V_UPTH_ICLR	13	w	<b>VREF5V ADC1 Reference Overvoltage (ADC2, Channel 6) Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
VREF5V_LOWTH_ICLR	12	w	<b>VREF5V ADC1 Reference Undervoltage (ADC2, Channel 6) Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
REFBG_UPTHWARN_ICLR	11	w	<b>8-Bit ADC2 Reference Overvoltage (ADC2, Channel 7) interrupt status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
REFBG_LOTHWARN_ICLR	10	w	<b>8-Bit ADC2 Reference Undervoltage (ADC2, Channel 7) interrupt status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
SYS_OT_ICLR	9	w	<b>System Overtemperature Shutdown (ADC2, Channel 9) interrupt status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag



---

**System Control Unit - Power Modules (SCU-PM)**

Field	Bits	Type	Description
<b>SYS_OTWARN_ICLR</b>	8	w	<b>System Overtemperature Prewarning (ADC2, Channel 9) interrupt status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>PMU_OT_ICLR</b>	7	w	<b>PMU Regulator Overtemperature Shutdown (ADC2, Channel 9) interrupt status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>PMU_OTWARN_ICLR</b>	6	w	<b>PMU Regulator Overtemperature Prewarning (ADC2, Channel 9) interrupt status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>Res</b>	5:3	r	<b>Reserved</b> Always read as 0
<b>LIN_TMOUT_ICLR</b>	2	w	<b>LIN TXD timeout</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>LIN_OT_ICLR</b>	1	w	<b>LIN Overtemperature interrupt status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>LIN_OC_ICLR</b>	0	w	<b>LIN Overcurrent interrupt status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag

1) This bit is only valid for TLE9879-2QXA40; Reserved for other variants, read as 0.

**System Control Unit - Power Modules (SCU-PM)**

**Bridge Driver Interrupt Status**

The register is reset by RESET\_TYPE\_4.

**BDRV\_IS** **Offset**  
**Bridge Driver Interrupt Status** **58<sub>H</sub>** **Reset Value**  
**0000 0000<sub>H</sub>**

31		29		28	27	26	25	24	23		21	20	19	18	17	16
Res			VSD UPT*	VSD LOW*	VCP UPT*	VCP LOW*	VCP LOW*	Res			VSD UPT*	VSD LOW*	VCP UPT*	VCP LOW*	VCP LOW*	
	r		r	r	r	r	r		r		r	r	r	r	r	r
15	14	13	12	11	10	9	Res			6	5	4	3	2	1	0
HS3 OC_*	LS3 OC_*	HS2 OC_*	HS1 OC_*	LS2 OC_*	LS1 OC_*		Res			HS3 DS_*	LS3 DS_*	HS2 DS_*	HS1 DS_*	LS2 DS_*	LS1 DS_*	
r	r	r	r	r	r			r		r	r	r	r	r	r	r

Field	Bits	Type	Description
<b>Res</b>	31:29	r	<b>Reserved</b> Always read as 0
<b>VSD_UPTH_STS</b>	28	r	<b>Warning for VSD Upper Threshold Measurement (ADC2 channel 2) Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no overvoltage status set 1 <sub>B</sub> <b>ACTIVE</b> , overvoltage status set
<b>VSD_LOWTH_STS</b>	27	r	<b>Warning for VSD Lower Threshold Measurement (ADC2 channel 2) Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no undervoltage status set 1 <sub>B</sub> <b>ACTIVE</b> , undervoltage status set
<b>VCP_UPTH_STS</b>	26	r	<b>Warning for VCP Upper Threshold Measurement (ADC2 channel 3) Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no overvoltage status set 1 <sub>B</sub> <b>ACTIVE</b> , overvoltage status set
<b>VCP_LOWTH1_STS</b>	25	r	<b>Warning for VCP Lower Threshold 1 Measurement (ADC2 channel 3) Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no undervoltage status set 1 <sub>B</sub> <b>ACTIVE</b> , undervoltage status set
<b>VCP_LOWTH2_STS</b>	24	r	<b>Warning for VCP Lower Threshold 2 Measurement (VCP_LOW Signal from CP) Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no undervoltage status set 1 <sub>B</sub> <b>ACTIVE</b> , undervoltage status set
<b>Res</b>	23:21	r	<b>Reserved</b> Always read as 0
<b>VSD_UPTH_IS</b>	20	r	<b>Warning for VSD Upper Threshold Measurement (ADC2 channel 2) Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , interrupt status set

## System Control Unit - Power Modules (SCU-PM)

Field	Bits	Type	Description
VSD_LOWTH_IS	19	r	<b>Warning for VSD Lower Threshold Measurement (ADC2 channel 2) Interrupt Status</b> 0 <sub>B</sub> INACTIVE, no interrupt status set 1 <sub>B</sub> ACTIVE, interrupt status set
VCP_UPTH_IS	18	r	<b>Warning for VCP Upper Threshold Measurement (ADC2 channel 3) Interrupt Status</b> 0 <sub>B</sub> INACTIVE, no interrupt status set 1 <sub>B</sub> ACTIVE, interrupt status set
VCP_LOWTH1_IS	17	r	<b>Warning for VCP Lower Threshold 1 Measurement (ADC2 channel 3) Interrupt Status</b> 0 <sub>B</sub> INACTIVE, no interrupt status set 1 <sub>B</sub> ACTIVE, interrupt status set
VCP_LOWTH2_IS	16	r	<b>Warning for VCP Lower Threshold 2 Measurement (VCP_LOW Signal from CP) Interrupt Status</b> 0 <sub>B</sub> INACTIVE, no interrupt status set 1 <sub>B</sub> ACTIVE, interrupt status set
HS3_OC_IS	15	r	<b>External High Side 3 FET Over-current Status</b> 0 <sub>B</sub> INACTIVE, no interrupt status set. 1 <sub>B</sub> ACTIVE, at least one interrupt status set.
LS3_OC_IS	14	r	<b>External Low Side 3 FET Over-current Status</b> 0 <sub>B</sub> INACTIVE, no interrupt status set. 1 <sub>B</sub> ACTIVE, at least one interrupt status set.
HS2_OC_IS	13	r	<b>External High Side 2 FET Over-current Status</b> 0 <sub>B</sub> INACTIVE, no interrupt status set. 1 <sub>B</sub> ACTIVE, at least one interrupt status set.
HS1_OC_IS	12	r	<b>External High 1 FET Over-current Status</b> 0 <sub>B</sub> INACTIVE, no interrupt status set. 1 <sub>B</sub> ACTIVE, at least one interrupt status set.
LS2_OC_IS	11	r	<b>External Low Side 2 FET Over-current Status</b> 0 <sub>B</sub> INACTIVE, no interrupt status set. 1 <sub>B</sub> ACTIVE, at least one interrupt status set.
LS1_OC_IS	10	r	<b>External Low Side 1 FET Over-current Status</b> 0 <sub>B</sub> INACTIVE, no interrupt status set. 1 <sub>B</sub> ACTIVE, at least one interrupt status set.
Res	9:6	r	<b>Reserved</b> Always read as 0
HS3_DS_IS	5	r	<b>Bridge Driver High Side 3 Pre-Driver short Interrupt Status</b> 0 <sub>B</sub> INACTIVE, no interrupt status set 1 <sub>B</sub> ACTIVE, interrupt status set
LS3_DS_IS	4	r	<b>Bridge Driver Low Side 3 Pre-Driver short Interrupt Status</b> 0 <sub>B</sub> INACTIVE, no interrupt status set 1 <sub>B</sub> ACTIVE, interrupt status set
HS2_DS_IS	3	r	<b>Bridge Driver High Side 2 Pre-Driver short Interrupt Status</b> 0 <sub>B</sub> INACTIVE, no interrupt status set 1 <sub>B</sub> ACTIVE, interrupt status set

---

**System Control Unit - Power Modules (SCU-PM)**

Field	Bits	Type	Description
<b>HS1_DS_IS</b>	2	r	<b>Bridge Driver High Side 1 Pre-Driver short Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , interrupt status set
<b>LS2_DS_IS</b>	1	r	<b>Bridge Driver Low Side 2 Pre-Driver short Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , interrupt status set
<b>LS1_DS_IS</b>	0	r	<b>Bridge Driver Low Side 1 Pre-Driver short Interrupt Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , no interrupt status set 1 <sub>B</sub> <b>ACTIVE</b> , interrupt status set

**System Control Unit - Power Modules (SCU-PM)**

**Bridge Driver Interrupt Status Clear**

The register is reset by RESET\_TYPE\_3.

**BDRV\_ISCLR** **Offset**  
**Bridge Driver Interrupt Status Clear** **54<sub>H</sub>** **Reset Value**  
**0000 0000<sub>H</sub>**

31		29		28		27		26		25		24		23		21		20		19		18		17		16	
Res				VSD UPT*	VSD LOW*	VCP UPT*	VCP LOW*	VCP LOW*	Res				VSD UPT*	VSD LOW*	VCP UPT*	VCP LOW*	VCP LOW*										
r				w	w	w	w	w	r				w	w	w	w	w										
15	14	13	12	11	10	9			6	5	4	3	2	1	0												
HS3 OC_*	LS3 OC_*	HS2 OC_*	HS1 OC_*	LS2 OC_*	LS1 OC_*	Res				HS3 DS_*	LS3 DS_*	HS2 DS_*	HS1 DS_*	LS2 DS_*	LS1 DS_*												
w	w	w	w	w	w	r				w	w	w	w	w	w												

Field	Bits	Type	Description
<b>Res</b>	31:29	r	<b>Reserved</b> Always read as 0
<b>VSD_UPTH_SCLR</b>	28	w	<b>Warning for VSD Upper Threshold Measurement (ADC2 channel 2) Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>VSD_LOWTH_SCLR</b>	27	w	<b>Warning for VSD Lower Threshold Measurement (ADC2 channel 2) Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>VCP_UPTH_SCLR</b>	26	w	<b>Warning for VCP Upper Threshold Measurement (ADC2 channel 3) Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>VCP_LOWTH1_SCLR</b>	25	w	<b>Warning for VCP Lower Threshold 1 Measurement (ADC2 channel 3) Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>VCP_LOWTH2_SCLR</b>	24	w	<b>Warning for VCP Lower Threshold 2 Measurement (VCP_LOW Signal from CP) Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>Res</b>	23:21	r	<b>Reserved</b> Always read as 0
<b>VSD_UPTH_ICLR</b>	20	w	<b>Warning for VSD Upper Threshold Measurement (ADC2 channel 2) Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag

## System Control Unit - Power Modules (SCU-PM)

Field	Bits	Type	Description
VSD_LOWTH_ICLR	19	w	<b>Warning for VSD Lower Threshold Measurement (ADC2 channel 2) Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
VCP_UPTH_ICLR	18	w	<b>Warning for VCP Upper Threshold Measurement (ADC2 channel 3) Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
VCP_LOWTH1_ICLR	17	w	<b>Warning for VCP Lower Threshold 1 Measurement (ADC2 channel 3) Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
VCP_LOWTH2_ICLR	16	w	<b>Warning for VCP Lower Threshold 2 Measurement (VCP_LOW Signal from CP) Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
HS3_OC_ICLR	15	w	<b>External High Side 3 FET Over-current Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
LS3_OC_ICLR	14	w	<b>External Low Side 3 FET Over-current Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
HS2_OC_ICLR	13	w	<b>External High Side 2 FET Over-current Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
HS1_OC_ICLR	12	w	<b>External High 1 FET Over-current Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
LS2_OC_ICLR	11	w	<b>External Low Side 2 FET Over-current Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
LS1_OC_ICLR	10	w	<b>External Low Side 1 FET Over-current Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
Res	9:6	r	<b>Reserved</b> Always read as 0
HS3_DS_ICLR	5	w	<b>Bridge Driver High Side 3 Pre-Driver short Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
LS3_DS_ICLR	4	w	<b>Bridge Driver Low Side 3 Pre-Driver short Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
HS2_DS_ICLR	3	w	<b>Bridge Driver High Side 2 Pre-Driver short Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag

---

**System Control Unit - Power Modules (SCU-PM)**

Field	Bits	Type	Description
<b>HS1_DS_ICLR</b>	2	w	<b>Bridge Driver High Side 1 Pre-Driver short Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>LS2_DS_ICLR</b>	1	w	<b>Bridge Driver Low Side 2 Pre-Driver short Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>LS1_DS_ICLR</b>	0	w	<b>Bridge Driver Low Side 1 Pre-Driver short Interrupt Status</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag

## System Control Unit - Power Modules (SCU-PM)

### System Supply Interrupt Status

The register is reset by RESET\_TYPE\_4.

SYS_SUPPLY_IRQ_STS	Offset	Reset Value
System Supply Interrupt Status	1C <sub>H</sub>	0000 0000 <sub>H</sub>

31	24	23	22	21	20	19	18	17	16		
Res				VDD1 V5_*	VDD5 V_O*	VS_O V_S*	MON OV_*	VDD1 V5_*	VDD5 V_U*	VS_U V_S*	MON UV_*
r				r	r	r	r	r	r	r	r
15	8	7	6	5	4	3	2	1	0		
Res				VDD1 V5_*	VDD5 V_O*	VS_O V_IS	MON OV_*	VDD1 V5_*	VDD5 V_U*	VS_U V_IS	MON UV_*
r				r	r	r	r	r	r	r	r

Field	Bits	Type	Description
Res	31:24	r	<b>Reserved</b> Always read as 0
VDD1V5_OV_STS	23	r	<b>VDDC Overvoltage (ADC2 channel 8) Status</b> 0 <sub>B</sub> No Overvoltage, occurred 1 <sub>B</sub> Overvoltage, occurred
VDD5V_OV_STS	22	r	<b>VDDP Overvoltage (ADC2 channel 5) Status</b> 0 <sub>B</sub> No Overvoltage, occurred 1 <sub>B</sub> Overvoltage, occurred
VS_OV_STS	21	r	<b>VS Overvoltage (ADC2 channel 1) Status</b> 0 <sub>B</sub> No Overvoltage, occurred 1 <sub>B</sub> Overvoltage, occurred
MON_OV_STS	20	r	<b>MON Overvoltage (ADC2 channel 4) Status</b> 0 <sub>B</sub> No Overvoltage, occurred 1 <sub>B</sub> Overvoltage, occurred
VDD1V5_UV_STS	19	r	<b>VDDC Undervoltage (ADC2 channel 8) Status</b> 0 <sub>B</sub> No Undervoltage, occurred 1 <sub>B</sub> Undervoltage, occurred
VDD5V_UV_STS	18	r	<b>VDDP Undervoltage (ADC2 channel 5) Status</b> 0 <sub>B</sub> No Undervoltage, occurred 1 <sub>B</sub> Undervoltage, occurred
VS_UV_STS	17	r	<b>VS Undervoltage (ADC2 channel 1) Status</b> 0 <sub>B</sub> No Undervoltage, occurred 1 <sub>B</sub> Undervoltage, occurred
MON_UV_STS	16	r	<b>MON Undervoltage (ADC2 channel 4) Status</b> 0 <sub>B</sub> No Undervoltage, occurred 1 <sub>B</sub> Undervoltage, occurred
Res	15:8	r	<b>Reserved</b> Always read as 0



---

**System Control Unit - Power Modules (SCU-PM)**

Field	Bits	Type	Description
VDD1V5_OV_IS	7	r	<b>VDDC Overvoltage (ADC2 channel 8) Interrupt Status</b> 0 <sub>B</sub> No Overvoltage Interrupt, occurred 1 <sub>B</sub> Overvoltage Interrupt, occurred
VDD5V_OV_IS	6	r	<b>VDDP Overvoltage (ADC2 channel 5) Interrupt Status</b> 0 <sub>B</sub> No Overvoltage Interrupt, occurred 1 <sub>B</sub> Overvoltage Interrupt, occurred
VS_OV_IS	5	r	<b>VS Overvoltage (ADC2 channel 1) Interrupt Status</b> 0 <sub>B</sub> No Overvoltage Interrupt, occurred 1 <sub>B</sub> Overvoltage Interrupt, occurred
MON_OV_IS	4	r	<b>MON Overvoltage (ADC2 channel 4) Interrupt Status</b> 0 <sub>B</sub> No Overvoltage Interrupt, occurred 1 <sub>B</sub> Overvoltage Interrupt, occurred
VDD1V5_UV_IS	3	r	<b>VDDC Undervoltage (ADC2 channel 8) Interrupt Status</b> 0 <sub>B</sub> No Undervoltage Interrupt, occurred 1 <sub>B</sub> Undervoltage Interrupt, occurred
VDD5V_UV_IS	2	r	<b>VDDP Undervoltage (ADC2 channel 5) Interrupt Status</b> 0 <sub>B</sub> No Undervoltage Interrupt, occurred 1 <sub>B</sub> Undervoltage Interrupt, occurred
VS_UV_IS	1	r	<b>VS Undervoltage (ADC2 channel 1) Interrupt Status</b> 0 <sub>B</sub> No Undervoltage Interrupt, occurred 1 <sub>B</sub> Undervoltage Interrupt, occurred
MON_UV_IS	0	r	<b>MON Undervoltage (ADC2 channel 4) Interrupt Status</b> 0 <sub>B</sub> No Undervoltage Interrupt, occurred 1 <sub>B</sub> Undervoltage Interrupt, occurred

## System Control Unit - Power Modules (SCU-PM)

### System Supply Interrupt Status Clear

The register is reset by RESET\_TYPE\_4.

This register is being initialized by the BootROM during the bootup process to a value of 0101\_XXXX<sub>H</sub>

SYS_SUPPLY_IRQ_CLR	Offset	Reset Value
System Supply Interrupt Status Clear	24 <sub>H</sub>	0000 0000 <sub>H</sub>

31	24	23	22	21	20	19	18	17	16		
Res				VDD1 V5_*	VDD5 V_O*	VS_O V_S*	MON OV_*	VDD1 V5_*	VDD5 V_U*	VS_U V_S*	MON UV_*
r				w	w	w	w	w	w	w	w
15	8	7	6	5	4	3	2	1	0		
Res				VDD1 V5_*	VDD5 V_O*	VS_O V_T*	MON OV_*	VDD1 V5_*	VDD5 V_U*	VS_U V_T*	MON UV_*
r				w	w	w	w	w	w	w	w

Field	Bits	Type	Description
Res	31:24	r	<b>Reserved</b> Always read as 0
VDD1V5_OV_SCLR	23	w	<b>VDDC Overvoltage (ADC2 channel 8) Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
VDD5V_OV_SCLR	22	w	<b>VDDP Overvoltage (ADC2 channel 5) Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
VS_OV_SCLR	21	w	<b>VS Overvoltage (ADC2 channel 1) Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
MON_OV_SCLR	20	w	<b>MON Overvoltage (ADC2 channel 4) Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
VDD1V5_UV_SCLR	19	w	<b>VDDC Undervoltage (ADC2 channel 8) Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
VDD5V_UV_SCLR	18	w	<b>VDDP Undervoltage (ADC2 channel 5) Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
VS_UV_SCLR	17	w	<b>VS Undervoltage (ADC2 channel 1) Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
MON_UV_SCLR	16	w	<b>MON Undervoltage (ADC2 channel 4) Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag

---

**System Control Unit - Power Modules (SCU-PM)**

Field	Bits	Type	Description
<b>Res</b>	15:8	r	<b>Reserved</b> Always read as 0
<b>VDD1V5_OV_ICLR</b>	7	w	<b>VDDC Overvoltage (ADC2 channel 8) Interrupt Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>VDD5V_OV_ICLR</b>	6	w	<b>VDDP Overvoltage (ADC2 channel 5) Interrupt Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>VS_OV_ICLR</b>	5	w	<b>VS Overvoltage (ADC2 channel 1) Interrupt Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>MON_OV_ICLR</b>	4	w	<b>MON Overvoltage (ADC2 channel 4) Interrupt Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>VDD1V5_UV_ICLR</b>	3	w	<b>VDDC Undervoltage (ADC2 channel 8) Interrupt Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>VDD5V_UV_ICLR</b>	2	w	<b>VDDP Undervoltage (ADC2 channel 5) Interrupt Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>VS_UV_ICLR</b>	1	w	<b>VS Undervoltage (ADC2 channel 1) Interrupt Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag
<b>MON_UV_ICLR</b>	0	w	<b>MON Undervoltage (ADC2 channel 4) Interrupt Status Clear</b> 0 <sub>B</sub> no operation 1 <sub>B</sub> clear status flag

## System Control Unit - Power Modules (SCU-PM)

### 7.4.2.2 Interrupt Control Unit - Interrupt Enable Register

The Analog Module Interrupts can be enabled and disabled by there corresponding enable bits which are located in Registers:

- **SYS\_SUPPLY\_IRQ\_CTRL**: Enable of Interrupts for Under- and Overvoltage detection for all system relevant supplies. These interrupts are edge triggered interrupts to reduce interrupt load of the  $\mu\text{C}$ .
- **SYS\_IRQ\_CTRL**: Enable of interrupts for Analog Modules.

#### System Interrupt Control

The register is reset by RESET\_TYPE\_3.

SYS_IRQ_CTRL	Offset	Reset Value
System Interrupt Control	28 <sub>H</sub>	0000 0000 <sub>H</sub>

31				24				23	22	21	20	19	18	17	16
Res								ADC4 _EO*	ADC3 _EO*	PHW ZCH*	PHW ZCL*	PHV ZCH*	PHV ZCL*	PHU ZCH*	PHU ZCL*
r								rw	rw	rw	rw	rw	rw	rw	rw
15	14	13	12	11	10	9	8	7	6	5	3		2	1	0
ADC2 _ES*	VREF 5V_*	VREF 5V_*	VREF 5V_*	REFB G_U*	REFB G_L*	SYS OT_*	SYS OTW*	PMU OT_*	PMU OTW*	Res		LIN TMO*	LIN OT_*	LIN OC_*	
rw	rw	rw	rw	rw	rw	rw	rw	rw	rw	r		rw	rw	rw	

Field	Bits	Type	Description
Res	31:24	r	<b>Reserved</b> Always read as 0
ADC4_EOC_IE	23	rw	<b>ADC4 EOC Interrupt Enable<sup>1)</sup></b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
ADC3_EOC_IE	22	rw	<b>ADC3 EOC Interrupt Enable<sup>1)</sup></b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
PHW_ZCHI_IE	21	rw	<b>Phase W Zero Crossing Comparator High Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
PHW_ZCLOW_IE	20	rw	<b>Phase W Zero Crossing Comparator Low Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
PHV_ZCHI_IE	19	rw	<b>Phase V Zero Crossing Comparator High Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled

## System Control Unit - Power Modules (SCU-PM)

Field	Bits	Type	Description
PHV_ZCLOW_IE	18	rw	<b>Phase V Zero Crossing Comparator Low Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
PHU_ZCHI_IE	17	rw	<b>Phase U Zero Crossing Comparator High Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
PHU_ZCLOW_IE	16	rw	<b>Phase U Zero Crossing Comparator Low Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
ADC2_ESM_IE	15	rw	<b>ADC2 Exceptional Sequence Measurement Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
VREF5V_OVL_IE	14	rw	<b>VREF5V Overload Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
VREF5V_UPTH_IE	13	rw	<b>VREF5V ADC1 Reference Overvoltage (ADC2, Channel 6) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
VREF5V_LOWTH_IE	12	rw	<b>VREF5V ADC1 Reference Undervoltage (ADC2, Channel 6) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
REFBG_UPTHWARN_IE	11	rw	<b>Reference Voltage Overvoltage (ADC2 channel 7) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
REFBG_LOTHWARN_IE	10	rw	<b>Reference Voltage Undervoltage (ADC2 channel 7) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
SYS_OT_IE	9	rw	<b>System Overtemperature Shutdown (ADC2 channel 9) Interrupt Enable (leads to shutdown of System)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
SYS_OTWARN_IE	8	rw	<b>System Overtemperature Warning (ADC2 channel 9) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
PMU_OT_IE	7	rw	<b>PMU Regulator Overtemperature Shutdown (ADC2 channel 9) Interrupt Enable (leads to shutdown of System)</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled

---

**System Control Unit - Power Modules (SCU-PM)**

Field	Bits	Type	Description
<b>PMU_OTWARN_IE</b>	6	rw	<b>PMU Regulator Overtemperature Warning (ADC2 channel 9) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>Res</b>	5:3	r	<b>Reserved</b> Always read as 0
<b>LIN_TMOUT_IE</b>	2	rw	<b>LIN TXD timeout Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>LIN_OT_IE</b>	1	rw	<b>LIN Overtemperature Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>LIN_OC_IE</b>	0	rw	<b>LIN Overcurrent Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled

1) This bit is only valid for TLE9879-2QXA40; Reserved for other variants, read as 0.

## System Control Unit - Power Modules (SCU-PM)

### Bridge Driver Interrupt Control

The register is reset by RESET\_TYPE\_3.

<b>BDRV_IRQ_CTRL</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Bridge Driver Interrupt Control</b>	<b>5C<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

31						21						20	19	18	17	16		
Res												VSD UPT*	VSD LOW*	VCP UPT*	VCP LOW*	VCP LOW*		
r												rw	rw	rw	rw	rw		
15	14	13	12	11	10	9	6						5	4	3	2	1	0
HS3 OC_*	LS3 OC_*	HS2 OC_*	HS1 OC_*	LS2 OC_*	LS1 OC_*	Res						HS3 DS_*	LS3 DS_*	HS2 DS_*	HS1 DS_*	LS2 DS_*	LS1 DS_*	
rw	rw	rw	rw	rw	rw	r						rw	rw	rw	rw	rw	rw	

Field	Bits	Type	Description
<b>Res</b>	31:21	r	<b>Reserved</b> Always read as 0
<b>VSD_UPTH_IE</b>	20	rw	<b>VSD Measurement Upper Threshold (ADC2 channel 2) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>VSD_LOWTH_IE</b>	19	rw	<b>VSD Measurement Lower Threshold (ADC2 channel 2) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>VCP_UPTH_IE</b>	18	rw	<b>VCP Measurement Upper Threshold (ADC2 channel 2) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>VCP_LOWTH1_IE</b>	17	rw	<b>VCP Measurement Lower Threshold 1 (ADC2 channel 3) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>VCP_LOWTH2_IE</b>	16	rw	<b>VCP Measurement Lower Threshold 2 Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>HS3_OC_IE</b>	15	rw	<b>External High Side 3 FET Over-current Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
<b>LS3_OC_IE</b>	14	rw	<b>External Low Side 3 FET Over-current Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled

## System Control Unit - Power Modules (SCU-PM)

Field	Bits	Type	Description
HS2_OC_IE	13	rw	<b>External High Side 2 FET Over-current Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
HS1_OC_IE	12	rw	<b>External High Side 1 FET Over-current Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
LS2_OC_IE	11	rw	<b>External Low Side 2 FET Over-current Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
LS1_OC_IE	10	rw	<b>External Low Side 1 FET Over-current Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
Res	9:6	r	<b>Reserved</b>
HS3_DS_IE	5	rw	<b>Bridge Driver High Side 3 Pre-Driver Short Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
LS3_DS_IE	4	rw	<b>Bridge Driver Low Side 3 Pre-Driver Short Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
HS2_DS_IE	3	rw	<b>Bridge Driver High Side 2 Pre-Driver Short Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
HS1_DS_IE	2	rw	<b>Bridge Driver High Side 1 Pre-Driver Short Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
LS2_DS_IE	1	rw	<b>Bridge Driver Low Side 2 Pre-Driver Short Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
LS1_DS_IE	0	rw	<b>Bridge Driver Low Side 1 Pre-Driver Short Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled




## System Control Unit - Power Modules (SCU-PM)

### System Supply Interrupt Control

The register is reset by RESET\_TYPE\_4.

This register is being initialized by the BootROM during the bootup process to a value of 0000\_0000<sub>H</sub>

SYS_SUPPLY_IRQ_CTRL	Offset	Reset Value
System Supply Interrupt Control	20 <sub>H</sub>	0000 00FF <sub>H</sub>

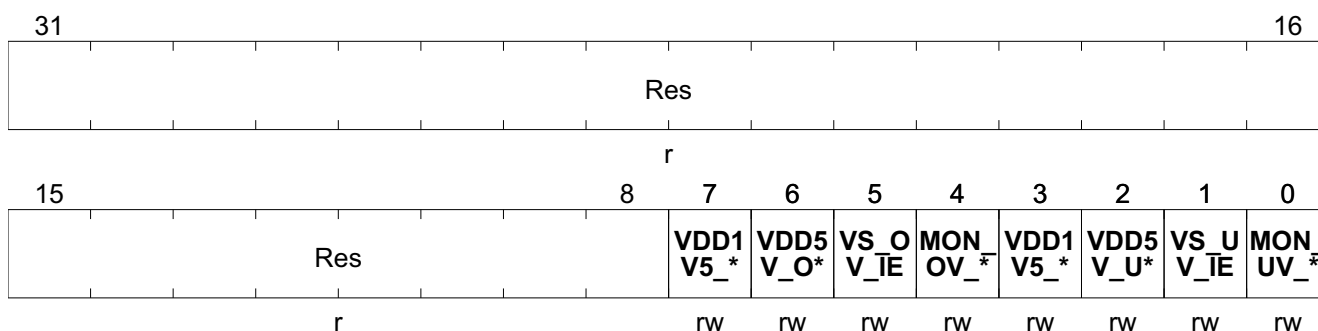

Field	Bits	Type	Description
Res	31:8	r	<b>Reserved</b> Always read as 0
VDD1V5_OV_IE	7	rw	<b>VDD1V5 Overvoltage (ADC2 channel 8) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
VDD5V_OV_IE	6	rw	<b>VDD5V Overvoltage (ADC2 channel 5) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
VS_OV_IE	5	rw	<b>VS Overvoltage (ADC2 channel 1) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
MON_OV_IE	4	rw	<b>MON Overvoltage (ADC2 channel 4) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
VDD1V5_UV_IE	3	rw	<b>VDD1V5 Undervoltage (ADC2 channel 8) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
VDD5V_UV_IE	2	rw	<b>VDD5V Undervoltage (ADC2 channel 5) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled
VS_UV_IE	1	rw	<b>VS Undervoltage (ADC2 channel 1) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled

---

**System Control Unit - Power Modules (SCU-PM)**

Field	Bits	Type	Description
MON_UV_IE	0	rw	<b>MON Undervoltage (ADC2 channel 4) Interrupt Enable</b> 0 <sub>B</sub> Interrupt is disabled 1 <sub>B</sub> Interrupt is enabled


## System Control Unit - Power Modules (SCU-PM)

### 7.5 Power Control Unit for Power Modules (PCU\_PM)

The chapter describes the implementation of the power modules state machine. This state machine is responsible for powering up and powering down the on-board power modules. It takes care about the interaction between the Measurement Unit and the modules which are evaluated by the Unit. The following modules are controlled by this statemachine:

#### Analog Modules controlled by Power Control Unit:

- Central Reference Voltage Generation
- Central Bias Current Generation
- 8-Bit ADC Core
- Supply Voltage Attenuators
- Monitoring Inputs Voltage Attenuators
- LIN Transceiver
- MOSFET Drivers

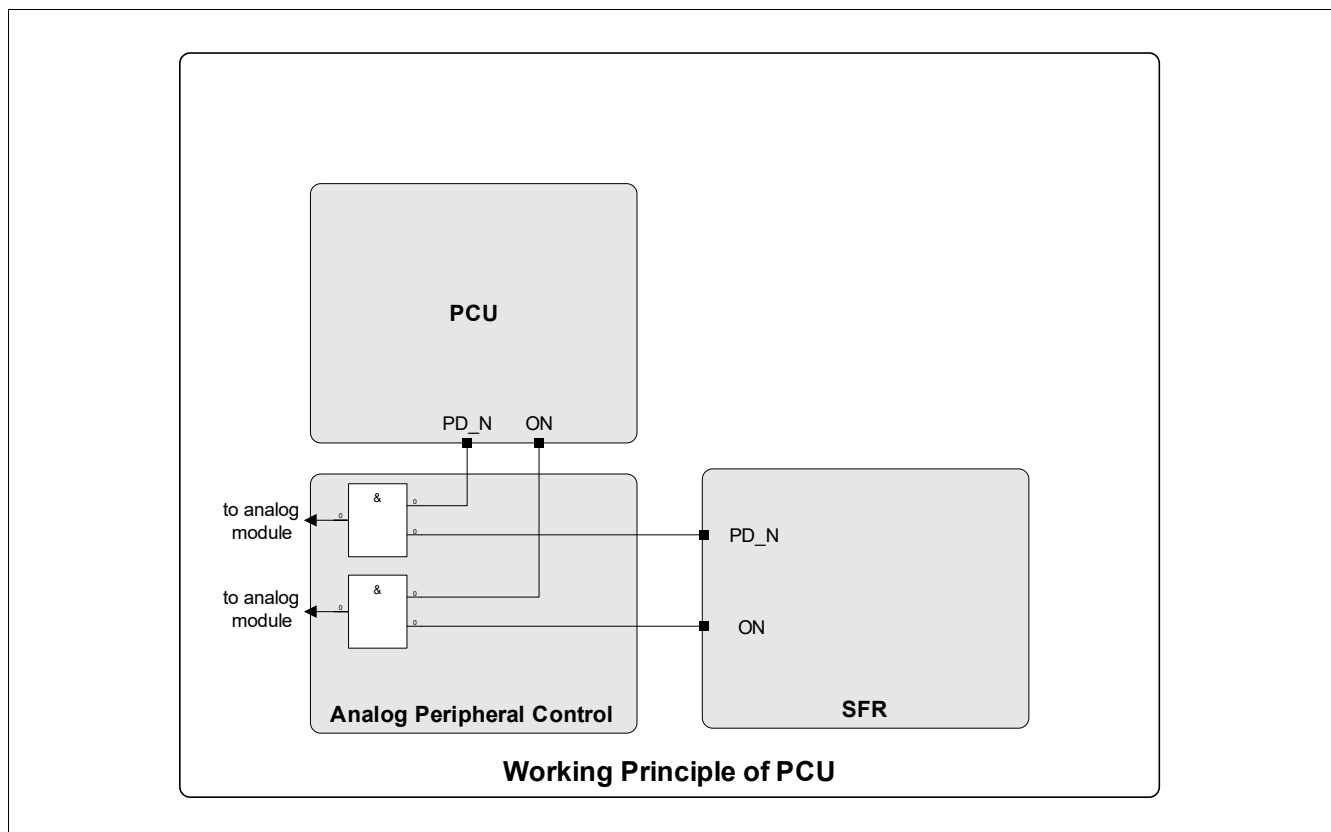

**Figure 35 Function of AP\_SUB\_CTRL**

If the device will power up the analog modules statemachine will startup all analog modules. First of all, the reference voltage will be enabled. After that the biasing module will be enabled. If this step is completed the analog modules will be enabled step by step. After this is done the measurement interface will start-up.

When leaving Stop Mode, this sequence restores the SFR register contents with the values written before entering Stop Mode.

The Sleep and Stop Mode entry is as well controlled by this state machine. This ensures a smooth shutdown of the modules avoiding disturbances (like load jumps) on the supplies.

The power control unit also handles system failures indicated by the analog measurement interface. They are:

---

## System Control Unit - Power Modules (SCU-PM)

### System failures handled by SCU\_PM:

- automatic shutdown of power modules in case of VS Overvoltage
- automatic shutdown of power modules in case of System Overtemperature
- automatic shutdown of power modules in case of loss of clock
- automatic shutdown of system in case of System Overtemperature
- automatic shutdown of system in case of internal supply fail
- automatic shutdown of LIN module in case of VS Undervoltage

How to configure this actions on the above described system failures will be described in the following chapters.

### 7.5.1 VSD-Overvoltage System Shutdown

The PCU provides the possibility of an system shutdown in case of VSD Overvoltage. The system shutdown means the device enters Sleep Mode. This feature can be used to reduce power dissipation in case of an increased supply voltage VSD. This feature can be enabled by bit **SYS\_VSD\_OV\_SLM\_DIS**. **This bit is low active!** When there is an overvoltage, the system will be set in system shutdown and all power modules as:

- LIN
- Bridge Driver
- Charge Pump
- Supply Voltage Attenuators

are switched off automatically. The power modules will be switched on when the VSD-Overvoltage condition is left again.

### 7.5.2 Overtemperature System Shutdown

In case of overtemperature ( $T_j > T_{j,max}$ ) the system will be set to Sleep Mode. This functionality is used to protect the system from thermal overstress. One possibility of avoiding this thermal shutdown is to stick to an emergency procedure, which helps to minimize the power dissipation in the system. This routine would require to shutdown all modules which have big contribution to power dissipation (e.g. Bridge Driver). This procedure has to be implemented in user software. Another possibility is to use the implemented hardware shutdown procedure. This procedure can be activated by the flag **SYS\_OT\_PS\_DIS**. **This flag is low active!** When this flag is set all power dissipation contributors will be automatically shutdown.

- Main power dissipation contributors are:
  - Charge Pump
  - Bridge Driver

## System Control Unit - Power Modules (SCU-PM)

### 7.5.3 Power Control Unit Register

The PCU is fully controllable by the below listed SFR Registers.

**Table 42 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Power Control Unit Register</b>			
<b>PCU_CTRL_STS</b>	Power Control Unit Control Status Register	30 <sub>H</sub>	06E3 7EF3 <sub>H</sub>


The registers are addressed wordwise.

#### Power Control Unit Register

The register is reset by RESET\_TYPE\_4.

This register is being initialized by the BootROM during the bootup process to a value of 82E3\_7EF3<sub>H</sub>

PCU_CTRL_STS	Offset	Reset Value
Power Control Unit Control Status Register	30 <sub>H</sub>	06E3 7EF3 <sub>H</sub>

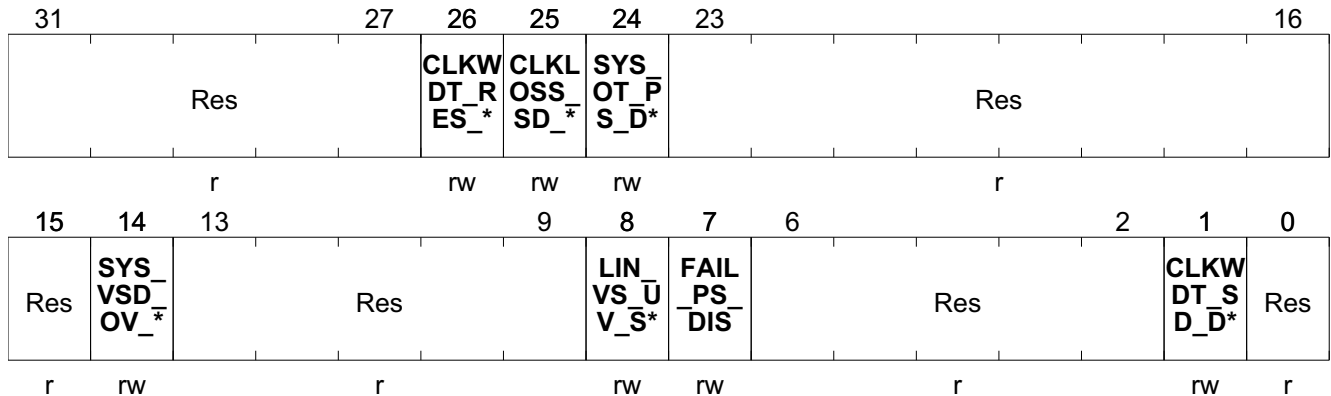

Field	Bits	Type	Description
<b>Res</b>	31	r	<b>Reserved</b> Always read as 1
<b>Res</b>	30:27	r	<b>Reserved</b> Always read as 0
<b>CLKWDT_RES_SD_DISS</b>	26	rw	<b>Clock Watchdog Reset Disable</b> 0 <sub>B</sub> <b>Enable</b> , Clock Watchdog Reset Enable 1 <sub>B</sub> <b>Disable</b> , Clock Watchdog Reset Disable
<b>CLKLOSS_SD_DIS</b>	25	rw	<b>Power Switches Loss of Clock Shutdown Disable (APCLK3)</b> 0 <sub>B</sub> <b>Enable</b> , Automatic Shutdown Signal for Power Switches in case of loss of clock 1 <sub>B</sub> <b>Disable</b> , Automatic Shutdown Signal for Power Switches in case of loss of clock

---

**System Control Unit - Power Modules (SCU-PM)**

Field	Bits	Type	Description
<b>SYS_OT_PS_DIS</b>	24	rw	<b>System Overtemperature Power Switches Shutdown Disable</b> 0 <sub>B</sub> <b>Enable</b> , Automatic Shutdown Signal for Power Switches in case of system overtemperature preenable 1 <sub>B</sub> <b>Disable</b> , Automatic Shutdown Signal for Power Switches in case of system overtemperature enable
<b>Res</b>	23:15	r	<b>Reserved</b> Always read as 0
<b>SYS_VSD_OV_SLM_DIS</b>	14	rw	<b>VSD Overvoltage Shutdown for Peripherals Disable</b> 0 <sub>B</sub> <b>Enable</b> , Automatic Shutdown for Power modules in case of VSD Overvoltage enabled 1 <sub>B</sub> <b>Disable</b> , Automatic Shutdown for Power modules in case of VSD Overvoltage disabled
<b>Res</b>	13:9	r	<b>Reserved</b> Always read as 0
<b>LIN_VS_UV_SD_DIS</b>	8	rw	<b>LIN Module VS Undervoltage Transmitter Shutdown</b> 0 <sub>B</sub> <b>Enable</b> , Automatic Shutdown for Power modules in case of VS Undervoltage enabled 1 <sub>B</sub> <b>Disable</b> , Automatic Shutdown for Power modules in case of VS Undervoltage disabled
<b>FAIL_PS_DIS</b>	7	rw	<b>Disable LIN, BDRV and CP because of Overtemperature</b> 0 <sub>B</sub> <b>Switch off Enabled</b> , LIN, BDRV and CP will be turned off when Overtemperature occurs 1 <sub>B</sub> <b>Switch off Disabled LIN, BDRV and CP will be kept on when Overtemperature occurs,</b>
<b>Res</b>	6:2	r	<b>Reserved</b> Always read as 0
<b>CLKWDT_SD_DIS</b>	1	rw	<b>Power Modules Clock Watchdog Shutdown Disable</b> 0 <sub>B</sub> <b>Shutdown Enable</b> , Power Devices will be switched off when Clock Watchdog occurs 1 <sub>B</sub> <b>Shutdown Disable</b> , Power Devices will not be shutdown when Clock Watchdog occurs
<b>Res</b>	0	r	<b>Reserved</b> Always read as 0

---

**System Control Unit - Power Modules (SCU-PM)**
**7.6 MISC Control**
**7.6.1 Bus Faults**

Due to the pipeline structure of the ARM Cortex M3 core, it is difficult to determine the fault address of a non-existing or protected memory region. For this reason, the following register allows the user to determine the address of the memory access that caused the fault. The registers model the processor's instruction pipeline.

**7.6.1.1 Bus Fault Control Register**

For the determining the address of a bus fault exception the following registers should be used.

**Table 43 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Bus Fault Control Register</b>			
<b>BFSTS</b>	Bus Fault Status Register	80 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>DBFA</b>	Data Bus Fault Address Register	84 <sub>H</sub>	xxxx xxxx <sub>H</sub>
<b>SBFA</b>	System Bus Fault Address Register	88 <sub>H</sub>	xxxx xxxx <sub>H</sub>
<b>BFSTS_CLR</b>	Bus Fault Status Clear Register	8C <sub>H</sub>	0000 0000 <sub>H</sub>


The registers are addressed wordwise.

**System Control Unit - Power Modules (SCU-PM)**

**BUS\_FAULT\_STATUS**

The register is reset by RESET\_TYPE\_3.

**BFSTS** **Offset**  
**Bus Fault Status Register** **80<sub>H</sub>** **Reset Value**  
**0000 0000<sub>H</sub>**

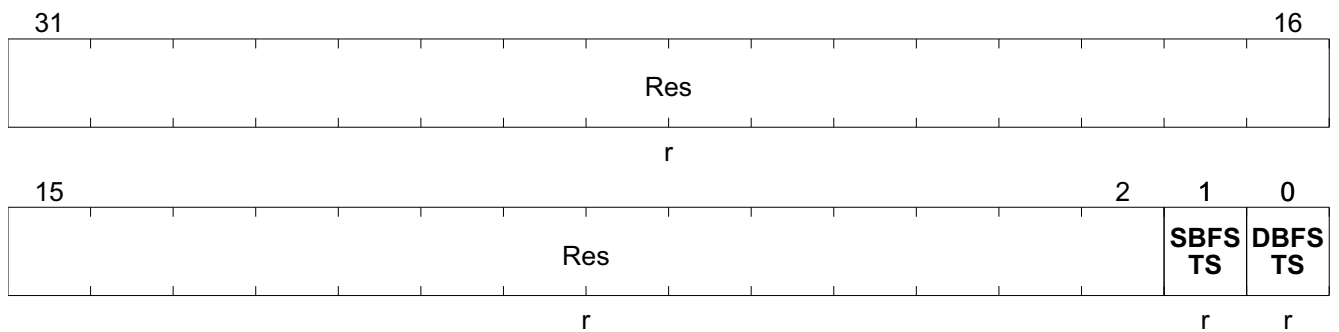

Field	Bits	Type	Description
<b>Res</b>	31:2	r	<b>Reserved</b> Always read as 0
<b>SBFSTS</b>	1	r	<b>System Bus Fault Status Valid Flag</b> Address of System Bus Fault is valid and can be read out of SBFA Register 1 <sub>B</sub> <b>Valid</b> , Address is valid 0 <sub>B</sub> <b>not valid</b> , Address is not valid
<b>DBFSTS</b>	0	r	<b>Data Bus Fault Status Valid Flag</b> Address of Data Bus Fault is valid and can be read out of DBFA Register 1 <sub>B</sub> <b>Valid</b> , Address is valid 0 <sub>B</sub> <b>not valid</b> , Address is not valid




**System Control Unit - Power Modules (SCU-PM)**

**BUS\_FAULT\_STATUS\_CLEAR**

The register is reset by RESET\_TYPE\_3.

**BFSTS\_CLR** **Offset**  
**Bus Fault Status Clear Register** **8C<sub>H</sub>** **Reset Value**  
**0000 0000<sub>H</sub>**

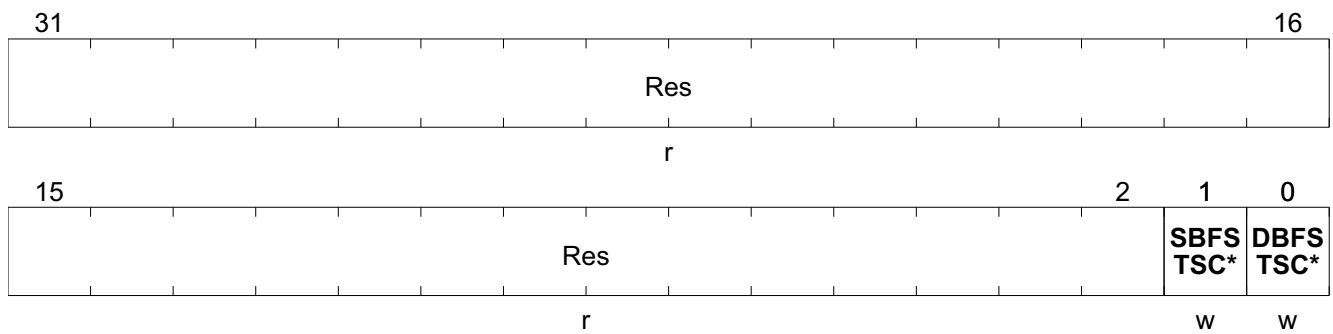


Field	Bits	Type	Description
<b>Res</b>	31:2	r	<b>Reserved</b> Always read as 0
<b>SBFSTSCLR</b>	1	w	<b>System Bus Fault Status Clear Flag</b> System Bus Fault valid flag is cleared. 1 <sub>B</sub> <b>Cleared</b> , Valid Address is cleared 0 <sub>B</sub> <b>not cleared</b> , Valid Address is not cleared
<b>DBFSTSCLR</b>	0	w	<b>Data Bus Fault Status Clear Flag</b> Data Bus Fault valid flag is cleared. 1 <sub>B</sub> <b>Cleared</b> , Address is cleared 0 <sub>B</sub> <b>not cleared</b> , Address is not cleared

**System Control Unit - Power Modules (SCU-PM)**

**DATA\_BUS\_FAULT\_ADDRESS**

The register is reset by RESET\_TYPE\_3.

<b>DBFA</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Data Bus Fault Address Register</b>	<b>84<sub>H</sub></b>	<b>xxxx xxxx<sub>H</sub></b>

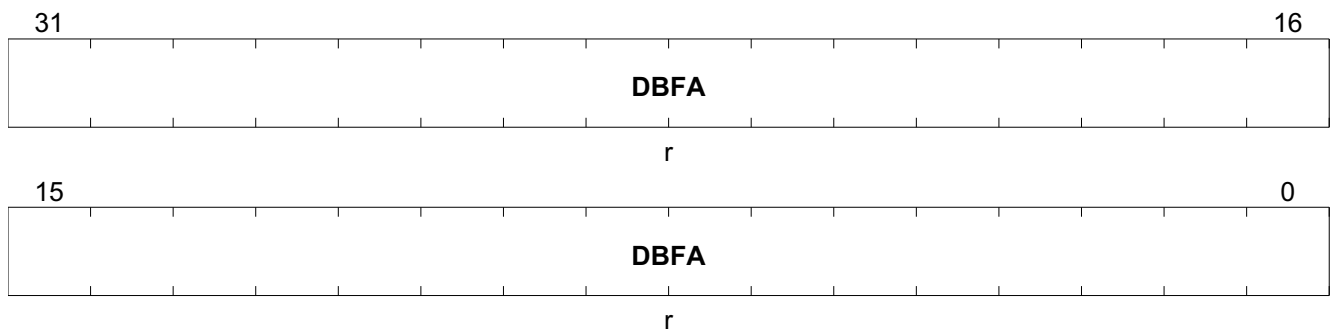


Field	Bits	Type	Description
DBFA	31:0	r	<b>Reserved</b> Always read as 0

**System Control Unit - Power Modules (SCU-PM)**

**SYSTEM\_BUS\_FAULT\_ADDRESS**

The register is reset by RESET\_TYPE\_3.

<b>SBFA</b>	<b>Offset</b>	<b>Reset Value</b>
<b>System Bus Fault Address Register</b>	<b>88<sub>H</sub></b>	<b>xxxx xxxx<sub>H</sub></b>

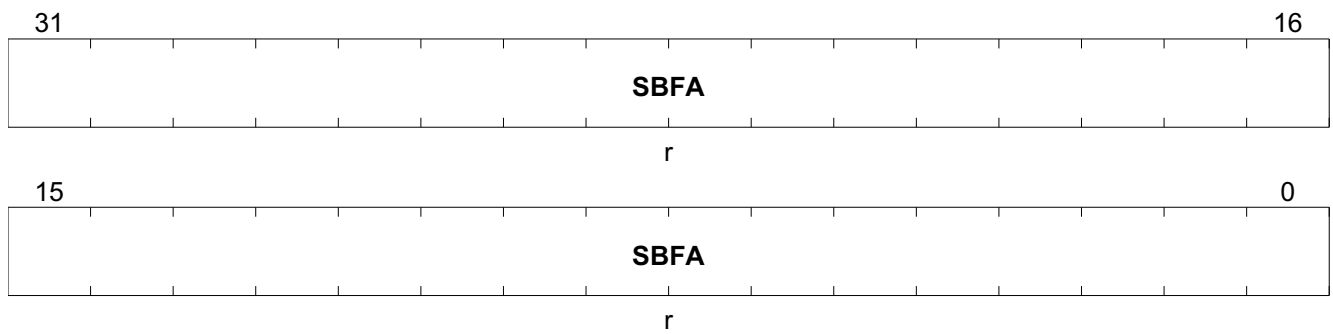

Field	Bits	Type	Description
<b>SBFA</b>	31:0	r	<b>Reserved</b> Always read as 0

## System Control Unit - Power Modules (SCU-PM)

### 7.7 Register Access Hints

Registers in the SCUPM module are clocked with the MI\_CLK. Write operations will be delayed by one MI\_CLK cycle.

For handling the clearing of interrupt status flags special care might be necessary. Under certain coding constellations an extra write access to the interrupt clear flag will be necessary to add the extra MI\_CLK cycle.

In case of interrupt status clear, two use cases in the software can be considered:

1. the writing to the interrupt clear flag and the reading of the corresponding interrupt status flag are having some other code in between
2. the writing to the interrupt clear flag and the reading of the corresponding interrupt status flag are placed in code right behind each other, with no code in between

#### Use Case 1 - Example, no extra write attempt to the interrupt clear register required

```

/* clearing of VAREF overvoltage interrupt status flag */
SCUPM->SYS_ISCLR.bit.VREF5V_UPTH_ICLR = 1;
/* some other code is placed here */
...
/* reading of VAREF overvoltage interrupt status flag */
if ( SCUPM->SYS_IS.bit.VREF5V_UPTH_IS == 1 )
{
    /* some user code here */
}

```

In this example, between the interrupt clear register write and the corresponding status register read, sufficient time is ensured, as some C code (at least one C instruction) is placed in between.

#### Use Case 2- Example, one extra write attempt to the interrupt clear register required

```

/* clearing of VAREF overvoltage interrupt status flag */
SCUPM->SYS_ISCLR.bit.VREF5V_UPTH_ICLR = 1;
/* place another interrupt status flag clear attempt to add an extra MI_CLK cycle*/
SCUPM->SYS_ISCLR.bit.VREF5V_UPTH_ICLR = 0;
/* reading of VAREF overvoltage interrupt status flag */
if ( SCUPM->SYS_IS.bit.VREF5V_UPTH_IS == 1 )
{
    /* some user code here */
}

```

In this example, between the interrupt clear register write and the corresponding status register read, another interrupt clear register write is placed. In order to add another MI\_CLK cycle and ensure that the first interrupt status flag write attempt has reached the interrupt status register before it will be read again in the if clause right after it. Without this extra clear attempt the following interrupt status flag read might still reflect the interrupt status set.

An extra instruction gives the first clear attempt at least one MI\_CLK cycle of time. Any other C instruction might be sufficient as well. Using the same interrupt clear write again is proposed. This access cannot be eliminated by the compiler by optimization.

Executing the second interrupt clear write with a '0' is recommended, as so, no functional effect to the register takes place.

## 8 ARM Cortex-M3 Core

### 8.1 Features

The key features of the Cortex-M3 implemented are listed below.

#### **Processor Core; a low gate count core, with low latency interrupt processing:**

- A subset of the Thumb<sup>®</sup>-2 Instruction Set
- Banked stack pointer (SP) only
- 32-bit hardware divide instructions, SDIV and UDIV (Thumb-2 instructions)
- Handler and Thread Modes
- Thumb and debug states
- Interruptible-continued instructions LDM/STM, Push/Pop for low interrupt latency
- Automatic processor state saving and restoration for low latency Interrupt Service Routine (ISR) entry and exit
- ARM architecture v7-M Style BE8/LE support
- ARMv6 unaligned accesses

#### **Nested Vectored Interrupt Controller (NVIC) closely integrated with the processor core to achieve low latency interrupt processing:**

- Interrupts, configurable from 1 to 16
- Bits of priority (4)
- Dynamic reprioritization of interrupts
- Priority grouping. This enables selection of preemptive interrupt levels and non-preemptive interrupt levels
- Support for tail-chaining and late arrival of interrupts. This enables back-to-back interrupt processing without the overhead of state saving and restoration between interrupts.
- Processor state automatically saved on interrupt entry, and restored on interrupt exit, with no instruction overhead

#### **Bus interfaces**

- Advanced High-performance Bus-Lite (AHB-Lite) interfaces: ICode, DCode, and System bus interface
- Memory access alignment
- Write buffer for buffering of write data

ARM Cortex-M3 Core

8.2 Introduction

The ARM Cortex-M3 processor is a leading 32-bit processor and provides a high-performance and cost-optimized platform for a broad range of applications including microcontrollers, automotive body systems and industrial control systems. Like the other Cortex family processors, the Cortex-M3 processor implements the Thumb<sup>®</sup>-2 instruction set architecture. With the optimized feature set the Cortex-M3 delivers 32-bit performance in an application space that is usually associated with 8- and 16-bit microcontrollers.

8.2.1 Block Diagram

Figure 36 shows the functional blocks of the Cortex-M3.

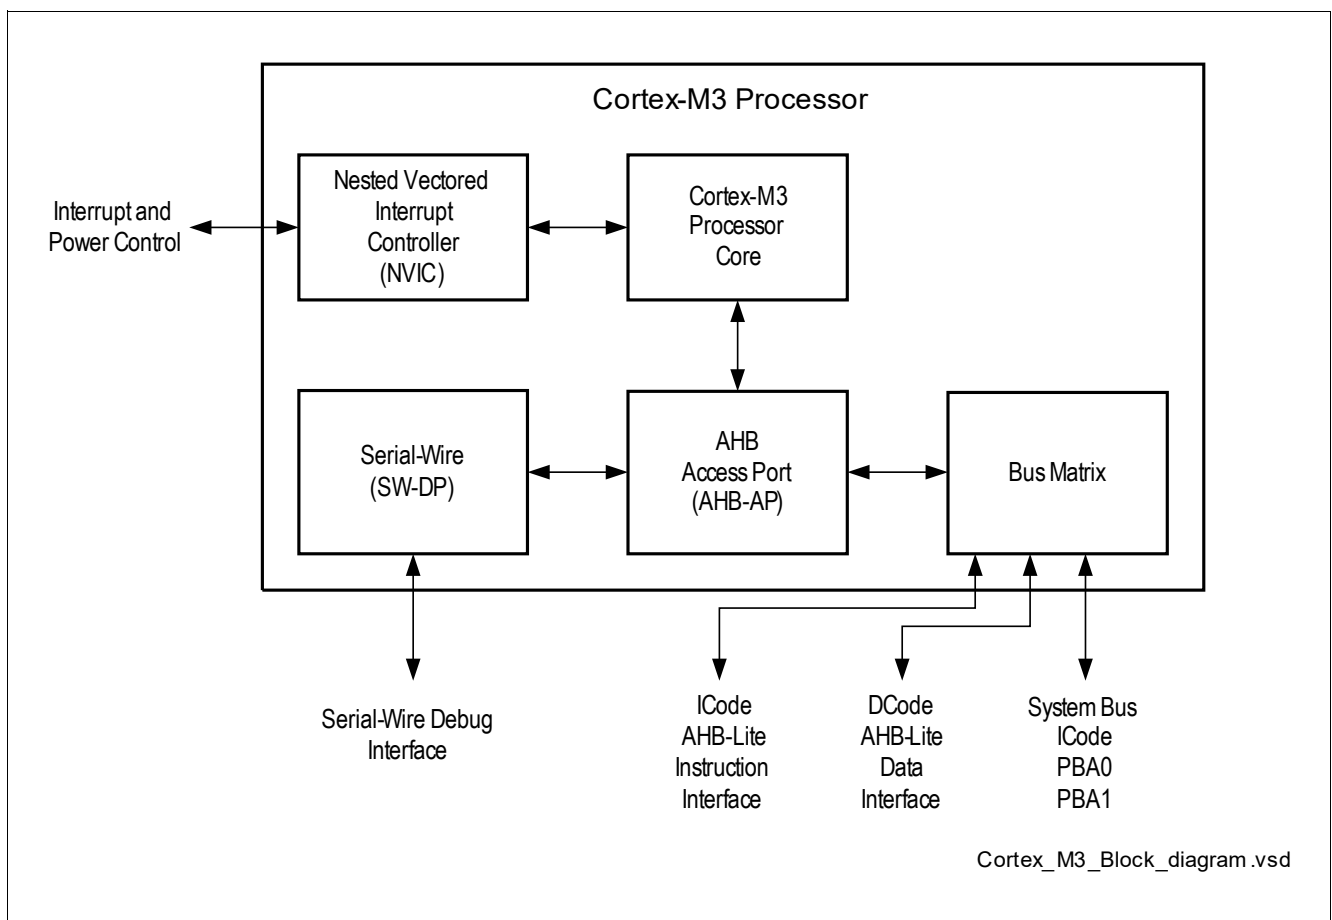



Figure 36 Cortex-M3 Block Diagram

## 8.3 Functional Description

### 8.3.1 Registers

The processor has the following 32-bit registers:

- 13 general-purpose registers, R0-R12
- Stack pointer (SP), R13 alias of banked registers, SP\_process and SP\_main
- Link register (LR), R14
- Program counter (PC), R15
- Special-purpose program status registers (xPSR)

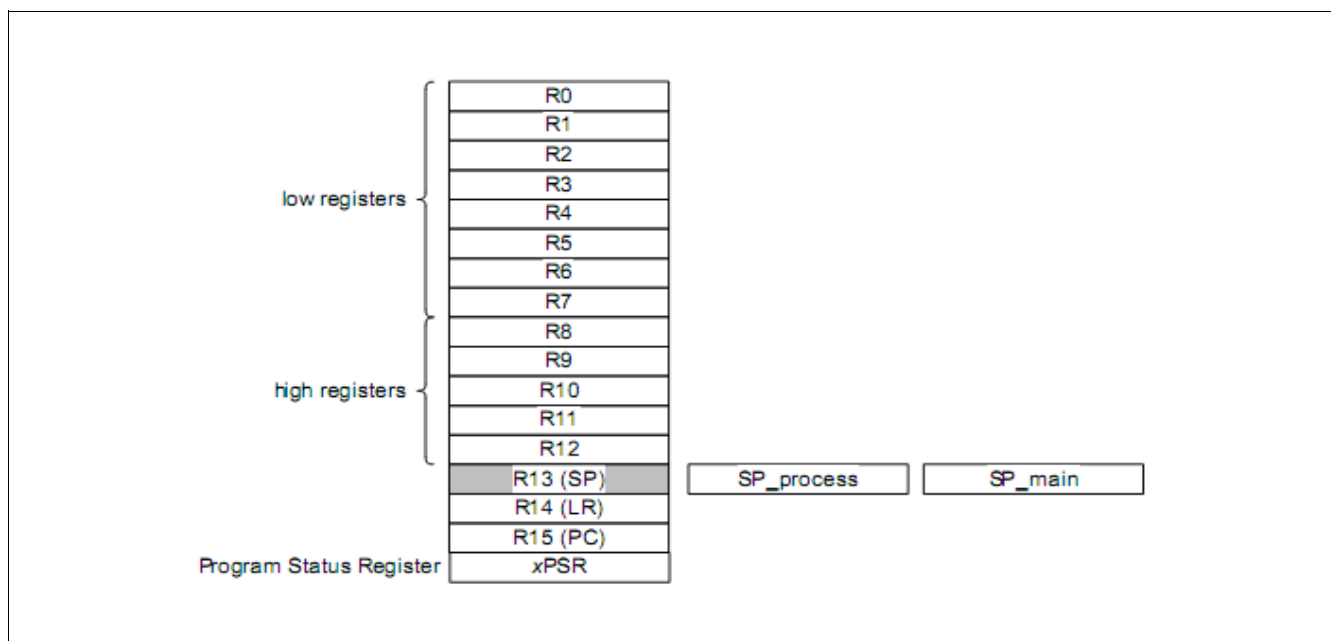

**Figure 37 Processor Register Set**

#### 8.3.1.1 General-Purpose Registers

The general-purpose registers R0-R12 have no special architecturally-defined uses. Most instructions that can specify a general-purpose register can specify R0-R12.

##### Low Registers

Registers R0-R7 are accessible by all instructions that specify a general-purpose register.

##### High Registers

Registers R8-R12 are accessible by all 32-bit instructions that specify a general-purpose register.

Registers R8-R12 are not accessible by all 16-bit instructions.

**Registers R13, R14, and R15 have the following special functions:**

##### Stack Pointer

Register R13 is used as Stack Pointer (SP).

---

## ARM Cortex-M3 Core

### Link Register

Register R14 is the subroutine Link Register (LR).

### Program counter

Register R15 is the Program Counter (PC).

### 8.3.1.2 Special-Purpose Program Status Registers (xPSR)

Processor status at the system level breaks down into three categories:

- Application PSR
- Interrupt PSR
- Execution PSR

They can be accessed as individual registers, a combination of any two from three, or a combination of all three using the Move to Register from Status (MRS) and MSR instructions.



## ARM Cortex-M3 Core

## 8.4 Summary of Processor Registers

The processor has the following 32-bit registers that control functionality:

**Table 44 Register Address Space for Processor Registers**

Module	Base Address	End Address	Note
CPU	E000E000 <sub>H</sub>	E000EFFF <sub>H</sub>	ARM Cortex-M3 Core SCS (System Control Space), SysTick, NVICProcessor Registers

**Table 45 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
---------------------	--------------------	----------------	-------------

### Summary of Processor Registers

<b>ICT</b>	Interrupt Controller Type Register	004 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>SYSTICK_CS</b>	SysTick Control and Status Register	010 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>SYSTICK_RL</b>	SysTick Reload Value Register	014 <sub>H</sub>	00XX XXXX <sub>H</sub>
<b>SYSTICK_CUR</b>	SysTick Current Value Register	018 <sub>H</sub>	00XX XXXX <sub>H</sub>
<b>SYSTICK_CAL</b>	SysTick Calibration Value Register	01C <sub>H</sub>	XX00 0000 XXXX XXXX XXXX XXXX XXXX XXXX <sub>B</sub>
<b>NVIC_ISER0</b>	Interrupt Set-Enable	100 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>NVIC_IPR0</b>	Interrupt Priority	400 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>NVIC_IPR1</b>	Interrupt Priority	404 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>NVIC_IPR2</b>	Interrupt Priority	408 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>NVIC_IPR3</b>	Interrupt Priority	40C <sub>H</sub>	0000 0000 <sub>H</sub>
<b>NVIC_ICER0</b>	Interrupt Clear-Enable	180 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>NVIC_ISPR0</b>	Interrupt Set-Pending	200 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>SHPR2</b>	System Handler Priority Register 2	21C <sub>H</sub>	0000 0000 <sub>H</sub>
<b>NVIC_ICPR0</b>	Interrupt Clear-Pending	280 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>NVIC_IABR0</b>	Active Bit Register	300 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CPUID</b>	CPU ID Base Register	D00 <sub>H</sub>	412F C231 <sub>H</sub>
<b>ICSR</b>	Interrupt Control State Register	D04 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>VTOR</b>	Vector Table Offset Register	D08 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>AIRCR</b>	Application Interrupt/Reset Control Register	D0C <sub>H</sub>	0000 0000 <sub>H</sub>
<b>SCR</b>	System Control Register	D10 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CCR</b>	Configuration Control Register	D14 <sub>H</sub>	0000 0200 <sub>H</sub>
<b>SHPR1</b>	System Handler Priority Register 1	D18 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>SHPR3</b>	System Handler Priority Register 3	D20 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>SHCSR</b>	System Handler Control and State Register	D24 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CFSR</b>	Configurable Fault Status Register	D28 <sub>H</sub>	0000 0000 <sub>H</sub>

## ARM Cortex-M3 Core


Table 45 Register Overview (cont'd)

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>HFSR</b>	Hard Fault Status Register	D2C <sub>H</sub>	0000 0000 <sub>H</sub>
<b>DFSR</b>	Debug Fault Status Register	D30 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>MMFAR</b>	MemManage Fault Status Register	D34 <sub>H</sub>	XXXX XXXX <sub>H</sub>
<b>BFAR</b>	Bus Fault Status Register	D38 <sub>H</sub>	XXXX XXXX <sub>H</sub>
<b>AFSR</b>	Auxiliary Fault Status Register	D3C <sub>H</sub>	0000 0000 <sub>H</sub>

The registers are addressed wordwise.

## Interrupt Controller Type Register

<b>ICT</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Interrupt Controller Type</b>	<b>004<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

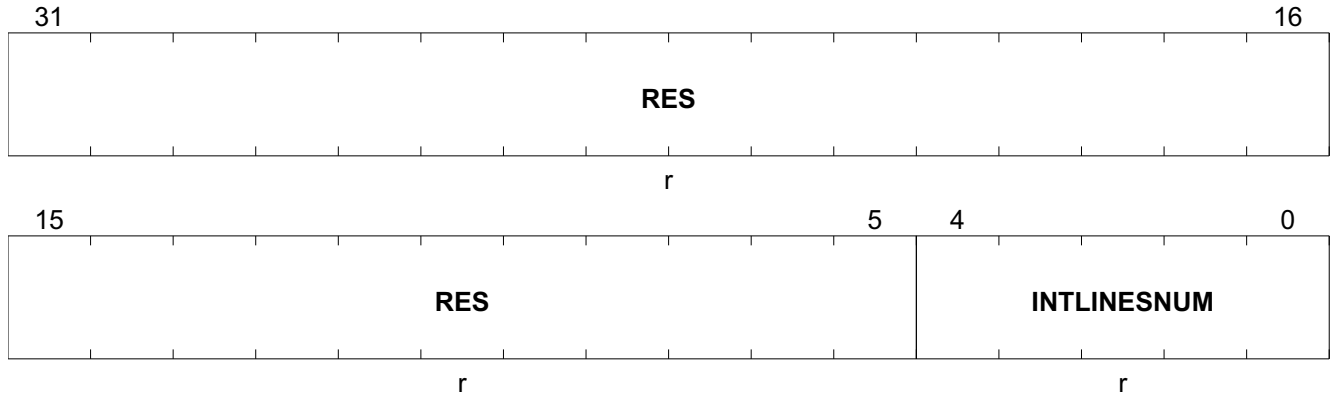


Field	Bits	Type	Description
<b>RES</b>	31:5	r	<b>Reserved</b>
<b>INTLINESNUM</b>	4:0	r	<b>Interrupt Lines</b> Total number of interrupt lines in groups of 32: 00000 <sub>B</sub> , 0 to 32 <sup>1)</sup> 00001 <sub>B</sub> , 33 to 64 00010 <sub>B</sub> , 65 to 95 00011 <sub>B</sub> , 97 to 128 00100 <sub>B</sub> , 129 to 160 00101 <sub>B</sub> , 161 to 192 00110 <sub>B</sub> , 193 to 224 00111 <sub>B</sub> , 225 to 256 <sup>1)</sup>

1) The processor only supports between 1 and 240 interrupts.

## ARM Cortex-M3 Core

## SysTick Control and Status Register

<b>SYSTICK_CS</b>	<b>Offset</b>	<b>Reset Value</b>
SysTick Control and Status	010 <sub>H</sub>	0000 0000 <sub>H</sub>

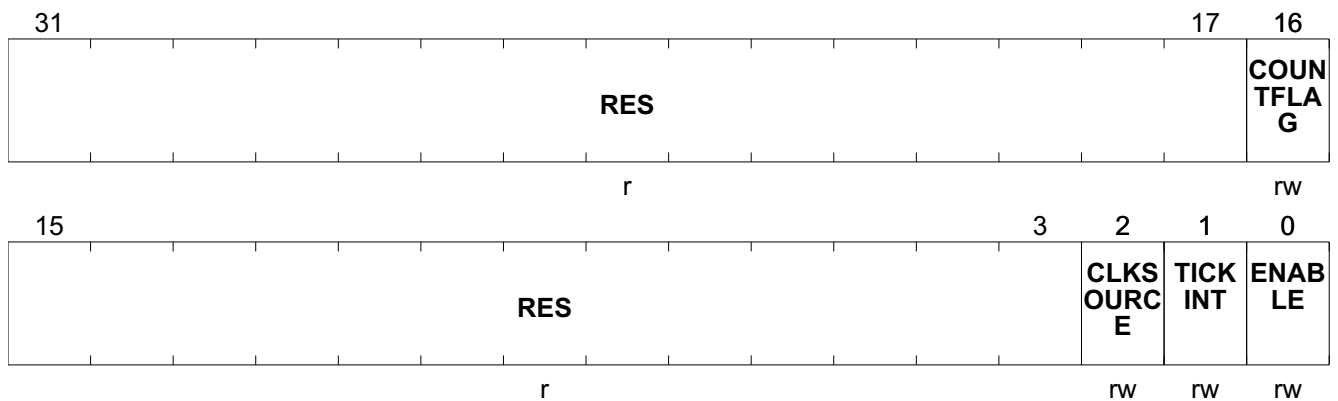


Field	Bits	Type	Description
<b>RES</b>	31:17	r	<b>Reserved</b>
<b>COUNTFLAG</b>	16	rw	<b>Count Flag</b> Returns 1 if timer counted to 0 since last time this was read. Clears on read by application of any part of the SysTick Control and Status Register. If read by the debugger using the SWD, this bit is cleared on read-only if the MasterType bit in the AHB-AP Control Register is set to 0. Otherwise, the COUNTFLAG bit is not changed by the debugger read.
<b>RES</b>	15:3	r	<b>Reserved</b>
<b>CLKSOURCE</b>	2	rw	<b>CLK Source</b> If no reference clock is provided, it is held at 1 and gives the same time as the core clock. The core clock must be at least 2.5 times faster than the reference clock. If it is not, the count values are unpredictable. 0 <sub>B</sub> , external reference clock (STCLK: 4:1 from $f_{sys}$ ) 1 <sub>B</sub> , core clock (HCLK)
<b>TICKINT</b>	1	rw	<b>TICKINT</b> 0 <sub>B</sub> , counting down to 0 does not pend the SysTick handler. Software can use the COUNTFLAG to determine if ever counted to 0. 1 <sub>B</sub> , counting down to 0 pends the SysTick handler.
<b>ENABLE</b>	0	rw	<b>Enable</b> 0 <sub>B</sub> , counter disabled. 1 <sub>B</sub> , counter operates in a multi-shot way. That is, counter loads with the Reload value and then begins counting down. On reaching 0, it sets the COUNTFLAG to 1 and optionally pends the SysTick handler, based on TICKINT. It then loads the Reload value again, and begins counting.

ARM Cortex-M3 Core

SysTick Reload Value Register

**SYSTICK\_RL** **Offset**  
**SysTick Reload Value** **014<sub>H</sub>** **Reset Value**  
**00XX XXXX<sub>H</sub>**

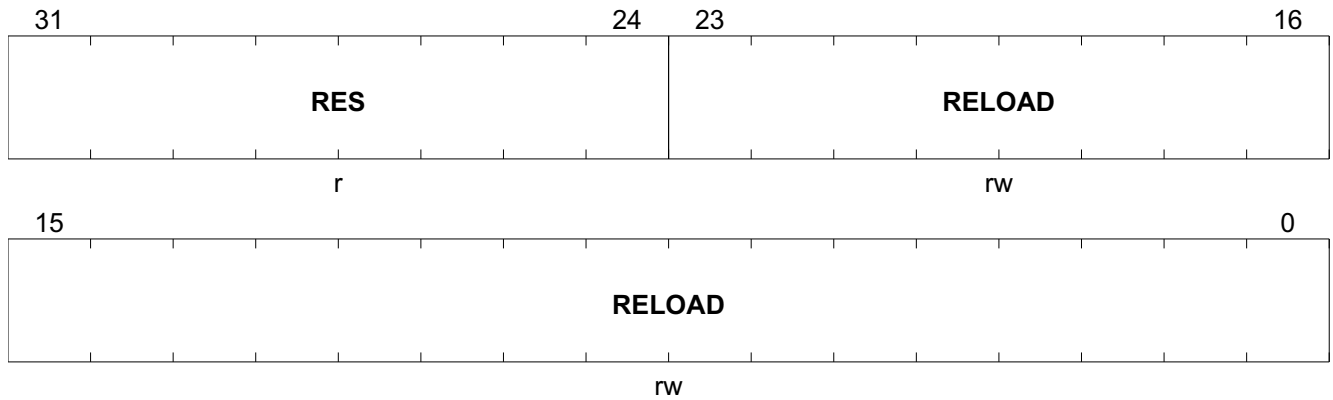


Field	Bits	Type	Description
<b>RES</b>	31:24	r	<b>Reserved</b>
<b>RELOAD</b>	23:0	rw	<b>Reload</b> Value to load into the SysTick Current Value Register when the counter reaches 0.

ARM Cortex-M3 Core

SysTick Current Value Registers

**SYSTICK\_CUR** **Offset** **Reset Value**  
**SysTick Current Value** **018<sub>H</sub>** **00XX XXXX<sub>H</sub>**

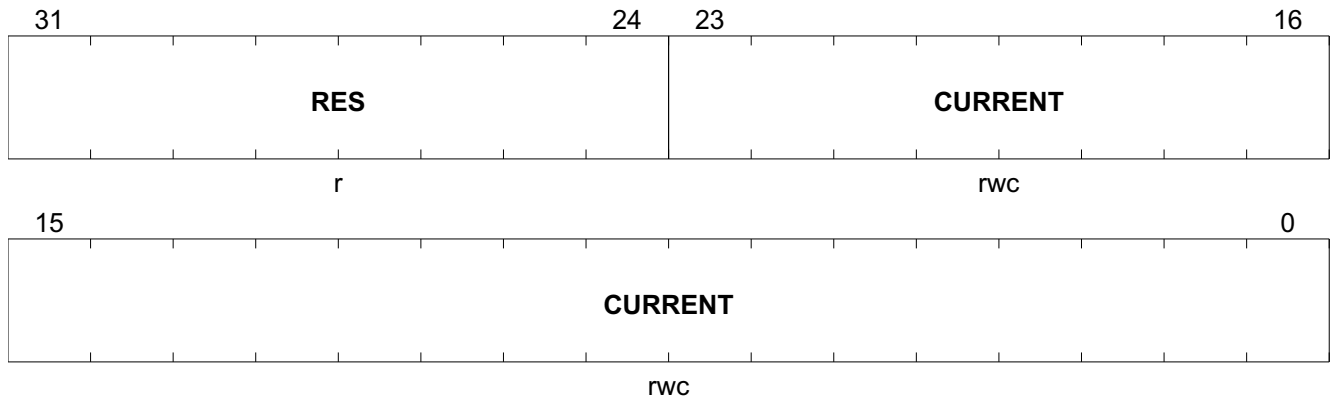


Field	Bits	Type	Description
<b>RES</b>	31:24	r	<b>Reserved</b>
<b>CURRENT</b>	23:0	rwc	<b>Current</b> Current value at the time the register is accessed. No read-modify-write protection is provided, so change with care. This register is write-clear. Writing to it with any value clears the register to 0. Clearing this register also clears the COUNTFLAG bit of the SysTick Control and Status Register.

ARM Cortex-M3 Core

SysTick Calibration Value Registers

<b>SYSTICK_CAL</b>	<b>Offset</b>	<b>Reset Value</b>
SysTick Calibration Value	01C <sub>H</sub>	XX00 0000 XXXX XXXX XXXX XXXX XXXX XXXX <sub>B</sub>

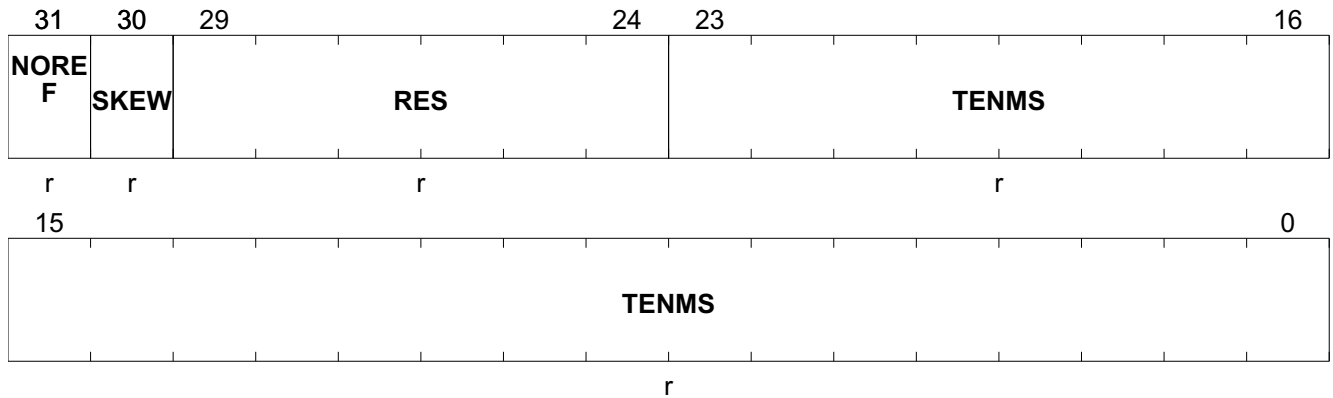


Field	Bits	Type	Description
<b>NOREF</b>	31	r	<b>No Reference Clock</b> 0 <sub>B</sub> , n.u. 1 <sub>B</sub> , the reference clock is not provided
<b>SKEW</b>	30	r	<b>Skew</b> 0 <sub>B</sub> , n.u. 1 <sub>B</sub> , the calibration value is not exactly 10 ms because of clock frequency. This could affect its suitability as a software real time clock.
<b>RES</b>	29:24	r	<b>Reserved</b>
<b>TENMS</b>	23:0	r	<b>Tenms</b> This value is the Reload value to use for 10ms timing. Depending on the value of SKEW, this might be exactly 10ms or might be the closest value. If this reads as 0, then the calibration value is not known. This is probably because the reference clock is an unknown input from the system or scalable dynamically.

## ARM Cortex-M3 Core

## Interrupt Set-Enable Registers

<b>NVIC_ISER0</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Interrupt Set-Enable</b>	<b>100<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

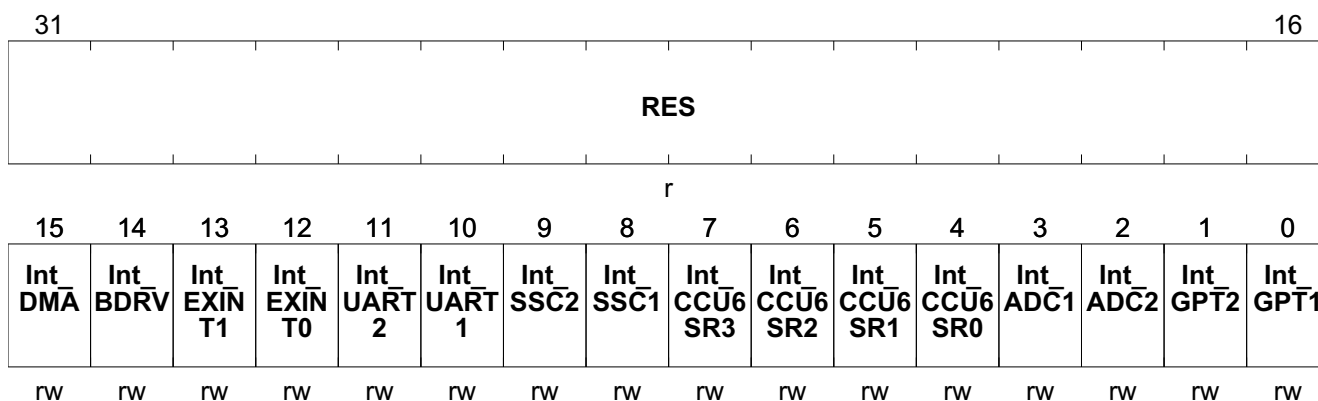

Field	Bits	Type	Description
<b>RES</b>	31:16	r	<b>Reserved</b>
<b>Int_DMA</b>	15	rw	<b>Interrupt Set for DMA</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
<b>Int_BDRV</b>	14	rw	<b>Interrupt Set for Bridge Driver</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
<b>Int_EXINT1</b>	13	rw	<b>Interrupt Set for External Int 1</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
<b>Int_EXINT0</b>	12	rw	<b>Interrupt Set for External Int 0</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
<b>Int_UART2</b>	11	rw	<b>Interrupt Set for UART2</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
<b>Int_UART1</b>	10	rw	<b>Interrupt Set for UART1</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
<b>Int_SSC2</b>	9	rw	<b>Interrupt Set for SSC2</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
<b>Int_SSC1</b>	8	rw	<b>Interrupt Set for SSC1</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt

## ARM Cortex-M3 Core


Field	Bits	Type	Description
Int_CCU6SR3	7	rw	<b>Interrupt Set for CCU6 SR3</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
Int_CCU6SR2	6	rw	<b>Interrupt Set for CCU6 SR2</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
Int_CCU6SR1	5	rw	<b>Interrupt Set for CCU6 SR1</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
Int_CCU6SR0	4	rw	<b>Interrupt Set for CCU6 SR0</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
Int_ADC1	3	rw	<b>Interrupt Set for ADC1</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
Int_ADC2	2	rw	<b>Interrupt Set for MU, ADC2</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
Int_GPT2	1	rw	<b>Interrupt Set for GPT2</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt
Int_GPT1	0	rw	<b>Interrupt Set for GPT1</b> 0 <sub>B</sub> <b>DISABLED</b> , no effect on write 1 <sub>B</sub> <b>ENABLE</b> , enables the associated interrupt



## ARM Cortex-M3 Core

## Interrupt Clear-Enable Registers

<b>NVIC_ICER0</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Interrupt Clear-Enable</b>	<b>180<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

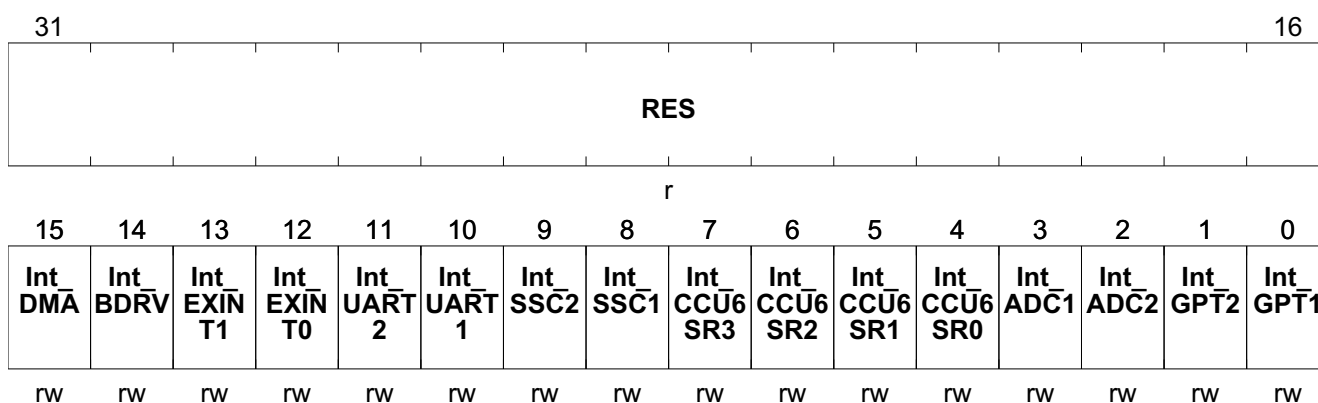

Field	Bits	Type	Description
<b>RES</b>	31:16	r	<b>Reserved</b>
<b>Int_DMA</b>	15	rw	<b>Interrupt Clear for DMA</b> 0 <sub>B</sub> <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write 1 <sub>B</sub> <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled
<b>Int_BDRV</b>	14	rw	<b>Interrupt Clear for Bridge Driver</b> 0 <sub>B</sub> <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write 1 <sub>B</sub> <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled
<b>Int_EXINT1</b>	13	rw	<b>Interrupt Clear for External Int 1</b> 0 <sub>B</sub> <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write 1 <sub>B</sub> <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled
<b>Int_EXINT0</b>	12	rw	<b>Interrupt Clear for External Int 0</b> 0 <sub>B</sub> <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write 1 <sub>B</sub> <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled
<b>Int_UART2</b>	11	rw	<b>Interrupt Clear for UART2</b> 0 <sub>B</sub> <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write 1 <sub>B</sub> <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled

## ARM Cortex-M3 Core

Field	Bits	Type	Description
<b>Int_UART1</b>	10	rw	<b>Interrupt Clear for UART1</b> $0_B$ <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write $1_B$ <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled
<b>Int_SSC2</b>	9	rw	<b>Interrupt Clear for SSC2</b> $0_B$ <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write $1_B$ <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled
<b>Int_SSC1</b>	8	rw	<b>Interrupt Clear for SSC1</b> $0_B$ <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write $1_B$ <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled
<b>Int_CCU6SR3</b>	7	rw	<b>Interrupt Clear for CCU6 SR3</b> $0_B$ <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write $1_B$ <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled
<b>Int_CCU6SR2</b>	6	rw	<b>Interrupt Clear for CCU6 SR2</b> $0_B$ <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write $1_B$ <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled
<b>Int_CCU6SR1</b>	5	rw	<b>Interrupt Clear for CCU6 SR1</b> $0_B$ <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write $1_B$ <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled
<b>Int_CCU6SR0</b>	4	rw	<b>Interrupt Clear for CCU6 SR0</b> $0_B$ <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write $1_B$ <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled
<b>Int_ADC1</b>	3	rw	<b>Interrupt Clear for ADC1</b> $0_B$ <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write $1_B$ <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled
<b>Int_ADC2</b>	2	rw	<b>Interrupt Clear for MU, ADC2</b> $0_B$ <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write $1_B$ <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled

---


**ARM Cortex-M3 Core**

Field	Bits	Type	Description
<b>Int_GPT2</b>	1	rw	<b>Interrupt Clear for GPT2</b> 0 <sub>B</sub> <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write 1 <sub>B</sub> <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled
<b>Int_GPT1</b>	0	rw	<b>Interrupt Clear for GPT1</b> 0 <sub>B</sub> <b>DISABLE</b> , on reads the associated interrupt is disabled, no effect on write 1 <sub>B</sub> <b>ENABLE</b> , on reads the associated interrupt is enabled, on writes the associated interrupt is disabled

## ARM Cortex-M3 Core

## Interrupt Set-Pending Registers

NVIC_ISPR0	Offset	Reset Value
Interrupt Set-Pending	200 <sub>H</sub>	0000 0000 <sub>H</sub>

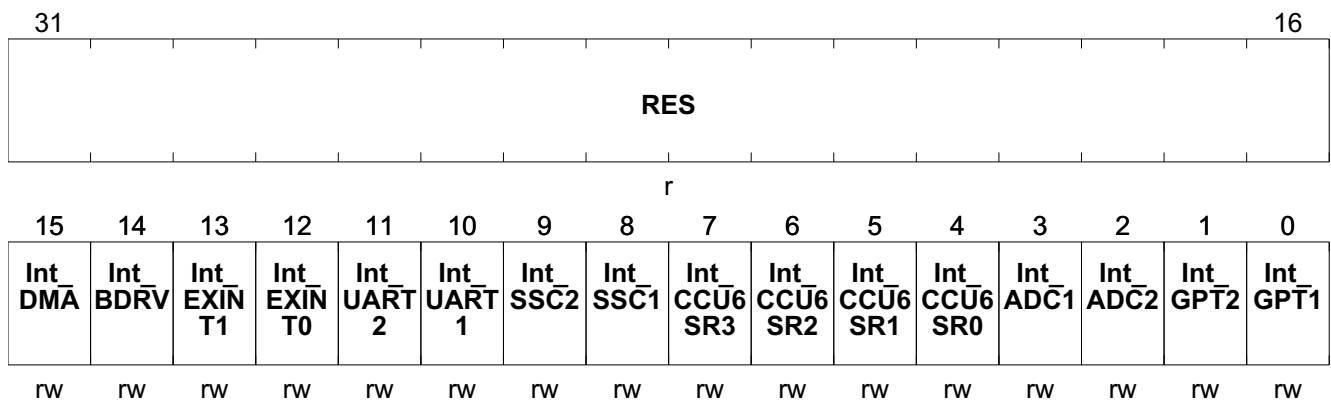

Field	Bits	Type	Description
RES	31:16	r	Reserved
Int_DMA	15	rw	<b>Interrupt Set Pending for DMA</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_BDRV	14	rw	<b>Interrupt Set Pending for Bridge Driver</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_EXINT1	13	rw	<b>Interrupt Set Pending for External Int 1</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_EXINT0	12	rw	<b>Interrupt Set Pending for External Int 0</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_UART2	11	rw	<b>Interrupt Set Pending for UART2</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_UART1	10	rw	<b>Interrupt Set Pending for UART1</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending


## ARM Cortex-M3 Core

Field	Bits	Type	Description
Int_SSC2	9	rw	<b>Interrupt Set Pending for SSC2</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_SSC1	8	rw	<b>Interrupt Set Pending for SSC1</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_CCU6SR3	7	rw	<b>Interrupt Set Pending for CCU6 SR3</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_CCU6SR2	6	rw	<b>Interrupt Set Pending for CCU6 SR2</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_CCU6SR1	5	rw	<b>Interrupt Set Pending for CCU6 SR1</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_CCU6SR0	4	rw	<b>Interrupt Set Pending for CCU6 SR0</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_ADC1	3	rw	<b>Interrupt Set Pending for ADC1</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_ADC2	2	rw	<b>Interrupt Set Pending for MU, ADC2</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_GPT2	1	rw	<b>Interrupt Set Pending for GPT2</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending
Int_GPT1	0	rw	<b>Interrupt Set Pending for GPT1</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , the associated interrupt is pending

## ARM Cortex-M3 Core

## Interrupt Clear-Pending Registers

NVIC_ICPR0	Offset	Reset Value
Interrupt Clear-Pending	280 <sub>H</sub>	0000 0000 <sub>H</sub>

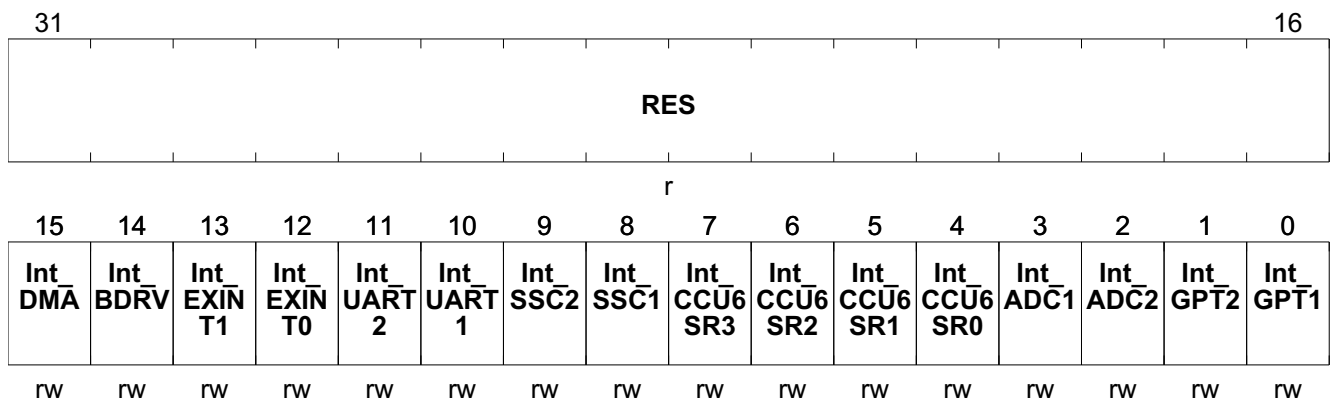

Field	Bits	Type	Description
RES	31:16	r	Reserved
Int_DMA	15	rw	<b>Interrupt Clear Pending for DMA</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending
Int_BDRV	14	rw	<b>Interrupt Clear Pending for Bridge Driver</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending
Int_EXINT1	13	rw	<b>Interrupt Clear Pending for External Int 1</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending
Int_EXINT0	12	rw	<b>Interrupt Clear Pending for External Int 0</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending
Int_UART2	11	rw	<b>Interrupt Clear Pending for UART2</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending

## ARM Cortex-M3 Core

Field	Bits	Type	Description
<b>Int_UART1</b>	10	rw	<p><b>Interrupt Clear Pending for UART1</b></p> <p>0<sub>B</sub> <b>Not Pending</b>, on reads the associated interrupt is not pending, no effect on writes</p> <p>1<sub>B</sub> <b>Pending</b>, on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending</p>
<b>Int_SSC2</b>	9	rw	<p><b>Interrupt Clear Pending for SSC2</b></p> <p>0<sub>B</sub> <b>Not Pending</b>, on reads the associated interrupt is not pending, no effect on writes</p> <p>1<sub>B</sub> <b>Pending</b>, on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending</p>
<b>Int_SSC1</b>	8	rw	<p><b>Interrupt Clear Pending for SSC1</b></p> <p>0<sub>B</sub> <b>Not Pending</b>, on reads the associated interrupt is not pending, no effect on writes</p> <p>1<sub>B</sub> <b>Pending</b>, on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending</p>
<b>Int_CCU6SR3</b>	7	rw	<p><b>Interrupt Clear Pending for CCU6 SR3</b></p> <p>0<sub>B</sub> <b>Not Pending</b>, on reads the associated interrupt is not pending, no effect on writes</p> <p>1<sub>B</sub> <b>Pending</b>, on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending</p>
<b>Int_CCU6SR2</b>	6	rw	<p><b>Interrupt Clear Pending for CCU6 SR2</b></p> <p>0<sub>B</sub> <b>Not Pending</b>, on reads the associated interrupt is not pending, no effect on writes</p> <p>1<sub>B</sub> <b>Pending</b>, on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending</p>
<b>Int_CCU6SR1</b>	5	rw	<p><b>Interrupt Clear Pending for CCU6 SR1</b></p> <p>0<sub>B</sub> <b>Not Pending</b>, on reads the associated interrupt is not pending, no effect on writes</p> <p>1<sub>B</sub> <b>Pending</b>, on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending</p>
<b>Int_CCU6SR0</b>	4	rw	<p><b>Interrupt Clear Pending for CCU6 SR0</b></p> <p>0<sub>B</sub> <b>Not Pending</b>, on reads the associated interrupt is not pending, no effect on writes</p> <p>1<sub>B</sub> <b>Pending</b>, on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending</p>
<b>Int_ADC1</b>	3	rw	<p><b>Interrupt Clear Pending for ADC1</b></p> <p>0<sub>B</sub> <b>Not Pending</b>, on reads the associated interrupt is not pending, no effect on writes</p> <p>1<sub>B</sub> <b>Pending</b>, on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending</p>
<b>Int_ADC2</b>	2	rw	<p><b>Interrupt Clear Pending for MU, ADC2</b></p> <p>0<sub>B</sub> <b>Not Pending</b>, on reads the associated interrupt is not pending, no effect on writes</p> <p>1<sub>B</sub> <b>Pending</b>, on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending</p>

---

**ARM Cortex-M3 Core**


Field	Bits	Type	Description
<b>Int_GPT2</b>	1	rw	<b>Interrupt Clear Pending for GPT2</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending
<b>Int_GPT1</b>	0	rw	<b>Interrupt Clear Pending for GPT1</b> 0 <sub>B</sub> <b>Not Pending</b> , on reads the associated interrupt is not pending, no effect on writes 1 <sub>B</sub> <b>Pending</b> , on reads the associated interrupt is pending, on writes the status of the associated interrupt is changed to not pending



## ARM Cortex-M3 Core

## Active Bit Register

<b>NVIC_IABR0</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Active Bit Register Interrupt Active Flags</b>	<b>300<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

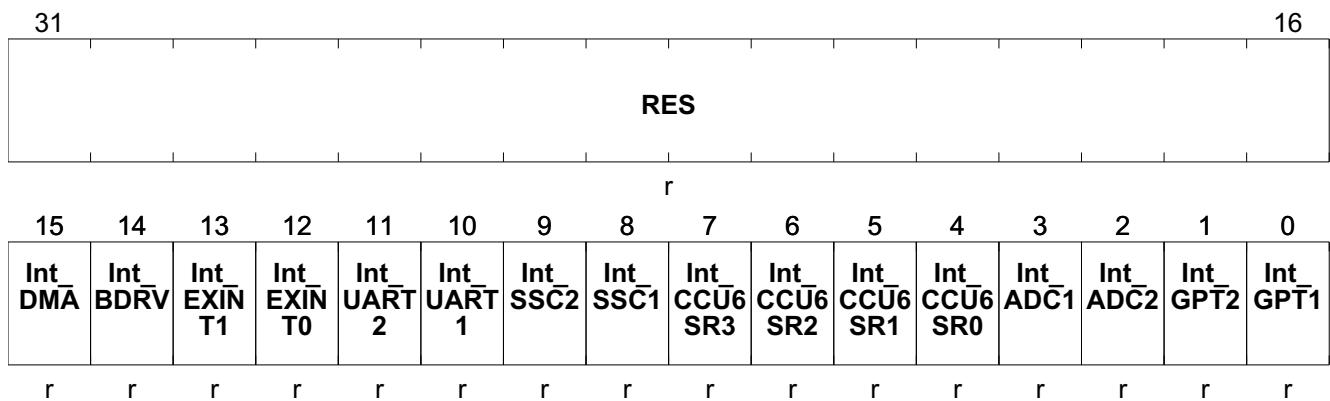

Field	Bits	Type	Description
<b>RES</b>	31:16	r	<b>Reserved</b>
<b>Int_DMA</b>	15	r	<b>Interrupt Active for DMA</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
<b>Int_BDRV</b>	14	r	<b>Interrupt Active for Bridge Driver</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
<b>Int_EXINT1</b>	13	r	<b>Interrupt Active for External Int 1</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
<b>Int_EXINT0</b>	12	r	<b>Interrupt Active for External Int 0</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
<b>Int_UART2</b>	11	r	<b>Interrupt Active for UART2</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
<b>Int_UART1</b>	10	r	<b>Interrupt Active for UART1</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation

## ARM Cortex-M3 Core


Field	Bits	Type	Description
Int_SSC2	9	r	<b>Interrupt Active for SSC2</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
Int_SSC1	8	r	<b>Interrupt Active for SSC1</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
Int_CCU6SR3	7	r	<b>Interrupt Active for CCU6 SR3</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
Int_CCU6SR2	6	r	<b>Interrupt Active for CCU6 SR2</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
Int_CCU6SR1	5	r	<b>Interrupt Active for CCU6 SR1</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
Int_CCU6SR0	4	r	<b>Interrupt Active for CCU6 SR0</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
Int_ADC1	3	r	<b>Interrupt Active for ADC1</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
Int_ADC2	2	r	<b>Interrupt Active for MU, ADC2</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
Int_GPT2	1	r	<b>Interrupt Active for GPT2</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation
Int_GPT1	0	r	<b>Interrupt Active for GPT1</b> 0 <sub>B</sub> <b>DISABLE</b> , disables interrupt for read operation, no effect for write operation 1 <sub>B</sub> <b>ENABLE</b> , enables interrupt for read and write operation

---

**ARM Cortex-M3 Core**
**Interrupt Priority Registers**

For the Interrupt Priority Registers, only the upper nibble of each priority bytes is significant.

**NVIC\_IPRO** **Offset**  
**Interrupt Priority** **400<sub>H</sub>** **Reset Value**  
**0000 0000<sub>H</sub>**

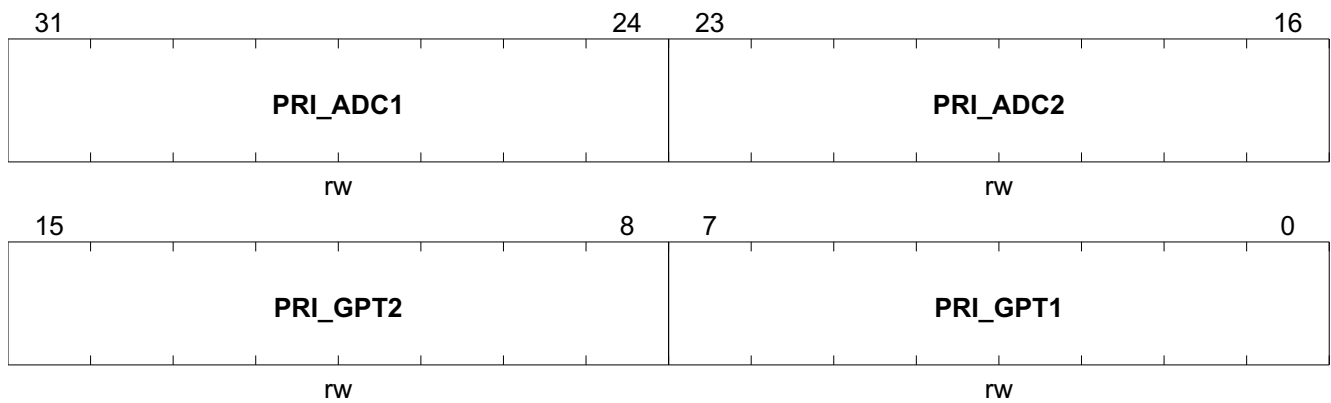


Field	Bits	Type	Description
PRI_ADC1	31:24	rw	Priority for ADC1
PRI_ADC2	23:16	rw	Priority for MU, ADC2
PRI_GPT2	15:8	rw	Priority for GPT2
PRI_GPT1	7:0	rw	Priority for GPT1

ARM Cortex-M3 Core

Interrupt Priority Registers

For the Interrupt Priority Registers, only the upper nibble of each priority bytes is significant.

**NVIC\_IPR1** **Offset** **Reset Value**  
**Interrupt Priority** **404<sub>H</sub>** **0000 0000<sub>H</sub>**

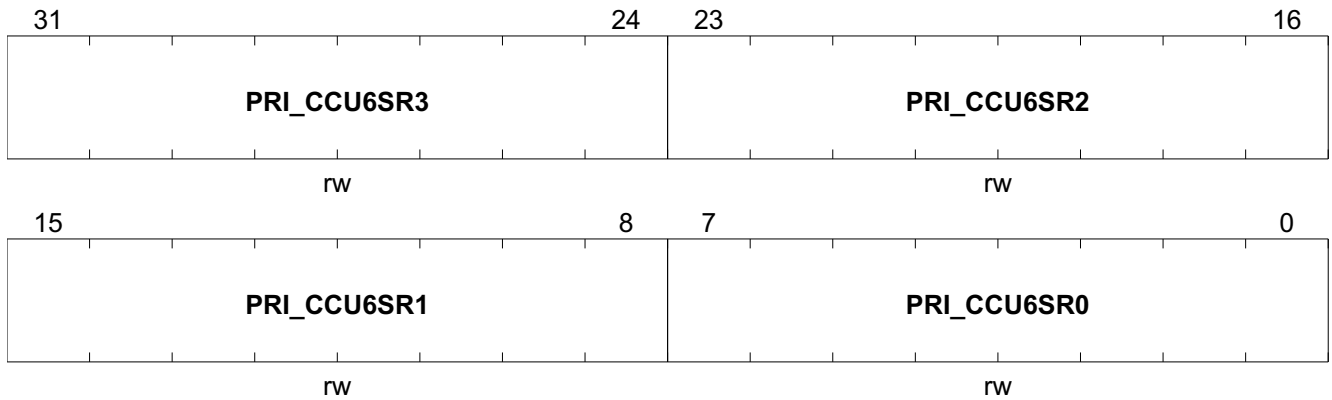


Field	Bits	Type	Description
<b>PRI_CCU6SR3</b>	31:24	rw	<b>Priority for CCU6 SR3</b>
<b>PRI_CCU6SR2</b>	23:16	rw	<b>Priority for CCU6 SR2</b>
<b>PRI_CCU6SR1</b>	15:8	rw	<b>Priority for CCU6 SR1</b>
<b>PRI_CCU6SR0</b>	7:0	rw	<b>Priority for CCU6 SR0</b>

---

**ARM Cortex-M3 Core**
**Interrupt Priority Registers**

For the Interrupt Priority Registers, only the upper nibble of each priority bytes is significant.

**NVIC\_IPR2** **Offset**  
**Interrupt Priority** **408<sub>H</sub>** **Reset Value**  
**0000 0000<sub>H</sub>**

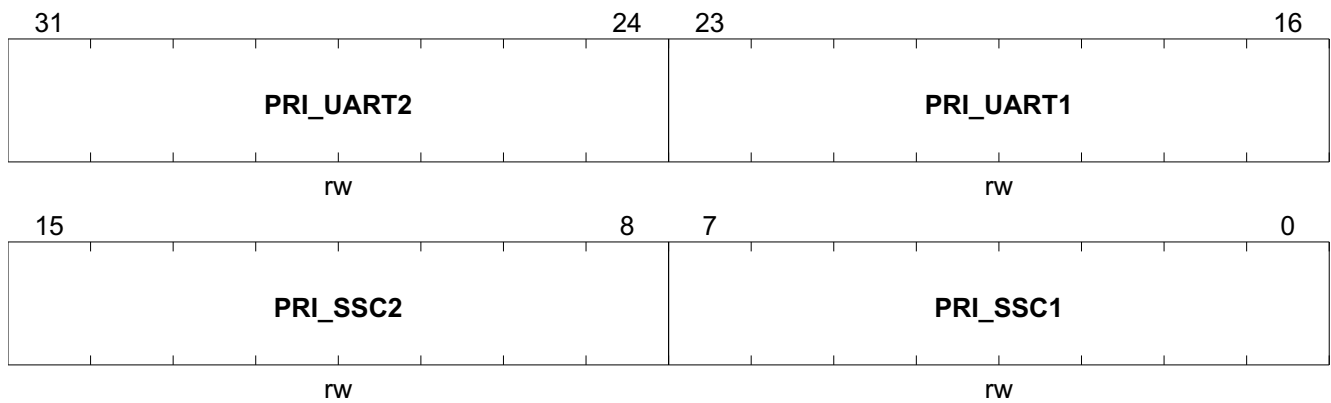


Field	Bits	Type	Description
PRI_UART2	31:24	rw	Priority for UART2
PRI_UART1	23:16	rw	Priority for UART1
PRI_SSC2	15:8	rw	Priority for SSC2
PRI_SSC1	7:0	rw	Priority for SSC1

---

**ARM Cortex-M3 Core**
**Interrupt Priority Registers**

For the Interrupt Priority Registers, only the upper nibble of each priority bytes is significant.

<b>NVIC_IPR3</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Interrupt Priority</b>	<b>40C<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

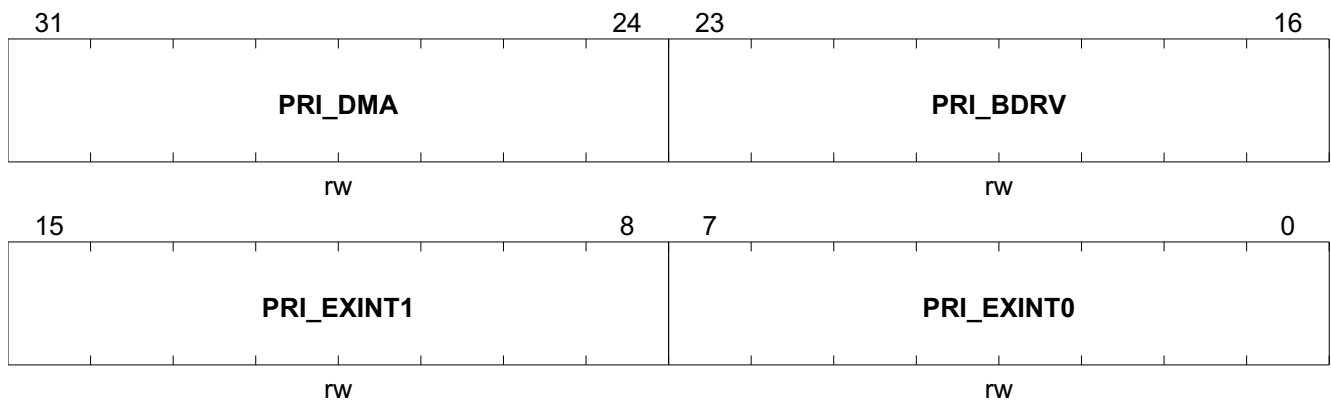


Field	Bits	Type	Description
<b>PRI_DMA</b>	31:24	rw	<b>Priority for DMA</b>
<b>PRI_BDRV</b>	23:16	rw	<b>Priority for Bridge Driver</b>
<b>PRI_EXINT1</b>	15:8	rw	<b>Priority for Ext. Int 1</b>
<b>PRI_EXINT0</b>	7:0	rw	<b>Priority for Ext. Int 0</b>

## ARM Cortex-M3 Core

## CPU ID Base Register

**CPUID** **Offset**  
**CPU ID Base Register** **D00<sub>H</sub>** **Reset Value**  
**412F C231<sub>H</sub>**

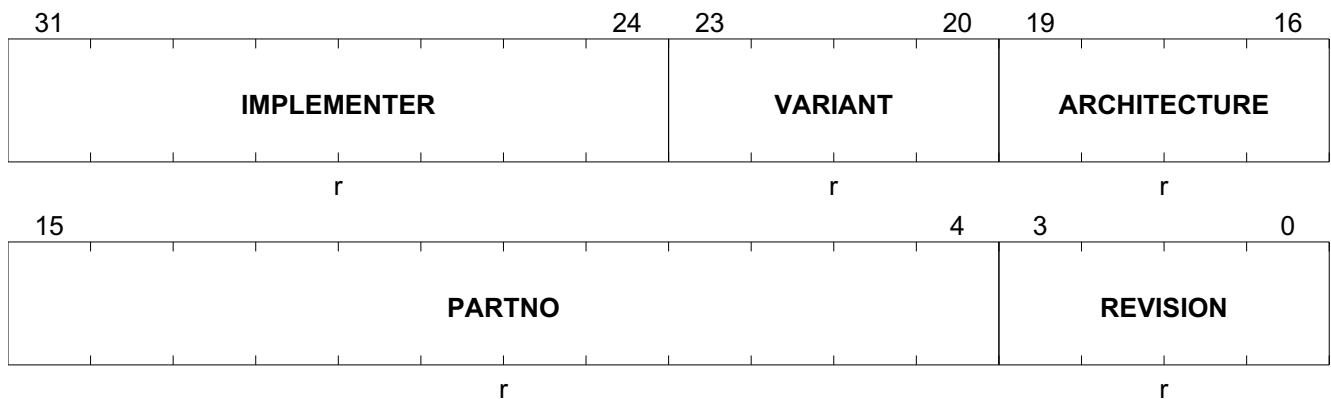

Field	Bits	Type	Description
<b>IMPLEMENTER</b>	31:24	r	<b>Implementer Code</b> Assigned by ARM. Read as 41 <sub>H</sub> for a processor implemented by ARM.
<b>VARIANT</b>	23:20	r	<b>Variant Number</b> Implementation defined.
<b>ARCHITECTURE</b>	19:16	r	<b>Architecture</b> Read as F <sub>H</sub> .
<b>PARTNO</b>	15:4	r	<b>Part Number</b> Implementation defined.
<b>REVISION</b>	3:0	r	<b>Revision Number</b> Implementation defined.

## ARM Cortex-M3 Core

## Interrupt Control State Register

**ICSR** **Offset**  
**Interrupt Control State Register** **D04<sub>H</sub>** **Reset Value**  
**0000 0000<sub>H</sub>**

31	30	29	28	27	26	25	24	23	22	21	20					16
<b>NMIP ENDS ET</b>	<b>RES</b>		<b>PEND SVSE T</b>	<b>PEND SVCL R</b>	<b>PEND STSE T</b>	<b>PEND STCL R</b>	<b>RES</b>	<b>ISR REEM PT</b>	<b>ISR ENDI NG</b>	<b>RES</b>	<b>VECTPENDING</b>					
rw	r		rw	w	rw	w	r	r	r	r	r					
15			12	11	10	9	8									0
<b>VECTPENDING</b>			<b>RETT OBAS E</b>	<b>RES</b>		<b>VECTACTIVE</b>										
r			r	r		r										

Field	Bits	Type	Description
<b>NMIPENDSET</b>	31	rw	<p><b>NMI PendSet</b></p> <p>On writes, makes the NMI exception active. On reads, indicates the state of the exception.</p> <p><i>Note:</i> Because NMI is higher priority than other exceptions, if the processor is not already executing the NMI handler, it enters the NMI exception handler as soon as it recognizes the write to this bit.</p> <p>0<sub>B</sub> , on writes, has no effect. On reads, NMI is active.            1<sub>B</sub> , on writes, make the NMI exception active. On reads, NMI is active.</p>
<b>RES</b>	30:29	r	<b>Reserved</b>
<b>PENDSVSET</b>	28	rw	<p><b>PENDSVSET</b></p> <p>On writes, sets the PendSV exception as pending. On reads, indicates the current state of the exception.</p> <p><i>Note:</i> Normally, software writes 1 to this bit to request a context switch.</p> <p>0<sub>B</sub> , on writes, has no effect. On reads, PendSV is not pending.            1<sub>B</sub> , on writes, make PendSV exception pending. On reads, PendSV is pending.</p>
<b>PENDSVCLR</b>	27	w	<p><b>PENDSVCLR</b></p> <p>Removes the pending status of the PendSV exception</p> <p>0<sub>B</sub> , no effect            1<sub>B</sub> , remove pending status</p>




## ARM Cortex-M3 Core

Field	Bits	Type	Description
<b>PENDSTSET</b>	26	rw	<p><b>PENDSTSET</b> On writes, sets the SysTick exception as pending. On reads, indicates the current state of the exception. 0<sub>B</sub> , on writes, has no effect. On reads, SysTick is not pending. 1<sub>B</sub> , on writes, make SysTick exception pending. On reads, SysTick is pending.</p>
<b>PENDSTCLR</b>	25	w	<p><b>PENDSTCLR</b> Removes the pending status of the SysTick exception. 0<sub>B</sub> , no effect 1<sub>B</sub> , remove pending status</p>
<b>RES</b>	24	r	<b>Reserved</b>
<b>ISRPREEMPT</b>	23	r	<p><b>ISRPREEMPT</b> Indicates whether a pending exception will be serviced on exit from debug halt state. 0<sub>B</sub> , will not service 1<sub>B</sub> , will service a pending exception</p>
<b>ISR_PENDING</b>	22	r	<p><b>ISR_PENDING</b> Indicates whether an external interrupt, generated by the NVIC, is pending. 0<sub>B</sub> , no external interrupt is pending 1<sub>B</sub> , external interrupt is pending</p>
<b>RES</b>	21	r	<b>Reserved</b>
<b>VECTPENDING</b>	20:12	r	<p><b>VECTPENDING</b> The exception number for the highest priority pending exception. A value of 0 indicates that there is no pending exception. 0<sub>B</sub> , no pending exceptions</p>
<b>RETTOBASE</b>	11	r	<p><b>RETTOBASE</b> In Handler Mode, indicates whether there is an active exception other than the exception indicated by the current value of the IPSR.  <i>Note: In Thread Mode the value of this bit is unknown.</i>  0<sub>B</sub> , There is an active exception other than the exception shown by IPSR. 1<sub>B</sub> , There is no active exception other than any exception shown by IPSR.</p>
<b>RES</b>	10:9	r	<b>Reserved</b>
<b>VECTACTIVE</b>	8:0	r	<p><b>VECTACTIVE</b> The exception number of the current executing exception. A value of 0 indicates that the processor is in Thread Mode. 0<sub>B</sub> , Thread Mode</p>

## ARM Cortex-M3 Core

## Vector Table Offset Register

<b>VTOR</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Vector Table Offset Register</b>	<b>D08<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

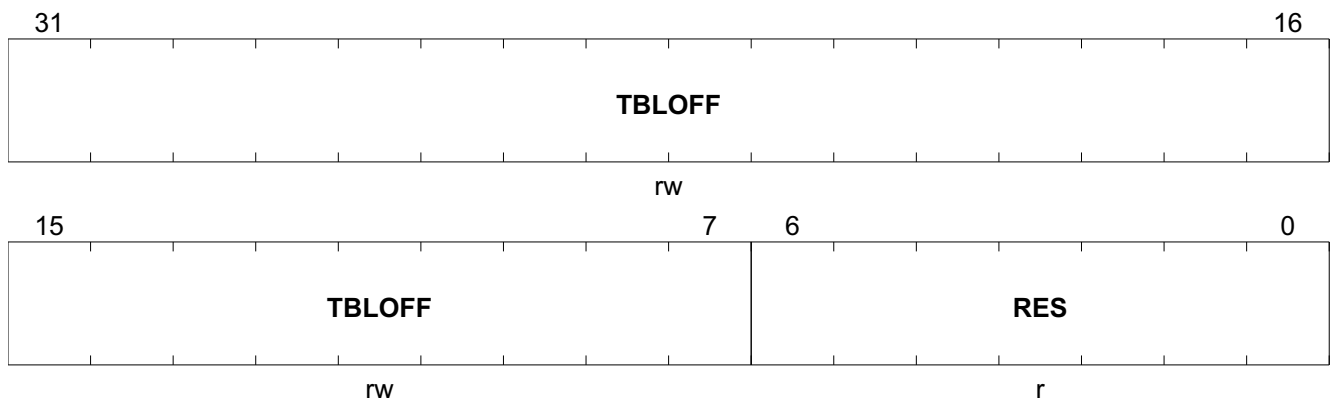


Field	Bits	Type	Description
<b>TBLOFF</b>	31:7	rw	<b>Vector Table Offset</b> Bits[31:7] of the vector table address.
<b>RES</b>	6:0	r	<b>Reserved</b>

## ARM Cortex-M3 Core

## Application Interrupt/Reset Control Register

<b>AIRCR</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Application Interrupt/Reset Control Register</b>	<b>DOC<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

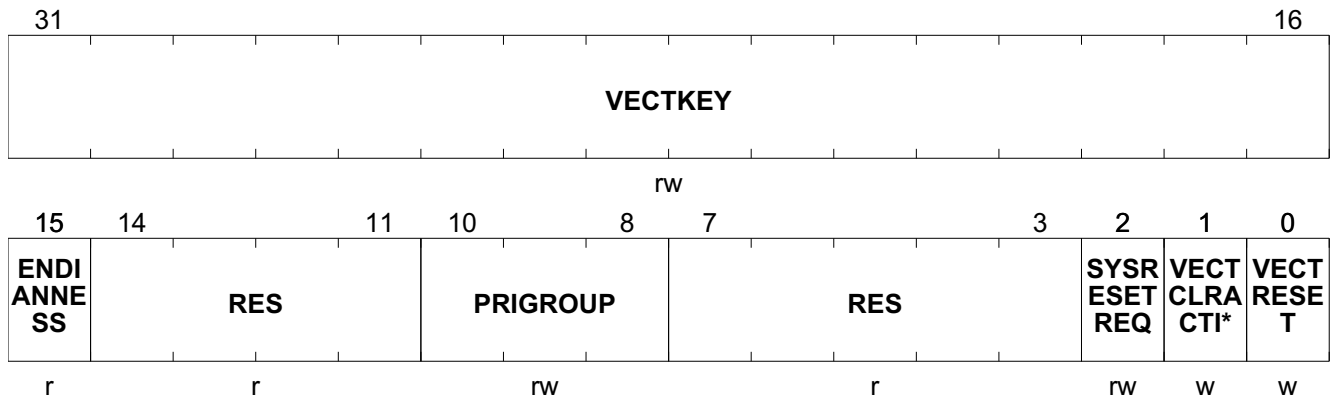

Field	Bits	Type	Description
<b>VECTKEY</b>	31:16	rw	<b>Vector Key</b> Register writes must write 05FA <sub>H</sub> to this field, otherwise the write is ignored. On reads, returns FA05 <sub>H</sub> .
<b>ENDIANNESS</b>	15	r	<b>Memory System Endianness</b> This bit is static or configured by hardware input on reset. 0 <sub>B</sub> , little endian 1 <sub>B</sub> , big endian
<b>RES</b>	14:11	r	<b>Reserved</b>
<b>PRIGROUP</b>	10:8	rw	<b>Priority Grouping</b> Indicates the binary point position. This bit resets to 000 <sub>B</sub>
<b>RES</b>	7:3	r	<b>Reserved</b>
<b>SYSRESETREQ</b>	2	rw	<b>System Reset Request</b> Writing 1 to this bit asserts a signal to the external system to request a Local reset. A Local or Power-on reset clears this bit to 0. 0 <sub>B</sub> , do not request a reset 1 <sub>B</sub> , request a reset
<b>VECTCLRACTIVE</b>	1	w	<b>VECTCLRACTIVE</b> Writing 1 to this bit clears all active state information for fixed and configurable exceptions. This includes clearing the IPSR to zero.  <i>Note: The effect of writing a 1 to this bit, if the processor is not halted in Debug state, is <b>unpredictable</b>.</i>


## ARM Cortex-M3 Core

Field	Bits	Type	Description
VECTRESET	0	w	<b>VECTRESET</b> Writing 1 to this bit causes a local system reset. This bit self-clears.  <i>Note:</i> <i>The effect of writing a 1 to this bit, if the processor is not halted in Debug state, is <b>unpredictable</b>.</i> <i>When the processor is halted in Debug state, if a write to the register writes a 1 to both VECTRESET and SYSRESETREQ, the behavior is <b>unpredictable</b>.</i>

## ARM Cortex-M3 Core

## System Control Register

SCR	Offset	Reset Value
System Control Register	D10 <sub>H</sub>	0000 0000 <sub>H</sub>

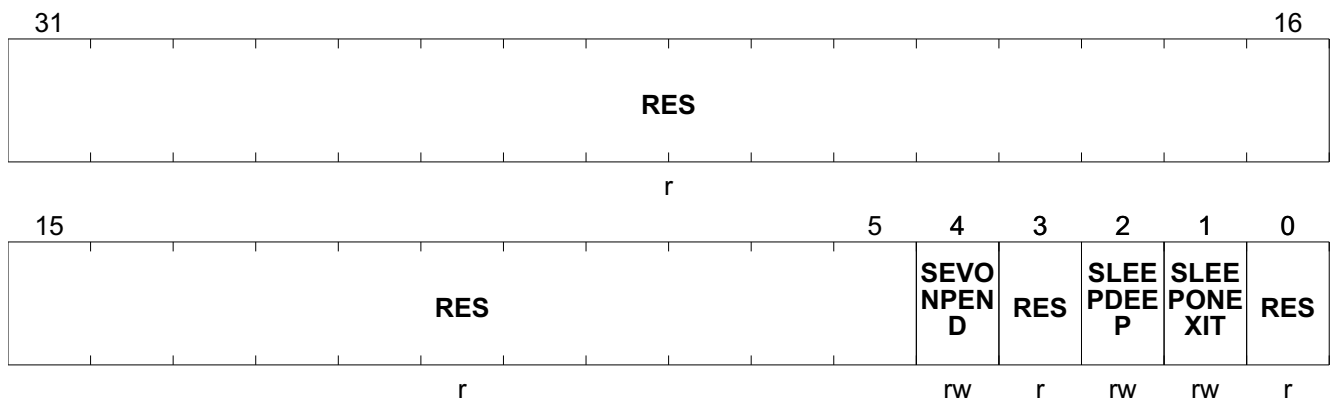


Field	Bits	Type	Description
<b>RES</b>	31:5	r	<b>Reserved</b>
<b>SEVONPEND</b>	4	rw	<b>SEVONPEND</b> Determines whether an interrupt transition from inactive state to pending state is a wake-up event. $0_B$ , transitions from inactive to pending are not wake-up events $1_B$ , transitions from inactive to pending are wake-up events
<b>RES</b>	3	r	<b>Reserved</b>
<b>SLEEPDEEP</b>	2	rw	<b>Sleep Deep</b> Provides a qualifying hint that waking from sleep might take longer. An implementation can use this bit to select between two alternative sleep states.  <i>Note: Details of the implemented sleep states, if any, and details of the use of this bit, are implementation defined.</i> <i>If the processor does not implement a deep sleep state then this bit can be RAZ/WI.</i>  $0_B$ , selected sleep state is not deep sleep $1_B$ , selected sleep state is deep sleep
<b>SLEEPONEXIT</b>	1	rw	<b>Sleep on Exit</b> Determines whether, on an exit from an ISR that returns to the base level of execution priority, the processor enters a sleep state. $0_B$ , do not enter sleep state $1_B$ , enter sleep state
<b>RES</b>	0	r	<b>Reserved</b>

## ARM Cortex-M3 Core

## Configuration Control Register

CCR **Offset** **Reset Value**  
 Configuration Control Register **D14<sub>H</sub>** **0000 0200<sub>H</sub>**

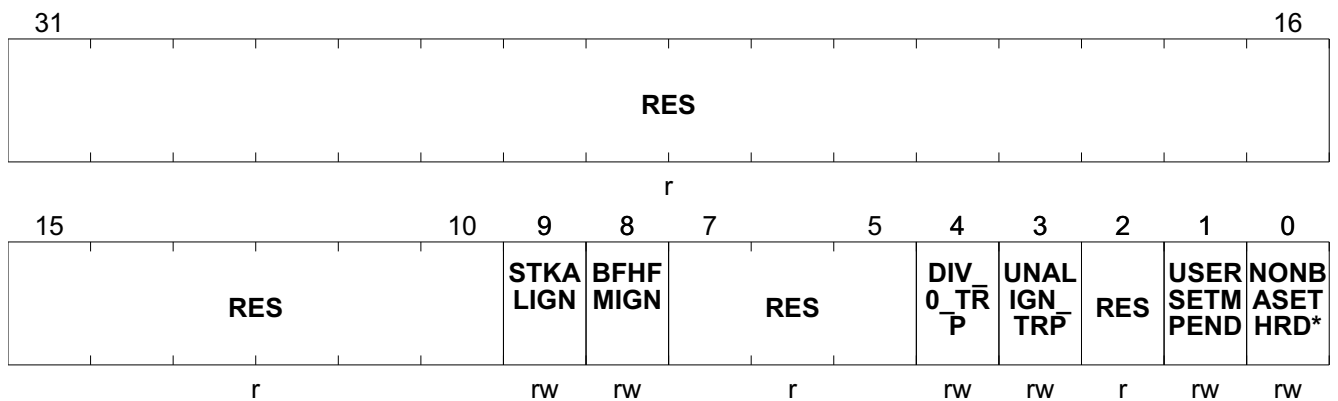

Field	Bits	Type	Description
<b>RES</b>	31:10	r	<b>Reserved</b>
<b>STKALIGN</b>	9	rw	<b>STKALIGN</b> Determines whether the exception entry sequence guarantees 8-byte stack frame alignment, adjusting the SP if necessary before saving state $0_B$ , guaranteed SP alignment is 4-byte, no SP adjustment is performed. $1_B$ , 8-byte alignment guaranteed, SP adjusted if necessary.
<b>BFHFMIGN</b>	8	rw	<b>BFHFMIGN</b> Determines the effect of precise data access faults on handlers running at priority -1 or priority -2. $0_B$ , precise data access fault causes a lockup $1_B$ , handler ignores the fault
<b>RES</b>	7:5	r	<b>Reserved</b>
<b>DIV_0_TRP</b>	4	rw	<b>DIV_0_TRP</b> Controls the trap on divide by 0. $0_B$ , trapping disabled $1_B$ , trapping enabled
<b>UNALIGN_TRP</b>	3	rw	<b>UNALIGN_TRP</b> Controls the trapping of unaligned word or halfword accesses.  <i>Note: Unaligned load-store multiples and word or halfword exclusive accesses always fault.</i>  $0_B$ , trapping disabled $1_B$ , trapping enabled
<b>RES</b>	2	r	<b>Reserved</b>

---

**ARM Cortex-M3 Core**

Field	Bits	Type	Description
<b>USERSETMPE ND</b>	1	rw	<b>USERSETMPEND</b> Controls whether unprivileged software can access the STIR. 0 <sub>B</sub> , unprivileged software cannot access the STIR. 1 <sub>B</sub> , unprivileged software can access the STIR.
<b>NONBASETH RDENA</b>	0	rw	<b>NONBASETHRDENA</b> Controls whether the processor can enter Thread Mode at an execution priority level other than base level. 0 <sub>B</sub> , any attempt to enter Thread Mode at an execution priority level of other than base level faults. 1 <sub>B</sub> , the processor can enter Thread Mode at any execution priority level because of a controlled return value.






ARM Cortex-M3 Core

System Handler Priority Register 2

**SHPR2** **Offset** **Reset Value**  
**System Handler Priority Register 2** **21C<sub>H</sub>** **0000 0000<sub>H</sub>**

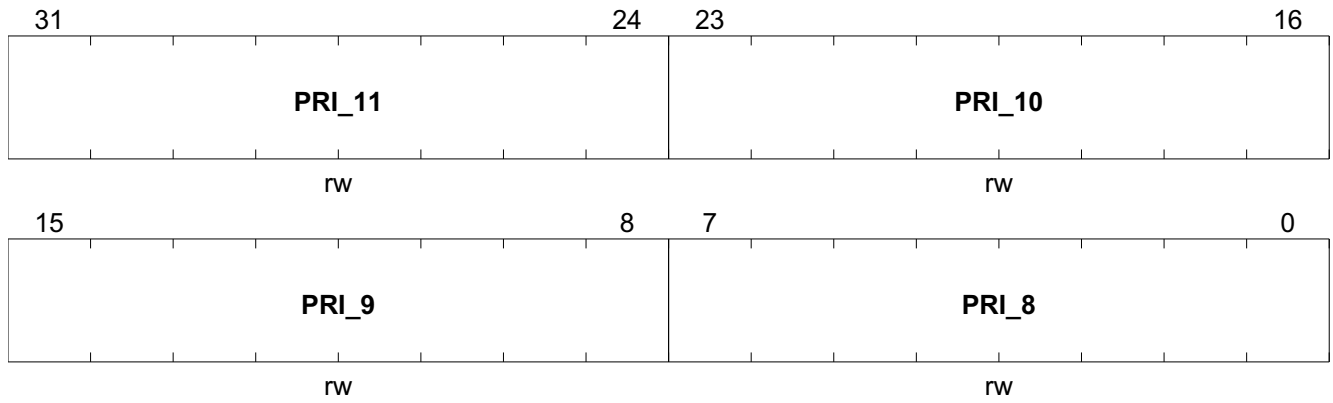


Field	Bits	Type	Description
PRI_11	31:24	rw	Priority of System Handler 11, SVCAll
PRI_10	23:16	rw	Reserved for Priority of System Handler 10
PRI_9	15:8	rw	Reserved for Priority of System Handler 9
PRI_8	7:0	rw	Reserved for Priority of System Handler 8

ARM Cortex-M3 Core

System Handler Priority Register 3

**SHPR3** **Offset** **Reset Value**  
**System Handler Priority Register 3** **D20<sub>H</sub>** **0000 0000<sub>H</sub>**

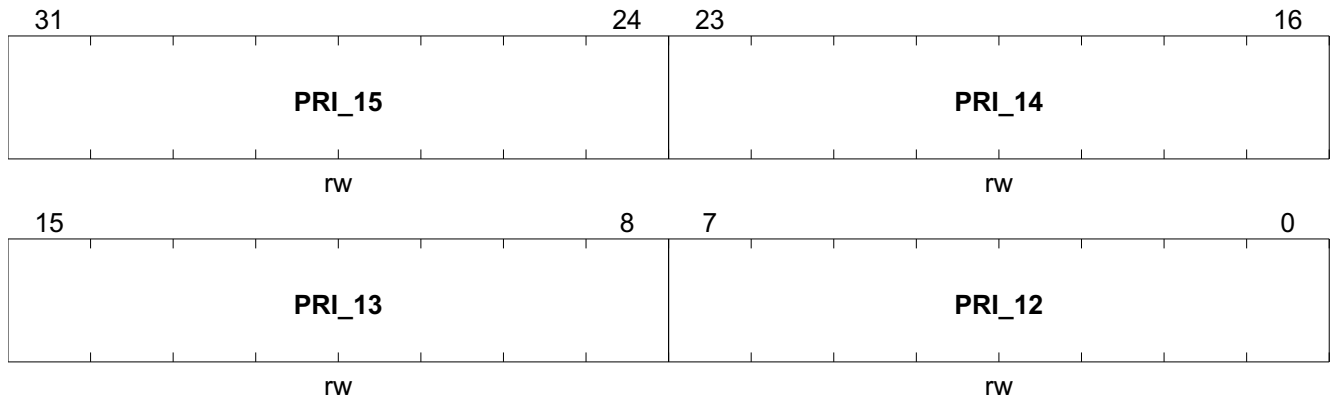

Field	Bits	Type	Description
<b>PRI_15</b>	31:24	rw	<b>Priority of System Handler 15, SysTick</b>
<b>PRI_14</b>	23:16	rw	<b>Priority of System Handler 14, PendSV</b>
<b>PRI_13</b>	15:8	rw	<b>Reserved for Priority of System Handler 13</b>
<b>PRI_12</b>	7:0	rw	<b>Priority of System Handler 12, DebugMonitor</b>

## ARM Cortex-M3 Core

## System Handler Control and State Register

**SHCSR** **Offset**  
**System Handler Control and State Register** **D24<sub>H</sub>** **Reset Value**  
**0000 0000<sub>H</sub>**

31											19	18	17	16
RES											USGF AULT ENA	BUSF AULT ENA	MEMF AULT ENA	
r											rw	rw	rw	
15	14	13	12	11	10	9	8	7	6	4	3	2	1	0
SVCA LLPE NDED	BUSF AULT PEN*	MEMF AULT PEN*	USGF AULT PEN*	SYST ICKA CT	PEND SVAC T	RES	MONI TORA CT	SVCA LLAC T	RES	RES	USGF AULT ACT	RES	BUSF AULT ACT	MEMF AULT ACT
rw	rw	rw	rw	rw	rw	r	rw	rw	r	r	rw	r	rw	rw

Field	Bits	Type	Description
<b>RES</b>	31:19	r	<b>Reserved</b>
<b>USGFAULTENA</b>	18	rw	<b>USGFAULTENA</b> 0 <sub>B</sub> , Disable UsageFault 1 <sub>B</sub> , Enable UsageFault
<b>BUSFAULTENA</b>	17	rw	<b>BUSFAULTENA</b> 0 <sub>B</sub> , Disable BusFault 1 <sub>B</sub> , Enable BusFault
<b>MEMFAULTENA</b>	16	rw	<b>MEMFAULTENA</b> 0 <sub>B</sub> , Disable MemManage fault 1 <sub>B</sub> , Enable MemManage fault
<b>SVCALLPENDED</b>	15	rw	<b>SVCALLPENDE<sup>1)</sup></b> 0 <sub>B</sub> , SVCALL is not pending 1 <sub>B</sub> , SVCALL is pending
<b>BUSFAULTPENDEDED</b>	14	rw	<b>BUSFAULTPENDE<sup>1)</sup></b> 0 <sub>B</sub> , BusFault is not pending 1 <sub>B</sub> , BusFault is pending
<b>MEMFAULTPENDEDED</b>	13	rw	<b>MEMFAULTPENDE<sup>1)</sup></b> 0 <sub>B</sub> , MemManage is not pending 1 <sub>B</sub> , MemManage is pending
<b>USGFAULTPENDEDED</b>	12	rw	<b>USGFAULTPENDE<sup>1)</sup></b> 0 <sub>B</sub> , UsageFault is not pending 1 <sub>B</sub> , UsageFault is pending
<b>SYSTICKACT</b>	11	rw	<b>SYSTICKACT<sup>2)</sup></b> 0 <sub>B</sub> , SysTick is not active 1 <sub>B</sub> , SysTick is active

## ARM Cortex-M3 Core

Field	Bits	Type	Description
<b>PENDSVACT</b>	10	rw	<b>PENDSVACT<sup>2)</sup></b> 0 <sub>B</sub> , PendSV is not active 1 <sub>B</sub> , PendSV is active
<b>RES</b>	9	r	<b>Reserved</b>
<b>MONITORACT</b>	8	rw	<b>MONITORACT<sup>2)</sup></b> 0 <sub>B</sub> , Monitor is not active 1 <sub>B</sub> , Monitor is active
<b>SVCALLACT</b>	7	rw	<b>SVCALLACT<sup>2)</sup></b> 0 <sub>B</sub> , SVCALL is not active 1 <sub>B</sub> , SVCALL is active
<b>RES</b>	6:4	r	<b>Reserved</b>
<b>USGFAULTACT</b>	3	rw	<b>USGFAULTACT<sup>2)</sup></b> 0 <sub>B</sub> , UsageFault is not active 1 <sub>B</sub> , UsageFault is active
<b>RES</b>	2	r	<b>Reserved</b>
<b>BUSFAULTACT</b>	1	rw	<b>BUSFAULTACT<sup>2)</sup></b> 0 <sub>B</sub> , BusFault is not active 1 <sub>B</sub> , BusFault is active
<b>MEMFAULTACT</b>	0	rw	<b>MEMFAULTACT<sup>2)</sup></b> 0 <sub>B</sub> , MemManage is not active 1 <sub>B</sub> , MemManage is active

- 1) Pending state bits are set to 1 when an exception occurs, and are cleared to 0 when the exception becomes active.
- 2) Active state bits are set to 1 if the associated exception is the current exception or an exception that is nested because of preemption

## ARM Cortex-M3 Core

## Configurable Fault Status Register

**CFSR** **Offset**  
**Configurable Fault Status Register** **D28<sub>H</sub>** **Reset Value**  
**0000 0000<sub>H</sub>**

31				26				25	24	23				20		19	18	17	16
RES				RES				DIVBYZERO	UNALIGNED	RES				NOCP	INVPC	INVSTATE	UNDEFINTR		
r				rw				rw		r				rw	rw	rw	rw		
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
BFARVALID	RES	LSPEERR	STKEERR	UNSTKERR	IMPRECISEERR	PRECISERR	IBUSERR	MMARVALID	RES	MLSPERR	MSTERR	MUNSTKER	RES	DACCVIOL	IACCVIOL				
rw	r	rw	rw	rw	rw	rw	rw	rw	r	rw	rw	rw	r	rw	rw				

Field	Bits	Type	Description
<b>RES</b>	31:26	r	<b>Reserved</b>
<b>DIVBYZERO</b>	25	rw	<b>Divide by Zero</b>  <i>Note:</i> When SDIV or UDIV instruction is used with a divisor of 0, this fault occurs if DIV_0_TRP is enabled in the CCR.  0 <sub>B</sub> , No Divide by zero error has occurred. 1 <sub>B</sub> , A divide by zero error has occurred.
<b>UNALIGNED</b>	24	rw	<b>Unaligned</b>  <i>Note:</i> Multi-word accesses always fault if not word aligned. Software can configure unaligned word and halfword accesses to fault.  0 <sub>B</sub> , No unaligned access error has occurred. 1 <sub>B</sub> , A unaligned access error has occurred.
<b>RES</b>	23:20	r	<b>Reserved</b>
<b>NOCP</b>	19	rw	<b>No CP</b>  0 <sub>B</sub> , No coprocessor access error has occurred. 1 <sub>B</sub> , A coprocessor access error has occurred.
<b>INVPC</b>	18	rw	<b>INVPC</b>  0 <sub>B</sub> , No integrity check error has occurred. 1 <sub>B</sub> , A integrity check error has occurred.
<b>INVSTATE</b>	17	rw	<b>INVSTATE</b>  0 <sub>B</sub> , EPSR.T bit and EPSR.IT bits are valid for instruction execution. 1 <sub>B</sub> , Instruction executed with invalid EPSR.T or EPSR.IT field.

## ARM Cortex-M3 Core

Field	Bits	Type	Description
<b>UNDEFINSTR</b>	16	rw	<b>Undefined Instruction</b> 0 <sub>B</sub> , No Undefined Instruction Usage fault has occurred. 1 <sub>B</sub> , The processor hat attempted to execute an undefined instruction. This might be an undefined instruction associated with an enabled coprocessor.
<b>BFARVALID</b>	15	rw	<b>BFAR Valid</b> 0 <sub>B</sub> , BFAR does not have valid contents. 1 <sub>B</sub> , BFAR has valid contents.
<b>RES</b>	14	r	<b>Reserved</b>
<b>LSPERR</b>	13	rw	<b>LSPERR</b> 0 <sub>B</sub> , No bus fault occurred during FP lazy state preservation 1 <sub>B</sub> , A bus fault occurred during FP lazy state preservation
<b>STKERR</b>	12	rw	<b>STKERR</b> 0 <sub>B</sub> , No derived bus fault occurred 1 <sub>B</sub> , A derived bus fault occurred on exception entry
<b>UNSTKERR</b>	11	rw	<b>UNSTKERR</b> 0 <sub>B</sub> , No derived bus fault occurred 1 <sub>B</sub> , A derived bus fault occurred on exception return
<b>IMPRECISERR</b>	10	rw	<b>IMPRECISERR</b> 0 <sub>B</sub> , No precise data access error has occurred 1 <sub>B</sub> , An imprecise data access error has occurred.
<b>PRECISERR</b>	9	rw	<b>PRECISERR</b> 0 <sub>B</sub> , No precise data access error has occurred 1 <sub>B</sub> , An imprecise data access error has occurred, and the processor has written the faulting address to the BFAR.
<b>IBUSERR</b>	8	rw	<b>IBUSERR</b> 0 <sub>B</sub> , No bus fault on an instruction prefetch has occurred. 1 <sub>B</sub> , A bus fault on an instruction prefetch has occurred. The fault is signalled only if the instruction is issued.
<b>MMARVALID</b>	7	rw	<b>MMARVALID</b> 0 <sub>B</sub> , MMAR does not have valid contents. 1 <sub>B</sub> , MMAR has valid contents.
<b>RES</b>	6	r	<b>Reserved</b>
<b>MLSPERR</b>	5	rw	<b>MLSPERR</b> 0 <sub>B</sub> , No MemManage fault occurred during FP lazy state preservation 1 <sub>B</sub> , A MemManage fault occurred during FP lazy state preservation
<b>MSTERR</b>	4	rw	<b>MSTERR</b> 0 <sub>B</sub> , No derived MemManage fault occurred 1 <sub>B</sub> , A derived MemManage fault occurred on exception entry
<b>MUNSTKERR</b>	3	rw	<b>MUNSTKERR</b> 0 <sub>B</sub> , No derived MemManage fault occurred 1 <sub>B</sub> , A derived MemManage fault occurred on exception return
<b>RES</b>	2	r	<b>Reserved</b>

---

**ARM Cortex-M3 Core**

Field	Bits	Type	Description
<b>DACCVIOL</b>	1	rw	<b>DACCVIOL</b> 0 <sub>B</sub> , No data access violation has occurred. 1 <sub>B</sub> , Data access violation. The MMAR shows the data address that the load or store tried to access.
<b>IACCVIOL</b>	0	rw	<b>IACCVIOL</b> 0 <sub>B</sub> , No MPU or Execute Never (XN) default memory map access violation has occurred. 1 <sub>B</sub> , MPU or Execute Never (XN) default memory map access violation on an instruction fetch has occurred. The fault is signalled only if the instruction is issued.


**Notes**

1. *USAGFAULT* contains bits 31:16 of CFSR and provides information on UsageFault exceptions
2. *BUSFAULT* contains bits 15:8 of CFSR and provides information on BusFault exceptions
3. *MemManage* contains bits 7:0 of CFSR and provides information on MemManage exceptions

ARM Cortex-M3 Core

Hard Fault Status Register

**HFSR** **Offset** **Reset Value**  
**Hard Fault Status Register** **D2C<sub>H</sub>** **0000 0000<sub>H</sub>**

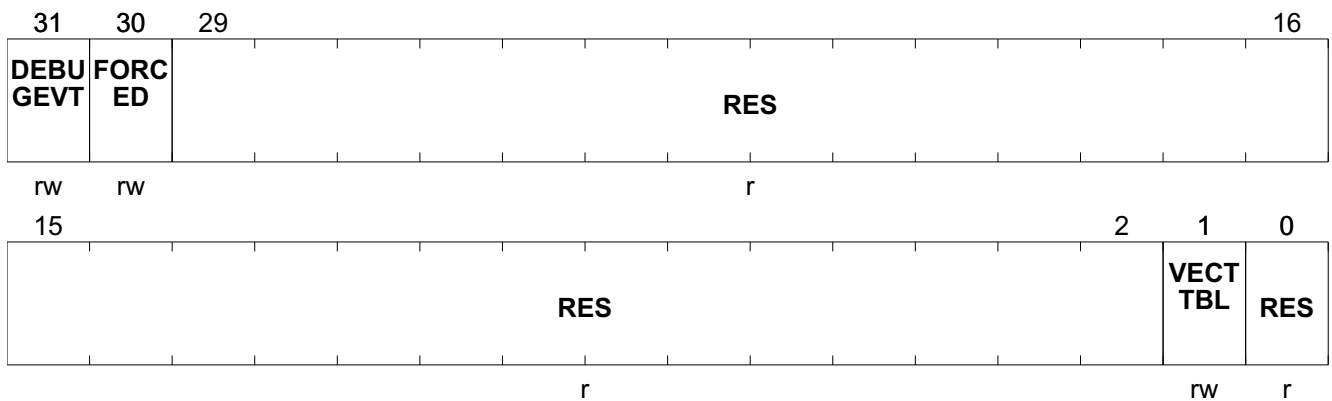


Field	Bits	Type	Description
<b>DEBUGEVT</b>	31	rw	<p><b>Debug Event</b>                      Indicates when a Debug event has occurred.</p> <p><i>Note:      The processor sets this bit to 1 only when halting debug is disabled and a Debug event occurs.</i></p> <p>0<sub>B</sub>    , No Debug event has occurred                      1<sub>B</sub>    , Debug event has occurred. The Debug Fault Status Register has been updated.</p>
<b>FORCED</b>	30	rw	<p><b>Forced</b>                      Indicates that a fault with configurable priority has been escalated to a HardFault exception, because it could not be made active, because of priority or because it was disabled.</p> <p>0<sub>B</sub>    , No priority escalation has occurred                      1<sub>B</sub>    , Processor has escalated a configurable priority exception to HardFault</p>
<b>RES</b>	29:2	r	<b>Reserved</b>
<b>VECTTBL</b>	1	rw	<p><b>VECTTBL</b>                      Indicates when a fault has occurred because of a vector table read error on exception processing.</p> <p>0<sub>B</sub>    , No vector table read fault has occurred                      1<sub>B</sub>    , Vector table read fault has occurred</p>
<b>RES</b>	0	r	<b>Reserved</b>



## ARM Cortex-M3 Core

## Debug Fault Status Register

**DFSR** **Offset**  
**Debug Fault Status Register** **D30<sub>H</sub>** **Reset Value**  
**0000 0000<sub>H</sub>**

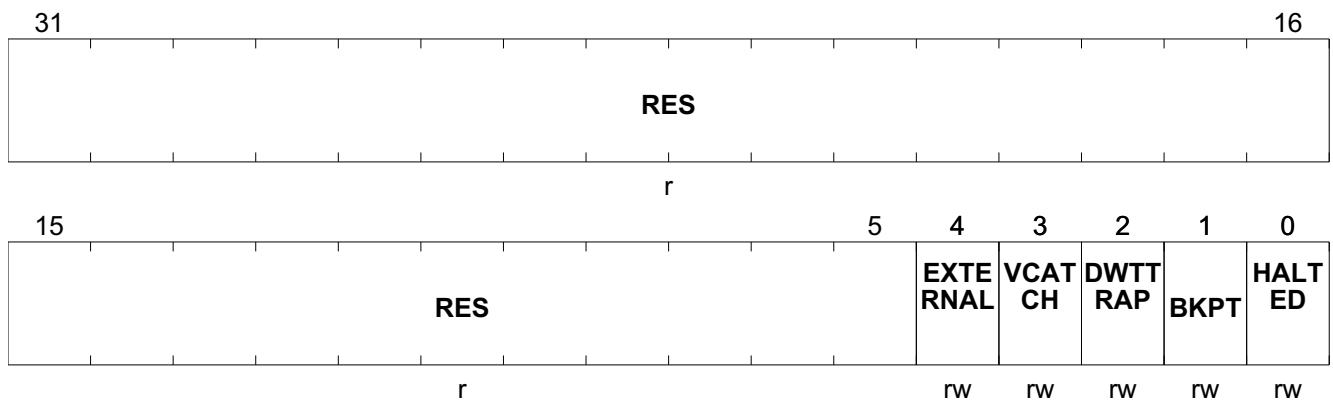

Field	Bits	Type	Description
<b>RES</b>	31:5	r	<b>Reserved</b>
<b>EXTERNAL</b>	4	rw	<b>External</b> Indicates a debug event generated because of the assertion of <b>EDBGRQ</b> . 0 <sub>B</sub> , No EDBGQRQ debug event 1 <sub>B</sub> , EDBGQRQ debug event
<b>VCATCH</b>	3	rw	<b>Vector Catch</b> Indicates triggering of a vector catch. The corresponding FSR shows the primary cause of exception. 0 <sub>B</sub> , No vector catch triggered 1 <sub>B</sub> , Vector catch triggered
<b>DWTTRAP</b>	2	rw	<b>DWTTRAP</b> Indicates a debug event generated by the DWT. 0 <sub>B</sub> , No current debug event generated by the DWT 1 <sub>B</sub> , At least one current debug event generated by the DWT
<b>BKPT</b>	1	rw	<b>BKPT</b> Indicates a debug event generated by BKPT instruction execution or a breakpoint match in FPB. 0 <sub>B</sub> , No current breakpoint debug event 1 <sub>B</sub> , At least one current breakpoint debug event
<b>HALTED</b>	0	rw	<b>HALTED</b> Indicates a debug event generated by either a C_HALT or C_STEP request, triggered by a write to the DHCSR, or a step request triggered by setting DEMCR.MON_STEP to 1. 0 <sub>B</sub> , No active halt request debug event 1 <sub>B</sub> , Halt request debug event active

ARM Cortex-M3 Core

MemManage Fault Status Register

<b>MMFAR</b>	<b>Offset</b>	<b>Reset Value</b>
<b>MemManage Fault Status Register</b>	<b>D34<sub>H</sub></b>	<b>XXXX XXXX<sub>H</sub></b>



Field	Bits	Type	Description
<b>ADDRESS</b>	31:0	rw	<p><b>Data Address for an MPU Fault</b></p> <p>This is the location addressed by an attempted load or store access that was faulted. The MemManage Status Register shows the cause of the fault, and whether MMFAR.ADDRESS is valid. When an unaligned access faults, the address is the actual address that faulted. Because an access might be split into multiple parts, each aligned, this address can be any offset in the range of the requested size.</p>

ARM Cortex-M3 Core

Bus Fault Status Register

<b>BFAR</b> Bus Fault Status Register	<b>Offset</b> D38 <sub>H</sub>	<b>Reset Value</b> XXXX XXXX <sub>H</sub>
--	-----------------------------------	--




Field	Bits	Type	Description
<b>ADDRESS</b>	31:0	rw	<p><b>Data Address for a precise BusFault</b></p> <p>This is the location addressed by an attempted data access that was faulted. The BFSR shows the reason for the fault, and whether BFAR.ADDRESS is valid. For unaligned access faults, the address returned is the address requested by the instruction. This might not be the address that faulted.</p>

## ARM Cortex-M3 Core

## Auxiliary Fault Status Register

**AFSR** **Offset** **Reset Value**  
**Auxiliary Fault Status Register** **D3C<sub>H</sub>** **0000 0000<sub>H</sub>**

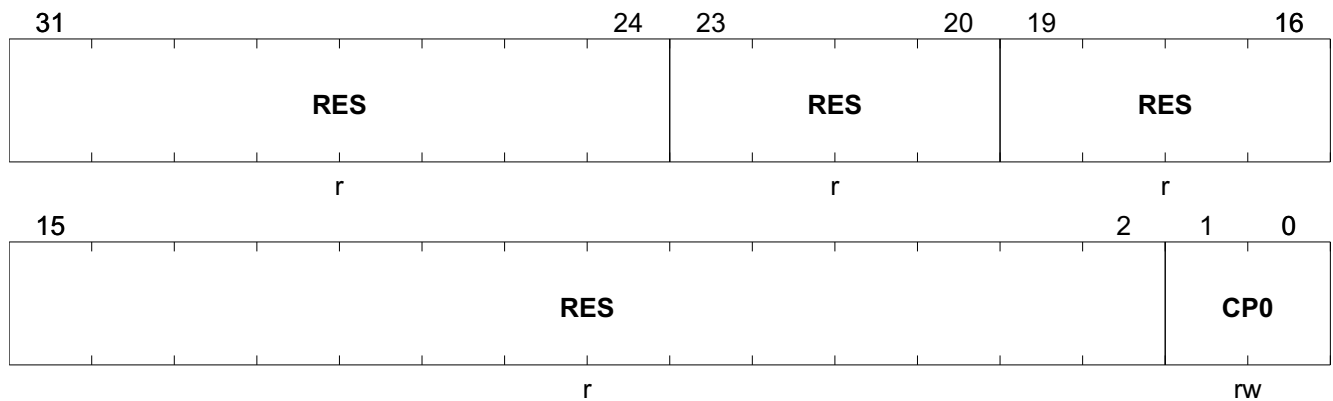

Field	Bits	Type	Description
<b>RES</b>	31:24	r	<b>Reserved, UNK/SBZP</b>
<b>CP<sub>n</sub> (n=0-7,10,11)</b>	2 <sup>n</sup> +1:2 <sup>n</sup>	rw	<b>Access Privileges for Coprocessor n (n= 0-7, 10, 11)</b> Fields CP10 and CP11 together control access to the Floating-point coprocessor, if implemented. 00 <sub>B</sub> , Access denied. Any attempted access generates a NOCP UsageFault 01 <sub>B</sub> , Privileged access only. An unprivileged access generates a NOCP UsageFault 10 <sub>B</sub> , Reserved 11 <sub>B</sub> , Full access
<b>RES</b>	19:16	r	<b>Reserved, UNK/SBZP</b>

## ARM Cortex-M3 Core

## 8.5 Instruction Set Summary

This chapter provides the Instruction set. **Table 46** shows the instructions and their cycle counts. The cycle counts are based on a system with zero wait states.

Within the assembler syntax, depending on the operation, the <op2> field can be replaced with one of the following options:

- a simple register
- an immediate shifted register
- a register shifted register
- an immediate value

For brevity, not all load and store addressing modes are shown.

**Table 46** uses the following abbreviations in the cycles column:

- P for the number of cycles required for a pipeline refill.
- B for the number of cycles required to perform the barrier operation.
- N for the number of registers in the register list to be loaded or stored, including PC or LR.
- W for the number of cycles spent waiting for an appropriate event.

**Table 46 Instruction Set Summary**

Operation	Description	Mnemonic	Cycles (without wait states)
Move	Register	MOV Rd, <op2>	1
	16-bit immediate	MOVW Rd, #<imm>	1
	Immediate into top	MOVT Rd, #<imm>	1
	To PC	MOV PC, Rm	1 + P
Add	Add	ADD Rd, Rn, <op2>	1
	Add to PC	Add PC, PC, Rm	1 + P
	Add with carry	ADC Rd, Rn, <op2>	1
	Form address	ADR Rd, <label>	1
Subtract	Subtract	SUB Rd, Rn, <op2>	1
	Subtract with borrow	SBC Rd, Rn, <op2>	1
	Reverse	RSB Rd, Rn, <op2>	1
Multiply	Multiply	MUL Rd, Rn, Rm	1
	Multiply accumulate	MLA Rd, Rn, Rm	2
	Multiply subtract	MLS Rd, Rn, Rm	2
	Long signed	SMULL RdLo, RDHi, Rn, Rm	3 to 5 <sup>1)</sup>
	Long unsigned	UMULL RdLo, RdHi, Rn, Rm	3 to 5 <sup>1)</sup>
	Long signed accumulate	SMLAL RdLo, RdHi, Rn, Rm	4 to 7 <sup>1)</sup>
	Long unsigned accumulate	UMLAL RdLo, RdHi, Rn, Rm	4 to 7 <sup>1)</sup>
Divide	Signed	SDIV Rd, Rn, Rm	2 to 12 <sup>2)</sup>
	Unsigned	UDIV Rd, Rn, Rm	2 to 12 <sup>2)</sup>
Saturate	Signed	SSAT Rd, #i<imm>, <op2>	1
	Unsigned	USAT Rd, #<imm>, <op2>	1

## ARM Cortex-M3 Core

Table 46 Instruction Set Summary (cont'd)

Operation	Description	Mnemonic	Cycles (without wait states)
Compare	Compare	CMP Rn, <op2>	1
	Negative	CMN Rn, <op2>	1
Logical	AND	AND Rd, Rn, <op2>	1
	Exclusive OR	EOR Rd, Rn, <op2>	1
	OR	ORR Rd, Rn, <op2>	1
	OR NOT	ORN Rd, Rn, <op2>	1
	Bit clear	BIC Rd, Rn, <op2>	1
	Move NOT	MVN Rd, <op2>	1
	AND test	TST Rn, <op2>	1
	Exclusive OR test	TEQ Rn, <op1>	
Shift	Logical shift left	LSL Rd, Rn, #<imm>	1
	Logical shift left	LSL Rd, Rn, Rs	1
	Logical shift right	LSR Rd, Rn, #<imm>	1
	Logical shift right	LSR Rd, Rn, Rs	1
	Arithmetic shift right	ASR Rd, Rn, #<imm>	1
	Arithmetic shift right	ASR Rd, Rn, Rs	1
Rotate	Rotate right	ROR Rd, Rn, #<imm>	1
	Rotate right	ROR Rd, Rn, Rs	1
	With extension	RRX Rd, Rn	1
Count	Leading zeroes	CLZ Rd, Rn	1
Load	Word	LDR Rd, [Rn, <op2>]	2 <sup>3</sup> )
	To PC	LDR PC, [Rn, <op2>]	2 <sup>3</sup> ) + P
	Halfword	LDRH Rd, [Rn, <op2>]	2 <sup>3</sup> )
	Byte	LDRB Rd, [Rn, <op2>]	2 <sup>3</sup> )
	Signed halfword	LDRSH Rd, [Rn, <op2>]	2 <sup>3</sup> )
	Signed byte	LDRSB Rd, [Rn, <op2>]	2 <sup>3</sup> )
	User word	LDRT Rd, [Rn, #<imm>]	2 <sup>3</sup> )
	User halfword	LDRHT Rd, [Rn, #<imm>]	2 <sup>3</sup> )
	User byte	LDRBT Rd, [Rn, #<imm>]	2 <sup>3</sup> )
	User signed halfword	LDRSHT Rd, [Rn, #<imm>]	2 <sup>3</sup> )
	User signed byte	LDRSBT Rd, [Rn, #<imm>]	2 <sup>3</sup> )
	PC relative	LDR Rd, [PC, #<imm>]	2 <sup>3</sup> )
	Doubleword	LDRD Rd, Rd, [Rn, #<imm>]	1 + N
	Multiple	LDM Rn, {<reglist>}	1 + N
Multiple including PC	LDM Rn, {<reglist>, PC}	1 + N + P	

## ARM Cortex-M3 Core

Table 46 Instruction Set Summary (cont'd)

Operation	Description	Mnemonic	Cycles (without wait states)
Store	Word	STR Rd, [Rn, <op2>]	2 <sup>3)</sup>
	Halfword	STRH Rd, [Rn, <op2>]	2 <sup>3)</sup>
	Byte	STRB Rd, [Rn, <op2>]	2 <sup>3)</sup>
	Signed halfword	STRSH Rd, [Rn, <op2>]	2 <sup>3)</sup>
	Signed byte	STRSB Rd, [Rn, <op2>]	2 <sup>3)</sup>
	User word	STRT Rd, [Rn, #<imm>]	2 <sup>3)</sup>
	User halfword	STRHT Rd, [Rn, #<imm>]	2 <sup>3)</sup>
	User byte	STRBT Rd, [Rn, #<imm>]	2 <sup>3)</sup>
	User signed halfword	STRSHT Rd, [Rn, #<imm>]	2 <sup>3)</sup>
	User signed byte	STRSBT Rd, [Rn, #<imm>]	2 <sup>3)</sup>
	Doubleword	STRD Rd, [Rn, #<imm>]	1 + N
	Multiple	STM Rn, {<reglist>}	1 + N
Push	Push	PUSH {<reglist>}	1 + N
	Push with link register	PUSH {<reglist>, LR}	1 + N
Pop	Pop	POP {<reglist>}	1 + N
	Pop and return	POP {<reglist>, PC}	1 + N + P
Semaphore	Load exclusive	LDREX Rd, [Rn, #<imm>]	2
	Load exclusive half	LDREXH Rd, [Rn]	2
	Load exclusive byte	LDREXB Rd, [Rn]	2
	Store exclusive	STREX Rd, Rt, [Rn, #<imm>]	2
	Store exclusive half	STREXH Rd, Rt, [Rn]	2
	Store exclusive byte	STREXB Rd, Rt, [Rn]	2
	Clear exclusive monitor	CLREX	1
Branch	Conditional	B <cc> <label>	1 or 1 + P <sup>4)</sup>
	Unconditional	B <label>	1 + P
	With link	BL <label>	1 + P
	With exchange	BX Rm	1 + P
	With link and exchange	BLX Rm	1 + P
	Branch if zero	CBZ Rn, <label>	1 or 1 + P <sup>4)</sup>
	Branch if non-zero	CBZN Rn, <label>	1 or 1 + P <sup>4)</sup>
	Byte table branch	TBB [Rn, Rm]	2 + P
	Halfword table branch	TBH [Rn, Rm, LSL#1]	2 + P

## ARM Cortex-M3 Core

Table 46 Instruction Set Summary (cont'd)

Operation	Description	Mnemonic	Cycles (without wait states)
State change	Supervisor call	SVC #<imm>	–
	If-then-else	IT... <cond>	1 <sup>5)</sup>
	Disable interrupts	CPSID <flags>	1 or 2
	Enable interrupts	CPSIE <flags>	1 or 2
	Read special register	MRS Rd, <specreg>	1 or 2
	Write special register	MSR <specreg>, Rn	1 or 2
	Breakpoint	BKPT #<imm>	–
Extend	Signed halfword to word	SXTH Rd, <op2>	1
	Signed byte to word	SXTB Rd, <op2>	1
	Unsigned halfword	UXTH Rd, <op2>	1
	Unsigned byte	UXTB Rd, <op2>	1
Bit field	Extract unsigned	UBFX Rd, Rn, #<imm>, #<imm>	1
	Extract signed	SBFX Rd, Rn, #<imm>, #<imm>	1
	Clear	BFC Rd, Rn, #<imm>, #<imm>	1
	Insert	BFI Rd, Rn, #<imm>, #<imm>	1
Reverse	Bytes in word	REV Rd, Rm	1
	Bytes in both halfwords	REV16 Rd, Rm	1
	Signed bottom halfword	REVSH Rd, Rm	1
	Bits in word	RBIT Rd, Rm	1
Hint	Send event	SEV	1
	Wait for event	WFE	1 + W
	Wait for interrupt	WFI	1 + W
	No operation	NOP	1
Barriers	Instruction synchronization	ISB	1 + B
	Data memory	DMB	1 + B
	Data synchronization	DSB <flags>	1 + B

- 1) UMULL, SMULL, UMLAL, and SMLAL instructions use early termination depending on the size of the source values. These are interruptible, that is abandoned and restarted, with worst case latency of one cycle.
- 2) Division operations use early termination to minimize the number of cycles required based on the number of leading ones and zeros in the input operands.
- 3) Neighboring load and store single instructions can pipeline their address and data phases. This enables these instructions to complete in a single execution cycle.
- 4) Conditional branch completes in a single cycle if the branch is not taken.
- 5) An IT instruction can be folded onto a preceding 16-bit Thumb instruction, enabling execution in zero cycles.



## 9 DMA Controller

**Figure 38** shows the Top Level Block Diagram of the TLE987x.

The bus matrix allows the  $\mu$ DMA to access the PBA0, PBA1 and RAM.

### 9.1 Features

The principal features of the DMA Controller are that:

- it is compatible with AHB-Lite for the DMA transfers
- it is compatible with APB for programming the registers
- it has a single AHB-Lite master for transferring data using a 32-bit address bus and 32-bit data bus
- it supports up to 14 DMA channels
- each DMA channel has dedicated handshake signals
- each DMA channel has a programmable priority level
- each priority level arbitrates using a fixed priority that is determined by the DMA channel number. The DMA also supports multiple transfer types:
  - memory-to-memory
  - memory-to-peripheral
  - peripheral-to-memory
- it supports multiple DMA cycle types
- it supports multiple DMA transfer data widths
- each DMA channel can access a primary, and alternate, channel control data structure
- all the channel control data is stored in system memory (RAM) in little-endian format
- it performs all DMA transfers using the single AHB-Lite burst type. The destination data width is equal to the source data width.
- the number of transfers in a single DMA cycle can be programmed from 1 to 1024
- the transfer address increment can be greater than the data width

DMA Controller

9.2 Introduction

Please also refer to [Chapter 9.3, Functional Description](#).

9.2.1 Block Diagram

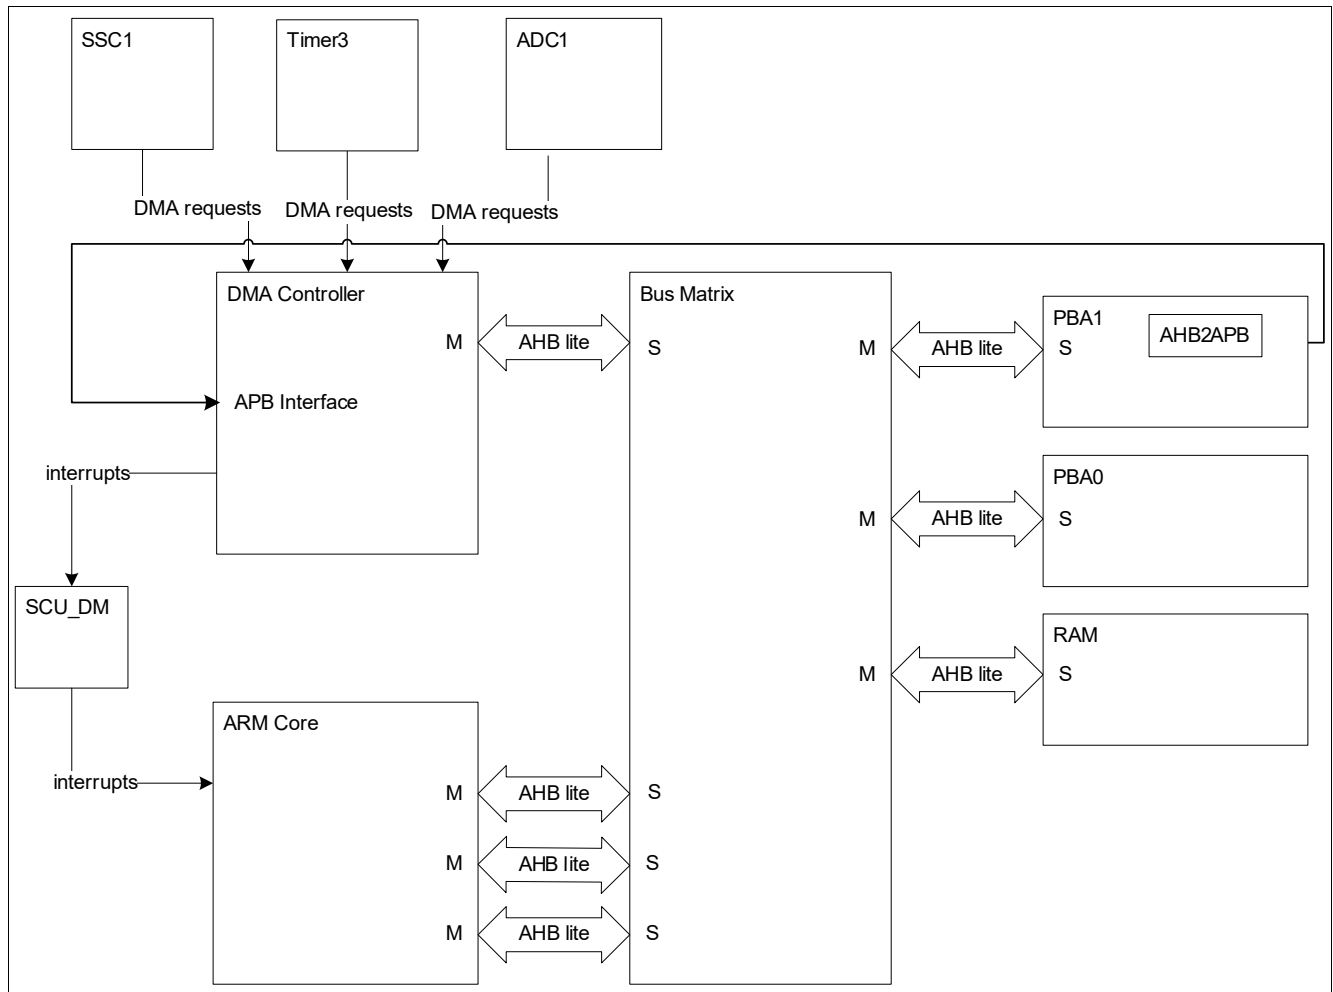


Figure 38 DMA Controller Top Level Block Diagram

---

**DMA Controller**
**9.3 Functional Description**
**9.3.1 DMA Mode Overview**

The DMA controller implements the following up to 14 hardware DMA requests:

- ADC1 complete sequence 1 done: DMA transfer is requested on completion of the ADC1 channel conversion sequence.
- ADC1 exceptional sequence 2 (ESM) done: DMA transfer is requested on completion of the ADC1 conversion sequence triggered by an exceptional measurement request.
- SSC1/2 transmit byte: DMA transfer is requested upon the completion of data transmission via SSC1/2
- SSC1/2: receive byte: DMA transfer is requested upon the completion of data reception via SSC1/2.
- ADC1 channel 0 conversion done: DMA transfer is requested on completion of the ADC1 channel 0 conversion.
- ADC1 channel 1 conversion done: DMA transfer is requested on completion of the ADC1 channel 1 conversion.
- ADC1 channel 2 conversion done: DMA transfer is requested on completion of the ADC1 channel 2 conversion.
- ADC1 channel 3 conversion done: DMA transfer is requested on completion of the ADC1 channel 3 conversion.
- ADC1 channel 4 conversion done: DMA transfer is requested on completion of the ADC1 channel 4 conversion.
- ADC1 channel 5 conversion done: DMA transfer is requested on completion of the ADC1 channel 5 conversion.
- ADC1 channel 6 conversion done: DMA transfer is requested on completion of the ADC1 channel 6 conversion.
- ADC1 channel 7 conversion done: DMA transfer is requested on completion of the ADC1 channel 7 conversion.
- Timer3 ccu6\_int: DMA transfer is requested following a timer trigger.
- SDADC, conversion done: DMA transfer is requested on completion of the SDADC (ADC3/4) conversion.<sup>1)</sup>

*Note: Channel 0 has the highest priority, when the priority setting for all channels is the same.*

Burst transfers via signal transfer

Single transfers:

The DMA Controller should be programmed for single transfers, see [Table 60 “channel\\_cfg bit assignments” on Page 293](#),

where  $R = 0$ ,  $n = \text{number of single transfer} + 1$ ,  $\text{transfer\_type} = 1$  (basic).

---

1) only available for TLE9879-2QXA40 variant

**DMA Controller**


For every dma\_req, one transfer is done; if the number of transfers reaches n, dma\_done (interrupt) is generated and the DMA channel is deactivated.

Burst transfers:

The DMA Controller should be programmed for burst transfers like this

n = number of transfers, transfer\_type = 2 (auto)

Then for one dma\_req, n +1 transfers are done, dma\_done (interrupt) is generated and the DMA channel is deactivated.

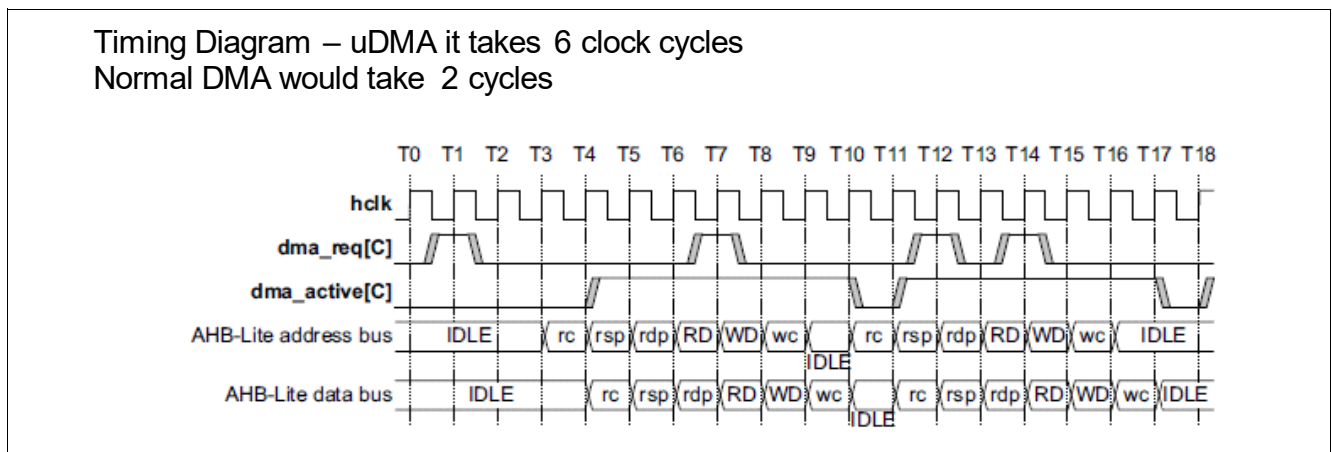

**Figure 39 DMA Controller Timing Diagram**

**Table 47 DMA Controller Timing Diagram - Names and Abbreviations**

Phrase	Definition
rc	read channel config
rsp	read src. ptr.
rdp	read dest. ptr
RD	read data
WD	write data
wc	write channel config

**9.3.2 DMA Arbitration Rate**

You can configure when the controller arbitrates during a DMA transfer. This enables you to reduce the latency to service a higher priority channel.

The controller provides four bits that configure how many AHB bus transfers occur before it rearbiterates. These bits are known as the R\_power bits because the value you enter, R, is raised to the power of two and this determines the arbitration rate. For example, if R = 4 then the arbitration rate is 2<sup>4</sup>, that is, the controller arbitrates every 16 DMA transfers.

**Table 48** lists the arbitration rates.

## DMA Controller

**Table 48 AHB-Bus Transfer Arbitration Interval**

R_power	Arbitrate after x DMA Transfers
0000 <sub>B</sub>	x = 1
0001 <sub>B</sub>	x = 2
0010 <sub>B</sub>	x = 4
0011 <sub>B</sub>	x = 8
0100 <sub>B</sub>	x = 16
0101 <sub>B</sub>	x = 32
0110 <sub>B</sub>	x = 64
0111 <sub>B</sub>	x = 128
1000 <sub>B</sub>	x = 256
1001 <sub>B</sub>	x = 512
1010-1111 <sub>B</sub>	x = 1024

*Note:* Take care not to assign a low-priority channel with a large R\_power because this prevents the controller from servicing high-priority requests, until it rearbitrates.

When  $N > 2^R$  and is not an integer multiple of  $2^R$  then the controller always performs sequences of  $2^R$  transfers until  $N < 2^R$  remain to be transferred. The controller performs the remaining N transfers at the end of the DMA cycle.

You store the value of the R\_power bits in the channel control data structure. See [Control Data Configuration](#) on [Page 292](#) for more information about the location of the R\_power bits in the data structure.

### Priority

When the controller arbitrates, it determines the next channel to service by using the following information:

- The channel number
- The priority level, default or high, that is assigned to the channel.

You can configure each channel to use either the default priority level or a high priority level by setting the chnl\_priority\_set Register. See Channel Priority set on page 3-23.

Channel number zero has the highest priority and as the channel number increases, the priority of a channel decreases. [Table 49](#) lists the DMA channel priority levels in descending order of priority.

**Table 49 DMA Channel Priority**


Channel Number	Priority Level Setting	Descending Order of Channel Priority
0	High	Highest-priority DMA channel
1	High	–
2	High	–
–	High	–
–	High	–
–	High	–
12	High	–
13	High	–

DMA Controller

**Table 49 DMA Channel Priority (cont'd)**

Channel Number	Priority Level Setting	Descending Order of Channel Priority
0	Default	–
1	Default	–
2	Default	–
–	Default	–
–	Default	–
–	Default	–
12	Default	–
13	Default	Lowest-priority DMA channel

After a DMA transfer completes, the controller polls all the DMA channels that are available. **Figure 40 “Polling Flowchart” on Page 278** shows the process it uses to determine which DMA transfer to perform next.

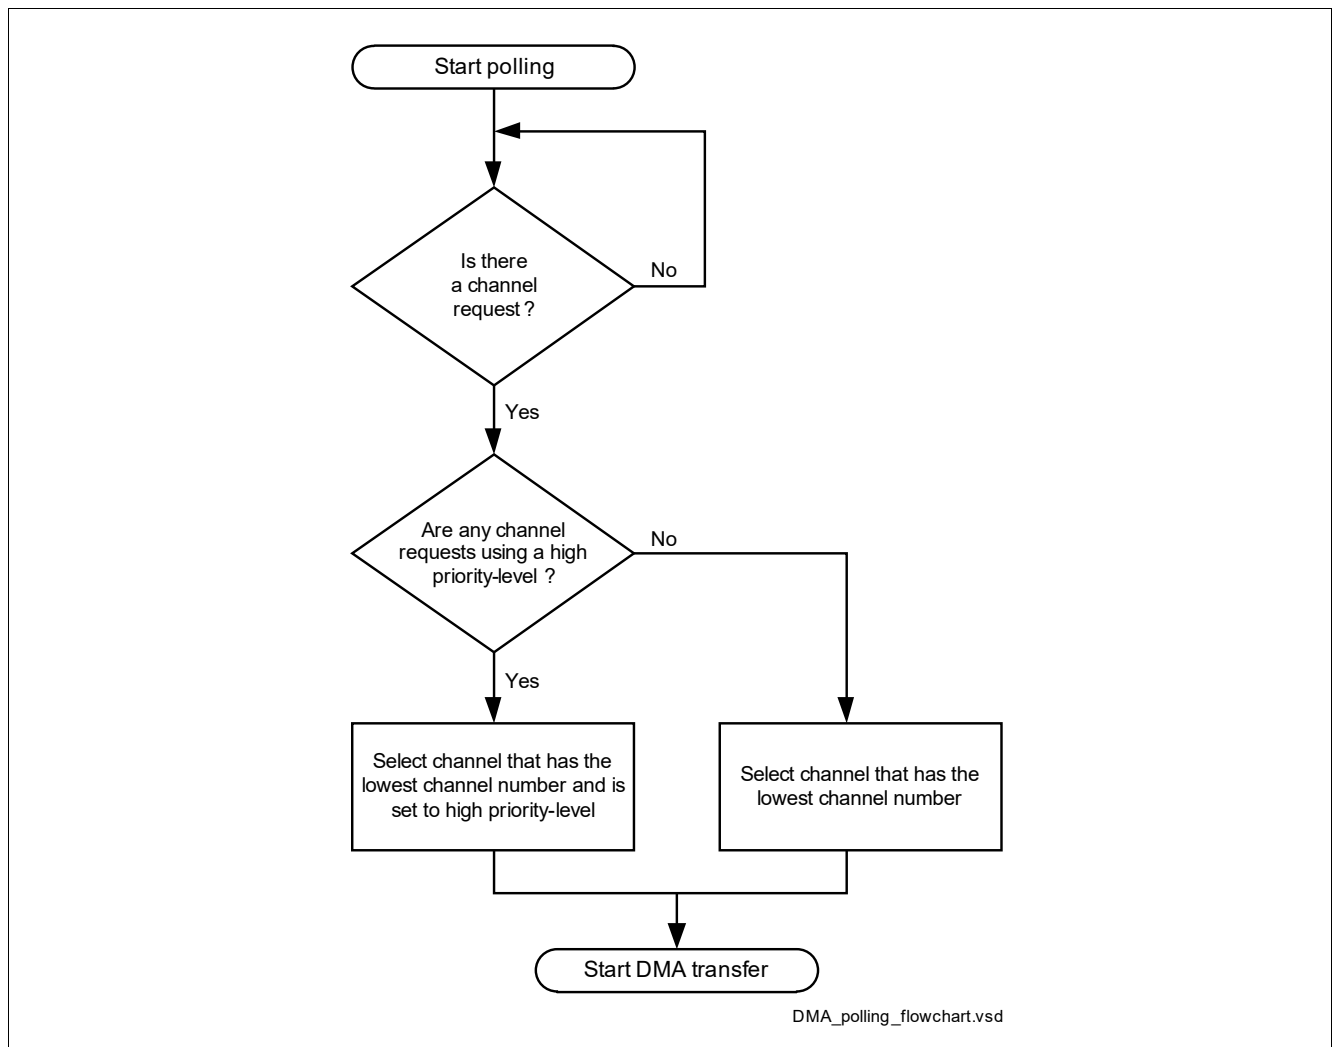

**Figure 40 Polling Flowchart**

**DMA Cycle Types**

The cycle\_ctrl bits control how the controller performs a DMA cycle. You can set the cycle\_ctrl bits as **Table 50** lists.

## DMA Controller

**Table 50 DMA Cycle Types**

cycle_ctrl	Description
000 <sub>B</sub>	Channel control data structure is invalid
001 <sub>B</sub>	Basic DMA transfer
010 <sub>B</sub>	Auto-request
011 <sub>B</sub>	Ping-pong
100 <sub>B</sub>	Memory scatter-gather using the primary data structure
101 <sub>B</sub>	Memory scatter-gather using the alternate data structure
110	Peripheral scatter-gather using the primary data structure
111	Peripheral scatter-gather using the alternate data structure

*Note:* The `cycle_ctrl` bits are located in the `channel_cfg` memory location that **Control Data Configuration** on [Page 292](#) describes.

For all cycle types, the controller arbitrates after  $2^R$  DMA transfers. If you set a low-priority channel with a large  $2^R$  value then it prevents all other channels from performing a DMA transfer, until the low-priority DMA transfer completes. Therefore, you must take care when setting the `R_power`, that you do not significantly increase the latency for high-priority channels.

The following sections describe the cycle types:

- **Invalid**
- **Basic**
- **Auto-Request** on [Page 280](#)
- **Ping-Pong** on [Page 280](#)
- **Memory Scatter-Gather** on [Page 283](#)
- **Peripheral Scatter-Gather** on [Page 286](#)

### Invalid

After the controller completes a DMA cycle it sets the cycle type to invalid, to prevent it from repeating the same DMA cycle.

### Basic

In this mode, you configure the controller to use either the primary, or alternate, data structure. After you enable the channel, and the controller receives a request then the flow for this DMA cycle is:

- The controller performs  $2^R$  transfers. If the number of transfers remaining is zero the flow continues at step 3.
- The controller arbitrates:
  - If a higher-priority channel is requesting service then the controller services that channel.
  - If the peripheral or software signals a request to the controller then it continues at step 1.
- The controller sets `dma_done[C]` HIGH for one `hclk` cycle. This indicates to the host processor that the DMA cycle is complete.

---

## DMA Controller

### Auto-Request

When the controller operates in this mode, it is only necessary for it to receive a single request to enable it to complete the entire DMA cycle. This enables a large data transfer to occur, without significantly increasing the latency for servicing higher priority requests, or requiring multiple requests from the processor or peripheral. You can configure the controller to use the primary, or alternate, data structure. After you enable the channel, and the controller receives a request for this channel, then the flow for this DMA cycle is:

- The controller performs  $2^R$  transfers for channel C. If the number of transfers remaining is zero the flow continues at step 3.
- The controller arbitrates. When channel C has the highest priority then the DMA cycle continues at step 1.
- The controller sets **dma\_done[C]** HIGH for one **hclk** cycle. This indicates to the host processor that the DMA cycle is complete.


### Ping-Pong

In ping-pong mode, the controller performs a DMA cycle using one of the data structures and it then performs a DMA cycle using the other data structure. The controller continues to switch from primary to alternate to primary... until it reads a data structure that is invalid, or until the host processor disables the channel.

**Figure 41 “Ping-Pong Example” on Page 281** shows an example of a ping-pong DMA transaction.



## DMA Controller

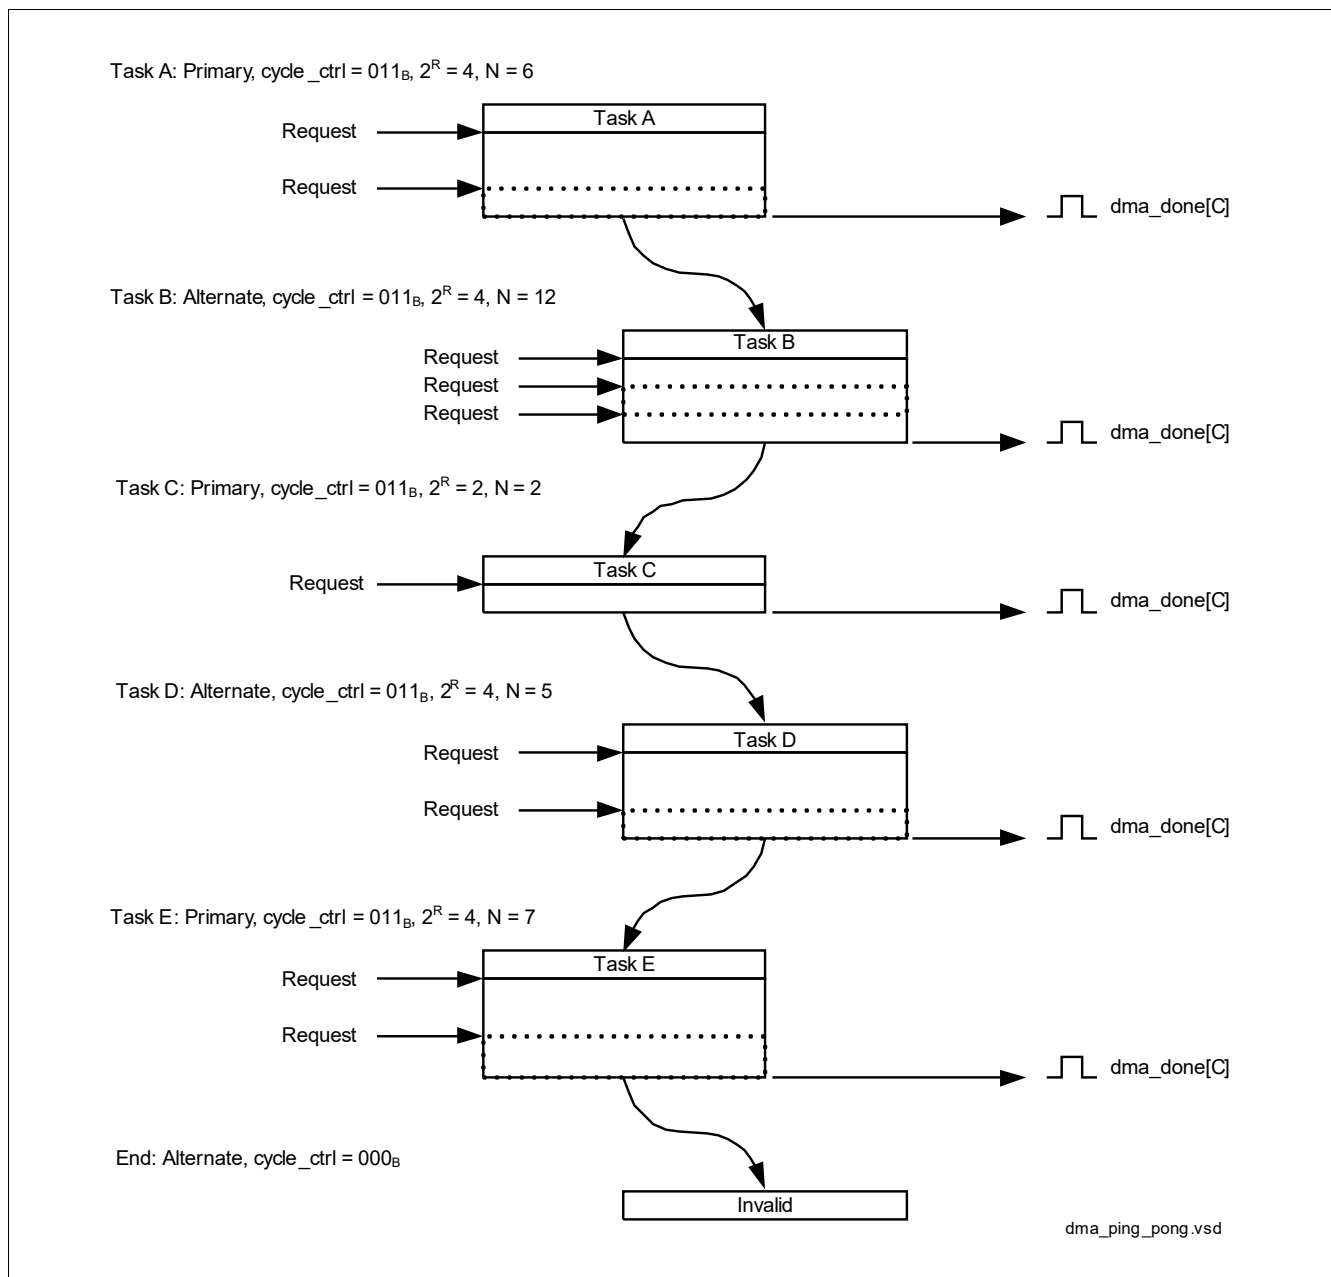

**Figure 41 Ping-Pong Example**

In [Figure 41 “Ping-Pong Example” on Page 281](#):

### Task A

- The host processor configures the primary data structure for task A.
- The host processor configures the alternate data structure for task B. This enables the controller to immediately switch to task B after task A completes, provided that a higher priority channel does not require servicing.
- The controller receives a request and performs four DMA transfers.
- The controller arbitrates. After the controller receives a request for this channel, the flow continues if the channel has the highest priority.
- The controller performs the remaining two DMA transfers.

## DMA Controller

- The controller sets **dma\_done[C]** HIGH for one **hclk** cycle and enters the arbitration process.

After task A completes, the host processor can configure the primary data structure for task C. This enables the controller to immediately switch to task C after task B completes, provided that a higher priority channel does not require servicing.

After the controller receives a new request for the channel and it has the highest priority then task B commences:

### Task B

- The controller performs four DMA transfers.
- The controller arbitrates. After the controller receives a request for this channel, the flow continues if the channel has the highest priority.
- The controller performs four DMA transfers.
- The controller arbitrates. After the controller receives a request for this channel, the flow continues if the channel has the highest priority.
- The controller performs the remaining four DMA transfers.
- The controller sets **dma\_done[C]** HIGH for one **hclk** cycle and enters the arbitration process.

After task B completes, the host processor can configure the alternate data structure for task D.

After the controller receives a new request for the channel and it has the highest priority then task C commences:

### Task C

- The controller performs two DMA transfers.
- The controller sets **dma\_done[C]** HIGH for one **hclk** cycle and enters the arbitration process.

After task C completes, the host processor can configure the primary data structure for task E. After the controller receives a new request for the channel and it has the highest priority then task D commences:

### Task D

- The controller performs four DMA transfers.
- The controller arbitrates. After the controller receives a request for this channel, the flow continues if the channel has the highest priority.
- The controller performs the remaining DMA transfer.
- The controller sets **dma\_done[C]** HIGH for one **hclk** cycle and enters the arbitration process.

After the controller receives a new request for the channel and it has the highest priority then task E commences:

### Task E

- The controller performs four DMA transfers.
- The controller arbitrates. After the controller receives a request for this channel, the flow continues if the channel has the highest priority.
- The controller performs the remaining three DMA transfers.
- The controller sets **dma\_done[C]** HIGH for one **hclk** cycle and enters the arbitration process.

If the controller receives a new request for the channel and it has the highest priority then it attempts to start the next task. However, because the host processor has not configured the alternate data structure, and on completion of task D the controller set the cycle\_ctrl bits to 000<sub>B</sub>, then the ping-pong DMA transaction completes.

## DMA Controller

*Note:* You can also terminate the ping-pong DMA cycle in [Figure 41 “Ping-Pong Example” on Page 281](#), if you configure task E to be a basic DMA cycle by setting the `cycle_ctrl` field to `3'001B`.

### Memory Scatter-Gather

In memory scatter-gather mode the controller receives an initial request and then performs four DMA transfers using the primary data structure. After this transfer completes, it starts a DMA cycle using the alternate data structure. After this cycle completes, the controller performs another four DMA transfers using the primary data structure. The controller continues to switch from primary to alternate to primary... until either:

- The host processor configures the alternate data structure for a basic cycle.
- It reads an invalid data structure.

*Note:* After the controller completes the *N* primary transfers it invalidates the primary data structure by setting the `cycle_ctrl` field to `000B`.

The controller only asserts `dma_done[C]` when the scatter-gather transaction completes using a basic cycle. In scatter-gather mode, the controller uses the primary data structure to program the alternate data structure. [Table 51](#) lists the fields of the `channel_cfg` memory location for the primary data structure, that you must program with constant values and those that can be user defined.

**Table 51 channel\_cfg for a Primary Data Structure, in Memory Scatter-Gather Mode**

Bit	Field	Value	Description
<b>Constant-Value Fields:</b>			
[31:30]	<code>dst_inc</code>	<code>10<sub>B</sub></code>	Configures the controller to use word increments for the address
[29:28]	<code>dst_size</code>	<code>10<sub>B</sub></code>	Configures the controller to use word transfers
[27:26]	<code>src_inc</code>	<code>10<sub>B</sub></code>	Configures the controller to use word increments for the address
[25:24]	<code>src_size</code>	<code>10<sub>B</sub></code>	Configures the controller to use word transfers
[17:14]	<code>R_power</code>	<code>0010<sub>B</sub></code>	Configures the controller to perform four DMA transfers
[3]	<code>next_useburst</code>	<code>0<sub>B</sub></code>	For a memory scatter-gather DMA cycle, this bit must be set to zero
[2:0]	<code>cycle_ctrl</code>	<code>100<sub>B</sub></code>	Configures the controller to perform a memory scatter-gather DMA cycle
<b>User Defined Values:</b>			
[23:21]	<code>dst_prot_ctrl</code>	–	Configures the state of <b>HPROT</b> when the controller writes the destination data
[20:18]	<code>src_prot_ctrl</code>	–	Configures the state of <b>HPROT</b> when the controller reads the source data
[13:4]	<code>n_minus_1</code>	<code>N<sup>1)</sup></code>	Configures the controller to perform N DMA transfers, where N is a multiple of four

1) Because the `R_power` field is set to four, you must set N to be a multiple of four. The value given by N/4 is the number of times that you must configure the alternate data structure.

See [Control Data Configuration on Page 292](#) for more information.

[Figure 42 “Memory Scatter-Gather Example” on Page 284](#) shows a memory scatter-gather example.


**DMA Controller**

**Initialization**

- Configure primary to enable the copy A, B, C and D operations:  $\text{cycle\_ctrl} = 100_B, 2^R = 4, N = 16$
- Write the primary source data to memory, using the structure shown in the following table.

**Table 52**

	src_data_end_ptr	dst_data_end_ptr	channel_cfg	Unused
Data for Task A	00A00000 <sub>H</sub>	00AE0000 <sub>H</sub>	cycle_ctrl = 101 <sub>B</sub> , $2^R = 4, N = 3$	0XXXXXXXX <sub>H</sub>
Data for Task B	00B00000 <sub>H</sub>	00BE0000 <sub>H</sub>	cycle_ctrl = 101 <sub>B</sub> , $2^R = 2, N = 8$	0XXXXXXXX <sub>H</sub>
Data for Task C	00C00000 <sub>H</sub>	00CE0000 <sub>H</sub>	cycle_ctrl = 101 <sub>B</sub> , $2^R = 8, N = 5$	0XXXXXXXX <sub>H</sub>
Data for Task D	00D00000 <sub>H</sub>	00DE0000 <sub>H</sub>	cycle_ctrl = 001 <sub>B</sub> , $2^R = 4, N = 4$	0XXXXXXXX <sub>H</sub>

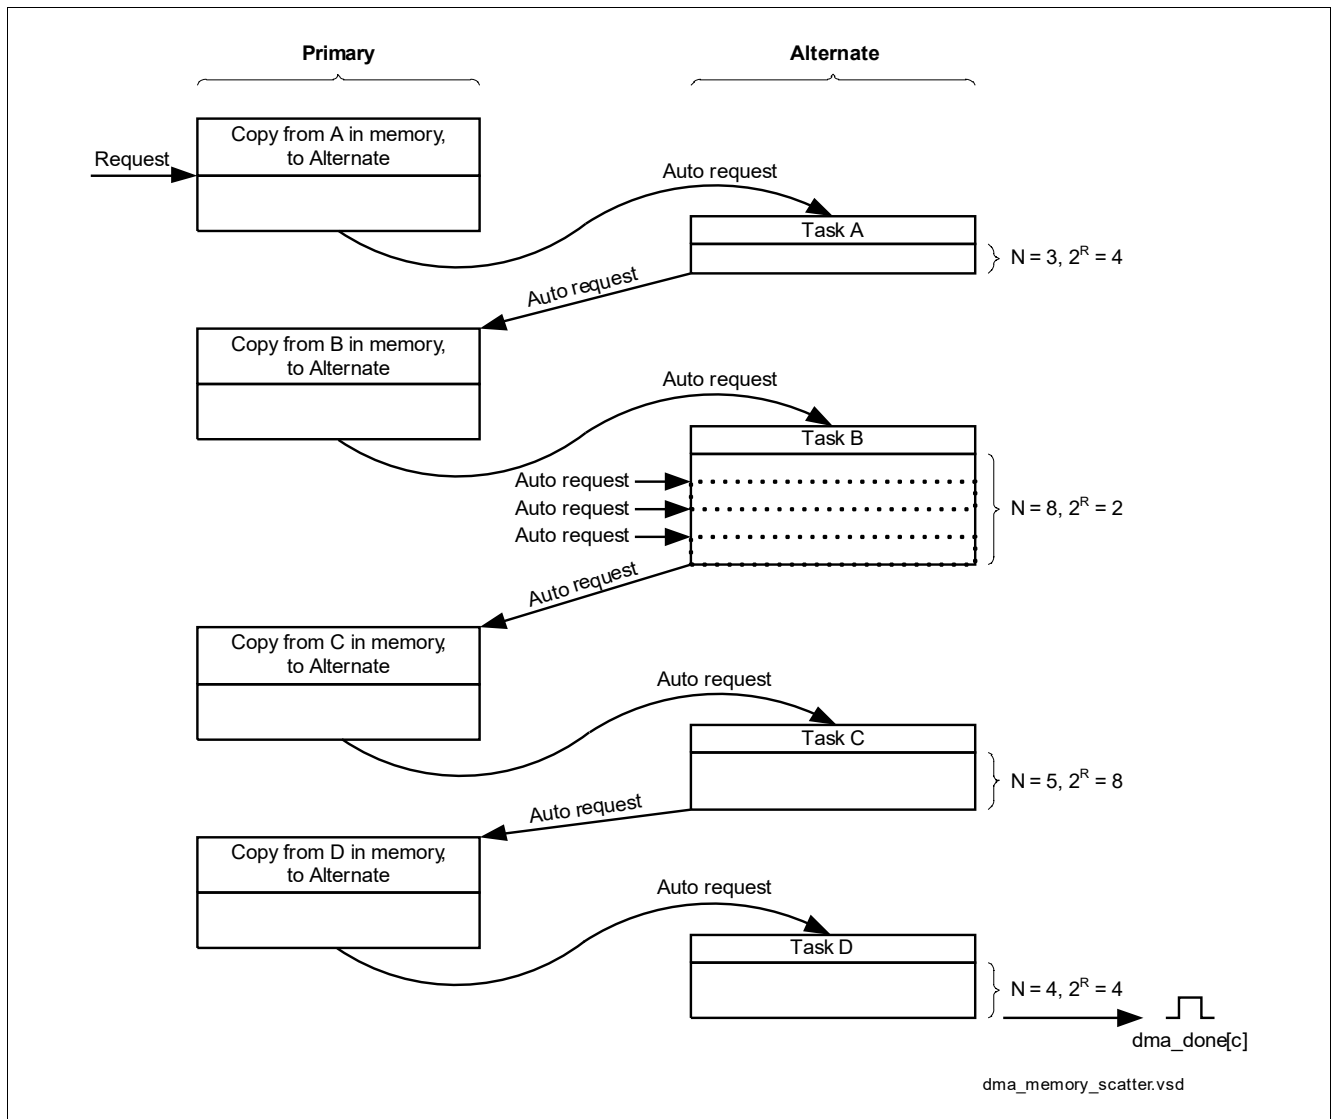

**Figure 42 Memory Scatter-Gather Example**

In [Figure 42 “Memory Scatter-Gather Example” on Page 284:](#)

## DMA Controller

### Initialization

- The host processor configures the primary data structure to operate in memory scatter-gather mode by setting `cycle_ctrl` to `100B`. Because a data structure for a single channel consists of four words then you must set  $2^R$  to 4. In this example, there are four tasks and therefore N is set to 16.
- The host processor writes the data structure for tasks A, B, C, and D to the memory locations that the `primary_src_data_end_ptr` specifies.
- The host processor enables the channel.

The memory scatter-gather transaction commences when the controller receives a request on `dma_req[]` or a manual request from the host processor. The transaction continues as follows:

### Primary, copy A

- After receiving a request, the controller performs four DMA transfers. These transfers write the alternate data structure for task A.
- The controller generates an auto-request for the channel and then arbitrates.

### Task A

- The controller performs task A. After it completes the task, it generates an auto-request for the channel and then arbitrates.

### Primary, copy B

- The controller performs four DMA transfers. These transfers write the alternate data structure for task B.
- The controller generates an auto-request for the channel and then arbitrates.

### Task B

- The controller performs task B. After it completes the task, it generates an auto-request for the channel and then arbitrates.

### Primary, copy C

- The controller performs four DMA transfers. These transfers write the alternate data structure for task C.
- The controller generates an auto-request for the channel and then arbitrates.

### Task C

- The controller performs task C. After it completes the task, it generates an auto-request for the channel and then arbitrates.

### Primary, copy D

- The controller performs four DMA transfers. These transfers write the alternate data structure for task D.
- The controller sets the `cycle_ctrl` bits of the primary data structure to `000B`, to indicate that this data structure is now invalid.
- The controller generates an auto-request for the channel and then arbitrates.

### Task D

- The controller performs task D using a basic cycle.
- The controller sets `dma_done[C]` HIGH for one `hclk` cycle and enters the arbitration process.

## DMA Controller

### Peripheral Scatter-Gather

In peripheral scatter-gather mode the controller receives an initial request from a peripheral and then it performs four DMA transfers using the primary data structure. It then immediately starts a DMA cycle using the alternate data structure, without re-arbitrating or **dma\_active[C]** going LOW.

*Note: These are the only circumstances, where the controller does not enter the arbitration process after completing a transfer using the primary data structure.*

After this cycle completes, the controller re-arbitrates and if the controller receives a request from the peripheral that has the highest priority then it performs another four DMA transfers using the primary data structure. It then immediately starts a DMA cycle using the alternate data structure, without re-arbitrating or **dma\_active[C]** going LOW. The controller continues to switch from primary to alternate to primary... until either:

- The host processor configures the alternate data structure for a basic cycle.
- It reads an invalid data structure.

*Note: After the controller completes the N primary transfers it invalidates the primary data structure by setting the cycle\_ctrl field to 000<sub>B</sub>.*

The controller asserts **dma\_done[C]** when the scatter-gather transaction completes using a basic cycle.

In scatter-gather mode, the controller uses the primary data structure to program the alternate data structure. **Table 53** lists the fields of the channel\_cfg memory location for the primary data structure, that you must program with constant values and those that can be user defined.

**Table 53 channel\_cfg for a Primary Data Structure, in Peripheral Scatter-Gather Mode**

Bit	Field	Value	Description
<b>Constant-Value Fields:</b>			
[31:30]	dst_inc	10 <sub>B</sub>	Configures the controller to use word increments for the address
[29:28]	dst_size	10 <sub>B</sub>	Configures the controller to use word transfers
[27:26]	src_inc	10 <sub>B</sub>	Configures the controller to use word increments for the address
[25:24]	src_size	10 <sub>B</sub>	Configures the controller to use word transfers
[17:14]	R_power	0010 <sub>B</sub>	Configures the controller to perform four DMA transfers
[2:0]	cycle_ctrl	110 <sub>B</sub>	Configures the controller to perform a peripheral scatter-gather DMA cycle
<b>User Defined Values:</b>			
[23:21]	dst_prot_ctrl	–	Configures the state of <b>HPROT</b> when the controller writes the destination data
[20:18]	src_prot_ctrl	–	Configures the state of <b>HPROT</b> when the controller reads the source data
[13:4]	n_minus_1	N <sup>1)</sup>	Configures the controller to perform N DMA transfers, where N is a multiple of four
[3]	next_useburst	–	When set to 1, the controller sets the chnl_useburst_set [C] bit to 1 after the alternate transfer completes

1) Because the R\_power field is set to four, you must set N to be a multiple of four. The value given by N/4 is the number of times that you must configure the alternate data structure.

**DMA Controller**

See **Control Data Configuration** on **Page 292** for more information.

**Figure 43 “Peripheral Scatter-Gather Example”** on **Page 287** shows a peripheral scatter-gather example.


**Initialization**

- Configure primary to enable the copy A, B, C and D operations:  $\text{cycle\_ctrl} = 110_B, 2^R = 4, N = 16$ .
- Write the primary source data to memory, using the structure shown in the following table.

**Table 54**

	src_data_end_ptr	dst_data_end_ptr	channel_cfg	Unused
Data for Task A	00A00000 <sub>H</sub>	00AE0000 <sub>H</sub>	cycle_ctrl = 111 <sub>B</sub> , $2^R = 4, N = 3$	0XXXXXXXX <sub>H</sub>
Data for Task B	00B00000 <sub>H</sub>	00BE0000 <sub>H</sub>	cycle_ctrl = 111 <sub>B</sub> , $2^R = 2, N = 8$	0XXXXXXXX <sub>H</sub>
Data for Task C	00C00000 <sub>H</sub>	00CE0000 <sub>H</sub>	cycle_ctrl = 111 <sub>B</sub> , $2^R = 8, N = 5$	0XXXXXXXX <sub>H</sub>
Data for Task D	00D00000 <sub>H</sub>	00DE0000 <sub>H</sub>	cycle_ctrl = 001 <sub>B</sub> , $2^R = 4, N = 4$	0XXXXXXXX <sub>H</sub>

Peripheral scatter-gather transaction:

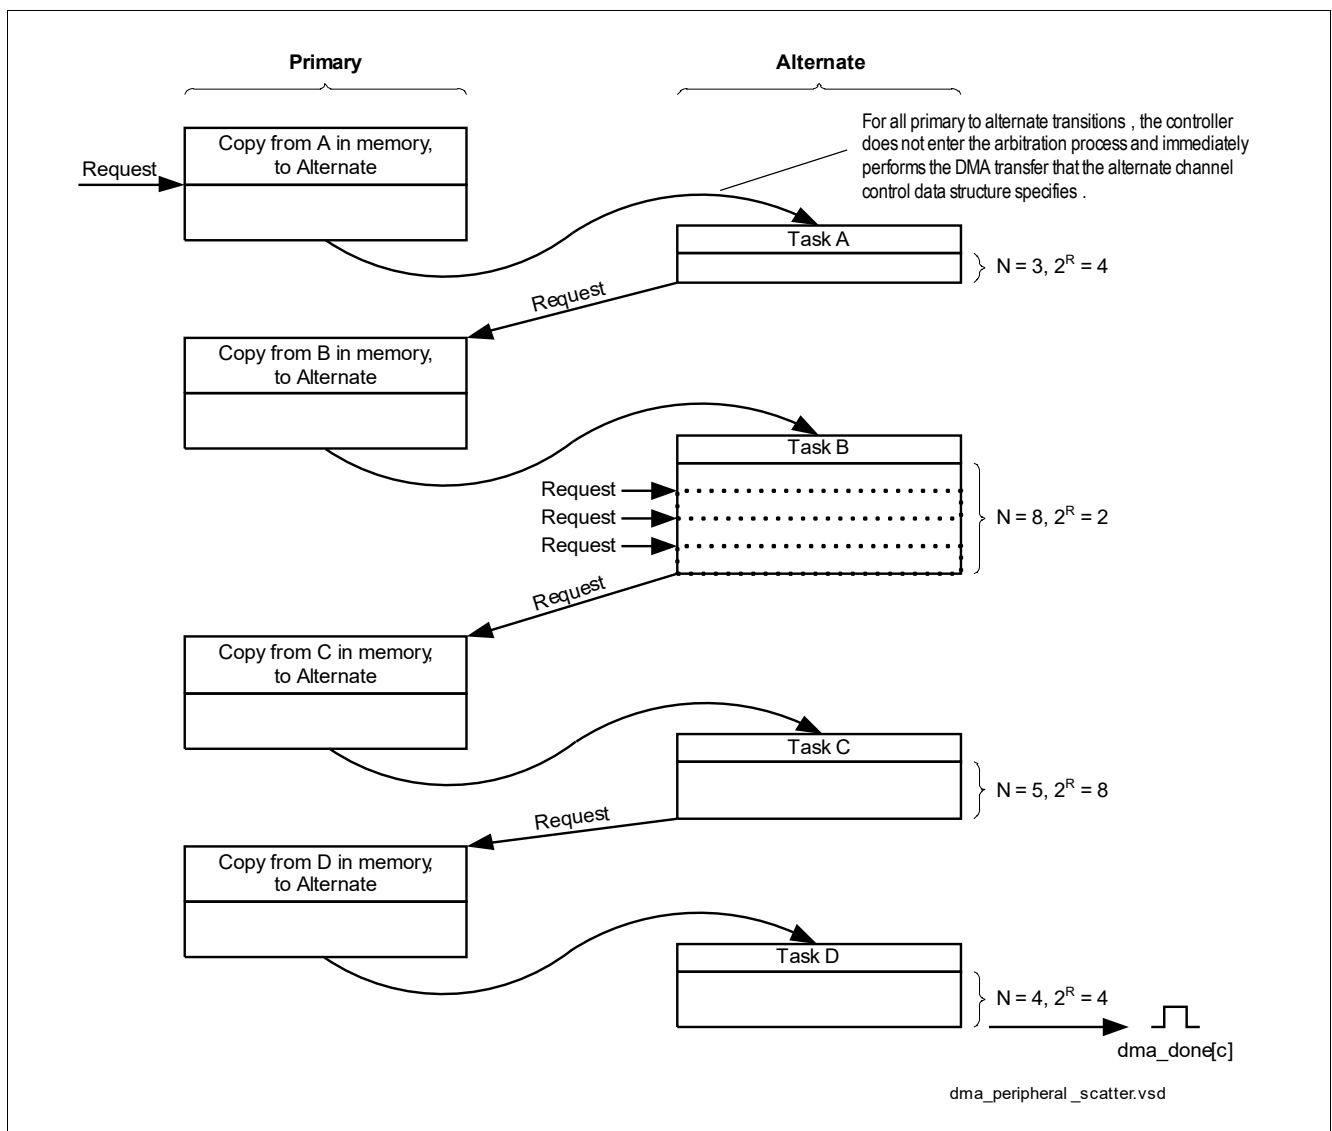

**Figure 43 Peripheral Scatter-Gather Example**

## DMA Controller

In [Figure 43 “Peripheral Scatter-Gather Example” on Page 287](#):

### Initialization

- The host processor configures the primary data structure to operate in peripheral scatter-gather mode by setting `cycle_ctrl` to `110B`. Because a data structure for a single channel consists of four words then you must set  $2^R$  to 4. In this example, there are four tasks and therefore N is set to 16.
- The host processor writes the data structure for tasks A, B, C, and D to the memory locations that the `primary_src_data_end_ptr` specifies.
- The host processor enables the channel.

The peripheral scatter-gather transaction commences when the controller receives a request on `dma_req[]`. The transaction continues as follows:

### Primary, copy A

- After receiving a request, the controller performs four DMA transfers. These transfers write the alternate data structure for task A.

### Task A

- The controller performs task A.
- After the controller completes the task it enters the arbitration process.

After the peripheral issues a new request and it has the highest priority then the process continues with:

### Primary, copy B

- The controller performs four DMA transfers. These transfers write the alternate data structure for task B.

### Task B

- The controller performs task B. To enable the controller to complete the task, the peripheral must issue a further three requests.
- After the controller completes the task it enters the arbitration process.

After the peripheral issues a new request and it has the highest priority then the process continues with:

### Primary, copy C

- The controller performs four DMA transfers. These transfers write the alternate data structure for task C.

### Task C

- The controller performs task C.
- After the controller completes the task it enters the arbitration process.

After the peripheral issues a new request and it has the highest priority then the process continues with:

### Primary, copy D

- The controller performs four DMA transfers. These transfers write the alternate data structure for task D.
- The controller sets the `cycle_ctrl` bits of the primary data structure to `000B`, to indicate that this data structure is now invalid.



**DMA Controller**

**Task D**

- The controller performs task D using a basic cycle.
- The controller sets **dma\_done[C]** HIGH for one **hclk** cycle and enters the arbitration process.

**Error Signaling**

If the controller detects an ERROR response on the AHB-Lite master interface, it:

- Disables the channel that corresponds to the ERROR.
- Sets **dma\_err** HIGH.

After the host processor detects that **dma\_err** is HIGH, it must check which channel was active when the ERROR occurred. It can do this by:

- Reading the **chnl\_enable\_set** Register to create a list of disabled channels.

When a channel asserts **dma\_done[]** then the controller disables the channel. The program running on the host processor must always keep a record of which channels have recently asserted their **dma\_done[]** outputs.


- It must compare the disabled channels list from step 1, with the record of the channels that have recently set their **dma\_done[]** outputs. The channel with no record of **dma\_done[C]** being set is the channel that the ERROR occurred on.

**9.3.3 Channel Control Data Structure**

You must provide an area of system memory to contain the channel control data structure. This system memory must:

- Provide a contiguous area of system memory that the controller and host processor can access.
- Have a base address that is an integer multiple of the total size of the channel control data structure.

**Figure 44** shows the memory that the controller requires for the channel control data structure, when it uses all 14 channels and the optional alternate data structure.

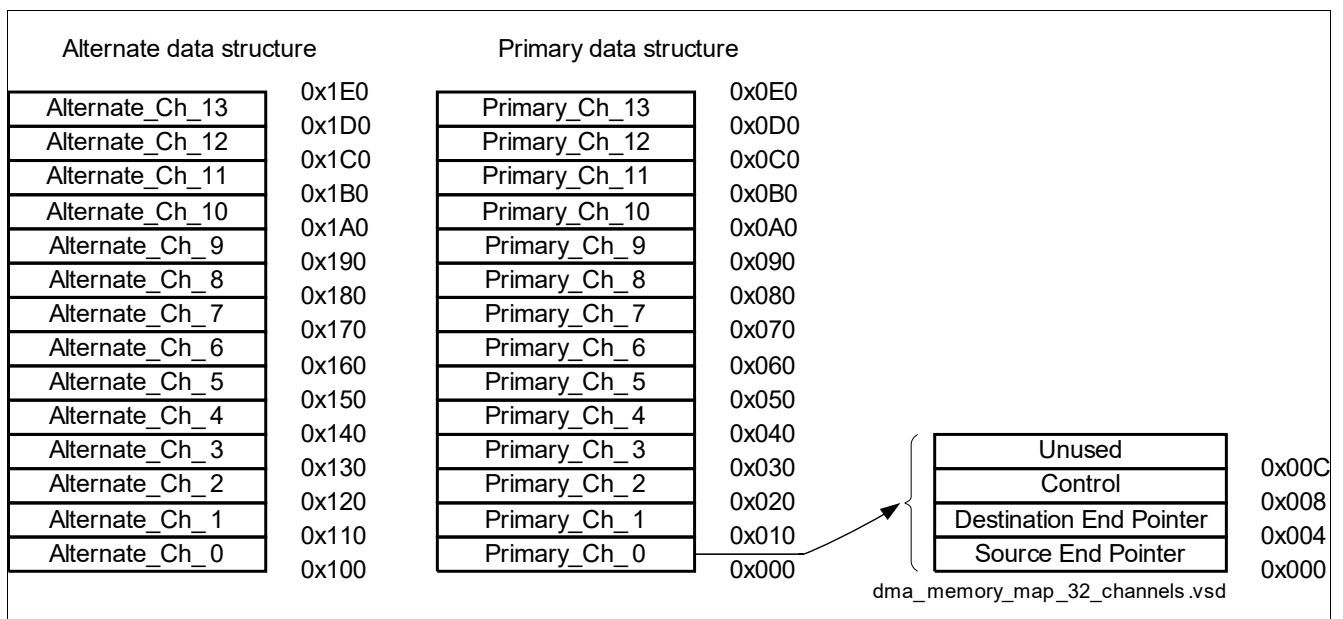

**Figure 44 Memory Map for 32 Channels, Including the Alternate Data Structure**

The example structure in **Figure 44** uses 1KB of system memory. In this example, the controller uses the lower 10 address bits to enable it to access all of the elements in the structure and therefore the base address must

## DMA Controller

be at 0XXXXX000<sub>H</sub>, 0XXXXX400<sub>H</sub>, 0XXXXX800<sub>H</sub>, or 0XXXXXC00<sub>H</sub>. You can configure the base address for the primary data structure by writing the appropriate value in the ctrl\_base\_ptr Register. See Channel control data base pointer on page 3-8.

### The amount of system memory you require depends on:

- The number of DMA channels you configure the controller to use.
- If you configure a DMA channel to use the alternate data structure. See Channel primary-alternate set.

**Table 55** lists the address bits that the controller uses when it accesses the elements of the channel control data structure, depending on the number of channels that the controller contains.

**Table 55 Address Bit Settings for the Channel Control Data Structure**

Address Bits							
Number of DMA Channels Implemented	[9]	[8]	[7]	[6]	[5]	[4]	[3:0]
0-13		A	C[3]	C[2]	C[1]	C[0]	00 <sub>H</sub> , 04 <sub>H</sub> or 08 <sub>H</sub>

Where:


**Table 56**

<b>A</b>	Selects one of the channel control data structures:	
	<b>A = 0</b>	Selects the primary data structure.
	<b>A = 1</b>	Selects the alternate data structure.
<b>C[x:0]</b>	Selects the DMA channel.	
<b>Address[3:0]</b>	Selects one of the control elements:	
	00 <sub>H</sub>	Selects the source data end pointer.
	04 <sub>H</sub>	Selects the destination data end pointer.
	08 <sub>H</sub>	Selects the control data configuration.
	0C <sub>H</sub>	The controller does not access this address location. If required, you can enable the host processor to use this memory location as system memory.

*Note:* It is not necessary for you to calculate the base address of the alternate data structure because the alt\_ctrl\_base\_ptr Register provides this information. See Channel alternate control data base pointer.

**Figure 44** shows an example implementation where the controller uses three DMA channels and the alternate data structure.

DMA Controller

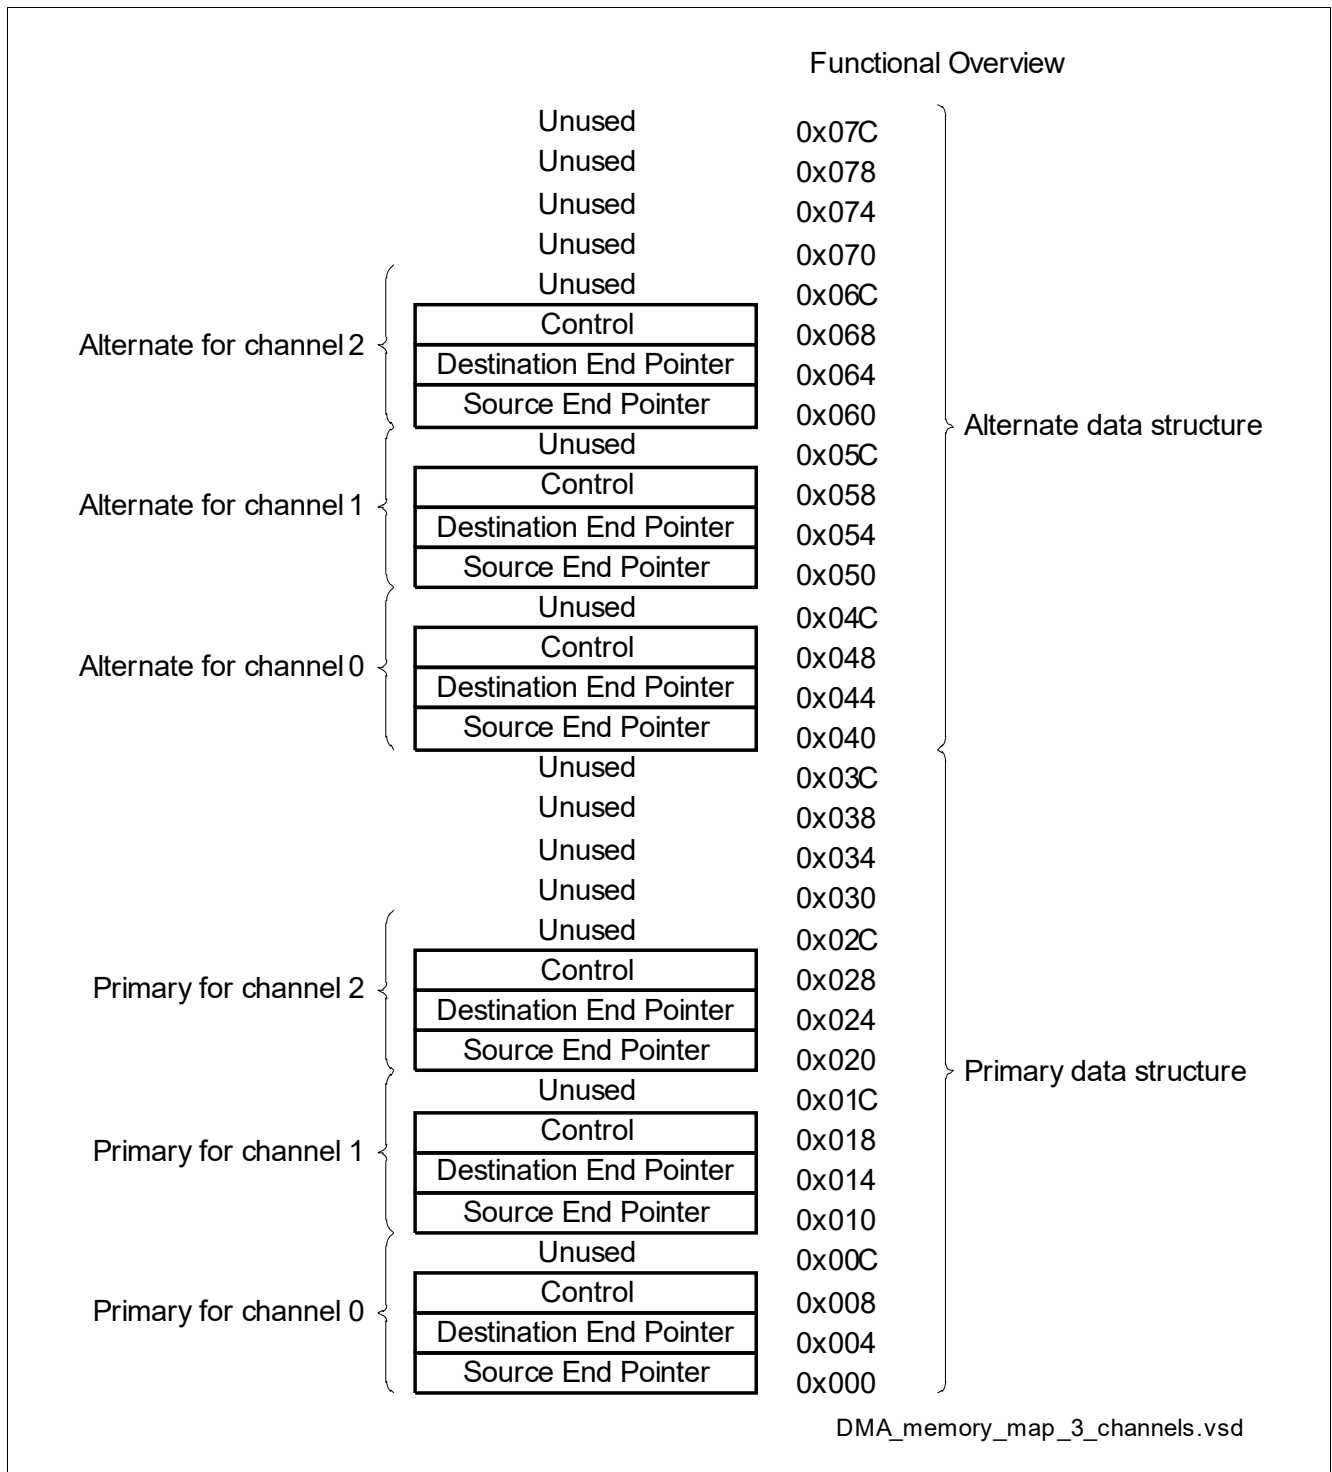

**Figure 45 Memory Map for Three DMA Channels, Including the Alternate Data Structure**

The example structure in [Figure 44](#) uses 128 bytes of system memory. In this example, the controller uses the lower six address bits to enable it to access all of the elements in the structure and therefore the base address must be at 0XXXXXX00<sub>H</sub> or 0XXXXXX80<sub>H</sub>.

[Table 57](#) lists the permitted base address values that you can assign for the primary data structure, depending on the number of channels that the controller contains.

## DMA Controller

**Table 57 Permitted Base Addresses**

Number of DMA Channels	Permitted Base Addresses <sup>1)</sup> for the Primary Data Structure
0-13	0XXXXX000 <sub>H</sub> , 0XXXXX200 <sub>H</sub> , 0XXXXX400 <sub>H</sub> , 0XXXXX600 <sub>H</sub> , 0XXXXX800 <sub>H</sub> , 0XXXXXA00 <sub>H</sub> , 0XXXXXC00 <sub>H</sub> , 0XXXXXE00 <sub>H</sub>

1) Where X is a hexadecimal.

The controller uses the system memory to enable it to access two pointers and the control information that it requires for each channel. The following subsections describe these 32-bit memory locations and how the controller calculates the DMA transfer address:

- [Source Data End Pointer](#)
- [Destination Data End Pointer](#)
- [Control Data Configuration](#)
- [Address Calculation](#)

### Source Data End Pointer

The `src_data_end_ptr` memory location contains a pointer to the end address of the source data. [Table 58](#) lists the bit assignments for this memory location.

**Table 58 `src_data_end_ptr` bit assignments**

Bit	Name	Description
[31:0]	<code>src_data_end_ptr</code>	Pointer to the end address of the source data

Before the controller can perform a DMA transfer, you must program this memory location with the end address of the source data. The controller reads this memory location when it starts a 2<sup>R</sup> DMA transfer.

*Note: The controller does not write to this memory location.*

### Destination Data End Pointer

The `dst_data_end_ptr` memory location contains a pointer to the end address of the destination data. [Table 59](#) lists the bit assignments for this memory location.

**Table 59 `dst_data_end_ptr` bit assignments**

Bit	Name	Description
[31:0]	<code>dst_data_end_ptr</code>	Pointer to the end address of the destination data

Before the controller can perform a DMA transfer, you must program this memory location with the end address of the destination data. The controller reads this memory location when it starts a 2<sup>R</sup> DMA transfer.

*Note: The controller does not write to this memory location.*

### Control Data Configuration

For each DMA transfer, the `channel_cfg` memory location provides the control information for the controller. [Figure 46](#) shows the bit assignments for this memory location.

DMA Controller

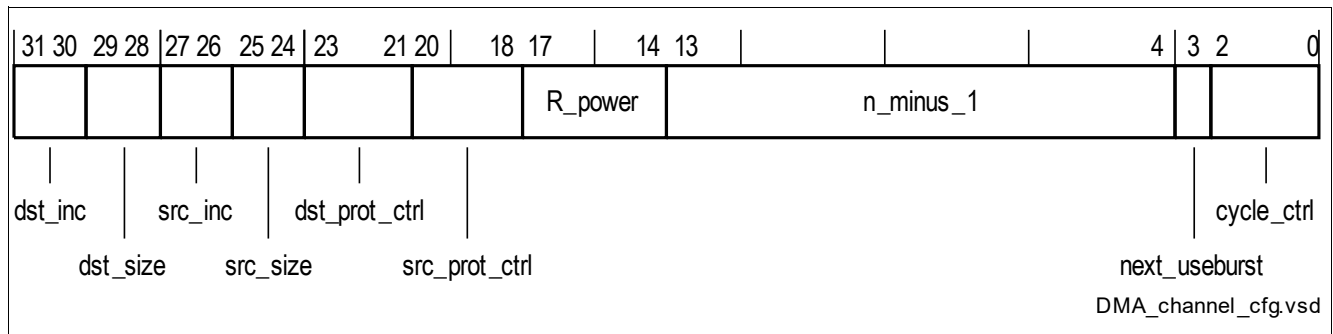


Figure 46 channel\_cfg bit assignments

Table 60 lists the bit assignments for this memory location.

Table 60 channel\_cfg bit assignments

Bit	Name	Description
[31:30]	dst_inc	Destination address increment. The address increment depends on the source data width as follows: <b>Source data width = byte</b> 00 <sub>B</sub> = byte. 01 <sub>B</sub> = halfword. 10 <sub>B</sub> = word. 11 <sub>B</sub> = no increment. Address remains set to the value that the dst_data_end_ptr memory location contains. <b>Source data width = halfword</b> 00 <sub>B</sub> = reserved. 01 <sub>B</sub> = halfword. 10 <sub>B</sub> = word. 11 <sub>B</sub> = no increment. Address remains set to the value that the dst_data_end_ptr memory location contains. <b>Source data width = word</b> 00 <sub>B</sub> = reserved. 01 <sub>B</sub> = reserved. 10 <sub>B</sub> = word. 11 <sub>B</sub> = no increment. Address remains set to the value that the dst_data_end_ptr memory location contains.
[29:28]	dst_size	Destination data size.  <i>Note: You must set dst_size to contain the same value that src_size contains.</i>

## DMA Controller

Table 60 channel\_cfg bit assignments (cont'd)

Bit	Name	Description
[27:26]	src_inc	<p>Set the bits to control the source address increment. The address increment depends on the source data width as follows:</p> <p><b>Source data width = byte</b></p> <p>00<sub>B</sub> = byte.  01<sub>B</sub> = halfword.  10<sub>B</sub> = word.  11<sub>B</sub> = no increment. Address remains set to the value that the src_data_end_ptr memory location contains.</p> <p><b>Source data width = halfword</b></p> <p>00<sub>B</sub> = reserved.  01<sub>B</sub> = halfword.  10<sub>B</sub> = word.  11<sub>B</sub> = no increment. Address remains set to the value that the src_data_end_ptr memory location contains.</p> <p><b>Source data width = word</b></p> <p>00<sub>B</sub> = reserved.  01<sub>B</sub> = reserved.  10<sub>B</sub> = word.  11<sub>B</sub> = no increment. Address remains set to the value that the src_data_end_ptr memory location contains.</p>
[25:24]	src_size	<p>Set the bits to match the size of the source data:</p> <p>00<sub>B</sub> = byte  01<sub>B</sub> = halfword  10<sub>B</sub> = word  11<sub>B</sub> = reserved.</p>
[23:21]	dst_prot_ctrl	<p>Set the bits to control the state of <b>HPROT[3:1]</b> when the controller writes the destination data.</p> <p><b>Bit [23]</b> Controls the state of <b>HPROT[3]</b> as follows:  0<sub>B</sub> = <b>HPROT[3]</b> is LOW and the access is non-cacheable.  1<sub>B</sub> = <b>HPROT[3]</b> is HIGH and the access is cacheable.</p> <p><b>Bit [22]</b> Controls the state of <b>HPROT[2]</b> as follows:  0<sub>B</sub> = <b>HPROT[2]</b> is LOW and the access is non-bufferable.  1<sub>B</sub> = <b>HPROT[2]</b> is HIGH and the access is bufferable.</p> <p><b>Bit [21]</b> Controls the state of <b>HPROT[1]</b> as follows:  0<sub>B</sub> = <b>HPROT[1]</b> is LOW and the access is non-privileged.  1<sub>B</sub> = <b>HPROT[1]</b> is HIGH and the access is privileged.</p>

## DMA Controller

Table 60 channel\_cfg bit assignments (cont'd)

Bit	Name	Description
[20:18]	src_prot_ctl	<p>Set the bits to control the state of <b>HPROT[3:1]</b> when the controller reads the source data.</p> <p><b>Bit [20]</b> Controls the state of <b>HPROT[3]</b> as follows:  <math>0_B = \mathbf{HPROT[3]}</math> is LOW and the access is non-cacheable.  <math>1_B = \mathbf{HPROT[3]}</math> is HIGH and the access is cacheable.</p> <p><b>Bit [19]</b> Controls the state of <b>HPROT[2]</b> as follows:  <math>0 = \mathbf{HPROT[2]}</math> is LOW and the access is non-bufferable.  <math>1 = \mathbf{HPROT[2]}</math> is HIGH and the access is bufferable.</p> <p><b>Bit [18]</b> Controls the state of <b>HPROT[1]</b> as follows:  <math>0_B = \mathbf{HPROT[1]}</math> is LOW and the access is non-privileged.  <math>1_B = \mathbf{HPROT[1]}</math> is HIGH and the access is privileged.</p>
[17:14]	R_power	<p>Set these bits to control how many DMA transfers can occur before the controller re-arbitrates. The possible arbitration rate settings are:</p> <p><b>0000<sub>B</sub></b> Arbitrates after each DMA transfer.  <b>0001<sub>B</sub></b> Arbitrates after 2 DMA transfers.  <b>0010<sub>B</sub></b> Arbitrates after 4 DMA transfers.  <b>0011<sub>B</sub></b> Arbitrates after 8 DMA transfers.  <b>0100<sub>B</sub></b> Arbitrates after 16 DMA transfers.  <b>0101<sub>B</sub></b> Arbitrates after 32 DMA transfers.  <b>0110<sub>B</sub></b> Arbitrates after 64 DMA transfers.  <b>0111<sub>B</sub></b> Arbitrates after 128 DMA transfers.  <b>1000<sub>B</sub></b> Arbitrates after 256 DMA transfers.  <b>1001<sub>B</sub></b> Arbitrates after 512 DMA transfers.  <b>1010<sub>B</sub>-1111<sub>B</sub></b> Arbitrates after 1024 DMA transfers. This means that no arbitration occurs during the DMA transfer because the maximum transfer size is 1024.</p>
[13:4]	n_minus_1	<p>Prior to the DMA cycle commencing, these bits represent the total number of DMA transfers that the DMA cycle contains. You must set these bits according to the size of DMA cycle that you require. The 10-bit value indicates the number of DMA transfers, minus one. The possible values are:</p> <p><math>00000000_B = 1</math> DMA transfer  <math>00000001_B = 2</math> DMA transfers  <math>00000010_B = 3</math> DMA transfers  <math>00000011_B = 4</math> DMA transfers  <math>00000100_B = 5</math> DMA transfers..  . . .  <math>11111111_B = 1024</math> DMA transfers.</p> <p>The controller updates this field immediately prior to it entering the arbitration process. This enables the controller to store the number of outstanding DMA transfers that are necessary to complete the DMA cycle.</p>

## DMA Controller

Table 60 channel\_cfg bit assignments (cont'd)

Bit	Name	Description
[3]	next_useburst	<p>Controls if the chnl_useburst_set [C] bit is set to a 1, when the controller is performing a peripheral scatter-gather and is completing a DMA cycle that uses the alternate data structure.</p> <p><i>Note:</i> Immediately prior to completion of the DMA cycle that the alternate data structure specifies, the controller sets the chnl_useburst_set [C] bit to 0 if the number of remaining transfers is less than 2R. The setting of the next_useburst bit controls if the controller performs an additional modification of the chnl_useburst_set [C] bit.</p> <p>In peripheral scatter-gather DMA cycle then after the DMA cycle that uses the alternate data structure completes, either: 0 = The controller does not change the value of the chnl_useburst_set [C] bit. If the chnl_useburst_set [C] bit is 0 then for all the remaining DMA cycles in the peripheral scatter-gather transaction, the controller responds to requests on <b>dma_req[]</b> and <b>dma_sreq[]</b>, when it performs a DMA cycle that uses an alternate data structure. 1 = The controller sets the chnl_useburst_set [C] bit to a 1. Therefore, for the remaining DMA cycles in the peripheral scatter-gather transaction, the controller only responds to requests on <b>dma_req[]</b>, when it performs a DMA cycle that uses an alternate data structure.</p>



## DMA Controller

**Table 60** channel\_cfg bit assignments (cont'd)

Bit	Name	Description
[2:0]	cycle_ctrl	<p>The operating mode of the DMA cycle. The modes are:</p> <p><b>000<sub>B</sub></b> Stop. Indicates that the data structure is invalid.</p> <p><b>001<sub>B</sub></b> Basic. The controller must receive a new request, prior to it entering the arbitration process, to enable the DMA cycle to complete.</p> <p><b>010<sub>B</sub></b> Auto-request. The controller automatically inserts a request for the appropriate channel during the arbitration process. This means that the initial request is sufficient to enable the DMA cycle to complete.</p> <p><b>011<sub>B</sub></b> Ping-pong. The controller performs a DMA cycle using one of the data structures. After the DMA cycle completes, it performs a DMA cycle using the other data structure. After the DMA cycle completes and provided that the host processor has updated the original data structure, it performs a DMA cycle using the original data structure. The controller continues to perform DMA cycles until it either reads an invalid data structure or the host processor changes the cycle_ctrl bits to 001<sub>B</sub> or 010<sub>B</sub>. See <a href="#">Ping-Pong</a> on <a href="#">Page 280</a>.</p> <p><b>100<sub>B</sub></b> Memory scatter/gather. See <a href="#">Memory Scatter-Gather</a> on <a href="#">Page 283</a>. When the controller operates in memory scatter-gather mode, you must only use this value in the primary data structure.</p> <p><b>101<sub>B</sub></b> Memory scatter/gather. See <a href="#">Memory Scatter-Gather</a> on <a href="#">Page 283</a>. When the controller operates in memory scatter-gather mode, you must only use this value in the alternate data structure.</p> <p><b>110<sub>B</sub></b> Peripheral scatter/gather. See <a href="#">Peripheral Scatter-Gather</a> on <a href="#">Page 286</a>. When the controller operates in peripheral scatter-gather mode, you must only use this value in the primary data structure.</p> <p><b>111<sub>B</sub></b> Peripheral scatter/gather. See <a href="#">Peripheral Scatter-Gather</a> on <a href="#">Page 286</a>. When the controller operates in peripheral scatter-gather mode, you must only use this value in the alternate data structure.</p>

At the start of a DMA cycle, or  $2^R$  DMA transfer, the controller fetches the channel\_cfg from system memory. After it performs  $2^R$ , or N, transfers it stores the updated channel\_cfg in system memory.

The controller does not support a dst\_size value that is different to the src\_size value. If it detects a mismatch in these values, it uses the src\_size value for source and destination and when it next updates the n\_minus\_1 field, it also sets the dst\_size field to the same as the src\_size field.

After the controller completes the N transfers it sets the cycle\_ctrl field to 000<sub>B</sub>, to indicate that the channel\_cfg data is invalid. This prevents it from repeating the same DMA transfer.

## DMA Controller

### Address Calculation

To calculate the source address of a DMA transfer, the controller performs a left shift operation on the  $n\_minus\_1$  value by a shift amount that  $src\_inc$  specifies, and then subtracts the resulting value from the source data end pointer. Similarly, to calculate the destination address of a DMA transfer, it performs a left shift operation on the  $n\_minus\_1$  value by a shift amount that  $dst\_inc$  specifies, and then subtracts the resulting value from the destination end pointer.

Depending on the value of  $src\_inc$  and  $dst\_inc$ , the source address and destination address can be calculated using the equations:

#### $src\_inc = 00_B$ and $dst\_inc = 00_B$

- source address =  $src\_data\_end\_ptr - n\_minus\_1$
- destination address =  $dst\_data\_end\_ptr - n\_minus\_1$

#### $src\_inc = 01_B$ and $dst\_inc = 01_B$

- source address =  $src\_data\_end\_ptr - (n\_minus\_1 \ll 1)$
- destination address =  $dst\_data\_end\_ptr - (n\_minus\_1 \ll 1)$

#### $src\_inc = 10_B$ and $dst\_inc = 10_B$

- source address =  $src\_data\_end\_ptr - (n\_minus\_1 \ll 2)$
- destination address =  $dst\_data\_end\_ptr - (n\_minus\_1 \ll 2)$

#### $src\_inc = 11_B$ and $dst\_inc = 11_B$

- source address =  $src\_data\_end\_ptr$
- destination address =  $dst\_data\_end\_ptr$

**Table 62** lists the destination addresses for a DMA cycle of six words.

**Table 61 DMA Cycle of Six Words Using a Word Increment**

#### Initial values of channel\_cfg, prior to the DMA cycle

$src\_size = 10_B$ ,  $dst\_inc = 10_B$ ,  $n\_minus\_1 = 101_B$ ,  $cycle\_ctrl = 1_B$

DMA Transfers	End Pointer	Count	Difference <sup>1)</sup>	Address
	02AC <sub>H</sub>	5	014 <sub>H</sub>	0298 <sub>H</sub>
	02AC <sub>H</sub>	4	010 <sub>H</sub>	029C <sub>H</sub>
	02AC <sub>H</sub>	3	0C <sub>H</sub>	02A0 <sub>H</sub>
	02AC <sub>H</sub>	2	08 <sub>H</sub>	02A4 <sub>H</sub>
	02AC <sub>H</sub>	1	04 <sub>H</sub>	02A8 <sub>H</sub>
	02AC <sub>H</sub>	0	00 <sub>H</sub>	02AC <sub>H</sub>

#### Final values of channel\_cfg, after the DMA cycle

$src\_size = 10_B$ ,  $dst\_inc = 10_B$ ,  $n\_minus\_1 = 0_B$ ,  $cycle\_ctrl = 0_B$

1) This value is the result of count being shifted left by the value of  $dst\_inc$ .

## DMA Controller

**Table 62** lists the destination addresses for a DMA transfer of 12 bytes using a halfword increment.

**Table 62 DMA Cycle of 12 Bytes Using a Halfword Increment**

### Initial values of channel\_cfg, prior to the DMA cycle

src\_size = 00<sub>B</sub>, dst\_inc = 01<sub>B</sub>, n\_minus\_1 = 1011<sub>B</sub>, cycle\_ctrl = 1<sub>B</sub>, R\_power = 11<sub>B</sub>

DMA Transfers	End Pointer	Count	Difference <sup>1)</sup>	Address
	05E7 <sub>H</sub>	11	016 <sub>H</sub>	05D1 <sub>H</sub>
	05E7 <sub>H</sub>	10	014 <sub>H</sub>	05D3 <sub>H</sub>
	05E7 <sub>H</sub>	9	012 <sub>H</sub>	05D5 <sub>H</sub>
	05E7 <sub>H</sub>	8	010 <sub>H</sub>	05D7 <sub>H</sub>
	05E7 <sub>H</sub>	7	0E <sub>H</sub>	05D9 <sub>H</sub>
	05E7 <sub>H</sub>	6	0C <sub>H</sub>	05DB <sub>H</sub>
	05E7 <sub>H</sub>	5	0A <sub>H</sub>	05DD <sub>H</sub>
	05E7 <sub>H</sub>	4	08 <sub>H</sub>	05DF <sub>H</sub>

### Values of channel\_cfg after 2<sup>R</sup> DMA transfers

src\_size = 00<sub>B</sub>, dst\_inc = 01<sub>B</sub>, n\_minus\_1 = 011<sub>B</sub>, cycle\_ctrl = 1<sub>B</sub>, R\_power = 11<sub>B</sub>

DMA Transfers	End Pointer	Count	Difference <sup>2)</sup>	Address
	05E7 <sub>H</sub>	3	06 <sub>H</sub>	05E1 <sub>H</sub>
	05E7 <sub>H</sub>	2	04 <sub>H</sub>	05E3 <sub>H</sub>
	05E7 <sub>H</sub>	1	02 <sub>H</sub>	05E5 <sub>H</sub>
	05E7 <sub>H</sub>	0	00 <sub>H</sub>	05E7 <sub>H</sub>

### Final values of channel\_cfg, after the DMA cycle.

src\_size = 00<sub>B</sub>, dst\_inc = 01<sub>B</sub>, n\_minus\_1 = 0<sub>B</sub>, cycle\_ctrl = 0<sub>B</sub>, R\_power = 11<sub>B</sub>

- 1) This value is the result of count being shifted left by the value of dst\_inc.
- 2) After the controller completes the DMA cycle it invalidates the channel\_cfg memory location by clearing the cycle\_ctrl field.

## DMA Controller

### 9.4 Register Definition

Please refer to [1], Chapter 3, Programmer's Model and chapter 4, Register Description

**Table 63** shows the <Module> module base address (for the configuration register).

**Table 63 Register Address Space**

Module	Base Address	End Address	Note
DMA	50014000 <sub>H</sub>	50017FFF <sub>H</sub>	

**Table 64 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Register Definition,</b>			
<b>STATUS</b>	DMA Status	00 <sub>H</sub>	000D 0000 <sub>H</sub>
<b>CFG</b>	DMA Configuration	04 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CTRL_BASE_PTR</b>	Channel Control Data Base Pointer	08 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>ALT_CTRL_BASE_PTR</b>	Channel Alternate Control Data Base Pointer	0C <sub>H</sub>	0000 0100 <sub>H</sub>
<b>WAITONREQ_STATUS</b>	Channel Wait on Request Status	10 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CHNL_SW_REQUEST</b>	Channel Software Request	14 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CHNL_USEBURST_SET</b>	Channel Useburst Set	18 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CHNL_USEBURST_CLR</b>	Channel Useburst Clear	1C <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CHNL_REQ_MASK_SET</b>	Channel Request Mask Set	20 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CHNL_REQ_MASK_CLR</b>	Channel Request Mask Clear	24 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CHNL_ENABLE_SET</b>	Channel Enable Set	28 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CHNL_ENABLE_CLR</b>	Channel Enable Clear	2C <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CHNL_PRI_ALT_SET</b>	Channel Primary-Alternate Set	30 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CHNL_PRI_ALT_CLR</b>	Channel Primary-Alternate Clear	34 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CHNL_PRIORITY_SET</b>	Channel Priority Set	38 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CHNL_PRIORITY_CLR</b>	Channel Priority Clear	3C <sub>H</sub>	0000 0000 <sub>H</sub>
<b>ERR_CLR</b>	Bus Error Clear	4C <sub>H</sub>	0000 0000 <sub>H</sub>


The registers are addressed wordwise.

## DMA Controller

### DMA Status Registers

The read-only DMA\_STATUS Register returns the status of the controller. You cannot read this register when the controller is in the reset state.

STATUS	Offset	Reset Value
DMA Status	00 <sub>H</sub>	000D 0000 <sub>H</sub>

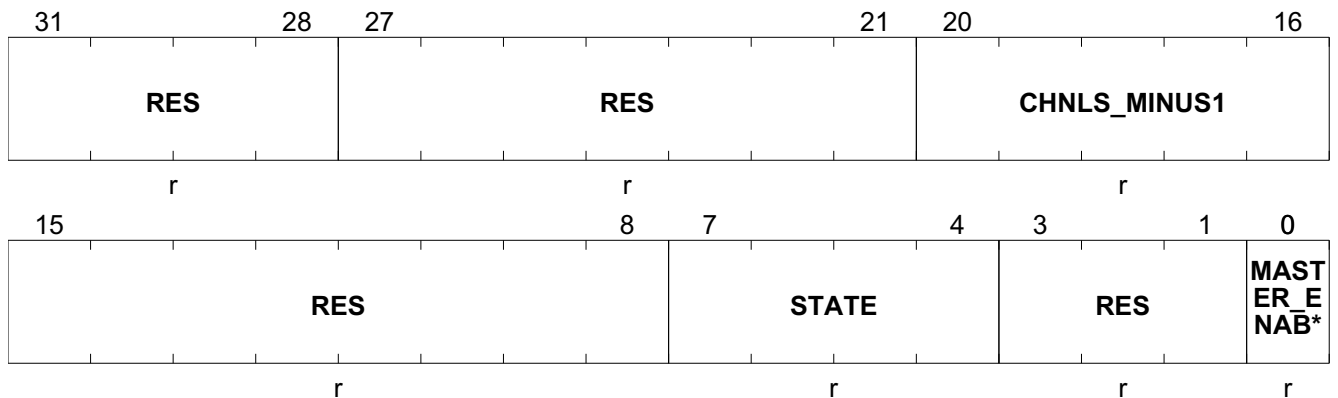


Field	Bits	Type	Description
RES	31:28	r	<b>Reserved</b> Read as 0.
RES	27:21	r	<b>Reserved</b> Read as 0.
CHNLS_MINUS1	20:16	r	<b>Available Channels minus 1</b> Number of available DMA channels minus one 1101 <sub>B</sub> , controller configured to use 14 DMA channels
RES	15:8	r	<b>Reserved</b>
STATE	7:4	r	<b>Current State of the Control State Machine</b> State can be one of the following bit combinations (other bit combinations are undefined): 0000 <sub>B</sub> , idle 0001 <sub>B</sub> , reading channel controller data 0010 <sub>B</sub> , reading source data end pointer 0011 <sub>B</sub> , reading destination data end pointer 0100 <sub>B</sub> , reading source data 0101 <sub>B</sub> , writing destination data 0110 <sub>B</sub> , waiting for DMA request to clear 0111 <sub>B</sub> , writing channel controller data 1000 <sub>B</sub> , stalled 1001 <sub>B</sub> , done 1010 <sub>B</sub> , peripheral scatter-gather transition
RES	3:1	r	<b>Reserved</b>
MASTER_ENABLE	0	r	<b>Enable Status of the Controller</b> 0 <sub>B</sub> <b>DISABLED</b> , controller is disabled 1 <sub>B</sub> <b>ENABLED</b> , controller is enabled

## DMA Controller

### DMA Configuration Register

The read-only dma\_status Register returns the status of the controller. You cannot read this register when the controller is in the reset state.

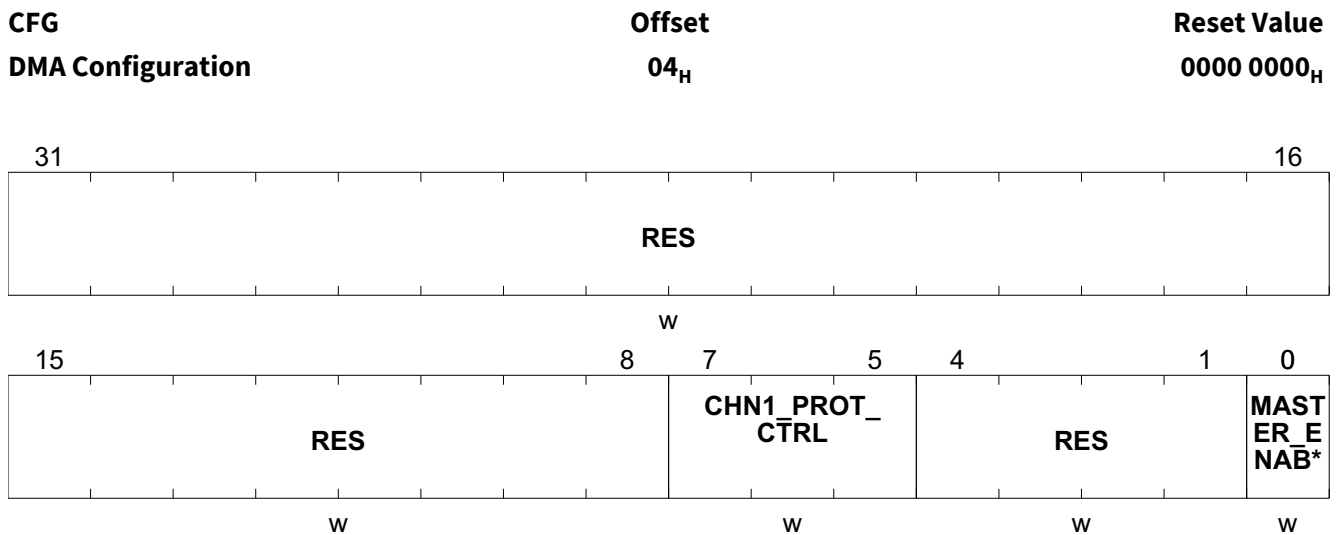

Field	Bits	Type	Description
RES	31:8	w	<b>Reserved</b> Write as zero.
CHN1_PROT_CTRL	7:5	w	<b>CHN1_PROT_CTRL</b> Sets the AHB-Lite protection by controlling the HPROT[3:1] signal levels as follows: bit 7 controls HPROT[3] to indicate if a cacheable access is occurring. bit 6 controls HPROT[2] to indicate if a bufferable access is occurring. bit 5 controls HPROT[1] to indicate if a privileged access is occurring.  <i>Note:</i> When bit[n]=1, then the corresponding HPROT is HIGH. When bit[n]=0, then the corresponding HPROT is LOW.  4. The CHN1_PROT_CTRL bits must not be changed when the MASTER:ENABLE bit is set because this may cause a protocol error on the AHB master interface. As the DMA_CFG register is write-only the user must read the status of the master enable bit from the DMA_STATUS register.
RES	4:1	w	<b>Reserved</b> Write as zero.
MASTER_ENABLE	0	w	<b>Enable for the Controller</b> 0 <sub>B</sub> <b>DISABLE</b> , disables the controller 1 <sub>B</sub> <b>ENABLE</b> , enables the controller

**DMA Controller**


**Channel Control Data Base Pointer Register**

The CTRL\_BASE\_PTR register is a read/write register. You must configure this register to that base pointer points to a location in your system memory.

*Note: The controller provides no internal memory for storing the channel control data.*

The amount of system memory that you must assign to the controller depends on the number of DMA channels and whether you configure it to use the alternate data structure. Therefore, the base pointer address requires a variable number of bits that depend on the system implementation.


You cannot read this register when the controller is in the reset state. **Figure 47** shows the possible bit assignments for this register, depending on the number of DMA channels that you configure the controller to contain

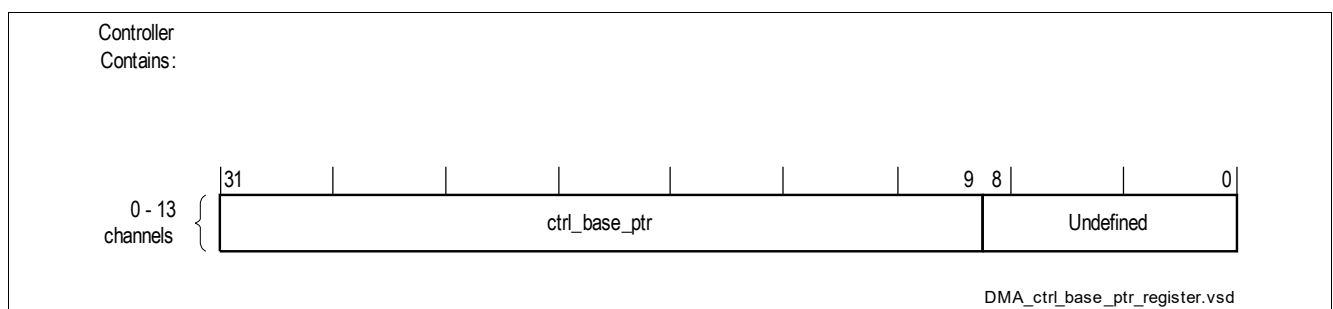

**Figure 47 CTRL\_BASE\_PTR Register Bit Assignments**

## DMA Controller

CTRL_BASE_PTR	Offset	Reset Value
Channel Control Data Base Pointer	08 <sub>H</sub>	0000 0000 <sub>H</sub>

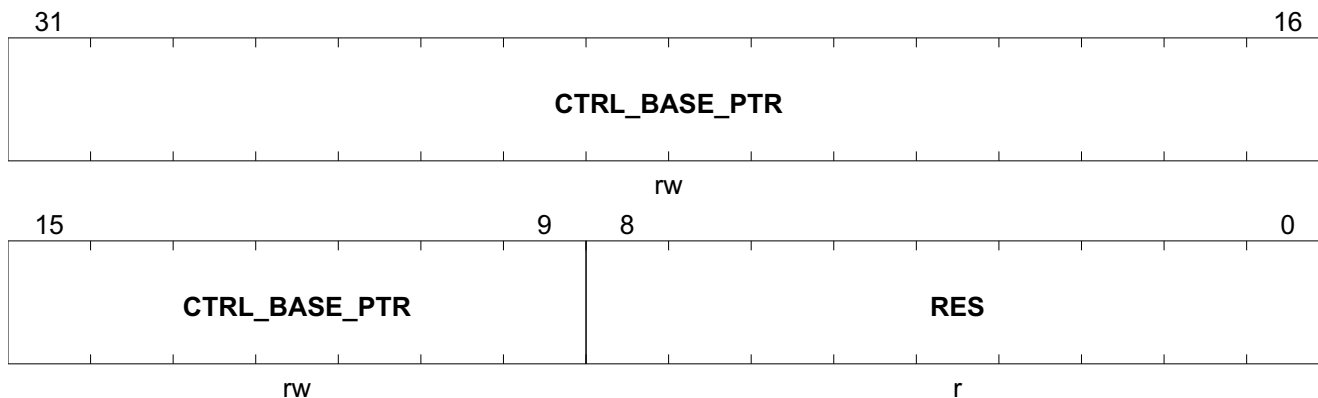

Field	Bits	Type	Description
CTRL_BASE_PTR	31:9	rw	CTRL_BASE_PTR Pointer to the base address of the primary data structure. See <a href="#">Chapter 9.2</a> for information about the data structure.
RES	8:0	r	Reserved read as zero.

**BITS Definition**

The bit range is 31 to PL230\_DMA\_CHNL\_BITS-5 for the field CTRL\_BASE\_PTR and PL230\_DMA\_CHNL\_BITS-4 to 0 for the field res.

PL230\_DMA\_CHNL\_BITS is defined as the minimum number of bits required to represent the number of DMA channels, minus one. The values that PL230\_DMA\_CHNL\_BITS can be assigned are

- 0, when the controller contains 1 DMA channel.
- 1, when the controller contains 2 DMA channels.
- 2, when the controller contains 3 or 4 DMA channels.
- 3, when the controller contains 5 to 8 DMA channels.
- 4, when the controller contains 9 to 16 DMA channels.
- 5, when the controller contains 17 to 32 DMA channels.




**DMA Controller**

**Channel Alternate Control Data Base Pointer Registers**

The read-only ALT\_CTRL\_BASE\_PTR Register returns the base address of the alternate data structure. You cannot read this register when the controller is in the reset state.

ALT_CTRL_BASE_PTR	Offset	Reset Value
Channel Alternate Control Data Base Pointer	0C <sub>H</sub>	0000 0100 <sub>H</sub>

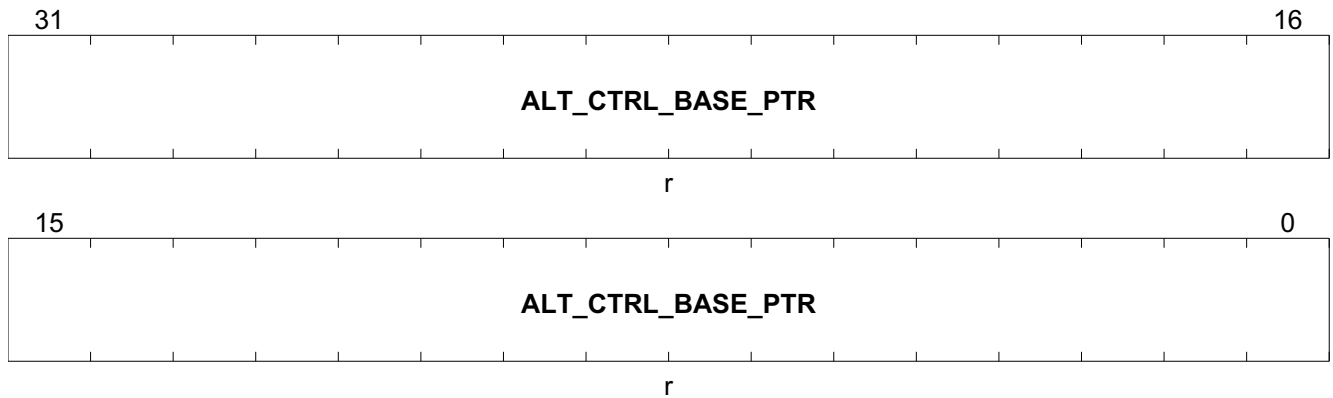


Field	Bits	Type	Description
ALT_CTRL_B ASE_PTR	31:0	r	Base Address of the Alternate Data Structure

**DMA Controller**

**Channel Wait on Request Status Register**

The read-only DMA\_WAITONREQ\_STATUS Register returns the status of dma\_waitonreq[]. You cannot read this register when the controller is in the reset state.

<b>WAITONREQ_STATUS</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Channel Wait on Request Status</b>	<b>10<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

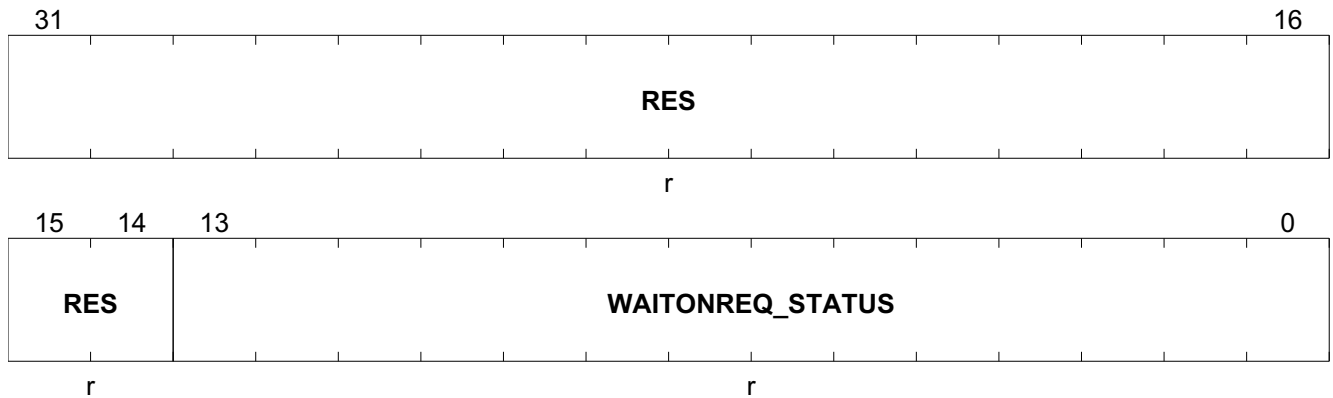


Field	Bits	Type	Description
<b>RES</b>	31:14	r	<b>Reserved</b> Always read as 0
<b>WAITONREQ_STATUS</b>	13:0	r	<b>Channel Wait on Request Status</b> Read as for each bit C (C = 13 to 0): 0 <sub>B</sub> <b>LOW</b> , dma_waitonreq[C] is LOW. 1 <sub>B</sub> <b>HIGH</b> , dma_waitonreq[C] is HIGH.

## DMA Controller

### Channel Software Request Register

The write-only CHNL\_SW\_REQUEST Register enables you to generate a software DMA request.

CHNL_SW_REQUEST	Offset	Reset Value
Channel Software Request	14 <sub>H</sub>	0000 0000 <sub>H</sub>

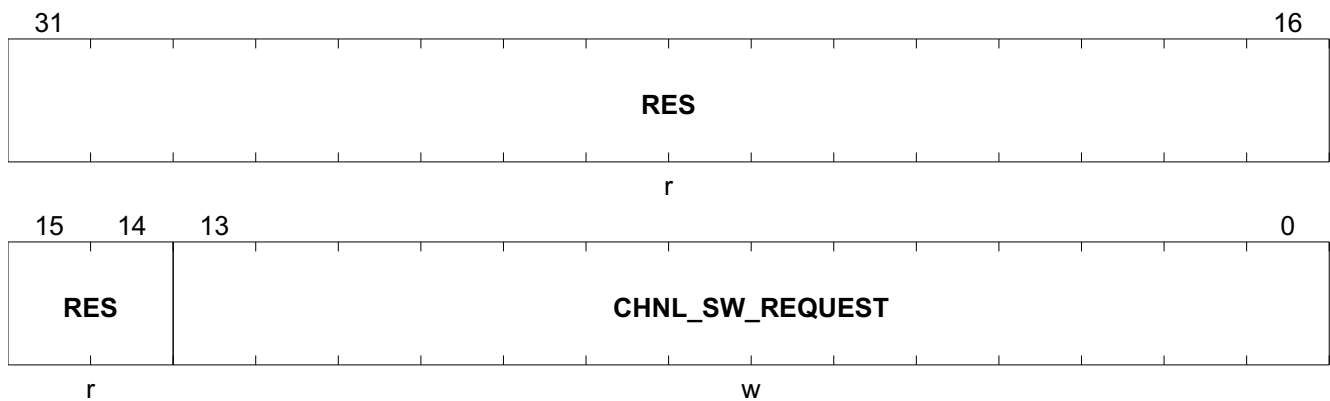


Field	Bits	Type	Description
<b>RES</b>	31:14	r	<b>Reserved</b> Always read as 0
<b>CHNL_SW_REQUEST</b>	13:0	w	<b>CHNL_SW_REQUEST</b> Set the appropriate bit to generate a software DMA request on the corresponding DMA channel. Write as for each bit C (C = 13 to 0):  <i>Note:</i> <i>Writing to this bit where a DMA channel is not implemented does not create a DMA request for that channel.</i>  0 <sub>B</sub> , does not create a DMA request for channel C. 1 <sub>B</sub> , creates a DMA request for channel C.

## DMA Controller

### Channel Useburst Set Register

The read/write CHNL\_USEBURST\_SET Register disables the single request dma\_sreq[] input from generating requests, and therefore only the request, dma\_req[], generates requests. Reading the register returns the useburst status.

CHNL_USEBURST_SET	Offset	Reset Value
Channel Useburst Set	18 <sub>H</sub>	0000 0000 <sub>H</sub>

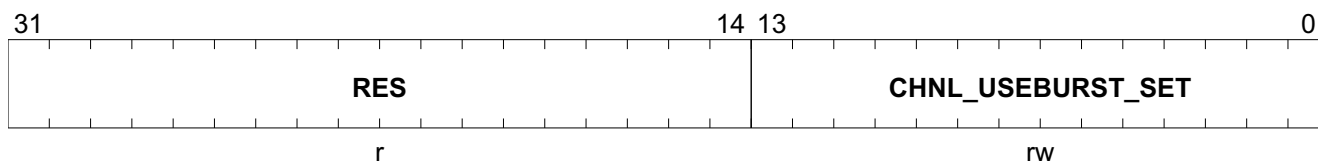

Field	Bits	Type	Description
RES	31:14	r	<b>Reserved</b> Always read as 0
CHNL_USEBURST_SET	13:0	rw	<p><b>CHNL_USEBURST_SET</b> Returns the useburst status, or disables dma_sreq[C] from generating DMA requests. For each bit C (C = 13 to 0)</p> <p><i>Note:</i>      <i>Writing to a bit where a DMA channel is not implemented has no effect.</i></p> <p>0<sub>B</sub>      , on read: DMA channel n responds to requests that it receives on dma_req[C] or dma_sreq[C]. The controller performs 2<sup>R</sup>, or single, bus transfers.</p> <p>1<sub>B</sub>      , on read: DMA channel n does not respond to requests that it receives on dma_req[C] or dma_sreq[C]. The controller only responds to dma_req[C] requests and performs 2<sup>R</sup> transfers.</p> <p>0<sub>B</sub>      , on write: No effect. Use the CHNL_USEBURST_CLR Register to set bit [C] to 0.</p> <p>1<sub>B</sub>      , on write: Disables dma_sreq[C] from generating DMA requests. The controller performs 2<sup>R</sup> transfers.</p>

After the penultimate 2<sup>R</sup> transfer completes, if the number of remaining transfers, N, is less than 2<sup>R</sup> then the controller resets the CHNL\_USEBURST\_SET bit to 0. This enables you to complete the remaining transfers using dma\_req[] or DMA\_SREQ[].

*Note:*      *If you program CHANNEL\_CFG with a value of N less than 2<sup>R</sup> then you must not set the corresponding CHNL\_USEBURST\_SET bit, if the peripheral does not assert dma\_req[].*


In peripheral scatter-gather mode, if the next\_useburst bit is set in CHANNEL\_CFG then the controller sets the CHNL\_USEBURST\_SET [n] bit to a 1, when it completes the DMA cycle that uses the alternate data structure.

DMA Controller

Channel Useburst Clear Register

The write-only CHNL\_USEBURST\_CLR Register enables dma\_sreq[] to generate requests.

<b>CHNL_USEBURST_CLR</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Channel Useburst Clear</b>	<b>1C<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

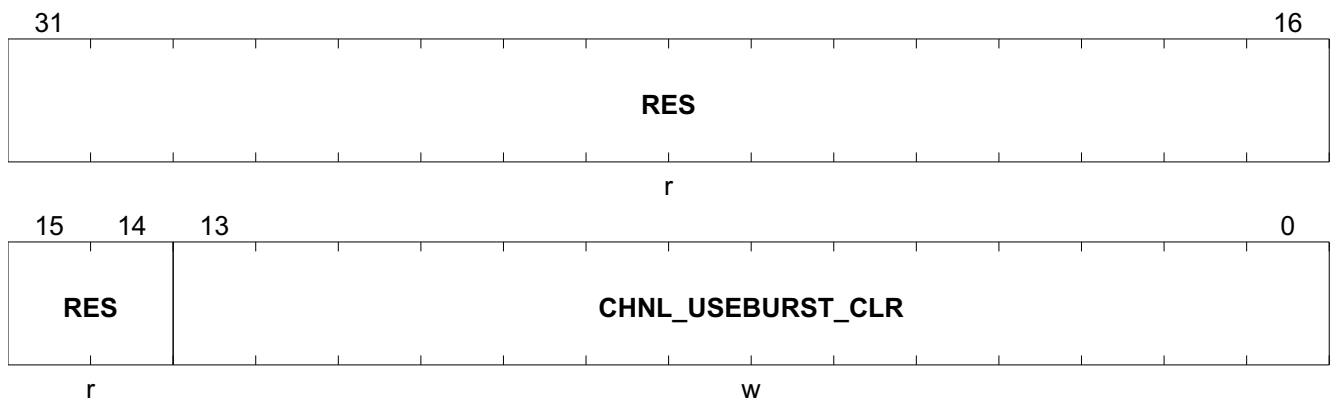


Field	Bits	Type	Description
<b>RES</b>	31:14	r	<b>Reserved</b> Always read as 0
<b>CHNL_USEBURST_CLR</b>	13:0	w	<b>CHNL_USEBURST_CLR</b> Set the appropriate bit to enable dma_sreq[] to generate requests. Write as for each bit C (C = 13 to 0):  <i>Note: Writing to a bit where a DMA channel is not implemented has no effect.</i>  0 <sub>B</sub> , No effect. Use the CHNL_USEBURST_SET Register to disable dma_sreq[] from generating requests. 1 <sub>B</sub> , Enables dma_sreq[C] to generate DMA requests.

## DMA Controller

### Channel Request Mask Set Register

The read/write CHNL\_REQ\_MASK\_SET Register disables a HIGH on dma\_req[], or dma\_sreq[], from generating a request. Reading the register returns the request mask status for dma\_req[] and dma\_sreq[].

CHNL_REQ_MASK_SET	Offset	Reset Value
Channel Request Mask Set	20 <sub>H</sub>	0000 0000 <sub>H</sub>

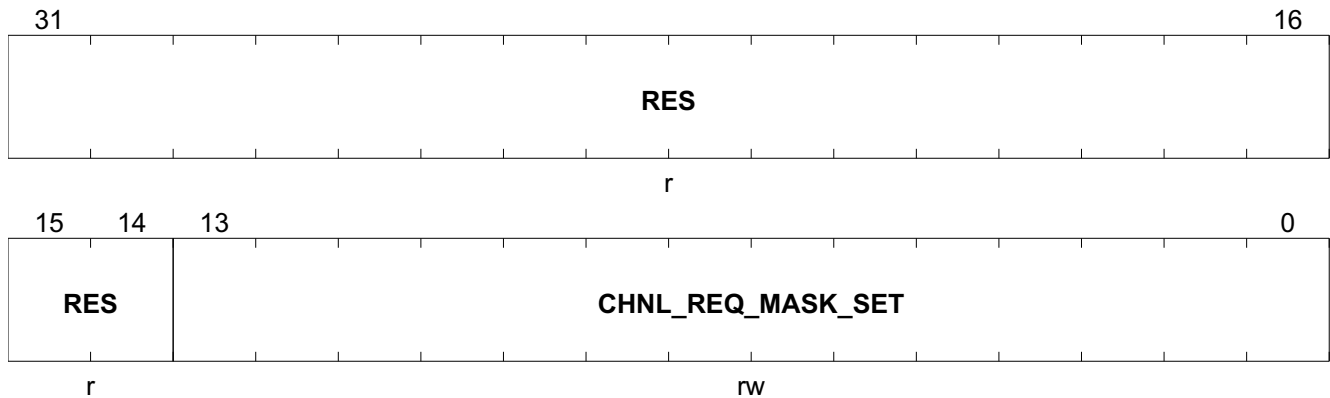


Field	Bits	Type	Description
<b>RES</b>	31:14	r	<b>Reserved</b> Always read as 0
<b>CHNL_REQ_M ASK_SET</b>	13:0	rw	<p><b>CHNL_REQ_MASK_SET</b> Returns the request mask status of dma_req[] and dma_sreq[], or disables the corresponding channel from generating DMA requests. For each bit C (C = 13 to 0):</p> <p><i>Note: Writing to a bit where a DMA channel is not implemented has no effect.</i></p> <p>0<sub>B</sub> , on read: External requests are enabled for channel C.            1<sub>B</sub> , on read: External requests are disabled for channel C.            0<sub>B</sub> , on write: No effect. Use the CHNL_REQ_MASK_CLR Register to enable DMA requests.            1<sub>B</sub> , on write: Disables dma_req[C] and dma_sreq[C] from generating DMA requests.</p>

**DMA Controller**

**Channel Request Mask Clear Register**

The write-only CHNL\_REQ\_MASK\_CLR Register enables a HIGH on dma\_req[], or dma\_sreq[], to generate a request.

<b>CHNL_REQ_MASK_CLR</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Channel Request Mask Clear</b>	<b>24<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

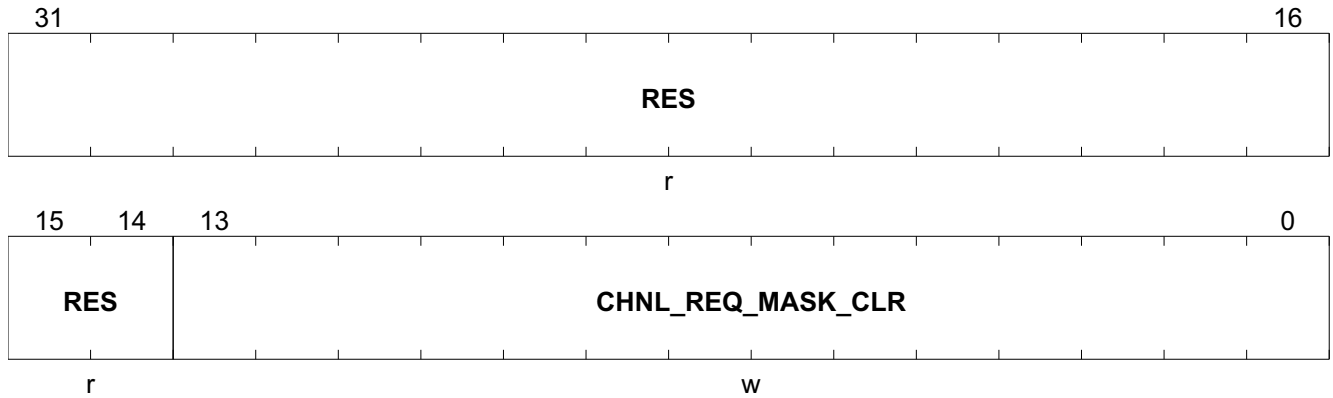


Field	Bits	Type	Description
<b>RES</b>	31:14	r	<b>Reserved</b> Always read as 0
<b>CHNL_REQ_M ASK_CLR</b>	13:0	w	<b>CHNL_REQ_MASK_CLR</b> Set the appropriate bit to enable DMA requests for the channel corresponding to dma_req[] and dma_sreq[]. Write as for each bit C (C = 13 to 0):  <i>Note:</i> <i>Writing to a bit where a DMA channel is not implemented has no effect.</i>  0 <sub>B</sub> , No effect. Use the CHNL_REQ_MASK_SET Register to disable dma_req[] and dma_sreq[] from generating requests. 1 <sub>B</sub> , Enables dma_req[C] or dma_sreq[C] to generate DMA request.

**DMA Controller**

**Channel Enable Set Register**

The read/write CHNL\_ENABLE\_SET Register enables you to enable a DMA channel. Reading the register returns the enable status of the channels.

<b>CHNL_ENABLE_SET</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Channel Enable Set</b>	<b>28<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

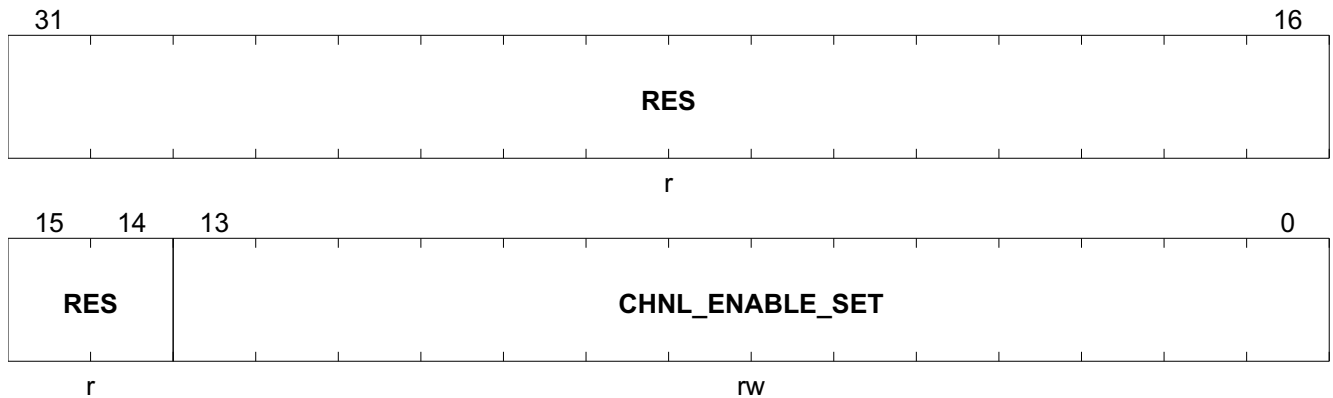

Field	Bits	Type	Description
<b>RES</b>	31:14	r	<b>Reserved</b> Always read as 0
<b>CHNL_ENABLE_SET</b>	13:0	rw	<b>CHNL_ENABLE_SET</b> Returns the enable status of the channels, or enables the corresponding channels. For each bit C (C = 13 to 0):  <i>Note: Writing to a bit where a DMA channel is not implemented has no effect.</i>  0 <sub>B</sub> , on read: Channel C is disabled. 1 <sub>B</sub> , on read: Channel C is enabled. 0 <sub>B</sub> , on write: No effect. Use the CHNL_ENABLE_CLR Register to disable a channel. 1 <sub>B</sub> , on write: Enables channel C.




## DMA Controller

### Channel Enable Clear Register

The write-only CHNL\_ENABLE\_CLR Register enables you to disable a DMA channel.

CHNL_ENABLE_CLR	Offset	Reset Value
Channel Enable Clear	2C <sub>H</sub>	0000 0000 <sub>H</sub>

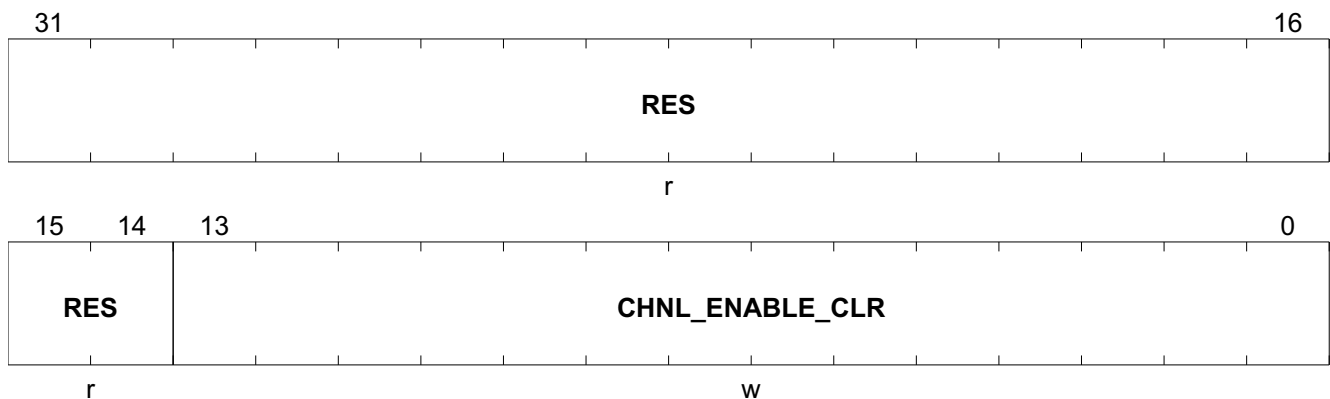

Field	Bits	Type	Description
RES	31:14	r	<b>Reserved</b> Always read as 0
CHNL_ENABLE_CLR	13:0	w	<b>CHNL_ENABLE_CLR</b> Set the appropriate bit to disable the corresponding DMA channel. Write as for each bit C (C = 13 to 0):  <i>Note:</i> Writing to a bit where a DMA channel is not implemented has no effect.  0 <sub>B</sub> , No effect. Use the CHNL_ENABLE_SET Register to enable DMA channels. 1 <sub>B</sub> , Disables channel C.

*Note:* The controller disables a channel, by setting the appropriate bit, when either:


- it completes the DMA cycle
- it reads a channel\_cfg memory location which has cycle\_ctrl = 000<sub>B</sub>
- an ERROR occurs on the AHB-Lite bus

## DMA Controller

### Channel Primary-Alternate Set Register

The read/write CHNL\_PRI\_ALT\_SET Register enables you to configure a DMA channel to use the alternate data structure. Reading the register returns the status of which data structure is in use for the corresponding DMA channel.

CHNL_PRI_ALT_SET	Offset	Reset Value
Channel Primary-Alternate Set	30 <sub>H</sub>	0000 0000 <sub>H</sub>

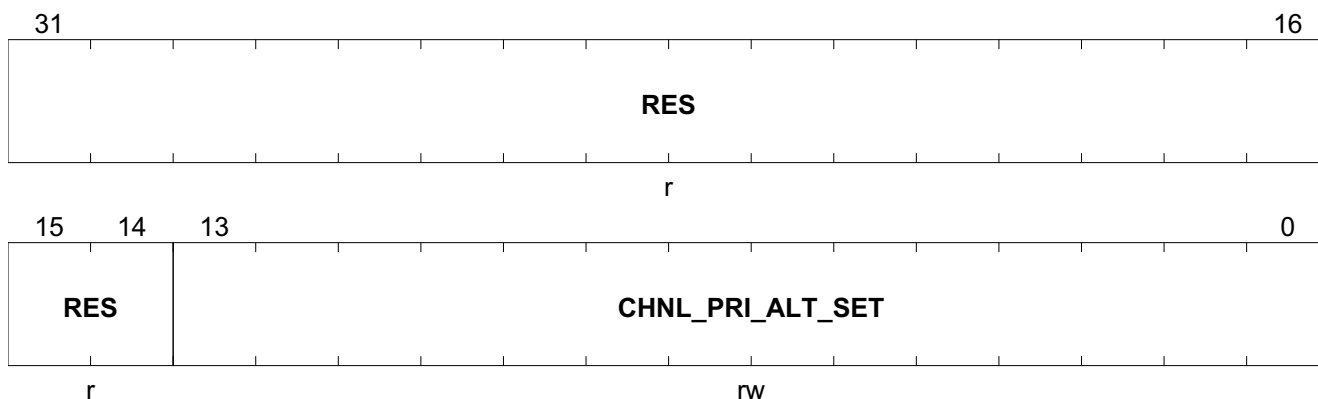

Field	Bits	Type	Description
RES	31:14	r	<b>Reserved</b> Always read as 0
CHNL_PRI_AL T_SET	13:0	rw	<b>CHNL_PRI_ALT_SET</b> Returns the channel control data structure status, or selects the alternate data structure for the corresponding DMA channel. For each bit C (C = 13 to 0):  <i>Note:</i> <i>Writing to a bit where a DMA channel is not implemented has no effect.</i>  0 <sub>B</sub> , on read: DMA channel C is using the primary data structure. 1 <sub>B</sub> , on read: DMA channel C is using the alternate data structure. 0 <sub>B</sub> , on write: No effect. Use the CHNL_PRI_ALT_CLR Register to set bit [C] to 0. 1 <sub>B</sub> , on write: Selects the alternate data structure for channel C.

*Note:*      *The controller toggles the value of the CHNL\_PRI\_ALT\_SET [C] bit after it completes:*

- the four transfers that the primary data structure specifies for a memory scatter-gather, or peripheral scatter-gather, DMA cycle
- all the transfers that the primary data structure specifies for a ping-pong DMA cycle
- all the transfers that the alternate data structure specifies for the following DMA cycle types:
  - ping-pong
  - memory scatter-gather

---

**DMA Controller**


- peripheral scatter-gather

## DMA Controller

### Channel Primary-Alternate Clear Register

The write-only CHNL\_PRI\_ALT\_CLR Register enables you to configure a DMA channel to use the primary data structure.

CHNL_PRI_ALT_CLR	Offset	Reset Value
Channel Primary-Alternate Clear	34 <sub>H</sub>	0000 0000 <sub>H</sub>

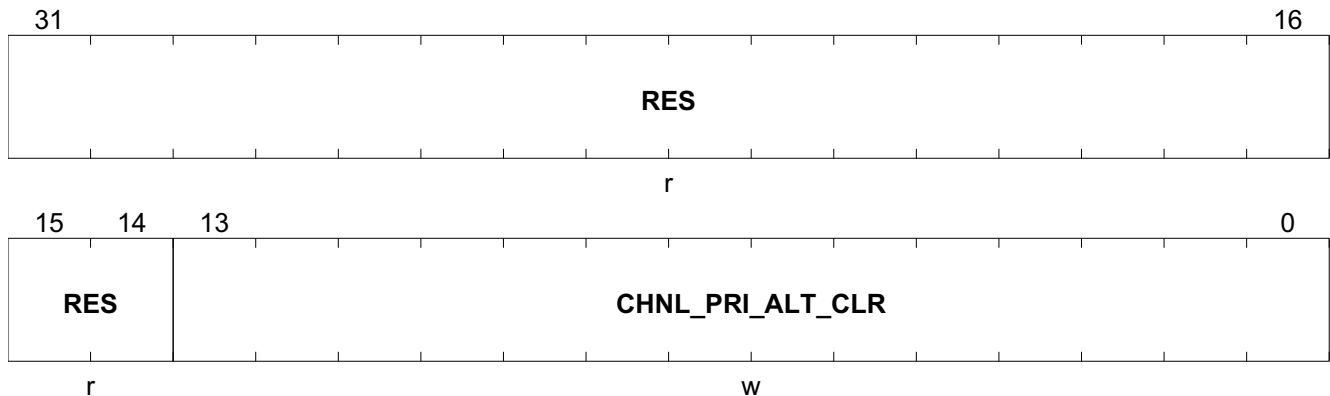

Field	Bits	Type	Description
<b>RES</b>	31:14	r	<b>Reserved</b> Always read as 0
<b>CHNL_PRI_ALT_CLR</b>	13:0	w	<b>CHNL_PRI_ALT_CLR</b> Set the appropriate bit to select the primary data structure for the corresponding DMA channel. Write as for each bit C (C = 13 to 0):  <i>Note:</i> <i>Writing to a bit where a DMA channel is not implemented has no effect.</i>  0 <sub>B</sub> , No effect. Use the CHNL_PRI_ALT_SET Register to select the alternate data structure. 1 <sub>B</sub> , Selects the primary data structure for channel C.

*Note:*      *The controller toggles the value of the chnl\_pri\_alt\_clr [C] bit after it completes:*


- the four transfers that the primary data structure specifies for a memory scatter-gather, or peripheral scatter-gather, DMA cycle
- all the transfers that the primary data structure specifies for a ping-pong DMA cycle
- all the transfers that the alternate data structure specifies for the following DMA cycle types:
  - ping-pong
  - memory scatter-gather
  - peripheral scatter-gather

## DMA Controller

### Channel Priority Set Register

The read/write CHNL\_PRIORITY\_SET Register enables you to configure a DMA channel to use the high priority level. Reading the register returns the status of the channel priority mask.

CHNL_PRIORITY_SET	Offset	Reset Value
Channel Priority Set	38 <sub>H</sub>	0000 0000 <sub>H</sub>

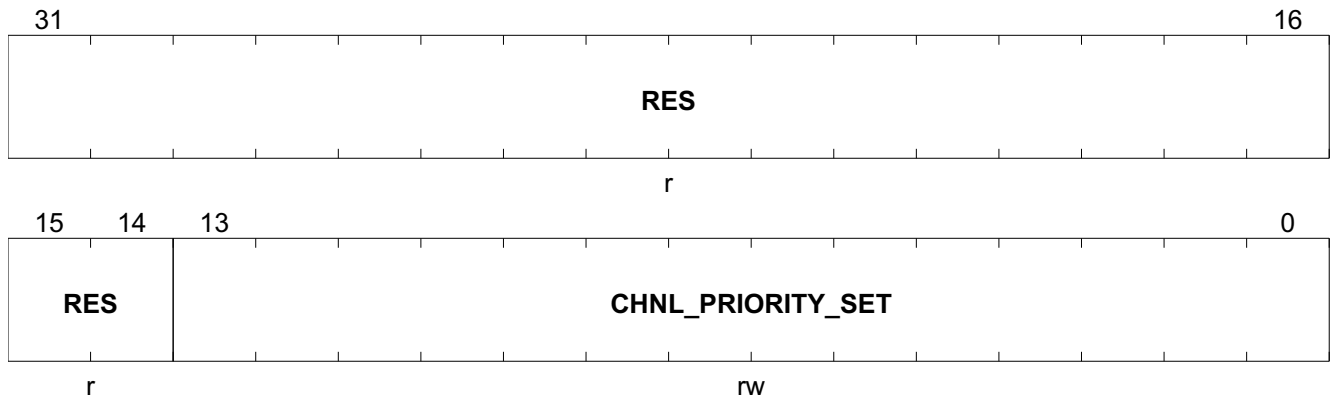


Field	Bits	Type	Description
<b>RES</b>	31:14	r	<b>Reserved</b> Always read as 0
<b>CHNL_PRIORITY_SET</b>	13:0	rw	<p><b>CHNL_PRIORITY_SET</b> Returns the channel priority mask status, or sets the channel priority to high. For each bit C (C = 13 to 0):</p> <p><i>Note:</i> Writing to a bit where a DMA channel is not implemented has no effect.</p> <p>0<sub>B</sub> , on read: DMA channel C is using the default priority level. 1<sub>B</sub> , on read: DMA channel C is using a high priority level. 0<sub>B</sub> , on write: No effect. Use the CHNL_ENABLE_CLR Register to set channel C to the default priority level. 1<sub>B</sub> , on write: Channel C uses the high priority level.</p>

**DMA Controller**

**Channel Priority Clear Register**

The write-only CHNL\_ENABLE\_CLR Register enables you to configure a DMA channel to use the default priority level.

<b>CHNL_PRIORITY_CLR</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Channel Priority Clear</b>	<b>3C<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

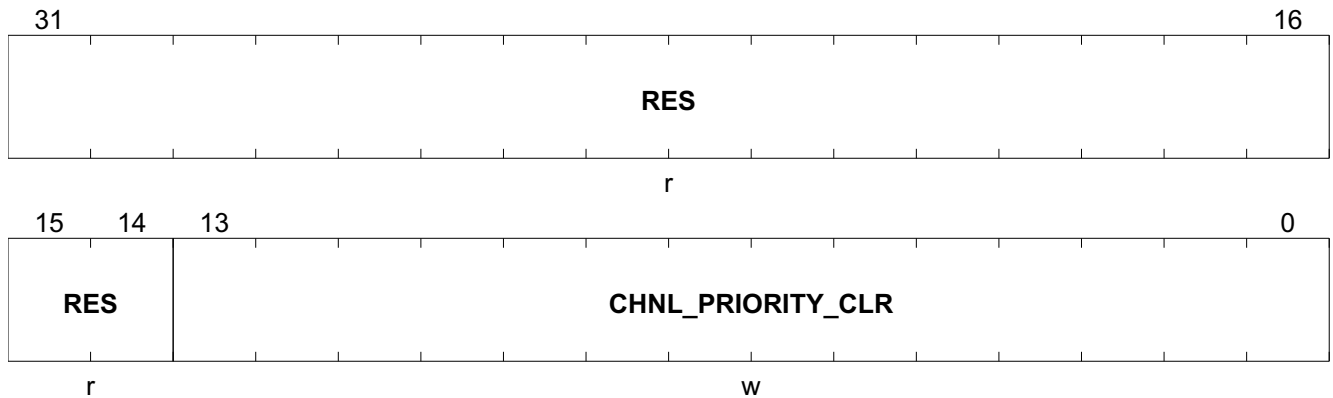


Field	Bits	Type	Description
<b>RES</b>	31:14	r	<b>Reserved</b> Always read as 0
<b>CHNL_PRIORITY_CLR</b>	13:0	w	<b>CHNL_PRIORITY_CLR</b> Set the appropriate bit to select the default priority level for the specified DMA channel. Write as for each bit C (C = 13 to 0):  <i>Note:</i> <i>Writing to a bit where a DMA channel is not implemented has no effect.</i>  0 <sub>B</sub> , No effect. Use the CHNL_ENABLE_SET Register to set channel C to the high priority level. 1 <sub>B</sub> , Channel C uses the default priority level.

**DMA Controller**

**Bus Error Clear Register**

The read/write ERR\_CLR Register returns the status of dma\_err, and enables you to set dma\_err LOW.

<b>ERR_CLR</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Bus Error Clear</b>	<b>4C<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

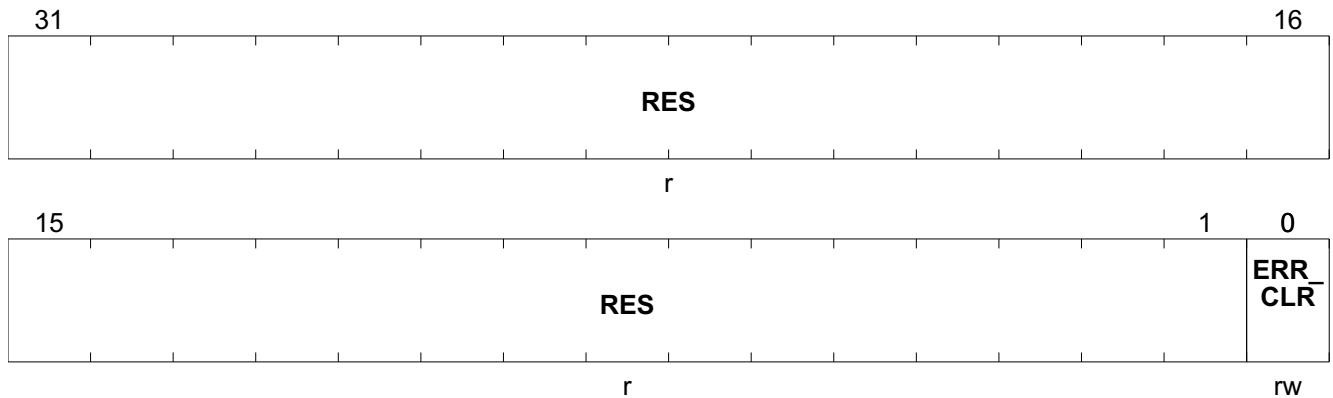

Field	Bits	Type	Description
<b>RES</b>	31:1	r	<b>Reserved</b> Write as zero.
<b>ERR_CLR</b>	0	rw	<b>ERR_CLR</b> Returns the status of dma_err, or sets the signal LOW.  <i>Note:</i> For test purposes, use the err_set register to set dma_err HIGH.  0 <sub>B</sub> , on read: dma_err is LOW. 1 <sub>B</sub> , on read: dma_err is HIGH. 0 <sub>B</sub> , on write: No effect, status of dma_err is unchanged. 1 <sub>B</sub> , on write: Sets dma_err LOW.

*Note:* If you deassert dma\_err at the same time as an ERROR occurs on the AHB-Lite bus, then the ERROR condition takes precedence and dma\_err remains asserted.


Address Space Organization

## 10 Address Space Organization

The TLE987x manipulates operands in the following memory spaces:

- up to 128 KByte (incl. 4 KByte emulated EEPROM) of Flash memory in code space
- 32 KByte Boot ROM memory in code space (used for boot code and IP storage)
- up to 6 KByte RAM memory in code space and data space (RAM can be read/written as program memory or external data memory)
- Special function registers (SFRs) in peripheral space

The figure below shows the detailed address alignment of TLE987x:

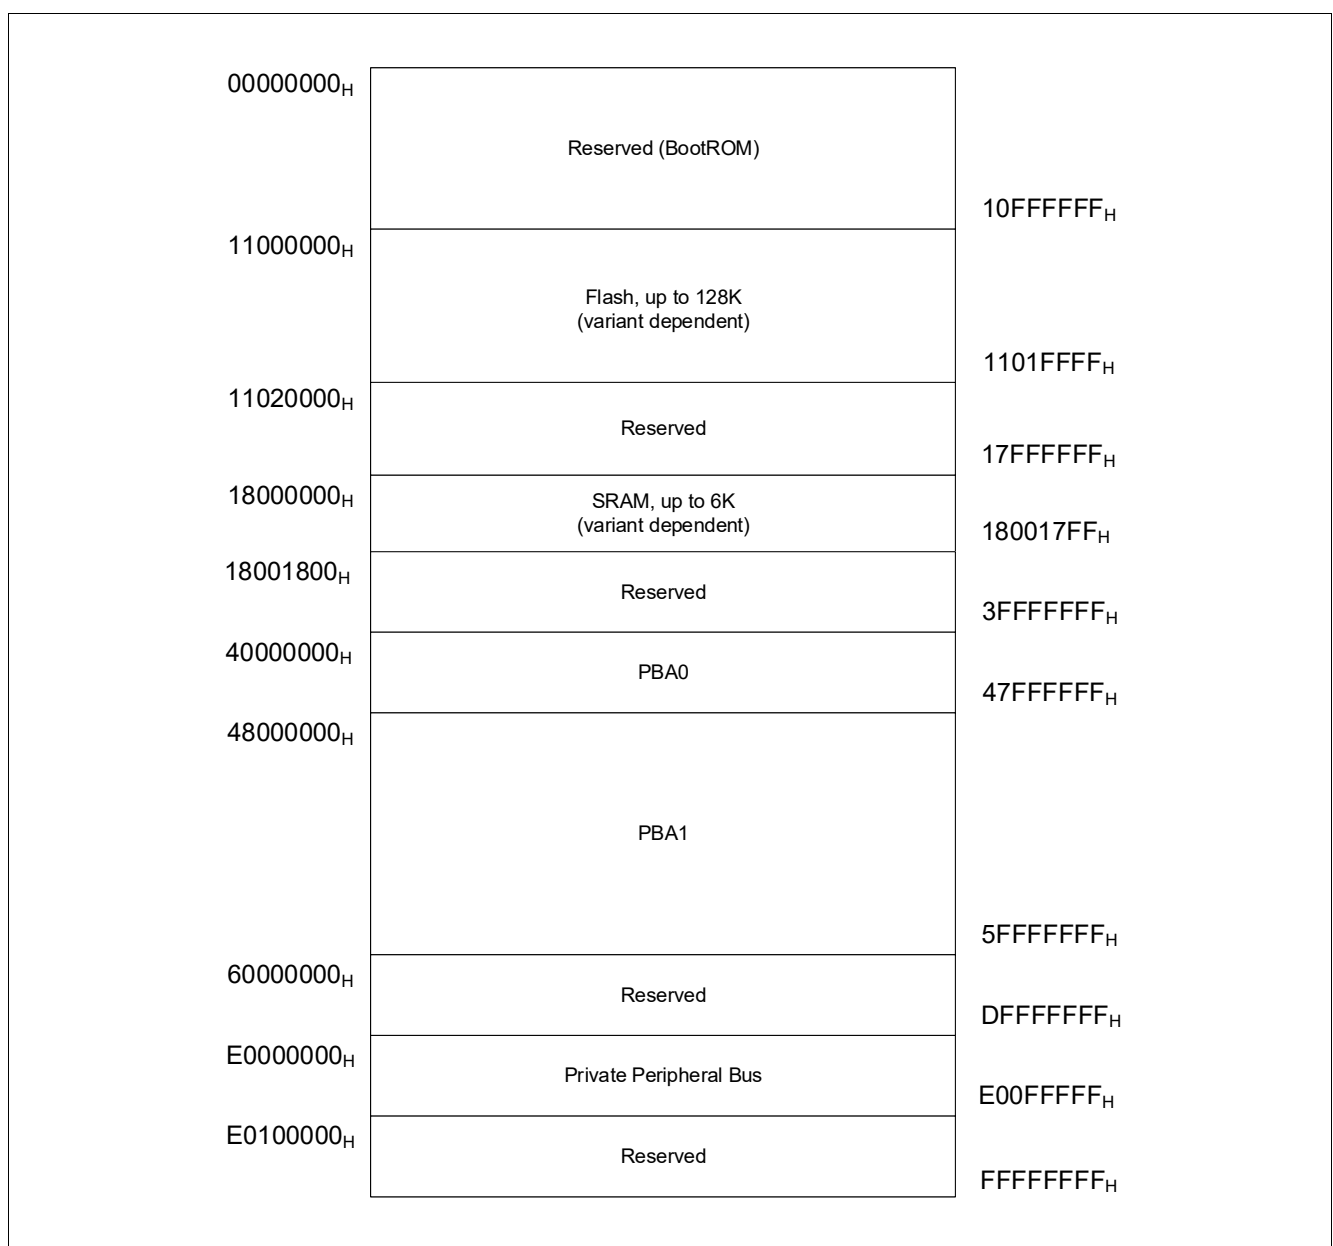

**Figure 48 TLE987x Memory Map**

Each module provides, beside the physical memory implementation, standard AHB-Lite interface and Error Correction Code (ECC) logic if needed.



---

**Address Space Organization**
**Table 65 Memory Map**

Start (hex)	End (hex)	Size (hex)	Space Name	Usage
0000_0000	0000_7FFF	8000	Code/Data	BROM
0000_8000	10FF_FFFF		Reserved	Reserved
1100_0000	1101_FFFF	20000	Code/Data	NVM, up to 128 KBytes
1102_0000	17FF_FFFF		Reserved	Reserved
1800_0000	1800_17FF	1800	Code/Data	RAM, up to 6 KBytes
1800_1800	3FFF_FFFF			Reserved
4000_0000	47FF_FFFF	08000000	Peripheral 0	Peripheral 0 (PBA0)
4800_0000	5FFF_FFFF	08000000	Peripheral 1	Peripheral 1 (PBA1)
6000_0000	DFFF_FFFF		Reserved	reserved
E000_0000	E00F_FFFF	00100000	PPB, Private Peripheral Bus	CPU
E010_0000	FFFF_FFFF		Vendor specific 1	reserved
F000_0000	FFFF_FFFF		Vendor specific 2	reserved

---

**Address Space Organization**
**Table 66 Peripheral Memory Map**

<b>Bus Structure</b>	<b>Modules</b>	<b>Start Address</b>	<b>End Address</b>	
Peripherals 0	Reserved	40000000 <sub>H</sub>	40003FFF <sub>H</sub>	
	ADC1	40004000 <sub>H</sub>	40007FFF <sub>H</sub>	
	ADC34	40008000 <sub>H</sub>	4000BFFF <sub>H</sub>	
	CCU6	4000C000 <sub>H</sub>	4000FFFF <sub>H</sub>	
	GPT12	40010000 <sub>H</sub>	40013FFF <sub>H</sub>	
	Reserved	40014000 <sub>H</sub>	40017FFF <sub>H</sub>	
	Reserved	40018000 <sub>H</sub>	4001BFFF <sub>H</sub>	
	Reserved	4001C000 <sub>H</sub>	4001FFFF <sub>H</sub>	
	Reserved	40020000 <sub>H</sub>	40023FFF <sub>H</sub>	
	Reserved	40024000 <sub>H</sub>	40027FFF <sub>H</sub>	
	Reserved	40028000 <sub>H</sub>	4002BFFF <sub>H</sub>	
	Reserved	4002C000 <sub>H</sub>	4002FFFF <sub>H</sub>	
	Reserved	40030000 <sub>H</sub>	40033FFF <sub>H</sub>	
	DRV	40034000 <sub>H</sub>	40037FFF <sub>H</sub>	
	Reserved	40038000 <sub>H</sub>	4003BFFF <sub>H</sub>	
	Reserved	4003C000 <sub>H</sub>	4003FFFF <sub>H</sub>	
	Reserved	40044000 <sub>H</sub>	40047FFF <sub>H</sub>	
	Reserved	40048000 <sub>H</sub>	47FFFFFF <sub>H</sub>	
	Peripherals 1	Reserved	48000000 <sub>H</sub>	48003FFF <sub>H</sub>
		TIMER2	48004000 <sub>H</sub>	48004FFF <sub>H</sub>
TIMER21		48005000 <sub>H</sub>	48005FFF <sub>H</sub>	
TIMER3		48006000 <sub>H</sub>	48007FFF <sub>H</sub>	
Reserved		48008000 <sub>H</sub>	4800BFFF <sub>H</sub>	
Reserved		4800C000 <sub>H</sub>	4800FFFF <sub>H</sub>	
Reserved		48010000 <sub>H</sub>	48013FFF <sub>H</sub>	
Reserved		48014000 <sub>H</sub>	48017FFF <sub>H</sub>	
MF		48018000 <sub>H</sub>	4801BFFF <sub>H</sub>	
ADC2		4801C000 <sub>H</sub>	4801DFFF <sub>H</sub>	
LIN		4801E000 <sub>H</sub>	4801FFFF <sub>H</sub>	
UART1		48020000 <sub>H</sub>	48021FFF <sub>H</sub>	
UART2		48022000 <sub>H</sub>	48023FFF <sub>H</sub>	
SSC1		48024000 <sub>H</sub>	48025FFF <sub>H</sub>	
SSC2		48026000 <sub>H</sub>	48027FFF <sub>H</sub>	
PORT		48028000 <sub>H</sub>	48029FFF <sub>H</sub>	
Reserved		4802A000 <sub>H</sub>	4802BFFF <sub>H</sub>	
Reserved	4802C000 <sub>H</sub>	4802DFFF <sub>H</sub>		
Reserved	4802E000 <sub>H</sub>	4802FFFF <sub>H</sub>		

---

**Address Space Organization**
**Table 66 Peripheral Memory Map (cont'd)**

Bus Structure	Modules	Start Address	End Address
	Reserved	48030000 <sub>H</sub>	4FFFFFFF <sub>H</sub>
	Reserved	48004000 <sub>H</sub>	4801FFFF <sub>H</sub>
	Reserved	50000000 <sub>H</sub>	50003FFF <sub>H</sub>
	PMU	50004000 <sub>H</sub>	50004FFF <sub>H</sub>
	SCU	50005000 <sub>H</sub>	50005FFF <sub>H</sub>
	SCUPM	50006000 <sub>H</sub>	50006FFF <sub>H</sub>
	Reserved	50007000 <sub>H</sub>	50007FFF <sub>H</sub>
	Reserved	50008000 <sub>H</sub>	50009FFF <sub>H</sub>
	Reserved	5000A000 <sub>H</sub>	5000BFFF <sub>H</sub>
	Reserved	5000C000 <sub>H</sub>	5000FFFF <sub>H</sub>
	Reserved	50010000 <sub>H</sub>	50013FFF <sub>H</sub>
	DMA	50014000 <sub>H</sub>	50017FFF <sub>H</sub>
	Reserved	50018000 <sub>H</sub>	5001BFFF <sub>H</sub>
	Reserved	5001C000 <sub>H</sub>	5001FFFF <sub>H</sub>
	Reserved	50020000 <sub>H</sub>	50023FFF <sub>H</sub>
	Reserved	50024000 <sub>H</sub>	50027FFF <sub>H</sub>
	Reserved	50028000 <sub>H</sub>	5002BFFF <sub>H</sub>
	Reserved	5002C000 <sub>H</sub>	57FFFFFF <sub>H</sub>
	Reserved	58000000 <sub>H</sub>	58003FFF <sub>H</sub>
	Reserved	58004000 <sub>H</sub>	58007FFF <sub>H</sub>
	Reserved	58008000 <sub>H</sub>	5800BFFF <sub>H</sub>
	Reserved	5800C000 <sub>H</sub>	5800FFFF <sub>H</sub>
	Reserved	58010000 <sub>H</sub>	58013FFF <sub>H</sub>
	Reserved	58014000 <sub>H</sub>	58017FFF <sub>H</sub>
	Reserved	58018000 <sub>H</sub>	5FFFFFFF <sub>H</sub>

---

## Memory Control Unit

# 11 Memory Control Unit

## 11.1 Features

- Handles all system memories and their interaction with the CPU
- Memory protection functions for all system memories (D-Flash, P-Flash, RAM)
- Address management with access violation detection including reporting
- Linear address range for all memories (no paging)

## 11.2 Introduction


### 11.2.1 Block Diagram

The Memory Control Unit (MCU) is divided in the following sub-modules:

- NVM memory module (embedded Flash Memory)
- RAM memory module
- BootROM memory module
- Memory Protection Unit (MPU) module
- Peripheral Bridge PBA0
- LMB (Local Memory Bus) interface logic.

A block diagram view of the MCU, together with the main interface signals, is shown in the [Figure 49](#).

## Memory Control Unit

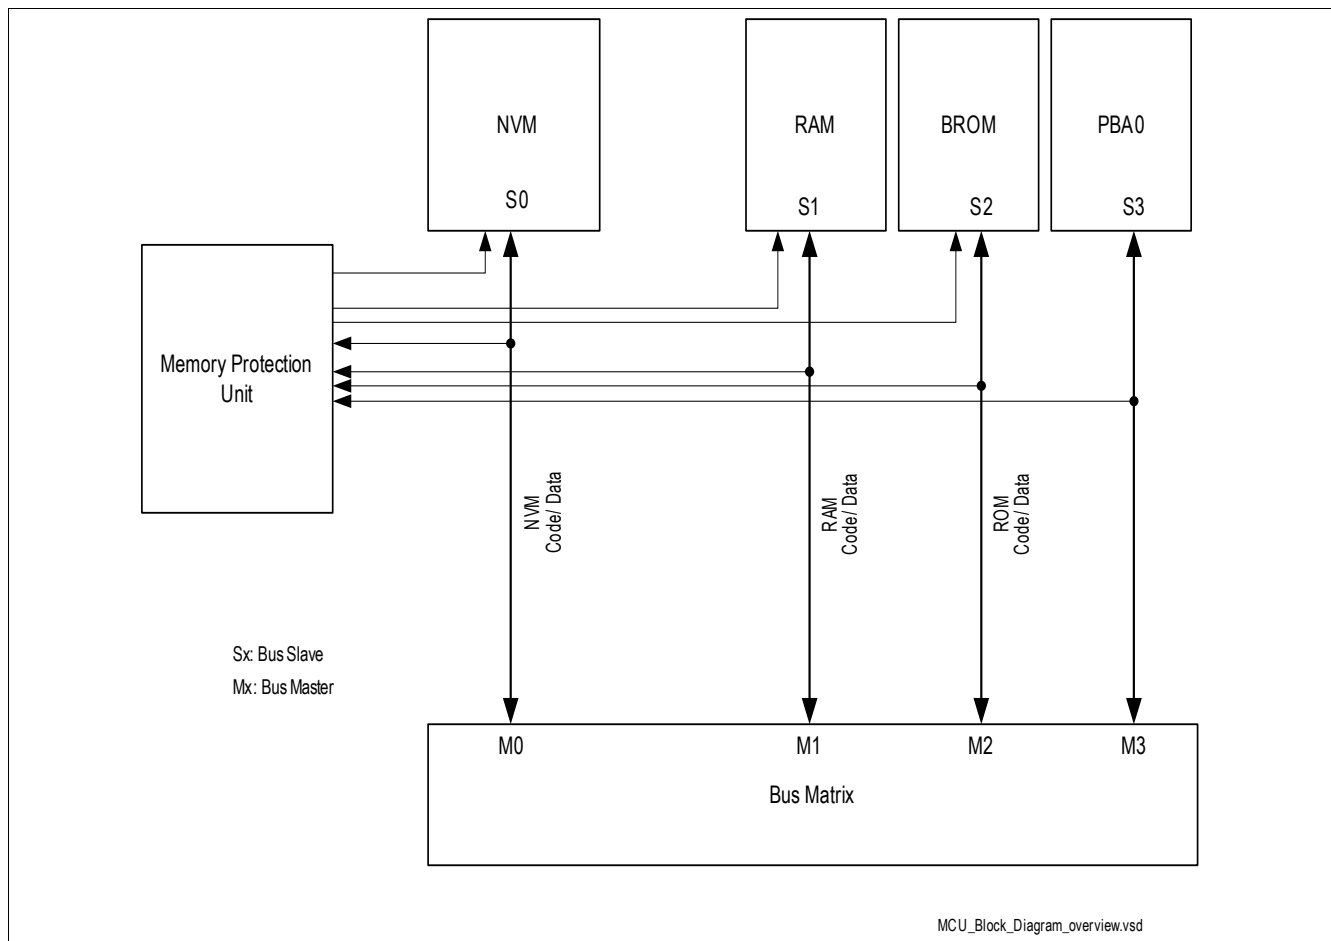

**Figure 49** MCU Block View

As shown in the **Figure 49**, the MCU interface communicates with the external world, mainly the core, via 4 AHB-Lite interfaces, Data/Code access to the NVM, BootROM and RAM plus an access to the NVM internal registers. The AMBA bus matrix block decodes the access requests coming from the masters and forwards them to the target module interface together with the required sideband signals. The AMBA bus matrix block provides all the needed interface functions between the masters and the memory peripheral. It will generate proper HSEL signals, and multiplex the response coming from the modules. In addition, the AMBA bus matrix block takes care of forwarding the transfer according to a fixed priority policy described in the AMBA chapter. Besides the AHB-Lite and sideband signals, the MCU has access to further Core specific signals, relevant for memory protection.

## Memory Control Unit

### 11.3 NVM Module (Flash Memory)

The Flash Memory provides an embedded user-programmable non-volatile memory, allowing fast and reliable storage of user code and data.

#### Features

- In-system programming via LIN (Flash Mode) and SWD
- Error Correction Code (ECC) for detection of single-bit and double-bit errors and dynamic correction of single Bit errors.
- Interrupts and signals double-bit error by NMI
- Program width of 128 byte (page)
- Minimum erase width of 128 bytes (page)
- Integrated hardware support for EEPROM emulation
- 8 byte read access
- Physical read access time: 75 ns
- Code read access acceleration integrated; read buffer and automatic pre-fetch
- Page program time:  $t_{PR}$  (see data sheet for value)
- Page erase (128 bytes) and sector erase (4K bytes) time:  $t_{ER}$  (see data sheet for value)
- erased bit (cell) is read as '1', for code flash and 100TP
- erased bit (cell) is read as '0' plus NMIMAP request, for data flash

*Note: The user has to ensure that no flash operations which change the content of the flash get interrupted at any time.*

The clock for the NVM is supplied with the system frequency  $f_{sys}$ . Integrated firmware routines are provided to erase NVM, and other operations including EEPROM emulation are provided as well.

The TLE987x NVM module provides physical implementation of the memory module as well as needed complementary features and interface towards the core.

The TLE987x NVM module consists of the memory cell array and all the control circuits and registers needed to access the array itself. The up to 128 Kbyte data module is mapped in the Cortex M3 code address range 11000000H - 1103FFFFH while the dedicated SFRs are mapped in the Cortex M3 system address range 58004000H - 58007FFFH.

Access of NVM module is granted through the AMBA matrix block that forwards to the memory modules AHB-Lite interfaces the requests generated by the masters according to the defined priority policy.

---

## Memory Control Unit

### 11.3.1 Definitions

This section defines the nomenclature and some abbreviations. The used flash memory is a non-volatile memory (“NVM”) based on a floating gate one-transistor cell. It is called “non-volatile” because the memory content is kept when the memory power supply is shut off.

#### 11.3.1.1 General Definitions

##### Logical and Physical states

###### Erasing

The erased state of a cell is ‘1’. Forcing an NVM cell to this state is called erasing. Erasing is possible with a granularity of a page (see below).

###### Writing

The written state of a cell is ‘0’. Forcing an NVM cell to this state is called writing. Each bit can be individually written.

###### Programming

The combination of erasing and writing is called ‘programming’. Programming often means also writing a previously erased page.

The wording ‘write’ or ‘writing’ are also used for accessing special function registers and the assembly buffer. The meaning depends therefore on the context.

The above listed processes have certain limitations:

**Retention:** This is the time during which the data of a flash cell can be read reliably. The retention time is a statistical figure that depends on the operating conditions of the flash array (temperature profile) and the accesses to the flash array. With an increasing number of program/erase cycles (see endurance) the retention is lowered. Drain and gate disturbs decrease data retention as well.

**Endurance:** As described above, the data retention is reduced with an increasing number of program/erase cycles. A flash cell incurs one cycle whenever its page or sector is erased. This number is called “endurance”. As said for the retention, it is a statistical figure that depend on operating conditions and the use of the flash cells and on the required quality level.

**Drain Disturb:** Because of using a so called “one-transistor” flash cell each program access disturbs all pages of the same sector slightly. Over long these “drain disturbs” make 0 and 1 values indistinguishable and thus provoke read errors. This effect is again interrelated with the retention. A cell that incurred a high number of drain disturbs will have a lower retention. The physical sectors of the flash array are isolated from each other. So pages of a different sector do not incur a drain disturb. this effect must be therefore considered when the page erase feature is used or when re-programming an ready programmed page (implicitly causing an erase of the page before writing the new data).

##### Data Portions

Memory Control Unit

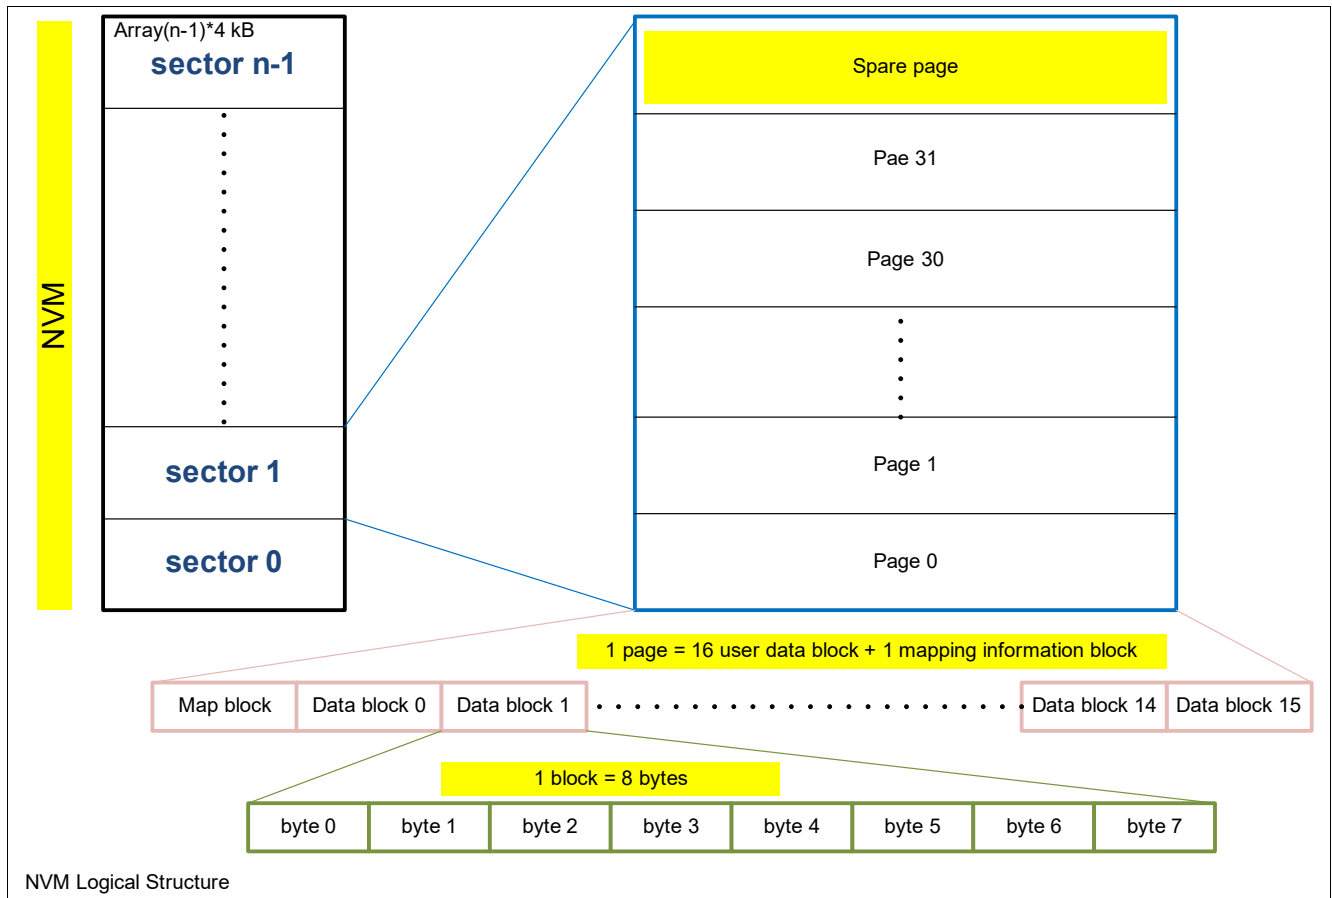


Figure 50 Logical structure of the NVM core

**Doubleword**

A doubleword consists of 64 bits. A doubleword represents the data size that is read from or written to the NVM core module within one access cycle.

**Block**

A block consists of one doubleword and its associated ECC data (64 bit data and 8 bit ECC). A block represents the smallest data portion that can be changed in the assembly buffer. Since the ECC protects 64 bits, when a byte is written to the assembly buffer automatically an NVM internal read of the complete block is triggered, the byte and the ECC are updated and the complete block is written back to the assembly buffer.

**Mapblock**

A map block consists of a module specific number of ECC -protected bits that hold the necessary information to map a physical page to a logical page.

**Page**

A page consists of 16 blocks and one map block.



---

## Memory Control Unit

### Spare page

A spare page is an additional page in a sector used in each programming routine to allow tearing-safe programming.

### Sector

A sector consists of 32 logical and 33 physical page.

## 11.3.2 Functional Description


The main tasks of the NVM module are reading from the memory array, writing to the assembly buffer, enabling (tearing safe) programming of a single page, provide basic in-module functionality for code protection and prefetch feature for optimized system performance. The main features are listed following:

- Up to 128 KB memory size
- 4 KB configuration sector
- write time  $t_{PR}$  per page
- erase time  $t_{ER}$  per page
- Error correction and Error Detection code (ECC and EDC)
- In module memory protection logic
- Prefetch logic for optimized module performance

### 11.3.2.1 Basic Block Functions

**Figure 51** shows a schematic block diagram of the NVM module

## Memory Control Unit

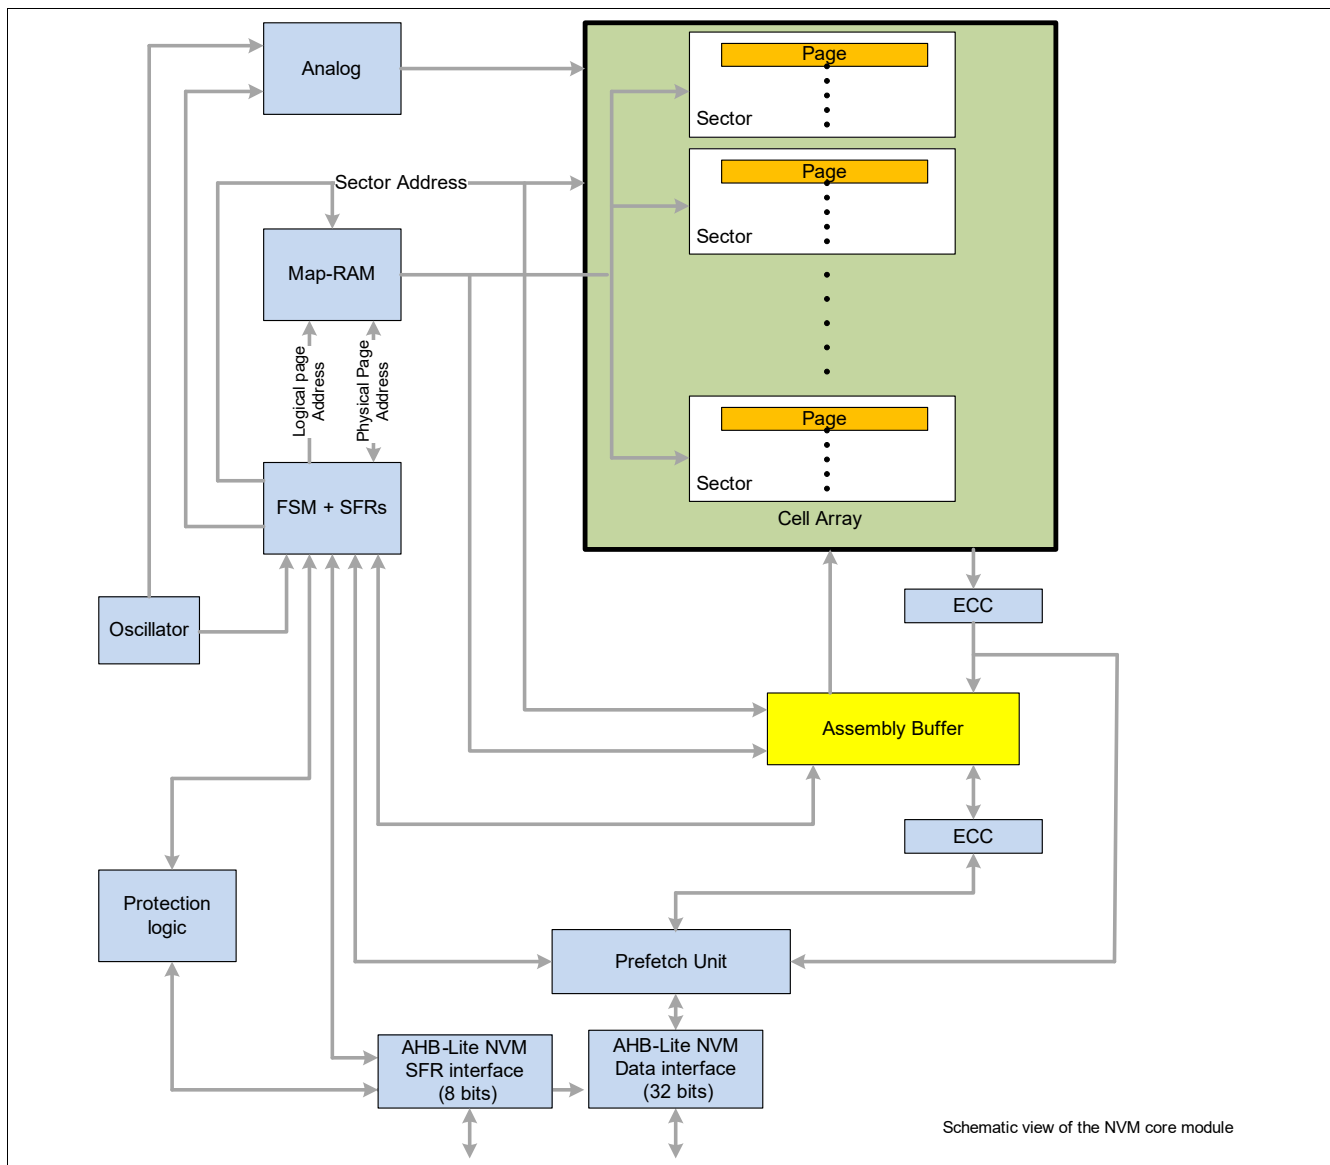

**Figure 51** Schematic view of the NVM core module

### 11.3.2.2 Memory Cell Array

The non-volatile memory cells are organized in sectors, which consists of pages, which are structured in blocks and map block.

#### Page

Each page consists of 16 data blocks of 64 bits each and one map block. The map block stores the mapping information of the page in the sector. All blocks of a page are ECC-protected.

A page is the smallest granularity of data that can be changed (erased or written) within the cell array. One data block is the minimum granularity of data that can be read from the NVM module within memory read access.

Employing the integrated EEPROM emulation using the map RAM, the minimum granularity of data that can be changed in the NVM is one byte, while all other bytes in the page do not change.

## Memory Control Unit

### Assembly Buffer

The assembly buffer is a RAM that can hold the content of one page including the map block.

### Sector

A sector consists of 33 physical pages. 32 pages can be logically addressed during a memory access. One page is internally used as a spare page.

### Map RAM

The map RAM is a static RAM that holds the mapping of a logical page addresses to physical page addresses for each sector. It is completely handled by the NVM programming related BootROM routines. The map-RAM currently is sized to support a max of 16 map-RAM mapped sectors.

### FSM and SFR Block

This block contains the special function registers (SFRs) of the NVM module. Beside memory reads and writes to the assembly all interactions of the BootROM software with the module take place through register accesses. The finite state machine (FSM) controls the actions (e.g. read, erase and write) of the NVM module.

### Analog Components

The module contains analog components to provide all the voltages necessary for erasing, writing and reading the non-volatile memory cells.

#### 11.3.2.3 SFR Accesses

All SFRs can only be accessed through the NVM related BootROM routines, that is, the customer software cannot access the SFRs directly but has to use BootROM routines.

#### 11.3.2.4 Memory Read

The NVM memory internally can be read with a minimum granularity of one block (64 data bits).

If the block is not within the memory address range of the NVM module, the module does not react at all and a different memory module may handle the access.

Memory read accesses are only possible while no FSM procedures (program, init, sleep or copy) is in progress. A memory read access while the FSM is busy is stalled as long as the FSM is busy and the access is carried out when the FSM is in idle mode again.

Since a read to the memory field takes a fixed time mostly independent of the system frequency, an optimized number of waitstates (3, 1 or, 0) is generated for different system frequencies.

Furthermore, a module internal read buffer holds the block read last. An access to an address within this block does not trigger a new reading from the memory field but is directly served from the read buffer.

To reduce system performance penalties due to the waitstates, a special local in-module prefetch unit is implemented.

#### 11.3.2.5 Memory Write

Data is not written to the memory array directly, but to the assembly buffer and then copied into the cell array by the write sequence.

Memory writes are handled through the BootROM software, which at first copies the existing content of a page to the assembly buffer, allows the user to modify the content of the assembly buffer and afterwards executes the programming of the data to the memory field followed by a verification step.

## Memory Control Unit

### 11.3.2.6 Timing

The target timing of the hardware sequences excluding the software overhead is shown below:

Erase:  $t_{ER}$  per page

Write:  $t_{PR}$  per page

Program (= Erase+ Write):  $t_{ER} + t_{PR}$  per page

The disturb handling routine when enabled with a probability of a approximately 0.1% adds additional  $t_{ER} + t_{PR}$  to a page write or program operation.

### 11.3.2.7 Verify

The data programmed by the BootROM function is verified by the BootROM routine itself. The programmed data in the cell array is compared with the data still available in the assembly buffer. This is done using suitable hard-read levels. These hard-read levels provide a margin compared to the normal read level to ensure that the data is actually programmed with suitably distinct levels for written and erased bits.

### 11.3.2.8 Tearing-Safe programming

The mapping mechanism of the NVM module is used like a log-structured file system: When a page is programmed in the sector the old values are not physically overwritten, but a different physical page (spare page) is programmed in the same sector in fact. If the programming fails (e.g. because of power loss during the erase or write procedure), the old values are still present in the sector. The BootROM routines therefore can program a single page in a tearing-safe way.

When an erase or write procedure to the memory field was interrupted by a power-down, this is identified during the reconstruction of the map-RAM content after the next reset. In this case, a special routine in the BootROM (called Service Algorithm) is automatically started, identifies this tearing case of respective logical page and repairs the NVM state, ensuring that either the old or the new data (or both) are fully valid.

### 11.3.2.9 Disturb handling

Due to the implementation of the cell array, while writing a page into the cell array all other pages within the same sector are slightly written (disturbed) too. If some pages of a sector are changed often and other pages of the same sector only rarely, these rarely programmed pages may be disturbed too often and lose their data.

If the disturbs for a page exceed a specific value (this happens only when a different page in the same sector is programmed), the page has to be reprogrammed (refreshed). A dedicate option of the programming routines provided with the BootROM make sure that the pages are refreshed in time.

As mentioned, the refreshing of a page - when actually triggered - will double the overall programming time.

### 11.3.2.10 ECC and EDC

The NVM module provides all needed logic for proper error correction and detection logic. Since the block is the smallest data portion used for accessing the array in read and write, the ECC and EDC are performed at block level. Requirement is to provide a single bit ECC and 2 bits EDC per block, that is 1 bit correction over 64 data bits.

Since the ECC protects 64bits, when a byte is written to the assembly buffer automatically an NVM internal read of the complete block is triggered, the byte and the ECC are updated and the complete block is written back to the assembly buffer.

## Memory Control Unit

### 11.3.2.11 Resume from disturbed Program/Erase operation

If a NVM operation like Program or Erase was interrupted by any means, then a data integrity check of the data flash is required. The data integrity check can be done by performing a cold reset, power-up reset, pin reset, WDT1 reset or exit from SleepMode. All these resets are running through the MapRAM Initialization of the BootROM, which executes the Service Algorithm in case a data integrity issue inside the data flash was detected. The Service Algorithm tries to resolve a data integrity issue by erasing erroneous data flash pages in order to maintain an proper data flash mapping. The return value of the Service Algorithm is provided inside the register MEMSTAT to the user application. The user application has to evaluate the **MEMSTAT** register in order to perform appropriate corrective actions if needed. Furthermore the register **SYS\_STARTUP\_STS** provides status information about the MapRAM Initialization function executed during start-up. It allows the user directly to judge the data integrity of the data flash. In case the **SYS\_STARTUP\_STS** register reports a MapRAM Initialization fail it is not recommended to perform any further write operation to the data flash, as this might result in unrecoverable loss of data integrity inside the data flash. A reinitialization of the data flash by performing a SECTOR\_ERASE will then be the only solution. Instead a reset of the device might be triggered in order to execute the Service Algorithm. If even the Service Algorithm fails to resolve the data integrity issue then the data flash sector has to be reinitialized. In order to provide full reliability of the data flash module and to avoid any loss of data integrity inside the data flash the user has to ensure that no NVM operation which changes the content of the data flash module, program or erase, get interrupted at any time. Appropriate actions to support this could be:

- the capacitor at the VS input has to be dimensioned large enough to provide enough charge to the device to keep the VS supply in the specified range until the NVM operation ended normally
- check the supply voltage to be high enough and stable before a NVM operation gets started in order to end the NVM operation normally without interruption
- disable interrupts in the system before a NVM operation gets started, reenable the interrupts upon return
- avoid nested NVM operations
- trigger the WDT1 in short-open-window mode for any NVM operation
- evaluate the return values of the NVM operations and perform corrective actions accordingly
- check the data integrity of the data flash by executing the USER\_MAPRAM\_INIT function and perform corrective actions accordingly

*Note: The above mentioned recommendation do also apply to NVM write/erase operations to the code flash and as well as to the 100TP pages.*

### 11.3.2.12 Code and Data Access through the AHB-Lite Interface

The system provides access to the data stored in the NVM cell array through an AHB Lite interface. Whenever the core needs to fetch instructions or read data from or write data into the NVM module, a proper AHB Lite compliant access request is forwarded by the bus matrix block into the module.

### 11.3.2.13 Prefetch Unit

At typical system working frequency, each NVM read access into the array takes 3 system clock cycles to move into the read buffer a complete block (containing 64 data bits). Since the on-chip micro (Cortex M3) is 32-bit microprocessor with an instruction set made of 16-bit and 32 bit opcodes, the amount of data read in 1 array access contains from a minimum of 2 to a max of 4 instructions. For this reason, in case of 32-bit instructions sequential code execution, 3 waitstates every 2 executed instructions have to be added.

In order to reduce the performance penalties due to the access time of the NVM, an internal prefetch logic is implemented. The idea is to use a prefetch unit that, assuming a sequential code execution, starts reading in a second read buffer the next 64 data bits while the system is still moving out the previously accessed data.

## Memory Control Unit

The idea is to have two read buffers that work interleaved: while the first read buffer is used as source of data for the AHB-Lite buffer interface, the second one is starting in parallel a new cell memory array access, assuming that data will be required in sequential order. When all the data from the first read buffer have been moved out of the memory module and the second one has completed the array access, then this last one will start providing data on the external bus while the first one will start prefetching next data from the array.

In case, a new non-sequential access request comes while both read buffers are filled with data not yet required by the core, the read buffer which was latest filled will be made available, flushing its content, to serve as soon as possible the non-sequential access request.

### 11.4 BootROM Module

The TLE987x BootROM module provides physical implementation of the memory module as well as needed complementary features and interface towards the core.

The BootROM module in TLE987x has a capacity of 24 Kbyte, organized with words of 32 bits.

The BootROM contents consists basically of three parts, used for:

startup and boot SW

Boot Strap Loader routines

User routines

#### 11.4.1 BootROM addressing

The BootROM, as visible from the memory map, is mapped starting at the address range  $00000000_H$  -  $00007FFF_H$ . After any reset, the device hardware-controlled start address is  $00000000_H$ . At this location, the first instruction of the startup procedure is stored.

#### 11.4.2 BootROM firmware program structure

The BootROM firmware provides basic functionality required to be executed after reset and routines for specific operation, such as:

Startup routines, which is the main control firmware in the BootROM executed after every reset. This routine checks which kind of reset was issued and accordingly performs different kinds of operation to properly configure the device.

Bootstrap loader, which provides basic functionality for code and data upload via LIN or UART into the RAM or NVM module.

User routines, which provide functions for proper NVM operation handling and other useful ready-to-use routines designed for the customer.

For a complete description of the BootROM code, please refer to the BootROM Manual.

### 11.5 RAM Module

The TLE987x RAM module provides physical implementation of the memory module as well as needed complementary features and interface towards the core.

The RAM module in TLE987x has a capacity of up to 6 Kbyte, organized with words of 32 bits.

The module supports 1 bit Error correction and 2 bits error detection per 32-bit word (actually requiring 7 bits parity per word). When an ECC error occurs, the corresponding status flag in the register EDCSTAT will be set. A double bit error can be configured via the interrupt enable bit in register EDCCON to trigger an exception.

---

## Memory Control Unit

### 11.5.1 RAM Addressing

The RAM, as visible from the memory map, is mapped at the address range 18000000H - 180017FFH. The module is mapped in the code area of the M3 map regions and can be used as program memory for code fetching as well as data storing.

### 11.6 Memory Protection Unit (MPU)

The target of the memory protection scheme is to prevent unauthorized read out of critical data and user IPs from the BootROM and NVM. Two memory protection schemes are offered in the TLE987x.

The first memory protection scheme involves the blocking of all external access to the device by firmware. Firmware will block all the boot options such that it is not possible to load and execute any external code. To enable this protection scheme a valid password must be programmed via the BootROM password routine.

The second memory protection scheme is hardware based; Instructions accessing memories executed from the unsafe memory address (e.g. RAM) that target the BootROM or NVM are blocked when the respective protection mode is enabled.

## Interrupt System

# 12 Interrupt System

## 12.1 Features

- Up to 16 interrupt nodes for on-chip peripherals
- Up to 8 NMI nodes for critical system events
- Maximum flexibility for all 16 interrupt nodes

## 12.2 Introduction

Before enabling an interrupt, all corresponding interrupt status flags should be cleared.

### 12.2.1 Overview

The TLE987x supports 16 interrupt vectors with 16 priority levels. Fifteen of these interrupt vectors are assigned to the on-chip peripherals: GPT12, SSC, CCU6, DMA, Bridge Driver and A/D Converter are each assigned to one dedicated interrupt vector; while UART1 and Timer2 or UART2, External Interrupt 2 and Timer21 share interrupt vectors. Two vectors are dedicated for External Interrupt 0 and 1.

A non-maskable interrupt (NMI) with the highest priority is shared by the following:

- Watchdog Timer, warning before overflow
- MI\_CLK Watchdog Timer overflow event
- PLL, loss of lock
- Flash, on operation complete e.g. erase.
- Oscillator watchdog detection for too low oscillation of  $f_{osc}$
- Flash map error
- Uncorrectable ECC error on Flash and RAM
- VSUP supply prewarning when any supply voltage drops below or exceeds any threshold.
- Overtemperature prewarning when system temperature exceeds a certain limit.

**Figure 52, Figure 55, Figure 56, Figure 57** and **Figure 57** give a general overview of the interrupt sources and nodes, and their corresponding control and status flags. **Figure 63** gives the corresponding overview for the NMI sources. The table below shows the available interrupt vectors.

**Table 67** Interrupt Vector Table

Service Request	Node ID	Description
GPT12	0/1	GPT interrupt (T2-T6, CAPIN)
MU- ADC8/T3	2	Measurement Unit, VBG, SDADC, Timer3, BEMF
ADC1	3	ADC1 interrupt / VREF5V Overload / VREF5V OV/UV
CCU0	4	CCU6 node 0 interrupt
CCU1	5	CCU6 node 1 interrupt
CCU2	6	CCU6 node 2 interrupt
CCU3	7	CCU6 node 3 interrupt
SSC1	8	SSC1 interrupt (receive, transmit, error)
SSC2	9	SSC2 interrupt (receive, transmit, error)



## Interrupt System

**Table 67 Interrupt Vector Table**

Service Request	Node ID	Description
UART1	10	UART1 (ASC-LIN) interrupt (receive, transmit), Timer2, linsync1, LIN
UART2	11	UART2 interrupt (receive, transmit), Timer21, External interrupt (EINT2)
EXINT0	12	External interrupt (EINT0), MON
EXINT1	13	External interrupt (EINT1)
BDRV/CP	14	Bridge Driver / Charge Pump
DMA	15	DMA Controller

**Table 68 NMI Interrupt Table**

Service Request	Node	Description
Watchdog Timer NMI	NMI	Watchdog Timer overflow
PLL NMI	NMI	PLL Loss-of-Lock
NVM Operation Complete NMI	NMI	NVM Operation Complete
Overtemperature NMI	NMI	System Overtemperature
Oscillator Watchdog NMI	NMI	Oscillator Watchdog / MI_CLK Watchdog Timer Overflow
NVM Map Error NMI	NMI	NVM Map Error
ECC Error NMI	NMI	RAM / NVM Uncorrectable ECC Error
Supply Prewarning NMI	NMI	Supply Prewarning

Interrupt System

12.3 Functional Description

12.3.1 Interrupt Node Assignment

12.3.1.1 Interrupt Node 0 and 1 - GPT12 Timer Module

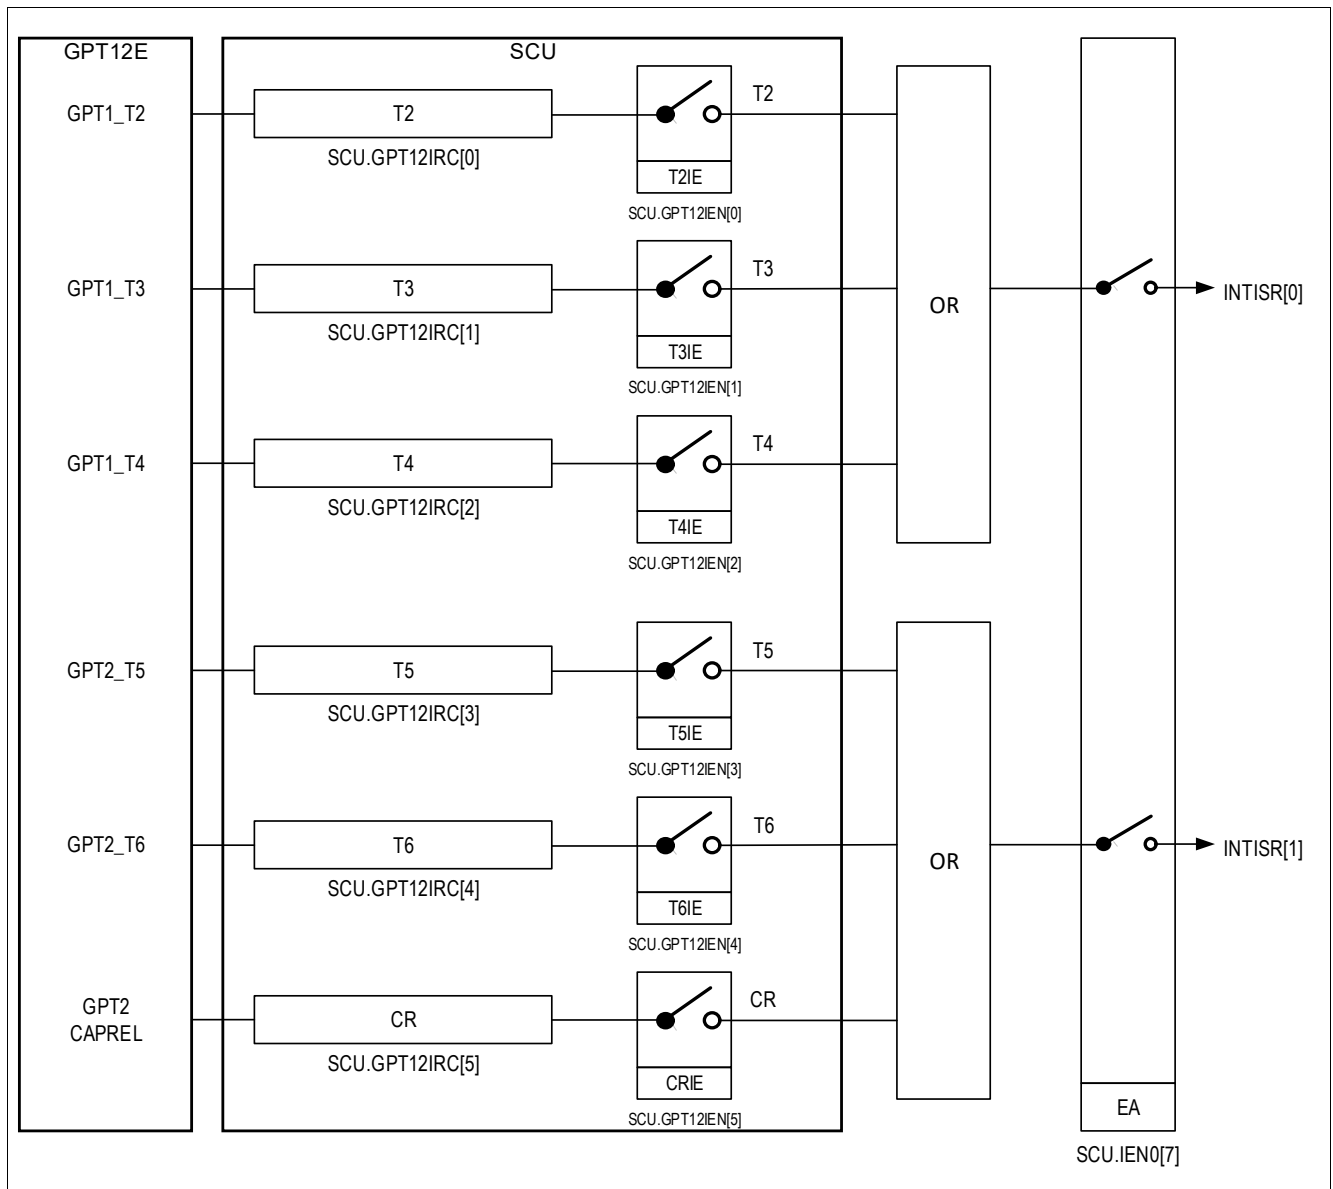


Figure 52 Interrupt Request Sources 0 and 1 (GPT12)

Interrupt System

12.3.1.2 Interrupt Node 2 - Measurement Unit

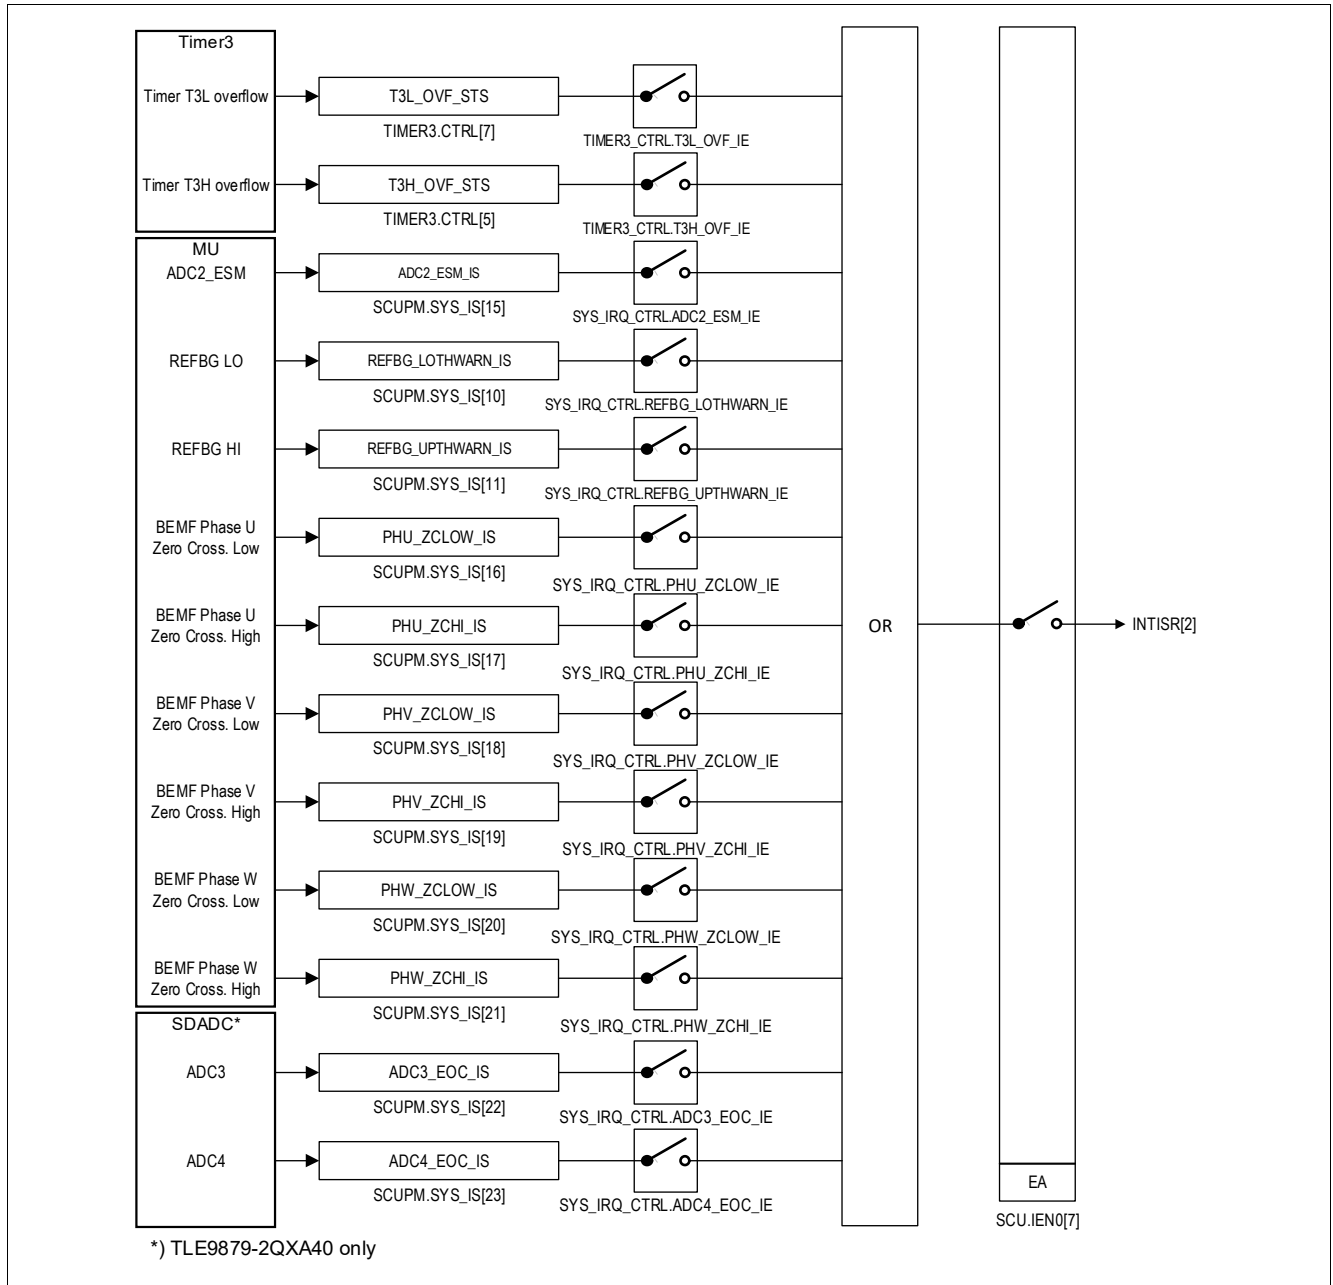


Figure 53 Interrupt Request Sources 2 (MU)

Interrupt System

12.3.1.3 Interrupt Node 3 - 10 Bit ADC (ADC1)

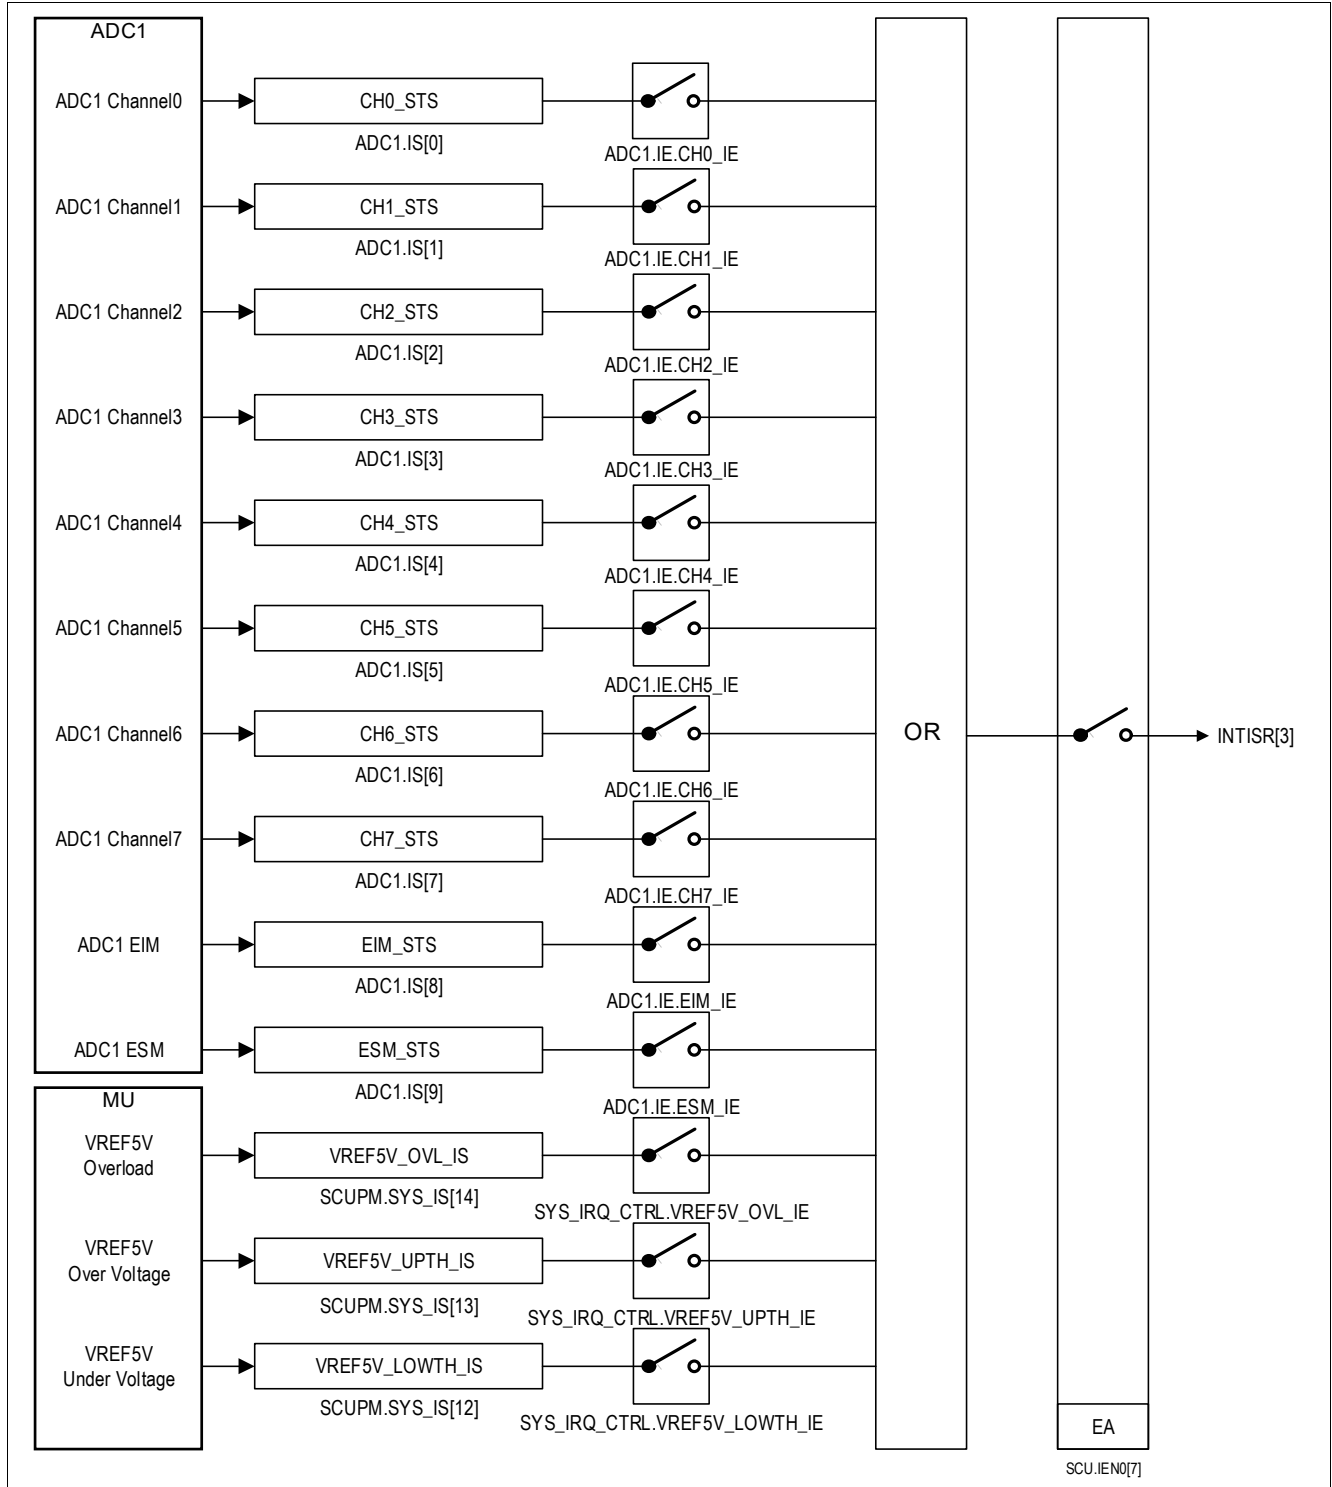


Figure 54 Interrupt Request Sources 3 (ADC1)

Interrupt System

12.3.1.4 Interrupt Nodes 4/5/6/7 - Capture Compare Unit (CCU6)

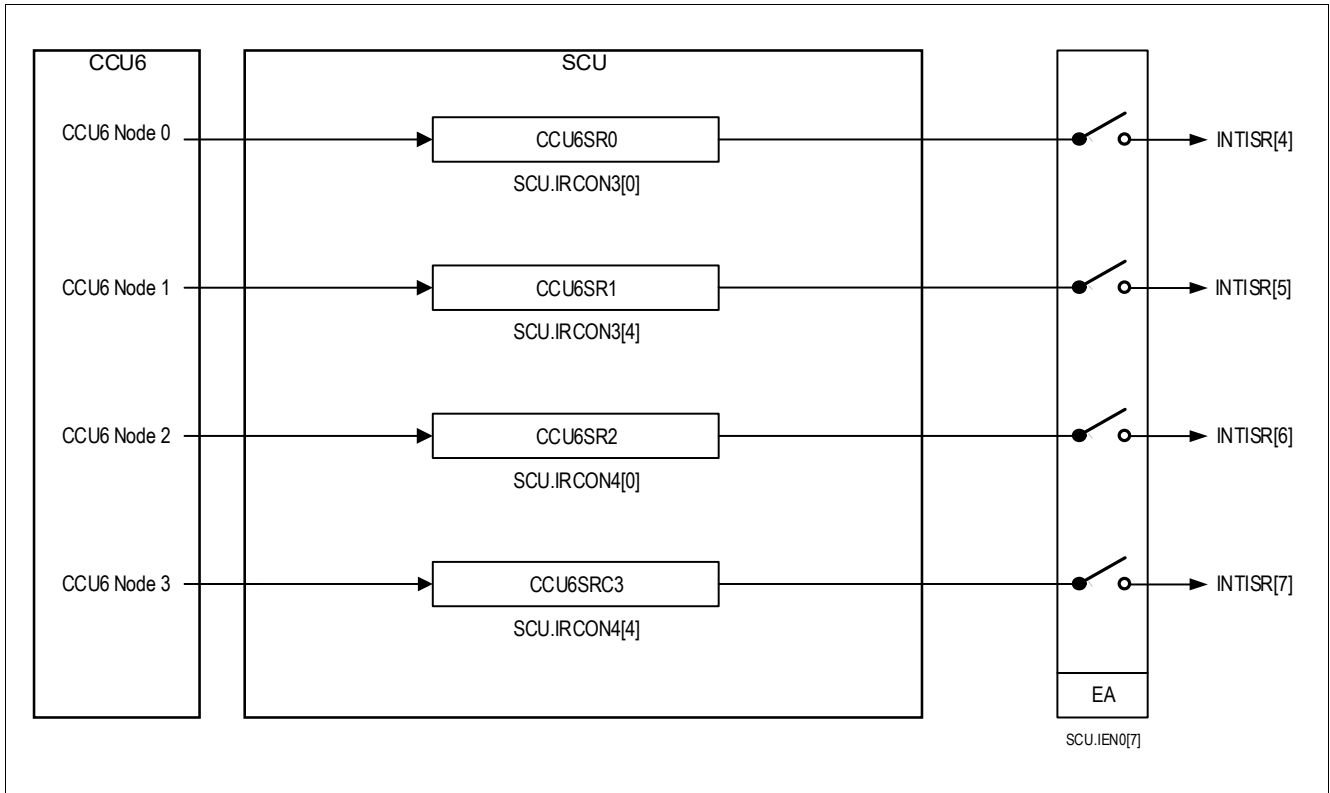


Figure 55 Interrupt Request Sources 4, 5, 6, 7 (CCU6)

Interrupt System

12.3.1.5 Interrupt Node 8 and 9 - SSC1/SSC2

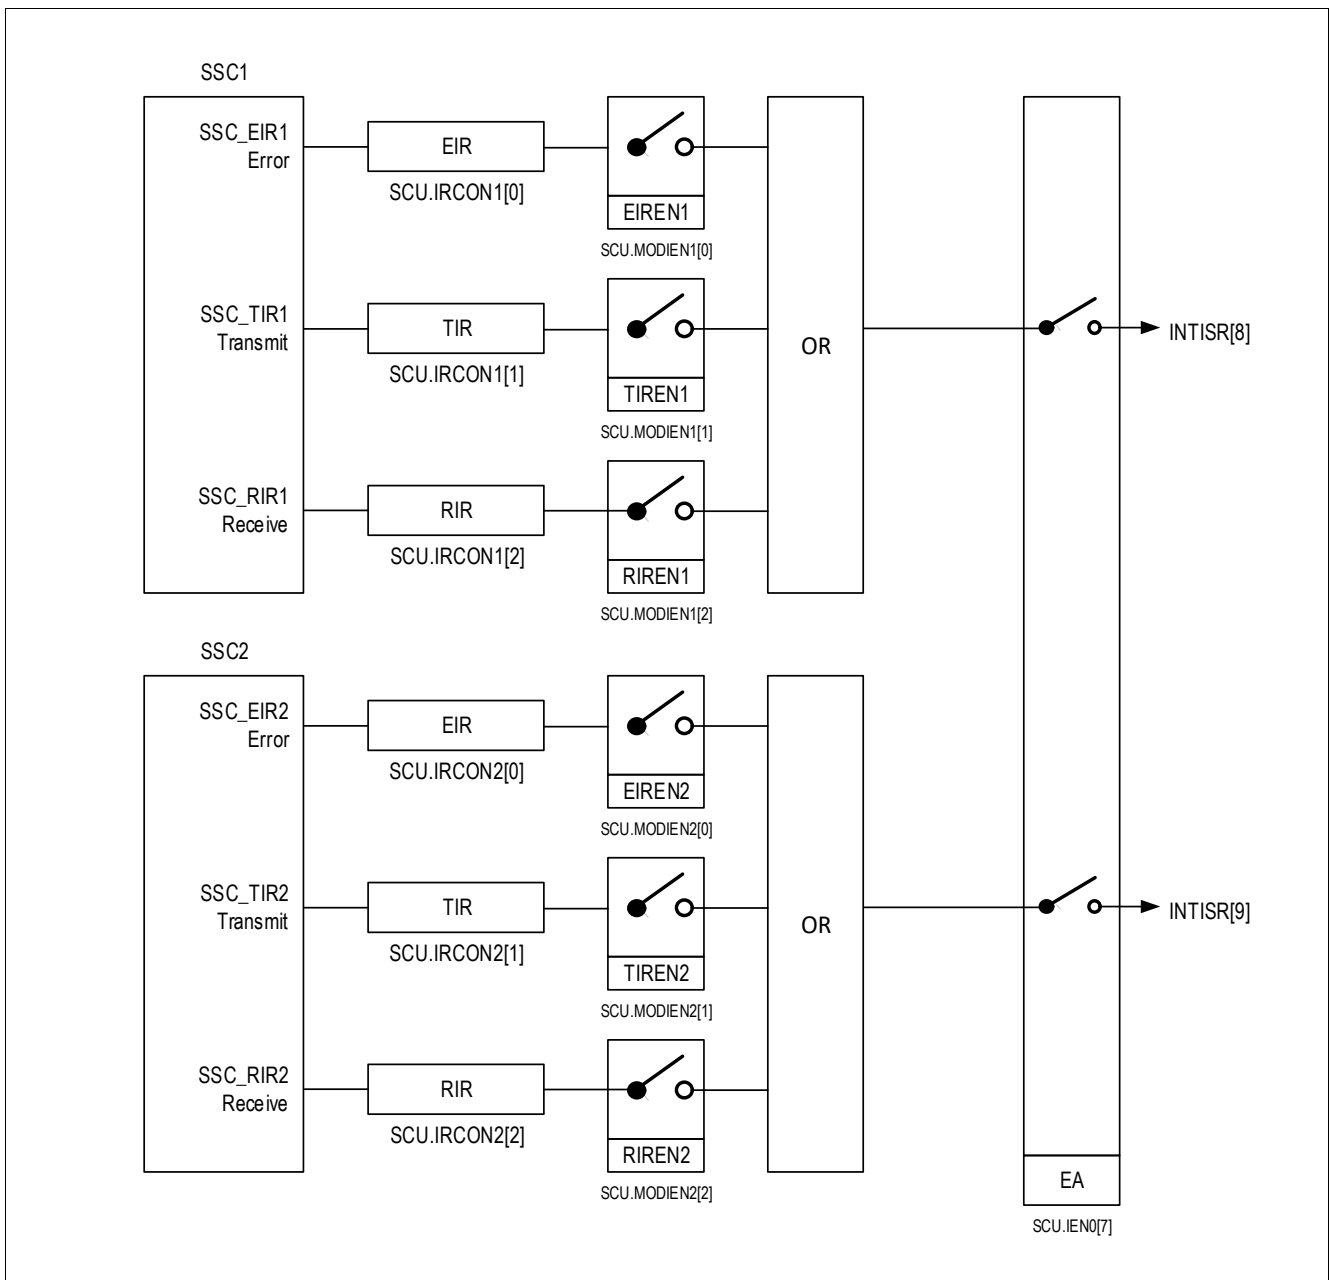


Figure 56 Interrupt Request Sources 8 and 9 (SSC)

Interrupt System

12.3.1.6 Interrupt Node 10 - UART1/LIN Transceiver

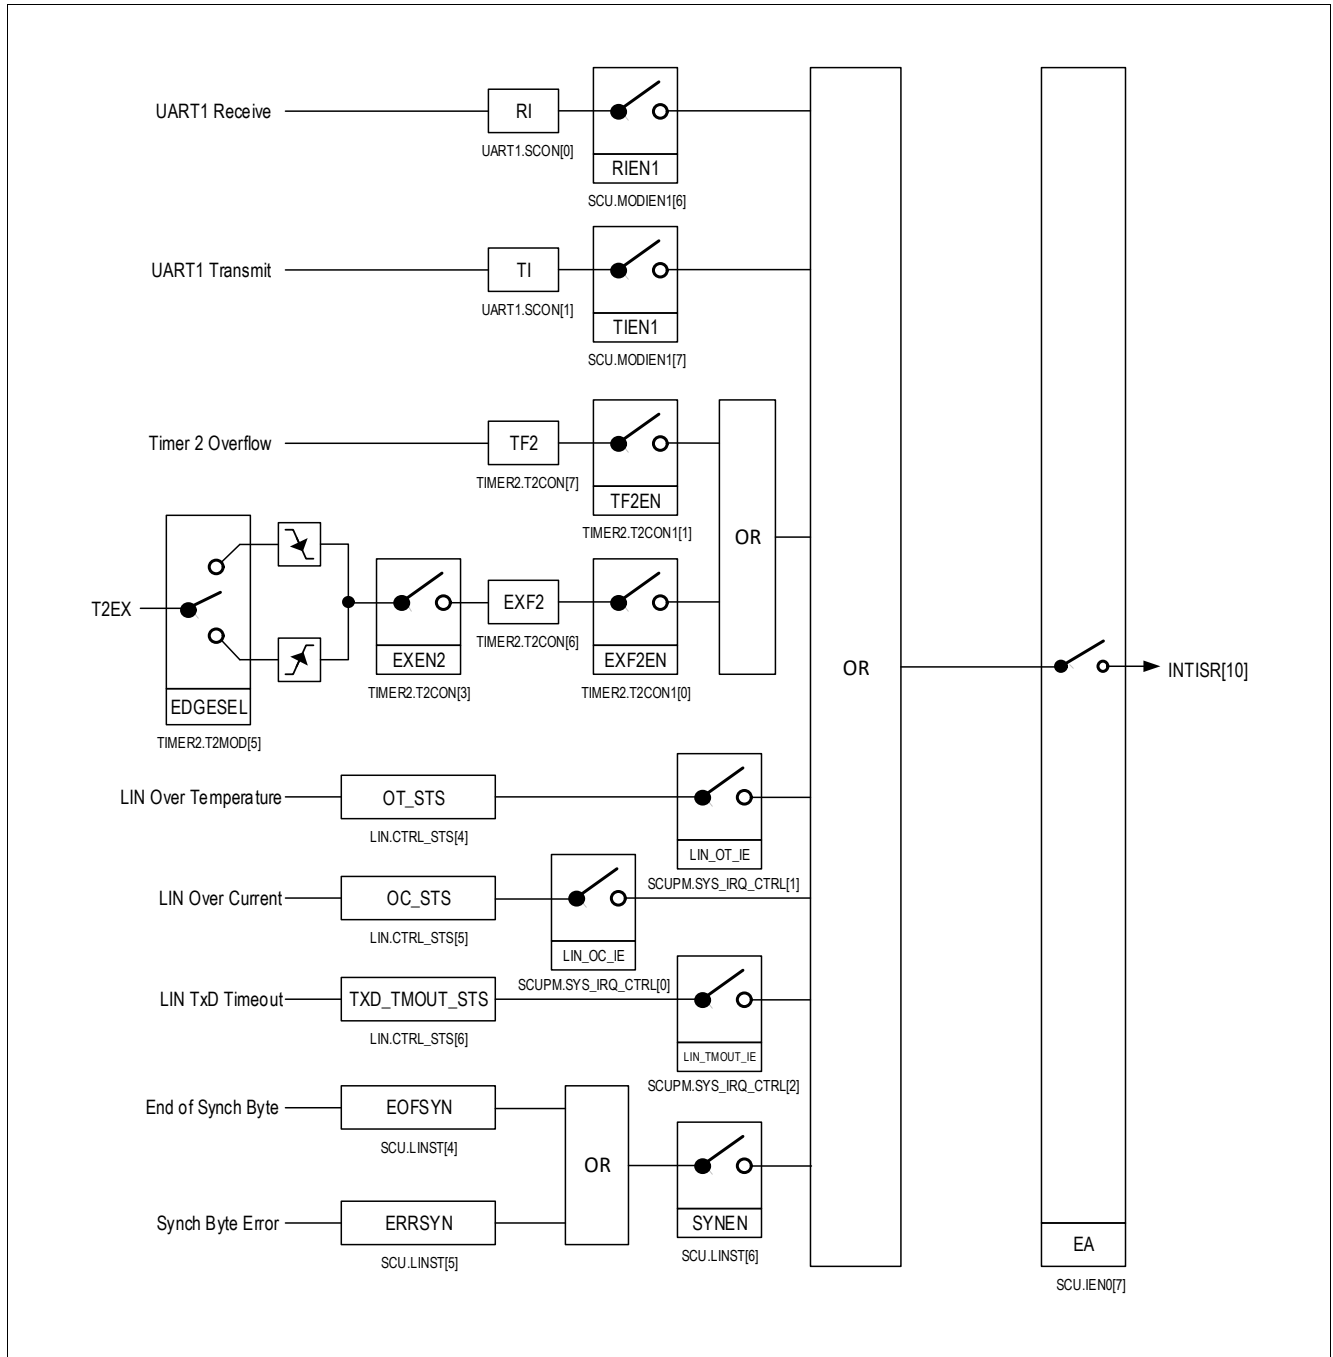


Figure 57 Interrupt Request Source 10 (UART1)

Interrupt System

12.3.1.7 Interrupt Node 11 - UART2

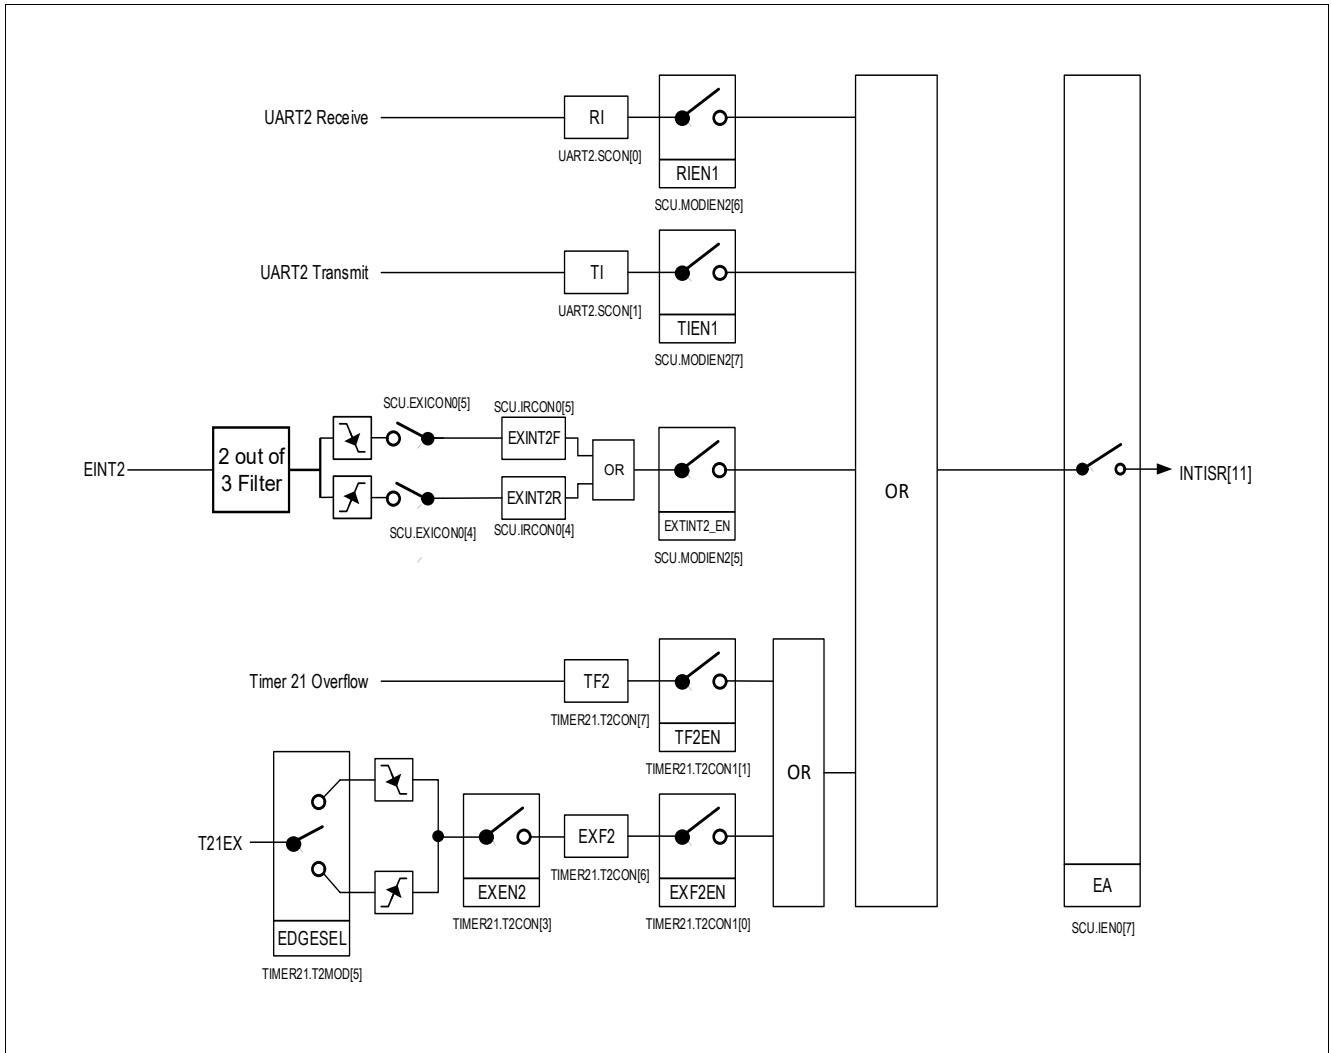


Figure 58 Interrupt Request Source 11 (UART2)



Interrupt System

12.3.1.8 Interrupt Node 12 - External Interrupt 0/MON

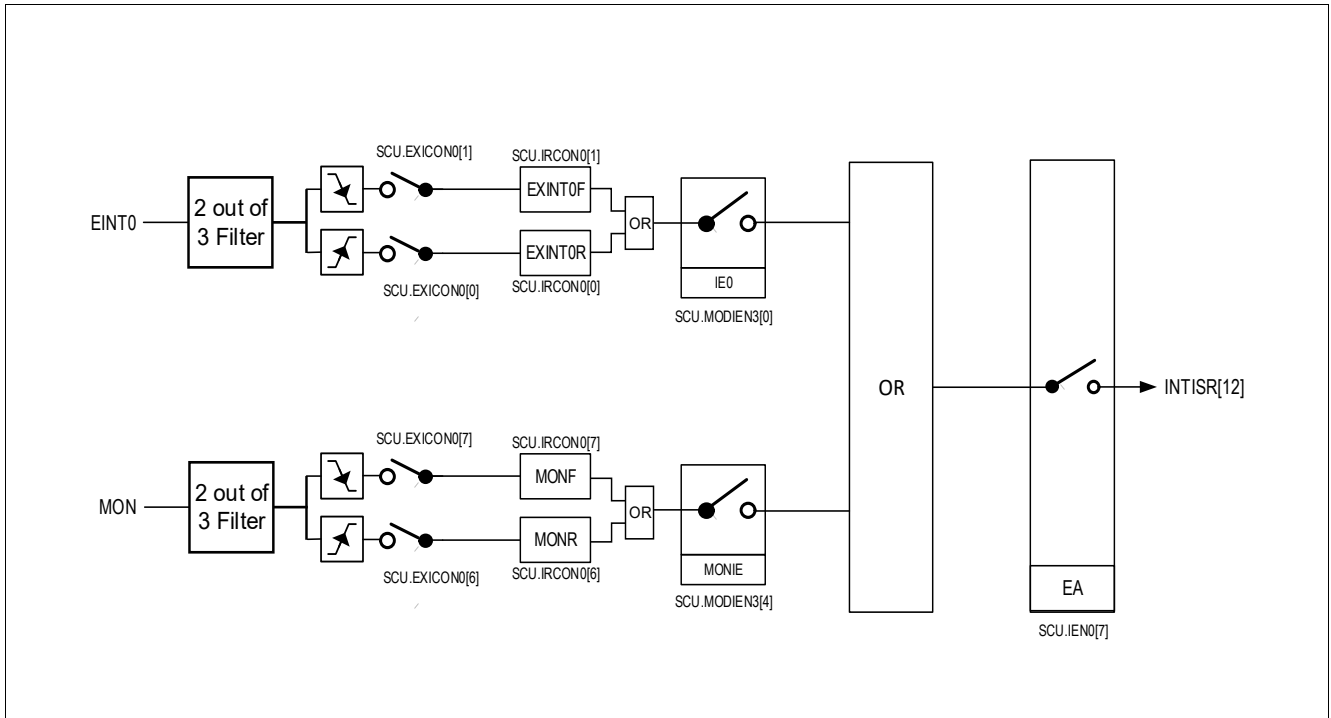


Figure 59 Interrupt Request Sources 12 (Interrupt)

Interrupt System

12.3.1.9 Interrupt Node 13 - External Interrupt 1

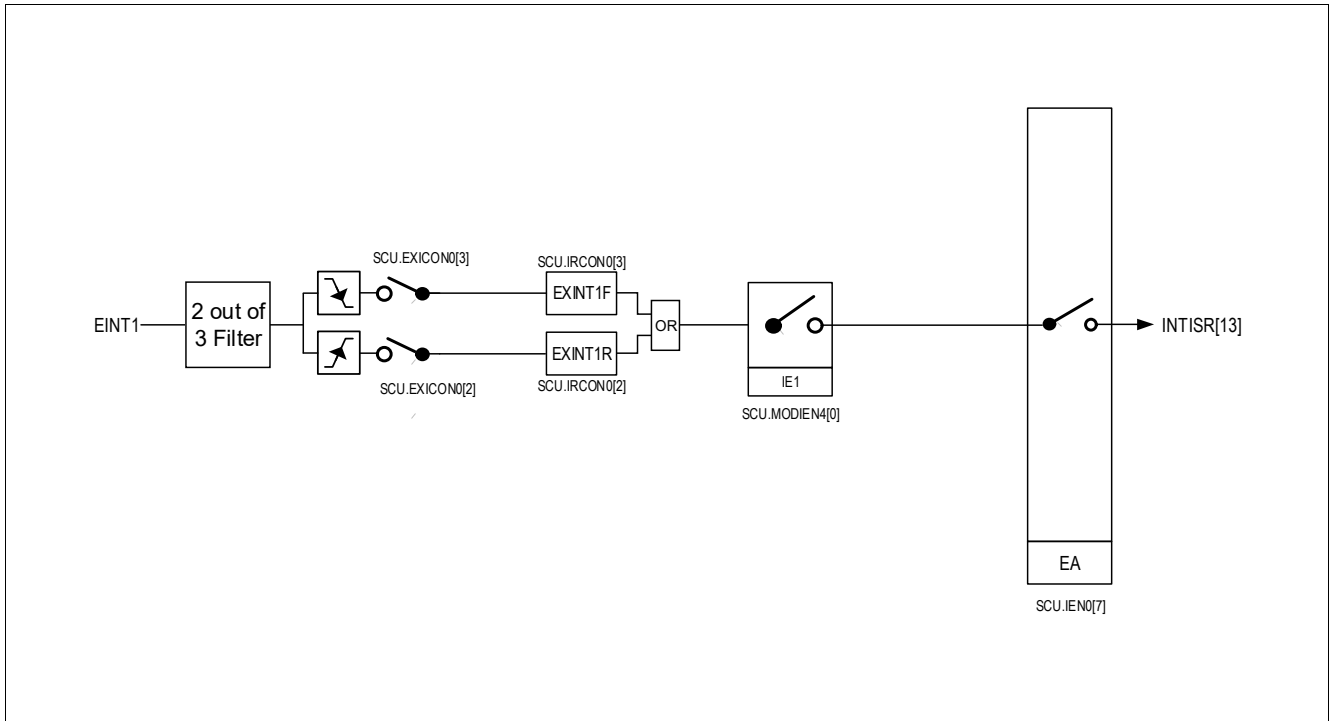


Figure 60 Interrupt Request Sources 13 (Interrupt)

Interrupt System

12.3.1.10 Interrupt Node 14 - Bridge Driver

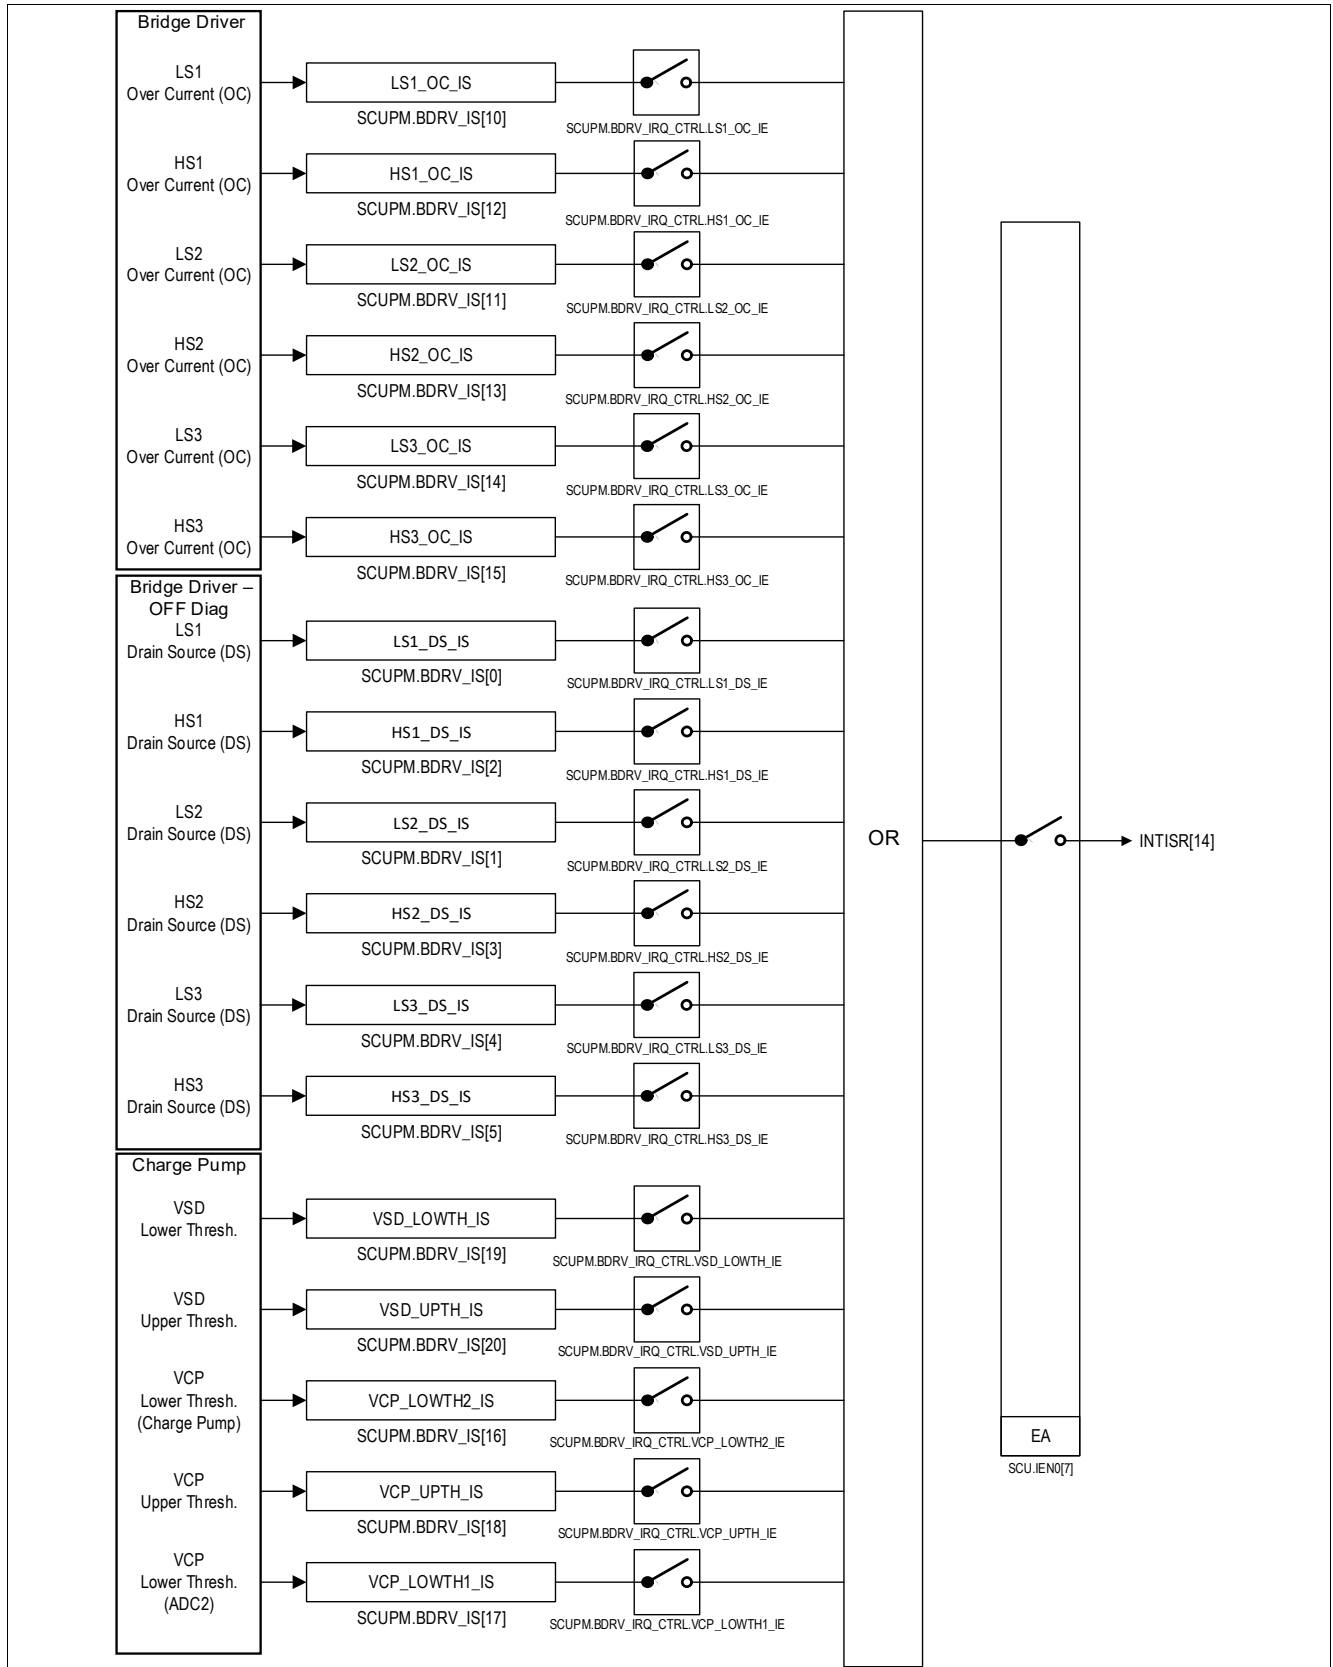


Figure 61 Interrupt Request Sources 14 (Bridge Driver)

Interrupt System

12.3.1.11 Interrupt Node 15 - DMA Controller

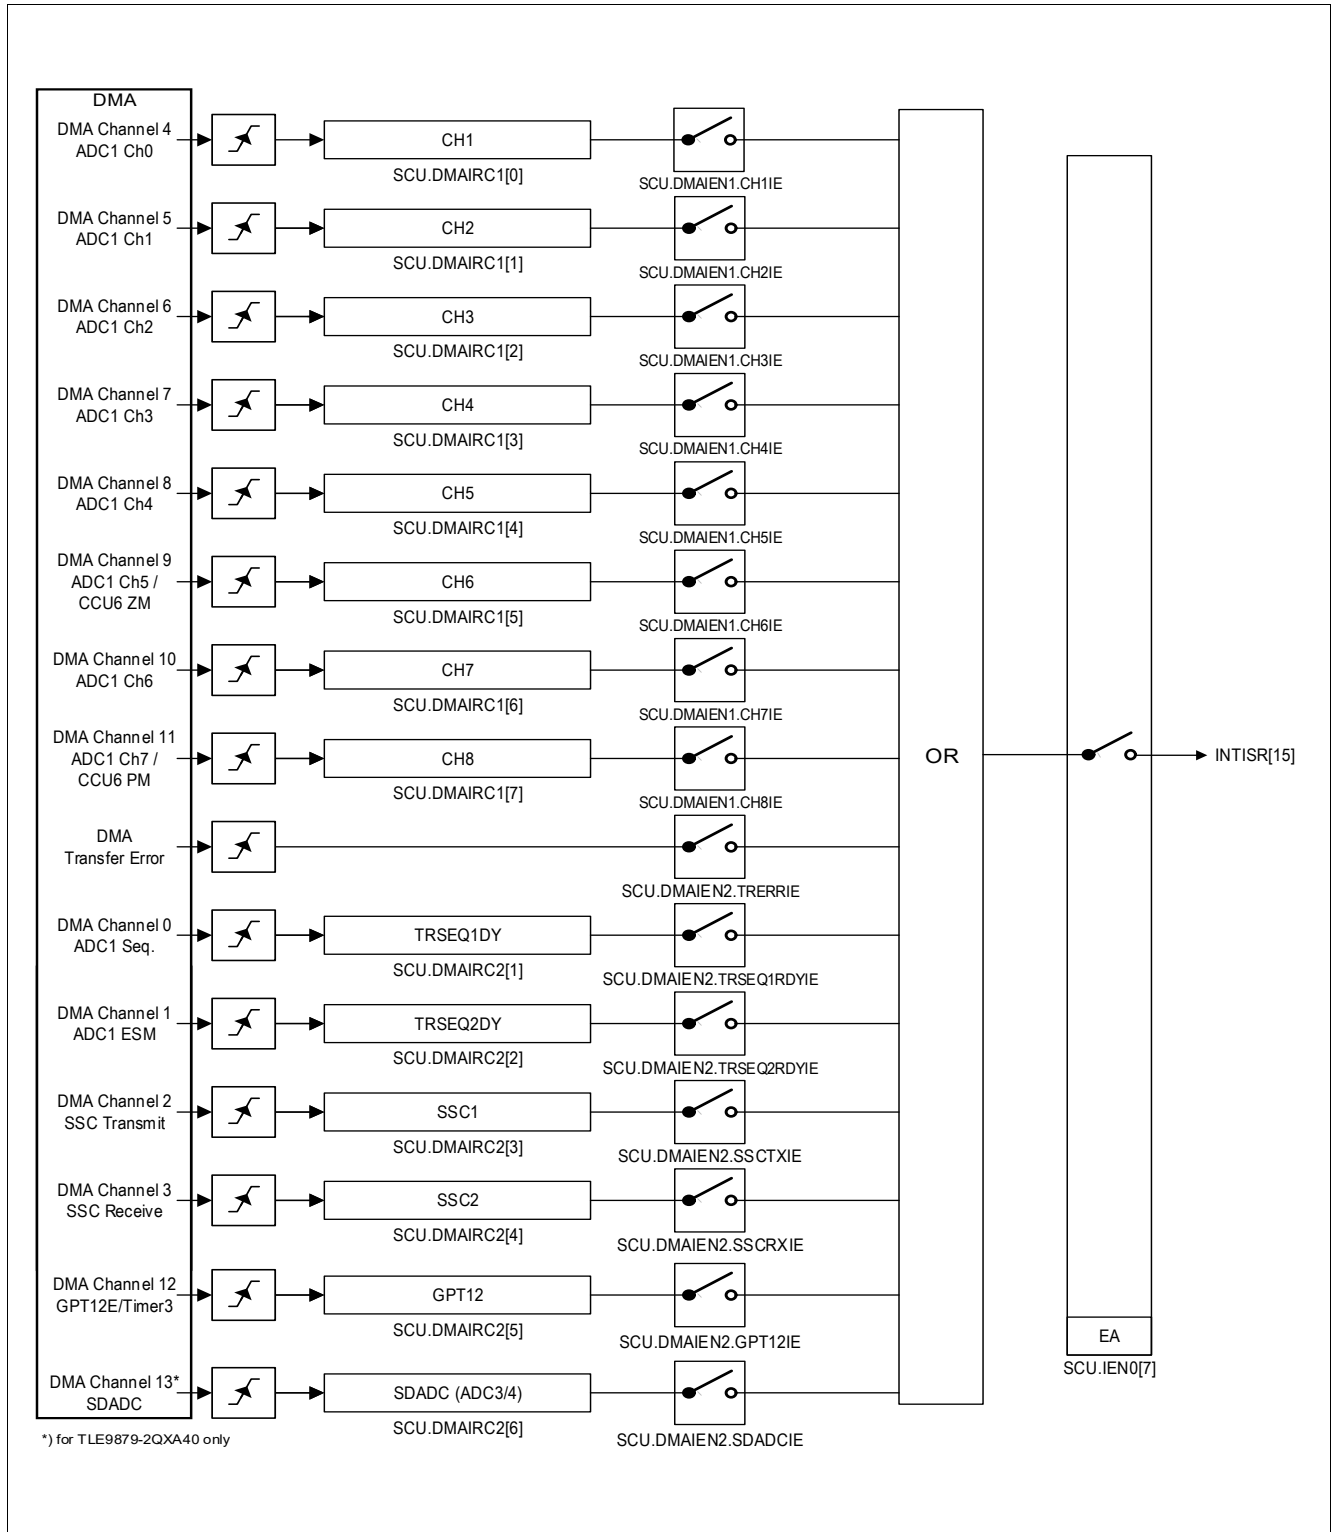


Figure 62 Interrupt Request Sources 15 (DMA)

Interrupt System

12.3.1.12 Non Maskable Interrupt (NMI)

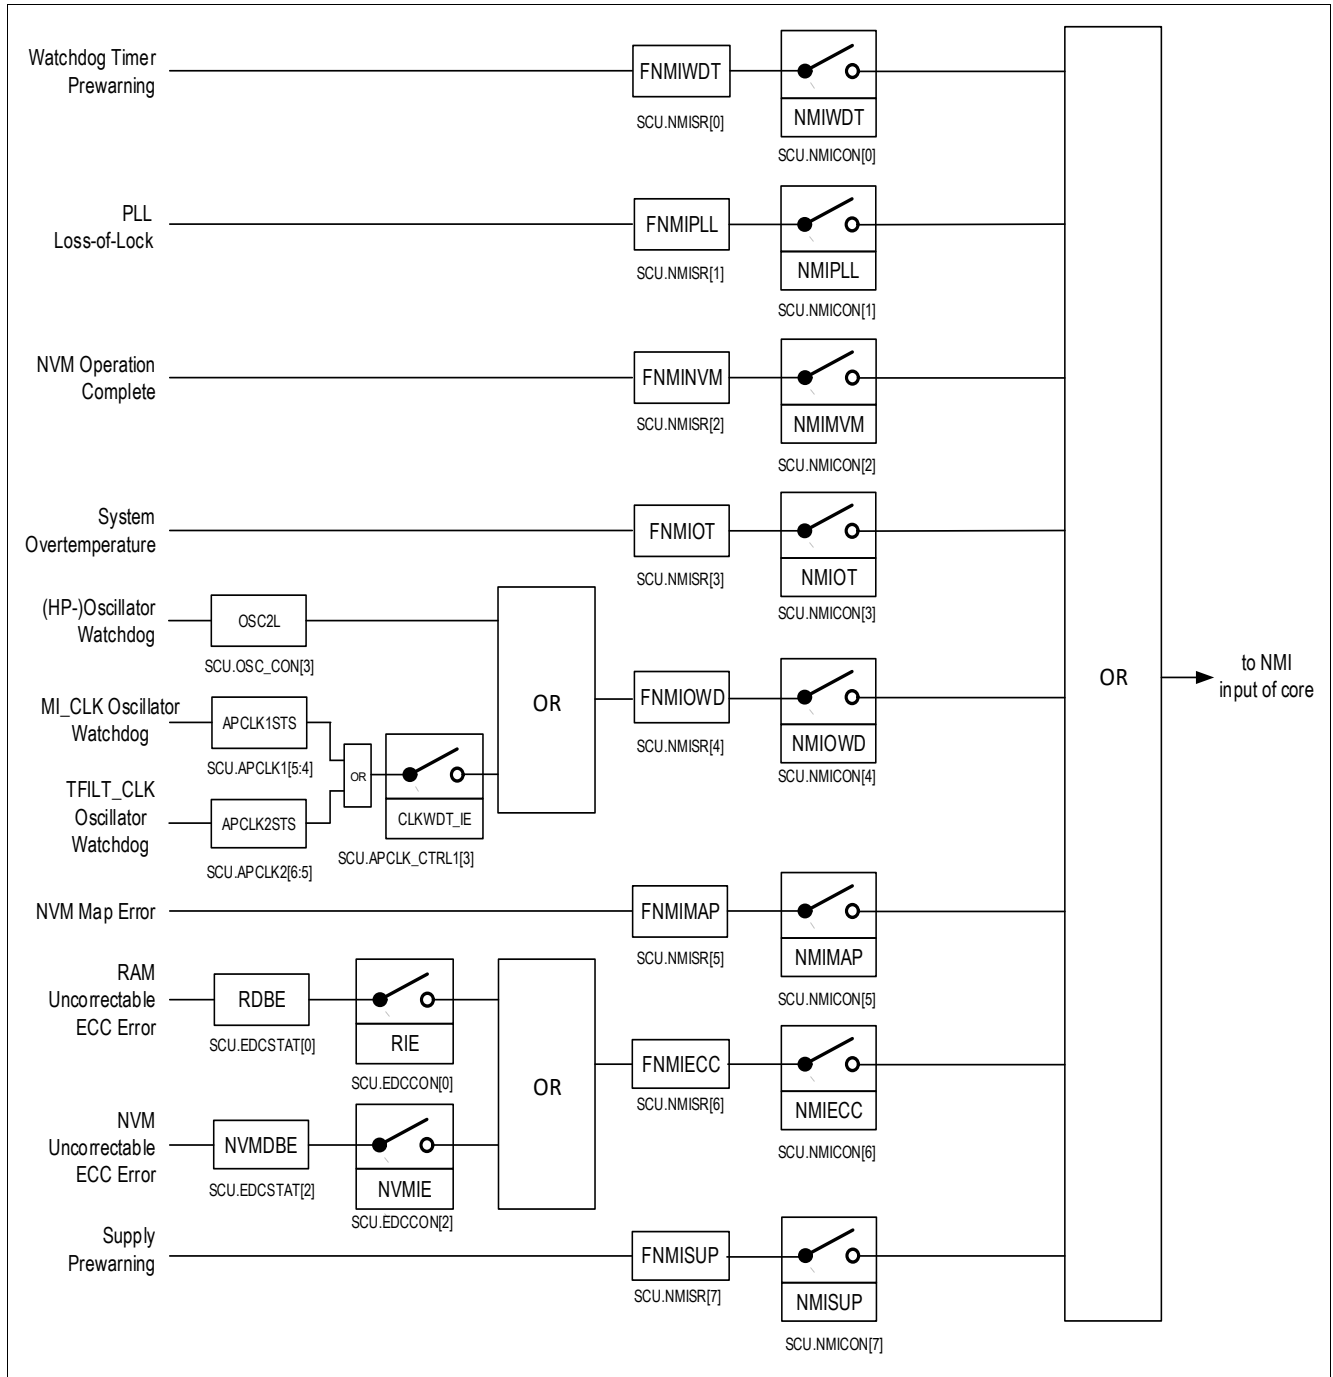


Figure 63 Non-Maskable Interrupt Request Source

## Interrupt System

## 12.3.1.13 Interrupt Flags Overview

Table 69 All Interrupt Flags and Enable

Service Request	Node ID	Level/Edge Sensitive	Duration	SFR Flag	Interrupt Enable
None Maskable Interrupts					
OT NMI					
SYS_OTWARN	NMI	edge	set until cleared by software	SCUPM. <a href="#">SYS_IS</a> .SYS_OTW ARN_IS	SCUPM. <a href="#">SYS_IRQ_CTRL</a> .S YS_OTWARN_IE
SYS_OT	NMI	edge	set until cleared by software	SCUPM. <a href="#">SYS_IS</a> .SYS_OT_I S	SCUPM. <a href="#">SYS_IRQ_CTRL</a> .S YS_OT_IE
PMU_OTWARN	NMI	edge	set until cleared by software	SCUPM. <a href="#">SYS_IS</a> .PMU_OT WARN_IS	SCUPM. <a href="#">SYS_IRQ_CTRL</a> .P MU_OTWARN_IE
PMU_OT	NMI	edge	set until cleared by software	SCUPM. <a href="#">SYS_IS</a> .PMU_OT_ IS	SCUPM. <a href="#">SYS_IRQ_CTRL</a> .P MU_OT_IE
Supply NMI					
PREWARN_SUP MON_UV	NMI	edge	set until cleared by software	SCUPM. <a href="#">SYS_SUPPLY_IR Q_STS</a> .MON_UV_IS	SCUPM. <a href="#">SYS_SUPPLY_IR Q_CTRL</a> .MON_UV_IE
PREWARN_SUP VS_UV	NMI	edge	set until cleared by software	SCUPM. <a href="#">SYS_SUPPLY_IR Q_STS</a> .VS_UV_IS	SCUPM. <a href="#">SYS_SUPPLY_IR Q_CTRL</a> .VS_UV_IE
PREWARN_SUP VDD5V_UV	NMI	edge	set until cleared by software	SCUPM. <a href="#">SYS_SUPPLY_IR Q_STS</a> .VDD5V_UV_IS	SCUPM. <a href="#">SYS_SUPPLY_IR Q_CTRL</a> .VDD5V_UV_IE
PREWARN_SUP VDD1V5_UV	NMI	edge	set until cleared by software	SCUPM. <a href="#">SYS_SUPPLY_IR Q_STS</a> .VDD1V5_UV_IS	SCUPM. <a href="#">SYS_SUPPLY_IR Q_CTRL</a> .VDD1V5_UV_IE
PREWARN_SUP MON_OV	NMI	edge	set until cleared by software	SCUPM. <a href="#">SYS_SUPPLY_IR Q_STS</a> .MON_OV_IS	SCUPM. <a href="#">SYS_SUPPLY_IR Q_CTRL</a> .MON_OV_IE
PREWARN_SUP VS_OV	NMI	edge	set until cleared by software	SCUPM. <a href="#">SYS_SUPPLY_IR Q_STS</a> .VS_OV_IS	SCUPM. <a href="#">SYS_SUPPLY_IR Q_CTRL</a> .VS_OV_IE
PREWARN_SUP VDD5V_OV	NMI	edge	set until cleared by software	SCUPM. <a href="#">SYS_SUPPLY_IR Q_STS</a> .VDD5V_OV_IS	SCUPM. <a href="#">SYS_SUPPLY_IR Q_CTRL</a> .VDD5V_OV_IE
PREWARN_SUP VDD1V5_OV	NMI	edge	set until cleared by software	SCUPM. <a href="#">SYS_SUPPLY_IR Q_STS</a> .VDD1V5_OV_IS	SCUPM. <a href="#">SYS_SUPPLY_IR Q_CTRL</a> .VDD1V5_OV_IE

## Interrupt System

**Table 69 All Interrupt Flags and Enable (cont'd)**

Service Request	Node ID	Level/Edge Sensitive	Duration	SFR Flag	Interrupt Enable
VDDP_OVERVOLT	NMI	level	set until cleared by software	PMU. <b>PMU_SUPPLY_STS</b> .PMU_5V_OVERVOLT	PMU. <b>PMU_SUPPLY_STS</b> .PMU_5V_FAIL_EN
VDDP_OVERLOAD	NMI	level	set until cleared by software	PMU. <b>PMU_SUPPLY_STS</b> .PMU_5V_OVERLOAD	PMU. <b>PMU_SUPPLY_STS</b> .PMU_5V_FAIL_EN
VDDC_OVERVOLT	NMI	level	set until cleared by software	PMU. <b>PMU_SUPPLY_STS</b> .PMU_1V5_OVERVOLT	PMU. <b>PMU_SUPPLY_STS</b> .PMU_1V5_FAIL_EN
VDDC_OVERLOAD	NMI	level	set until cleared by software	PMU. <b>PMU_SUPPLY_STS</b> .PMU_1V5_OVERLOAD	PMU. <b>PMU_SUPPLY_STS</b> .PMU_1V5_FAIL_EN
VDDEXT_OVERVOLT	NMI	level	set until cleared by software	PMU. <b>VDDEXT_CTRL</b> .OVERVOLT	PMU. <b>VDDEXT_CTRL</b> .FAIL_EN
VDDEXT_OVERLOAD	NMI	level	set until cleared by software	PMU. <b>VDDEXT_CTRL</b> .OVERLOAD	PMU. <b>VDDEXT_CTRL</b> .FAIL_EN
VDDEXT_SHORT	NMI	level	set until cleared by software	PMU. <b>VDDEXT_CTRL</b> .SHORT	PMU. <b>VDDEXT_CTRL</b> .FAIL_EN
MI_CLK_CLKWDT	NMI	level		SCU. <b>NMISR</b> .FNMIOWD SCU. <b>APCLK1</b> .APCLK1STS	SCU. <b>NMICON</b> .NMIOWD SCU. <b>APCLK_CTRL1</b> .CLKWDT_IE
TFILT_CLK_CLKWDT	NMI	level		SCU. <b>NMISR</b> .FNMIOWD SCU. <b>APCLK2</b> .APCLK2STS	SCU. <b>NMICON</b> .NMIOWD SCU. <b>APCLK_CTRL1</b> .CLKWDT_IE
(HP)Oscillator CLKWDT	NMI	level		SCU. <b>OSC_CON</b> .OSC2L	SCU. <b>NMICON</b> .NMIOWD
ECC Error NMI					
RAM Uncorrectable	NMI	level	set until cleared by software	SCU. <b>EDCSTAT</b> .RDBE	SCU. <b>EDCCON</b> .RIE
NVM Uncorrectable	NMI	level	set until cleared by software	SCU. <b>EDCSTAT</b> .NVMDBE	SCU. <b>EDCCON</b> .NVMIE
Supply Prewarning	NMI	level	set until cleared by software	SCU. <b>NMISR</b> .FNMISUP	SCU. <b>NMICON</b> .NMISUP
INTISR<0/1> → GPT12					
GPT12-T2	0	level	2 per_clk cycles	SCU. <b>GPT12IRC</b> .T2	SCU. <b>GPT12IEN</b> .T2IE

## Interrupt System

**Table 69 All Interrupt Flags and Enable (cont'd)**

Service Request	Node ID	Level/Edge Sensitive	Duration	SFR Flag	Interrupt Enable
GPT12E T3	0	level	2 per_clk cycles	SCU. <b>GPT12IRC</b> .T3	SCU. <b>GPT12IEN</b> .T3IE
GPT12E T4	0	level	2 per_clk cycles	SCU. <b>GPT12IRC</b> .T4	SCU. <b>GPT12IEN</b> .T4IE
GPT12E T5	1	level	2 per_clk cycles	SCU. <b>GPT12IRC</b> .T5	SCU. <b>GPT12IEN</b> .T5IE
GPT12E T6	1	level	2 per_clk cycles	SCU. <b>GPT12IRC</b> .T6	SCU. <b>GPT12IEN</b> .T6IE
GPT12E CAPREL	0/1	level	2 per_clk cycles	SCU. <b>GPT12IRC</b> .CR	SCU. <b>GPT12IEN</b> .CRIE
INTISR<2> → MU					
ADC2 ESM	2	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .ADC2_ESM_IS	SCUPM. <b>SYS_IRQ_CTRL</b> .ADC2_ESM_IE
T3L overflow	2	level	set until cleared by software	TIMER3. <b>CTRL</b> .T3L_OVF_STS	TIMER3. <b>CTRL</b> .T3L_OVF_IE
T3H overflow	2	level	set until cleared by software	TIMER3. <b>CTRL</b> .T3L_OVF_STS	TIMER3. <b>CTRL</b> .T3H_OVF_IE
REF_BG_LO	2	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .REFBG_LOTHWARN_IS MF. <b>REF1_STS</b> .REFBG_LOTHWARN_STS	SCUPM. <b>SYS_IRQ_CTRL</b> .REFBG_LOTHWARN_IE
REF_BG_HI	2	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .REFBG_UPTHWARN_IS MF. <b>REF1_STS</b> .REFBG_UPTHWARN_STS	SCUPM. <b>SYS_IRQ_CTRL</b> .REFBG_UPTHWARN_IE
PHU_ZCLOW	2	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .PHU_ZCLOW_IS	SCUPM. <b>SYS_IRQ_CTRL</b> .PHU_ZCLOW_IE
PHU_ZCHI	2	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .PHU_ZCHI_IS	SCUPM. <b>SYS_IRQ_CTRL</b> .PHU_ZCHI_IE
PHV_ZCLOW	2	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .PHV_ZCLOW_IS	SCUPM. <b>SYS_IRQ_CTRL</b> .PHV_ZCLOW_IE
PHV_ZCHI	2	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .PHV_ZCHI_IS	SCUPM. <b>SYS_IRQ_CTRL</b> .PHV_ZCHI_IE



## Interrupt System

**Table 69 All Interrupt Flags and Enable (cont'd)**

Service Request	Node ID	Level/Edge Sensitive	Duration	SFR Flag	Interrupt Enable
PHW_ZCLOW	2	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .PHW_ZCLOW_IS	SCUPM. <b>SYS_IRQ_CTRL</b> .PHW_ZCLOW_IE
PHW_ZCHI	2	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .PHW_ZCHI_IS	SCUPM. <b>SYS_IRQ_CTRL</b> .PHW_ZCHI_IE
ADC4 (SDADC) <sup>2)</sup>	2	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .ADC4_EOC_IS	SCUPM. <b>SYS_IRQ_CTRL</b> .ADC4_EOC_IE
ADC3 (SDADC) <sup>2)</sup>	2	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .ADC3_EOC_IS	SCUPM. <b>SYS_IRQ_CTRL</b> .ADC3_EOC_IE
INTISR<3> → ADC 10 Bit					
ADC1 CH0	3	level	set until cleared by software	ADC1. <b>IS</b> .CH0_STS	ADC1. <b>IE</b> .CH0_IE
ADC1 CH1	3	level	set until cleared by software	ADC1. <b>IS</b> .CH1_STS	ADC1. <b>IE</b> .CH1_IE
ADC1 CH2	3	level	set until cleared by software	ADC1. <b>IS</b> .CH2_STS	ADC1. <b>IE</b> .CH2_IE
ADC1 CH3	3	level	set until cleared by software	ADC1. <b>IS</b> .CH3_STS	ADC1. <b>IE</b> .CH3_IE
ADC1 CH4	3	level	set until cleared by software	ADC1. <b>IS</b> .CH4_STS	ADC1. <b>IE</b> .CH4_IE
ADC1 CH5	3	level	set until cleared by software	ADC1. <b>IS</b> .CH5_STS	ADC1. <b>IE</b> .CH5_IE
ADC1 CH6	3	level	set until cleared by software	ADC1. <b>IS</b> .CH6_STS	ADC1. <b>IE</b> .CH6_IE
ADC1 CH7	3	level	set until cleared by software	ADC1. <b>IS</b> .CH7_STS	ADC1. <b>IE</b> .CH7_IE
ADC1 ESM	3	level	set until cleared by software	ADC1. <b>IS</b> .ESM_STS	ADC1. <b>IE</b> .ESM_IE
ADC1 EIM	3	level	set until cleared by software	ADC1. <b>IS</b> .EIM_STS	ADC1. <b>IE</b> .EIM_IE

## Interrupt System

**Table 69 All Interrupt Flags and Enable (cont'd)**

Service Request	Node ID	Level/Edge Sensitive	Duration	SFR Flag	Interrupt Enable
VREF5V Overflow	3	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .VREF5V_OVL_IS	SCUPM. <b>SYS_IRQ_CTRL</b> .VREF5V_OVL_IE
VREF5V_UPTH (VAREF)	3	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .VREF5V_UPTH_IS	SCUPM. <b>SYS_IRQ_CTRL</b> .VREF5V_UPTH_IE
VREF5V_LOTH (VAREF)	3	level	set until cleared by software	SCUPM. <b>SYS_IS</b> .VREF5V_LOWTH_IS	SCUPM. <b>SYS_IRQ_CTRL</b> .VREF5V_LOWTH_IE
INTISR<4,5,6,7> → CCU6					
CCU0 <sup>1)</sup> Node 0 (SR0)	4	level	2 per_clk cycles	SCU. <b>IRCON3</b> .CCU6SR0	CPU. <b>NVIC_ISER0</b> .Int_CCU6SR0
CCU1 <sup>1)</sup> Node 1 (SR1)	5	level	2 per_clk cycles	SCU. <b>IRCON3</b> .CCU6SR1	CPU. <b>NVIC_ISER0</b> .Int_CCU6SR1
CCU2 <sup>1)</sup> Node 2 (SR2)	6	level	2 per_clk cycles	SCU. <b>IRCON4</b> .CCU6SR2	CPU. <b>NVIC_ISER0</b> .Int_CCU6SR2
CCU3 <sup>1)</sup> Node 3 (SR3)	7	level	2 per_clk cycles	SCU. <b>IRCON4</b> .CCU6SR3	CPU. <b>NVIC_ISER0</b> .Int_CCU6SR3
INTISR<8,9> → SSC1/SSC2					
SSC1 Error	8	level	2 per_clk cycles	SCU. <b>IRCON1</b> .EIR	SCU. <b>MODIEN1</b> .EIREN
SSC1 Transmit	8	level	2 per_clk cycles	SCU. <b>IRCON1</b> .TIR	SCU. <b>MODIEN1</b> .TIREN
SSC1 Receive	8	level	2 per_clk cycles	SCU. <b>IRCON1</b> .RIR	SCU. <b>MODIEN1</b> .RIREN
SSC2 Error	9	level	2 per_clk cycles	SCU. <b>IRCON2</b> .EIR	SCU. <b>MODIEN2</b> .EIREN
SSC2 Transmit	9	level	2 per_clk cycles	SCU. <b>IRCON2</b> .TIR	SCU. <b>MODIEN2</b> .TIREN
SSC2 Receive	9	level	2 per_clk cycles	SCU. <b>IRCON2</b> .RIR	SCU. <b>MODIEN2</b> .RIREN
INTISR<10,11> → UART1/UART2					
UART1 Receive	10	level	copy of RI bit, set until cleared by software	UART1. <b>SCON</b> .RI	SCU. <b>MODIEN1</b> .RIEN
UART1 Transmit	10	level	copy of TI bit, set until cleared by software	UART1. <b>SCON</b> .TI	SCU. <b>MODIEN1</b> .TIEN

## Interrupt System

**Table 69 All Interrupt Flags and Enable (cont'd)**

Service Request	Node ID	Level/Edge Sensitive	Duration	SFR Flag	Interrupt Enable
UART2 Receive	11	level	copy of RI bit, set until cleared by software	UART2. <b>SCON</b> .RI	SCU. <b>MODIEN2</b> .RIEN
UART2 Transmit	11	level	copy of TI bit, set until cleared by software	UART2. <b>SCON</b> .TI	SCU. <b>MODIEN2</b> .TIEN
LIN sync byte error	10	level		SCU. <b>LINST</b> .ERRSYN	SCU. <b>LINST</b> .SYNEN
LIN end of sync byte	10	level		SCU. <b>LINST</b> .EOFSYN	SCU. <b>LINST</b> .SYNEN
Timer2 Overflow	10	level		TIMER2. <b>T2CON</b> .TF2	TIMER2. <b>T2CON1</b> .TF2EN
Timer2 T2EX	10			TIMER2. <b>T2CON</b> .EXF2	TIMER2. <b>T2CON1</b> .EXF2EN
LIN OT	10	level		LIN. <b>CTRL_STS</b> .OT_STS	SCUPM. <b>SYS_IRQ_CTRL</b> .LIN_OT_IE
LIN OC	10	level		LIN. <b>CTRL_STS</b> .OC_STS	SCUPM. <b>SYS_IRQ_CTRL</b> .LIN_OC_IE
TxD_TMOU	10			LIN. <b>CTRL_STS</b> .TXD_TMOU_STS	SCUPM. <b>SYS_IRQ_CTRL</b> .LIN_TMOU_IE
Timer21 Overflow	11	level		TIMER21. <b>T2CON</b> .TF2	TIMER21. <b>T2CON1</b> .TF2EN
T21EX	11			TIMER21. <b>T2CON</b> .EXF2	TIMER21. <b>T2CON1</b> .EXF2EN
EINT2	11			SCU. <b>IRCON0</b> .EXINT2R/F	SCU. <b>MODIEN2</b> .EXINT2_EN
INTISR<12,13> → EXTINT1/EXTINT2					
exint0	12	level		SCU. <b>IRCON0</b> .EXINT0R/F	SCU. <b>MODIEN3</b> .IE0
MON	12	level		SCU. <b>IRCON0</b> .MONR/F	SCU. <b>MODIEN3</b> .MONIE
exint1	13	level		SCU. <b>IRCON0</b> .EXINT1R/F	SCU. <b>MODIEN4</b> .IE1
INTISR<14> → Bridge Driver					
BDRV/CP VSD Lower Threshold	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .VSD_LOWTH_IS	SCUPM. <b>BDRV_IRQ_CTRL</b> .VSD_LOWTH_IE
BDRV/CP VSD Upper Threshold	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .VSD_UPTH_IS	SCUPM. <b>BDRV_IRQ_CTRL</b> .VSD_UPTH_IE
BDRV/CP VCP Lower Threshold	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .VCP_LOWTH_IS	SCUPM. <b>BDRV_IRQ_CTRL</b> .VCP_LOWTH_IE

## Interrupt System

**Table 69 All Interrupt Flags and Enable (cont'd)**

Service Request	Node ID	Level/Edge Sensitive	Duration	SFR Flag	Interrupt Enable
BDRV/CP VCP Upper Threshold	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .VCP_UP TH_IS	SCUPM. <b>BDRV_IRQ_CTRL</b> . VCP_UPTH_IE
BDRV/CP LS1 Over Current (OC)	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .LS1_OC _IS	SCUPM. <b>BDRV_IRQ_CTRL</b> . LS1_OC_IE
BDRV/CP HS1 Over Current (OC)	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .HS1_OC _IS	SCUPM. <b>BDRV_IRQ_CTRL</b> . HS1_OC_IE
BDRV/CP LS2 Over Current (OC)	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .LS2_OC _IS	SCUPM. <b>BDRV_IRQ_CTRL</b> . LS2_OC_IE
BDRV/CP HS2 Over Current (OC)	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .HS2_OC _IS	SCUPM. <b>BDRV_IRQ_CTRL</b> . HS2_OC_IE
BDRV/CP LS3 Over Current (OC)	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .LS3_OC _IS	SCUPM. <b>BDRV_IRQ_CTRL</b> . LS3_OC_IE
BDRV/CP HS3 Over Current (OC)	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .HS3_OC _IS	SCUPM. <b>BDRV_IRQ_CTRL</b> . HS3_OC_IE
BDRV/CP LS1 Drain-Source Monitoring (DS)	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .LS1_DS _IS BDRV. <b>CTRL1</b> .LS1_DS_STS	SCUPM. <b>BDRV_IRQ_CTRL</b> . LS1_DS_IE
BDRV/CP HS1 Drain- Source Monitoring (DS)	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .HS1_DS _IS BDRV. <b>CTRL1</b> .HS1_DS_ST S	SCUPM. <b>BDRV_IRQ_CTRL</b> . HS1_DS_IE
BDRV/CP LS2 Drain-Source Monitoring (DS)	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .LS2_DS _IS BDRV. <b>CTRL1</b> .LS2_DS_STS	SCUPM. <b>BDRV_IRQ_CTRL</b> . LS2_DS_IE
BDRV/CP HS2 Drain- Source Monitoring (DS)	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .HS2_DS _IS BDRV. <b>CTRL1</b> .HS2_DS_ST S	SCUPM. <b>BDRV_IRQ_CTRL</b> . HS2_DS_IE
BDRV/CP LS3 Drain-Source Monitoring (DS)	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .LS3_DS _IS BDRV. <b>CTRL2</b> .LS3_DS_STS	SCUPM. <b>BDRV_IRQ_CTRL</b> . LS3_DS_IE
BDRV/CP HS3 Drain- Source Monitoring (DS)	14	level	set until cleared by software	SCUPM. <b>BDRV_IS</b> .HS3_DS _IS BDRV. <b>CTRL2</b> .HS3_DS_ST S	SCUPM. <b>BDRV_IRQ_CTRL</b> . HS3_DS_IE

INTISR&lt;15&gt; → DMA Controller

## Interrupt System

**Table 69 All Interrupt Flags and Enable (cont'd)**

Service Request	Node ID	Level/Edge Sensitive	Duration	SFR Flag	Interrupt Enable
DMA Channel 4 Src: ADC1 Ch0	15	level	set until cleared by software	SCU. <b>DMAIRC1</b> .CH1	SCU. <b>DMAIEN1</b> .CH1IE
DMA Channel 5 Src: ADC1 Ch1	15	level	set until cleared by software	SCU. <b>DMAIRC1</b> .CH2	SCU. <b>DMAIEN1</b> .CH2IE
DMA Channel 6 Src: ADC1 Ch2	15	level	set until cleared by software	SCU. <b>DMAIRC1</b> .CH3	SCU. <b>DMAIEN1</b> .CH3IE
DMA Channel 7 Src: ADC1 Ch3	15	level	set until cleared by software	SCU. <b>DMAIRC1</b> .CH4	SCU. <b>DMAIEN1</b> .CH4IE
DMA Channel 8 Src: ADC1 Ch4	15	level	set until cleared by software	SCU. <b>DMAIRC1</b> .CH5	SCU. <b>DMAIEN1</b> .CH5IE
DMA Channel 9 Src: ADC1 Ch5 or CCU6 ZM	15	level	set until cleared by software	SCU. <b>DMAIRC1</b> .CH6	SCU. <b>DMAIEN1</b> .CH6IE
DMA Channel 10 Src: ADC1 Ch6	15	level	set until cleared by software	SCU. <b>DMAIRC1</b> .CH7	SCU. <b>DMAIEN1</b> .CH7IE
DMA Channel 11 Src: ADC1 Ch7 or CCU6 PM	15	level	set until cleared by software	SCU. <b>DMAIRC1</b> .CH8	SCU. <b>DMAIEN1</b> .CH8IE
DMA Channel 12 Src: GPT12E, or TIMER3	15	level	set until cleared by software	SCU. <b>DMAIRC2</b> .GPT12	SCU. <b>DMAIEN2</b> .GPT12IE
DMA Channel 13 Src: ADC3 or ADC4 (SDADC) <sup>2)</sup>	15	level	set until cleared by software	SCU. <b>DMAIRC2</b> .SDADC	SCU. <b>DMAIEN2</b> .SDADCIE
DMA Channel 0 Src: ADC1 Sequence	15	level	set until cleared by software	SCU. <b>DMAIRC2</b> .TRSEQ1DY	SCU. <b>DMAIEN2</b> .TRSEQ1RDYIE
DMA Channel 1 Src: ADC1 ESM	15	level	set until cleared by software	SCU. <b>DMAIRC2</b> .TRSEQ2DY	SCU. <b>DMAIEN2</b> .TRSEQ2RDYIE
DMA Channel 2 Src: SSC Transmit	15	level	set until cleared by software	SCU. <b>DMAIRC2</b> .SSC1RDY	SCU. <b>DMAIEN2</b> .SSCTXIE
DMA Channel 3 Src: SSC Receive	15	level	set until cleared by software	SCU. <b>DMAIRC2</b> .SSC2RDY	SCU. <b>DMAIEN2</b> .SSCRXIE

1) Each CCU6 interrupt can be assigned to any of the CCU6 interrupt nodes [3:0] via CCU6 registers CCU6.**INP**.

---

**Interrupt System**

2) for TLE9879-2QXA40 only


## Interrupt System

### 12.3.2 Interrupt Structure

An interrupt event source may be generated from the on-chip peripherals or from external. Detection of interrupt events is controlled by the respective on-chip peripherals. Interrupt status flags are available for determining which interrupt event has occurred, especially useful for an interrupt node which is shared by several event sources. Each interrupt node (except NMI) has a global enable/disable bit. In most cases, additional enable bits are provided for enabling/disabling particular interrupt events (provided for NMI events). No interrupt will be requested for any occurred event that has its interrupt enable bit disabled.

There is an interrupt masking bit EA available, which is used to globally enable or disable all interrupt requests (except NMI) to the core. Resetting bit EA to 0 only masks the pending interrupt requests from the core, but does not block the capture of incoming interrupt requests.

As displayed in [Figure 64](#), the interrupt event will set the interrupt status flag which doubles as a pending interrupt request to the core. An active pending interrupt request will interrupt the core only if its corresponding interrupt node is enabled. Once an interrupt node is serviced (interrupt acknowledged), its pending interrupt request (represented by the interrupt status flag) may be automatically cleared by hardware (the core).

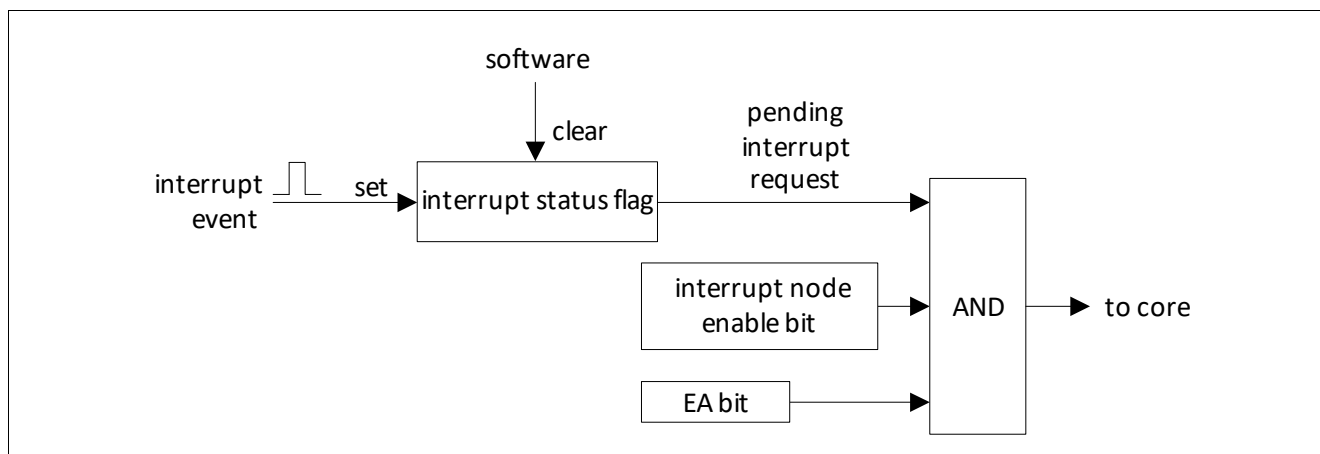

**Figure 64** Interrupt Structure

For the TLE987x, interrupt sources like ADC1, MU and Bridge Driver (each have a dedicated interrupt node) will have their respective interrupt status flags in the dedicated registers. These flags are not cleared by the core once their corresponding pending interrupt request is serviced. They have to be cleared by software. For the UART which has its dedicated interrupt node, interrupt status flags RI and TI in register SCON will not be cleared by the core even when its pending interrupt request is serviced. The UART interrupt status flags (and hence the pending interrupt request) can only be cleared by software.

### 12.3.3 Interrupt Source and Vector

Each interrupt event source has an associated interrupt vector address for the interrupt node it belongs to. This vector is accessed to service the corresponding interrupt node request. The interrupt service of each interrupt node can be individually enabled or disabled via an enable bit. The assignment of the TLE987x interrupt sources to the interrupt vector address and the corresponding interrupt node enable bits are summarized in [Table 67](#).

## Interrupt System

**Table 70 Interrupt Vector Address**

Interrupt Node	Assignment for TLE987x	Enable Bit	SFR
NMI	Watchdog Timer NMI	NMIWDT	NMICON
	PLL NMI	NMIPLL	
	NVM Operation Complete NMI	NMINVM	
	Overtemperature NMI	NMIOT	
	Oscillator Watchdog NMI	NMIOWD	
	NVM Map Error NMI	NMIMAP	
	ECC Error NMI	NMIECC	
	Supply Prewarning NMI	NMISUP	
INTISR[0]	GPT1_T2, GPT1_T3, GPT1_T4	GPT12	GPT12IEN
INTISR[1]	GPT2_T5, GPT2_T6, GPT2_CR	GPT12	GPT12IEN
INTISR[2]	MU/Timer3/SDADC <sup>1)</sup>	see SFR	Timer3_CTRL SYS_IRQ_CTRL
INTISR[3]	ADC1		ADC1
	VREF5V	SYS_IRQ_CTRL	
INTISR[4]	CCU6 Node 0	CCU6SR0	IRCON3.0
INTISR[5]	CCU6 Node 1	CCU6SR1	IRCON3.4
INTISR[6]	CCU6 Node 2	CCU6SR2	IRCON4.0
INTISR[7]	CCU6 Node 3	CCU6SRC3	IRCON4.4
INTISR[8]	SSC1	EIREN	MODIEN1.0
		TIREN	MODIEN1.1
		RIREN	MODIEN1.2
INTISR[9]	SSC2	EIREN	MODIEN2.0
		TIREN	MODIEN2.1
		RIREN	MODIEN2.2
INTISR[10]	UART1 Receive	RIEN1	MODIEN1.6
	UART1 Transmit	TIEN1	MODIEN1.7
	Timer 2 Overflow	TF2EN	T2_T2CON1.1
	T2EX	EXF2EN	T2_T2CON1.0
	LIN_OT_STS	LIN_CTRL_STS	LIN_CTRL_STS
	LIN_OC_STS		LIN_CTRL_STS
	TXD_TMOUT		LIN_CTRL_STS/
	EOFSYN	SYNEN	SYNCST
ERRSYN			



---

**Interrupt System**
**Table 70** Interrupt Vector Address (cont'd)

Interrupt Node	Assignment for TLE987x	Enable Bit	SFR
INTISR[11]	UART2 Receive	RIEN2	MODIEN2.6
	UART2 Transmit	TIEN2	MODIEN2.7
	EINT2	EXINT2	IRCON0.2
	Timer 21 Overflow	TF2EN/	T21T2CON1.1
	T21EX	EXF2EN	T21T2CON1.0
INTISR[12]	EINT0	IE0	MODIEN3.0
INTISR[13]	EINT1	IE1	MODIEN4.0
INTISR[14]	BDRV-VDS(1-6)	BRDRV_IS	BRDRV_IRQ_CTRL
	CP-UV, CP-OV		
INTISR[15]	DMA	ECCIP3	DMA TRSEQ SSC1 SSC2

1) for TLE9879-2QXA40 only

## Interrupt System

### 12.3.4 Interrupt Priority

An interrupt that is currently being serviced can only be interrupted by a higher-priority interrupt, but not by another interrupt of the same or lower priority. Hence, an interrupt of the highest priority cannot be interrupted by any other interrupt request.

If two or more requests of different priority levels are received simultaneously, the request with the highest priority is serviced first. If requests of the same priority are received simultaneously, an internal polling sequence determines which request is serviced first. Thus, within each priority level, there is a second priority structure determined by the polling sequence as shown in [Table 69](#).

**Table 71 Interrupt Node Table**

Service Request	Node ID	Description
GPT1	0	GPT1 interrupt (T2-T4)
GPT2	1	GPT2 interrupt (T5-T6, CR)
ADC2/Timer3	2	ADC2, Measurement Unit, VBG, SDADC <sup>1)</sup> , Timer3, BEMF
ADC1	3	ADC1 interrupt / VREF5V Overload / VREF5V OV/UV
CCU0	4	CCU6 node 0 interrupt
CCU1	5	CCU6 node 1 interrupt
CCU2	6	CCU6 node 2 interrupt
CCU3	7	CCU6 node 3 interrupt
SSC1	8	SSC1 interrupt (receive, transmit, error)
SSC2	9	SSC2 interrupt (receive, transmit, error)
UART1	10	UART1 (ASC-LIN) interrupt (receive, transmit), Timer2, linsync1, LIN
UART2	11	UART2 interrupt (receive, transmit), Timer21, linsync2, External interrupt (EINT2)
EXINT0	12	External interrupt (EINT0), wakeup
EXINT1	13	External interrupt (EINT1)
BDRV/CP	14	Bridge Driver / Charge Pump
DMA	15	DMA Controller

1) only available for TLE9879-2QXA40 variant

The interrupt priority is configured in the corresponding NVIC control register:

**Table 72**

Register Short name	Register Long Name	Offset Address	Reset Value
<a href="#">NVIC_IPR0</a>	Interrupt Priority	400 <sub>H</sub>	0000 0000 <sub>H</sub>
<a href="#">NVIC_IPR1</a>	Interrupt Priority	404 <sub>H</sub>	0000 0000 <sub>H</sub>
<a href="#">NVIC_IPR2</a>	Interrupt Priority	408 <sub>H</sub>	0000 0000 <sub>H</sub>
<a href="#">NVIC_IPR3</a>	Interrupt Priority	40C <sub>H</sub>	0000 0000 <sub>H</sub>

For further description see ARM\_Architecture\_v7n\_Reference\_Manual.

## Interrupt System

### 12.4 Interrupt Handling

See also ARM\_Architecture\_v7n\_Reference\_Manual. The most important Interrupt Registers are listed below. This registers are dedicated to the 16 available interrupt nodes. For all nodes which are a combination of several interrupt requests, the corresponding control and status registers are located in the System Control Unit (SCU) or the System Control Unit for the Power Modules (SCU\_PM).

**Table 73**

Register Short name	Register Long Name	Offset Address	Reset Value
<b>NVIC_ISER0</b>	Interrupt Set-Enable	100 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>NVIC_ICER0</b>	Interrupt Clear-Enable	180 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>NVIC_ISPR0</b>	Interrupt Set-Pending	200 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>NVIC_ICPR0</b>	Interrupt Clear-Pending	280 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>NVIC_IABR0</b>	Active Bit Register	300 <sub>H</sub>	0000 0000 <sub>H</sub>

## Interrupt System

### 12.5 Register Definition

Interrupt registers are used for interrupt node enable, external interrupt control, interrupt flags and interrupt priority setting.

**Table 74 Register Address Space Interrupt Registers**

Module	Base Address	End Address	Note
SCU	50005000 <sub>H</sub>	50005FFF <sub>H</sub>	

#### 12.5.1 Interrupt Node Enable Registers

Register IEN0 contains the global interrupt masking bit (EA), which can be cleared to block all pending interrupt requests at once.

The NMI interrupt vector is shared by a number of sources, each of which can be enabled or disabled individually via register NMICON.

**This register IEN0 is reset by RESET\_TYPE\_4.**

Register IEN0 is being initialized by the BootROM during the bootup process to a value of 7F<sub>H</sub>

#### IEN0

##### Interrupt Enable Register 0

(01C<sub>H</sub>)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
EA	Res	Res	Res	Res	Res	Res	Res
rw	r	r	r	r	r	r	r

Field	Bits	Type	Description
EA	7	rw	<b>Global Interrupt Mask</b> 0 <sub>B</sub> All pending interrupt requests (except NMI) are blocked from the core. 1 <sub>B</sub> Pending interrupt requests are not blocked from the core.
Res	6:0	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

## Interrupt System

### NMICON

#### NMI Control Register

(024<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>NMISUP</b>	<b>NMIECC</b>	<b>NMIMAP</b>	<b>NMIOWD</b>	<b>NMIOT</b>	<b>NMINVM</b>	<b>NMIPLL</b>	<b>NMIWDT</b>
rw	rw	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>NMISUP</b>	7	rw	<b>Supply Prewarning NMI Enable</b> 0 <sub>B</sub> Supply NMI is disabled. 1 <sub>B</sub> Supply NMI is enabled.
<b>NMIECC</b>	6	rw	<b>ECC Error NMI Enable</b> 0 <sub>B</sub> ECC Error NMI is disabled. 1 <sub>B</sub> ECC Error NMI is enabled.
<b>NMIMAP</b>	5	rw	<b>NVM Map Error NMI Enable</b> 0 <sub>B</sub> NVM Map Error NMI is disabled. 1 <sub>B</sub> NVM Map Error NMI is enabled.
<b>NMIOWD</b>	4	rw	<b>Oscillator Watchdog NMI Enable</b> 0 <sub>B</sub> Oscillator watchdog NMI is disabled. 1 <sub>B</sub> Oscillator watchdog NMI is enabled.
<b>NMIOT</b>	3	rw	<b>NMI OT Enable</b> 0 <sub>B</sub> NMI OT is disabled. 1 <sub>B</sub> NMI OT is enabled.
<b>NMINVM</b>	2	rw	<b>NVM Operation Complete NMI Enable</b> 0 <sub>B</sub> NVM operation complete NMI is disabled. 1 <sub>B</sub> NVM operation complete NMI is enabled.
<b>NMIPLL</b>	1	rw	<b>PLL Loss of Lock NMI Enable</b> 0 <sub>B</sub> PLL Loss of Lock NMI is disabled. 1 <sub>B</sub> PLL Loss of Lock NMI is enabled.
<b>NMIWDT</b>	0	rw	<b>Watchdog Timer NMI Enable</b> 0 <sub>B</sub> WDT NMI is disabled. 1 <sub>B</sub> WDT NMI is enabled.

---

## Interrupt System

### 12.5.2 External Interrupt Control Registers

The external interrupts, EXT\_INT[2:0], are driven into the TLE987x from the ports. External interrupts can be positive, negative or double edge triggered. Register EXICON0 specifies the active edge for the external interrupt.

If the external interrupt is positive (negative) edge triggered, the external source must hold the request pin low (high) for at least one CCLK cycle, and then hold it high (low) for at least one CCLK cycle to ensure that the transition is recognized.

External interrupts 2 share their interrupt node with other interrupt sources. Therefore in addition to the corresponding interrupt node enable, external interrupt 2 may be disabled individually, and are disabled by default after reset.

*Note: Several external interrupts support alternative input pin, selected via MODPISEL register in the SCU. When switching inputs, the active edge/level trigger select and the level on the associated pins should be considered to prevent unintentional interrupt generation.*

Register EXICON0 is being initialized by the BootROM during the bootup process to a value of 00<sub>H</sub>.


## Interrupt System

### EXICON0

External Interrupt Control Register 0

(028<sub>H</sub>)

Reset Value: 30<sub>H</sub>



Field	Bits	Type	Description
<b>MON_Trig_Sel</b>	7:6	rw	<b>MON Input Trigger Select</b> 00 <sub>B</sub> external interrupt MON is disabled. 01 <sub>B</sub> Interrupt on rising edge. 10 <sub>B</sub> Interrupt on falling edge. 11 <sub>B</sub> Interrupt on both rising and falling edge.
<b>EXINT2</b>	5:4	rw	<b>External Interrupt 2 Trigger Select</b> 00 <sub>B</sub> external interrupt 2 is disabled. 01 <sub>B</sub> Interrupt on rising edge. 10 <sub>B</sub> Interrupt on falling edge. 11 <sub>B</sub> Interrupt on both rising and falling edge.
<b>EXINT1</b>	3:2	rw	<b>External Interrupt 1 Trigger Select</b> 00 <sub>B</sub> external interrupt 1 is disabled. 01 <sub>B</sub> Interrupt on rising edge. 10 <sub>B</sub> Interrupt on falling edge. 11 <sub>B</sub> Interrupt on both rising and falling edge.
<b>EXINT0</b>	1:0	rw	<b>External Interrupt 0 Trigger Select</b> 00 <sub>B</sub> external interrupt 0 is disabled. 01 <sub>B</sub> Interrupt on rising edge. 10 <sub>B</sub> Interrupt on falling edge. 11 <sub>B</sub> Interrupt on both rising and falling edge.

## Interrupt System

### 12.5.3 Interrupt Flag Registers

The interrupt flags for the different interrupt sources are located in several special function registers. This section describes the interrupt flags located in system registers or external interrupts belonging to system. Other interrupt flags located in respective module registers are described in the specific module chapter.

In case of software and hardware access to a flag bit at the same time, hardware will have higher priority.

#### IRCON0

#### Interrupt Request Register 0

(004<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>MONF</b>	<b>MONR</b>	<b>EXINT2F</b>	<b>EXINT2R</b>	<b>EXINT1F</b>	<b>EXINT1R</b>	<b>EXINT0F</b>	<b>EXINT0R</b>
r	r	r	r	r	r	r	r

Field	Bits	Type	Description
<b>MONF</b>	7	r	<b>Interrupt Flag for External Interrupt MON on falling edge</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt on falling edge event has not occurred. 1 <sub>B</sub> Interrupt on falling edge event has occurred.
<b>MONR</b>	6	r	<b>Interrupt Flag for External Interrupt MON on rising edge</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt on rising edge event has not occurred. 1 <sub>B</sub> Interrupt on rising edge event has occurred.
<b>EXINT2F</b>	5	r	<b>Interrupt Flag for External Interrupt 2x on falling edge</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt on falling edge event has not occurred. 1 <sub>B</sub> Interrupt on falling edge event has occurred.
<b>EXINT2R</b>	4	r	<b>Interrupt Flag for External Interrupt 2x on rising edge</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt on rising edge event has not occurred. 1 <sub>B</sub> Interrupt on rising edge event has occurred.
<b>EXINT1F</b>	3	r	<b>Interrupt Flag for External Interrupt 1x on falling edge</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt on falling edge event has not occurred. 1 <sub>B</sub> Interrupt on falling edge event has occurred.
<b>EXINT1R</b>	2	r	<b>Interrupt Flag for External Interrupt 1x on rising edge</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt on rising edge event has not occurred. 1 <sub>B</sub> Interrupt on rising edge event has occurred.
<b>EXINT0F</b>	1	r	<b>Interrupt Flag for External Interrupt 0x on falling edge</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt on falling edge event has not occurred. 1 <sub>B</sub> Interrupt on falling edge event has occurred.
<b>EXINT0R</b>	0	r	<b>Interrupt Flag for External Interrupt 0x on rising edge</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt on rising edge event has not occurred. 1 <sub>B</sub> Interrupt on rising edge event has occurred.



## Interrupt System

### IRCON0CLR

#### Interrupt Request 0 Clear Register

(02C<sub>H</sub>)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
MONFC	MONRC	EXINT2FC	EXINT2RC	EXINT1FC	EXINT1RC	EXINT0FC	EXINT0RC
W	W	W	W	W	W	W	W

Field	Bits	Type	Description
<b>MONFC</b>	7	w	<b>Interrupt Flag for External Interrupt MON on falling edge clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt on falling edge event is not cleared. 1 <sub>B</sub> Interrupt on falling edge event is cleared.
<b>MONRC</b>	6	w	<b>Interrupt Flag for External Interrupt MON on rising edge clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt on rising edge event is not cleared. 1 <sub>B</sub> Interrupt on rising edge event is cleared.
<b>EXINT2FC</b>	5	w	<b>Interrupt Flag for External Interrupt 2x on falling edge clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt on falling edge event is not cleared. 1 <sub>B</sub> Interrupt on falling edge event is cleared.
<b>EXINT2RC</b>	4	w	<b>Interrupt Flag for External Interrupt 2x on rising edge clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt on rising edge event is not cleared. 1 <sub>B</sub> Interrupt on rising edge event is cleared.
<b>EXINT1FC</b>	3	w	<b>Interrupt Flag for External Interrupt 1x on falling edge clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt on falling edge event is not cleared. 1 <sub>B</sub> Interrupt on falling edge event is cleared.
<b>EXINT1RC</b>	2	w	<b>Interrupt Flag for External Interrupt 1x on rising edge clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt on rising edge event is not cleared. 1 <sub>B</sub> Interrupt on rising edge event is cleared.
<b>EXINT0FC</b>	1	w	<b>Interrupt Flag for External Interrupt 0x on falling edge clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt on falling edge event is not cleared. 1 <sub>B</sub> Interrupt on falling edge event is cleared.
<b>EXINT0RC</b>	0	w	<b>Interrupt Flag for External Interrupt 0x on rising edge clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt on rising edge event is not cleared. 1 <sub>B</sub> Interrupt on rising edge event is cleared.

## Interrupt System

### IRCON1

#### Interrupt Request Register 1

(008<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>RIR</b>	<b>TIR</b>	<b>EIR</b>
r	r	r	r	r	r	r	r

Field	Bits	Type	Description
<b>Res</b>	7:3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>RIR</b>	2	r	<b>Receive Interrupt Flag for SSC1</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt event has not occurred. 1 <sub>B</sub> Interrupt event has occurred.
<b>TIR</b>	1	r	<b>Transmit Interrupt Flag for SSC1</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt event has not occurred. 1 <sub>B</sub> Interrupt event has occurred.
<b>EIR</b>	0	r	<b>Error Interrupt Flag for SSC1</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt event has not occurred. 1 <sub>B</sub> Interrupt event has occurred.

### IRCON1CLR

#### Interrupt Request 1 Clear Register

(178<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>RIRC</b>	<b>TIRC</b>	<b>EIRC</b>
r	r	r	r	r	w	w	w

Field	Bits	Type	Description
<b>Res</b>	7:3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>RIRC</b>	2	w	<b>Receive Interrupt Flag for SSC1 Clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt event is not cleared. 1 <sub>B</sub> Interrupt event is cleared.
<b>TIRC</b>	1	w	<b>Transmit Interrupt Flag for SSC1 Clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt event is not cleared. 1 <sub>B</sub> Interrupt event is cleared.
<b>EIRC</b>	0	w	<b>Error Interrupt Flag for SSC1 Clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt event is not cleared. 1 <sub>B</sub> Interrupt event is cleared.

## Interrupt System

### IRCON2

#### Interrupt Request Register 2

(00C<sub>H</sub>)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>RIR</b>	<b>TIR</b>	<b>EIR</b>
r	r	r	r	r	r	r	r

Field	Bits	Type	Description
<b>Res</b>	7:3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>RIR</b>	2	r	<b>Receive Interrupt Flag for SSC2</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt event has not occurred. 1 <sub>B</sub> Interrupt event has occurred.
<b>TIR</b>	1	r	<b>Transmit Interrupt Flag for SSC2</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt event has not occurred. 1 <sub>B</sub> Interrupt event has occurred.
<b>EIR</b>	0	r	<b>Error Interrupt Flag for SSC2</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt event has not occurred. 1 <sub>B</sub> Interrupt event has occurred.

### IRCON2CLR

#### Interrupt Request 2 Clear Register

(17C<sub>H</sub>)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>Res</b>	<b>RIRC</b>	<b>TIRC</b>	<b>EIRC</b>
r	r	r	r	r	w	w	w

Field	Bits	Type	Description
<b>Res</b>	7:3	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>RIRC</b>	2	w	<b>Receive Interrupt Flag for SSC2 Clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt event is not cleared. 1 <sub>B</sub> Interrupt event is cleared.
<b>TIRC</b>	1	w	<b>Transmit Interrupt Flag for SSC2 Clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt event is not cleared. 1 <sub>B</sub> Interrupt event is cleared.
<b>EIRC</b>	0	w	<b>Error Interrupt Flag for SSC2 Clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt event is not cleared. 1 <sub>B</sub> Interrupt event is cleared.

## Interrupt System

### IRCON3

#### Interrupt Request Register 3

(010<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
Res			CCU6SR1	Res			CCU6SR0
r			r	r			r

Field	Bits	Type	Description
Res	7:5	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
CCU6SR1	4	r	<b>Interrupt Flag 1 for CCU6</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt event has not occurred. 1 <sub>B</sub> Interrupt event has occurred.
Res	3:1	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
CCU6SR0	0	r	<b>Interrupt Flag 0 for CCU6</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt event has not occurred. 1 <sub>B</sub> Interrupt event has occurred.

### IRCON3CLR

#### Interrupt Request 3 Clear Register

(190<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
Res			CCU6SR1C	Res			CCU6SR0C
r			w	r			w

Field	Bits	Type	Description
Res	7:5	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
CCU6SR1C	4	w	<b>Interrupt Flag 1 for CCU6 Clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt event is not cleared. 1 <sub>B</sub> Interrupt event is cleared.
Res	3:1	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
CCU6SR0C	0	w	<b>Interrupt Flag 0 for CCU6 Clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt event is not cleared. 1 <sub>B</sub> Interrupt event is cleared.

## Interrupt System

### IRCON4

#### Interrupt Request Register 4

(014<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
Res		CCU6SR3		Res		CCU6SR2	
r		r		r		r	

Field	Bits	Type	Description
Res	7:5	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
CCU6SR3	4	r	<b>Interrupt Flag 3 for CCU6</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt event has not occurred. 1 <sub>B</sub> Interrupt event has occurred.
Res	3:1	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
CCU6SR2	0	r	<b>Interrupt Flag 2 for CCU6</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt event has not occurred. 1 <sub>B</sub> Interrupt event has occurred.

### IRCON4CLR

#### Interrupt Request 4 Clear Register

(194<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
Res		CCU6SR3C		Res		CCU6SR2C	
r		w		r		w	

Field	Bits	Type	Description
Res	7:5	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
CCU6SR3C	4	w	<b>Interrupt Flag 3 for CCU6 Clear</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Interrupt event is not cleared. 1 <sub>B</sub> Interrupt event is cleared.
Res	3:1	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
CCU6SR2C	0	w	<b>Interrupt Flag 2 for CCU6 Clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Interrupt event is not cleared. 1 <sub>B</sub> Interrupt event is cleared.

## Interrupt System

### GPT12IRC

#### Timer and Counter Control/Status Register (160<sub>H</sub>)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>		<b>CR</b>	<b>T6</b>	<b>T5</b>	<b>T4</b>	<b>T3</b>	<b>T2</b>
r		r	r	r	r	r	r

Field	Bits	Type	Description
<b>Res</b>	7:6	r	<b>Reserved</b> This Flag is always read as zero.
<b>CR</b>	5	r	<b>GPT Module 2 Capture Reload Interrupt Status</b> Capture Reload Event of GPT1 Module Interrupt Status 0 <sub>B</sub> No Capture Reload Interrupt has occurred. 1 <sub>B</sub> Capture Reload Interrupt has occurred.
<b>T6</b>	4	r	<b>GPT Module 2 Timer6 Interrupt Status</b> Timer 6 of GPT Module Interrupt Status 0 <sub>B</sub> No Timer 6 Interrupt has occurred. 1 <sub>B</sub> Timer 6 Interrupt has occurred.
<b>T5</b>	3	r	<b>GPT Module 2 Timer5 Interrupt Status</b> Timer 5 of GPT2 Module Interrupt Status 0 <sub>B</sub> No Timer 5 Interrupt has occurred. 1 <sub>B</sub> Timer 5 Interrupt has occurred.
<b>T4</b>	2	r	<b>GPT Module 1 Timer4 Interrupt Status</b> Timer 4 of GPT1 Module Interrupt Status 0 <sub>B</sub> No Timer 4 Interrupt has occurred. 1 <sub>B</sub> Timer 4 Interrupt has occurred.
<b>T3</b>	1	r	<b>GPT Module 1 Timer3 Interrupt Status</b> Timer 3 of GPT1 Module Interrupt Status 0 <sub>B</sub> No Timer 3 Interrupt has occurred. 1 <sub>B</sub> Timer 3 Interrupt has occurred.
<b>T2</b>	0	r	<b>GPT Module 1 Timer 2 Interrupt Status</b> Timer 2 of GPT1 Module Interrupt Status 0 <sub>B</sub> No Timer 2 Interrupt has occurred. 1 <sub>B</sub> Timer 2 Interrupt has occurred.

## Interrupt System

### GPT12ICLR

#### Timer and Counter Control/Status Clear Register (164<sub>H</sub>)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
Res		CRC	T6C	T5C	T4C	T3C	T2C
r		w	w	w	w	w	w

Field	Bits	Type	Description
<b>Res</b>	7:6	r	<b>Reserved</b> This Flag is always read as zero.
<b>CRC</b>	5	w	<b>GPT Module 2 Capture Reload Interrupt Status Clear</b> Capture Reload Event of GPT1 Module Interrupt Status Clear 0 <sub>B</sub> No Capture Reload Interrupt is cleared. 1 <sub>B</sub> Capture Reload Interrupt is cleared.
<b>T6C</b>	4	w	<b>GPT Module 2 Timer6 Interrupt Status Clear</b> Timer 6 of GPT Module Interrupt Status Clear 0 <sub>B</sub> No Timer 6 Interrupt is cleared. 1 <sub>B</sub> Timer 6 Interrupt is cleared.
<b>T5C</b>	3	w	<b>GPT Module 2 Timer5 Interrupt Status Clear</b> Timer 5 of GPT2 Module Interrupt Status Clear 0 <sub>B</sub> No Timer 5 Interrupt is cleared. 1 <sub>B</sub> Timer 5 Interrupt is cleared.
<b>T4C</b>	2	w	<b>GPT Module 1 Timer4 Interrupt Status Clear</b> Timer 4 of GPT1 Module Interrupt Status Clear 0 <sub>B</sub> No Timer 4 Interrupt is cleared. 1 <sub>B</sub> Timer 4 Interrupt is cleared.
<b>T3C</b>	1	w	<b>GPT Module 1 Timer3 Interrupt Status Clear</b> Timer 3 of GPT1 Module Interrupt Status Clear 0 <sub>B</sub> No Timer 3 Interrupt is cleared. 1 <sub>B</sub> Timer 3 Interrupt is cleared.
<b>T2C</b>	0	w	<b>GPT Module 1 Timer 2 Interrupt Status Clear</b> Timer 2 of GPT1 Module Interrupt Status Clear 0 <sub>B</sub> No Timer 2 Interrupt is cleared. 1 <sub>B</sub> Timer 2 Interrupt is cleared.

## Interrupt System

### DMAIRC1

#### DMA Interrupt Control Register 1

(154<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>CH8</b>	<b>CH7</b>	<b>CH6</b>	<b>CH5</b>	<b>CH4</b>	<b>CH3</b>	<b>CH2</b>	<b>CH1</b>
r	r	r	r	r	r	r	r

Field	Bits	Type	Description
<b>CH8</b>	7	r	<b>DMA Channel 11 Interrupt Status (ADC1 Channel 7)</b> DMA Transfer of Channel has finished 0 <sub>B</sub> No DMA Channel 11 Interrupt has occurred. 1 <sub>B</sub> DMA Channel 11 Interrupt has occurred.
<b>CH7</b>	6	r	<b>DMA Channel 10 Interrupt Status (ADC1 Channel 6)</b> DMA Transfer of Channel has finished 0 <sub>B</sub> No DMA Channel 10 Interrupt has occurred. 1 <sub>B</sub> DMA Channel 10 Interrupt has occurred.
<b>CH6</b>	5	r	<b>DMA Channel 9 Interrupt Status (ADC1 Channel 5)</b> DMA Transfer of Channel has finished 0 <sub>B</sub> No DMA Channel 9 Interrupt has occurred. 1 <sub>B</sub> DMA Channel 9 Interrupt has occurred.
<b>CH5</b>	4	r	<b>DMA Channel 8 Interrupt Status (ADC1 Channel 4)</b> DMA Transfer of Channel has finished 0 <sub>B</sub> No DMA Channel 8 Interrupt has occurred. 1 <sub>B</sub> DMA Channel 8 Interrupt has occurred.
<b>CH4</b>	3	r	<b>DMA Channel 7 Interrupt Status (ADC1 Channel 3)</b> DMA Transfer of Channel has finished 0 <sub>B</sub> No DMA Channel 7 Interrupt has occurred. 1 <sub>B</sub> DMA Channel 7 Interrupt has occurred.
<b>CH3</b>	2	r	<b>DMA Channel 6 Interrupt Status (ADC1 Channel 2)</b> DMA Transfer of Channel has finished 0 <sub>B</sub> No DMA Channel 6 Interrupt has occurred. 1 <sub>B</sub> DMA Channel 6 Interrupt has occurred.
<b>CH2</b>	1	r	<b>DMA Channel 5 Interrupt Status (ADC1 Channel 1)</b> DMA Transfer of Channel has finished 0 <sub>B</sub> No DMA Channel 5 Interrupt has occurred. 1 <sub>B</sub> DMA Channel 5 Interrupt has occurred.
<b>CH1</b>	0	r	<b>DMA Channel 4 Interrupt Status (ADC1 Channel 0)</b> DMA Transfer of Channel has finished 0 <sub>B</sub> No DMA Channel 4 Interrupt has occurred. 1 <sub>B</sub> DMA Channel 4 Interrupt has occurred.

*Note: If a conversion is finished for the dedicated channel, the corresponding flag above will be set.*



## Interrupt System

### DMAIRC1CLR

#### DMA Interrupt Control 1 Clear Register

(184<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>CH8C</b>	<b>CH7C</b>	<b>CH6C</b>	<b>CH5C</b>	<b>CH4C</b>	<b>CH3C</b>	<b>CH2C</b>	<b>CH1C</b>
W	W	W	W	W	W	W	W

Field	Bits	Type	Description
<b>CH8C</b>	7	w	<b>DMA Channel 11 Interrupt Status Clear (ADC1 Channel 7)</b> Transfer of data, triggered by ADC1 Channel 7, has finished 0 <sub>B</sub> No DMA Channel 11 Interrupt is cleared. 1 <sub>B</sub> DMA Channel 11 Interrupt is cleared.
<b>CH7C</b>	6	w	<b>DMA Channel 10 Interrupt Status Clear (ADC1 Channel 6)</b> Transfer of data, triggered by ADC1 Channel 6, has finished 0 <sub>B</sub> No DMA Channel 10 Interrupt is cleared. 1 <sub>B</sub> DMA Channel 10 Interrupt is cleared.
<b>CH6C</b>	5	w	<b>DMA Channel 9 Interrupt Status Clear (ADC1 Channel 5)</b> Transfer of data, triggered by ADC1 Channel 5, has finished 0 <sub>B</sub> No DMA Channel 9 Interrupt is cleared. 1 <sub>B</sub> DMA Channel 9 Interrupt is cleared.
<b>CH5C</b>	4	w	<b>DMA Channel 8 Interrupt Status Clear (ADC1 Channel 4)</b> Transfer of data, triggered by ADC1 Channel 4, has finished 0 <sub>B</sub> No DMA Channel 8 Interrupt is cleared. 1 <sub>B</sub> DMA Channel 8 Interrupt is cleared.
<b>CH4C</b>	3	w	<b>DMA Channel 7 Interrupt Status Clear (ADC1 Channel 3)</b> Transfer of data, triggered by ADC1 Channel 3, has finished 0 <sub>B</sub> No DMA Channel 7 Interrupt is cleared. 1 <sub>B</sub> DMA Channel 7 Interrupt is cleared.
<b>CH3C</b>	2	w	<b>DMA Channel 6 Interrupt Status Clear (ADC1 Channel 2)</b> Transfer of data, triggered by ADC1 Channel 2, has finished 0 <sub>B</sub> No DMA Channel 6 Interrupt is cleared. 1 <sub>B</sub> DMA Channel 6 Interrupt is cleared.
<b>CH2C</b>	1	w	<b>DMA Channel 5 Interrupt Status Clear (ADC1 Channel 1)</b> Transfer of data, triggered by ADC1 Channel 1, has finished 0 <sub>B</sub> No DMA Channel 5 Interrupt is cleared. 1 <sub>B</sub> DMA Channel 5 Interrupt is cleared.
<b>CH1C</b>	0	w	<b>DMA Channel 4 Interrupt Status Clear (ADC1 Channel 0)</b> Transfer of data, triggered by ADC1 Channel 0, has finished 0 <sub>B</sub> No DMA Channel 4 Interrupt is cleared. 1 <sub>B</sub> DMA Channel 4 Interrupt is cleared.

*Note:* If a conversion is finished for the dedicated channel, the corresponding flag above will be set.

## Interrupt System

### DMAIRC2

#### ADC1 Interrupt Control Register 2

(158<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>SDADC</b>	<b>GPT12</b>	<b>SSC2RDY</b>	<b>SSC1RDY</b>	<b>TRSEQ2DY</b>	<b>TRSEQ1DY</b>	<b>STRDY</b>
r	r	r	r	r	r	r	r

Field	Bits	Type	Description
<b>Res</b>	7	r	<b>Reserved</b> Returns 0 if read; Should be written with 0.
<b>SDADC</b>	6	r	<b>DMA SDADC Transfer Ready (DMA channel 13)</b> Transfer of SDADC data has finished 0 <sub>B</sub> No DMA SDADC Transfer Ready Interrupt has occurred. 1 <sub>B</sub> DMA SDADC Transfer Ready Interrupt has occurred.
<b>GPT12</b>	5	r	<b>DMA Channel 12 Interrupt Status (GPT12/Timer3)</b> Transfer of data, triggered by GPT12/Timer3, has finished 0 <sub>B</sub> No DMA GPT12 Transfer Ready Interrupt has occurred. 1 <sub>B</sub> DMA GPT12 Transfer Ready Interrupt has occurred.
<b>SSC2RDY</b>	4	r	<b>DMA Channel 3 Interrupt Status (SSCx Receive)</b> Transfer of data, triggered by SSCx Receive, has finished 0 <sub>B</sub> No DMA SSCx Transfer Ready Interrupt has occurred. 1 <sub>B</sub> DMA SSCx Transfer Ready Interrupt has occurred.
<b>SSC1RDY</b>	3	r	<b>DMA Channel 2 Interrupt Status (SSCx Transmit)</b> Transfer of data, triggered by SSCx Transmit, has finished 0 <sub>B</sub> No DMA SSCx Transfer Ready Interrupt has occurred. 1 <sub>B</sub> DMA SSCx Transfer Ready Interrupt has occurred.
<b>TRSEQ2DY</b>	2	r	<b>DMA Channel 1 Interrupt Status (ADC1 ESM)</b> Transfer of data, triggered by ADC1 ESM, has finished 0 <sub>B</sub> No Transfer Sequence Ready Interrupt has occurred. 1 <sub>B</sub> Transfer Sequence Ready Interrupt has occurred.
<b>TRSEQ1DY</b>	1	r	<b>DMA Channel 0 Interrupt Status (ADC1 Sequence)</b> Transfer of data, triggered by ADC1 Sequence, has finished 0 <sub>B</sub> No Transfer Sequence Ready Interrupt has occurred. 1 <sub>B</sub> Transfer Sequence Ready Interrupt has occurred.
<b>STRDY</b>	0	r	<b>DMA Single Transfer Ready</b> This Flag is an OR of the DMA_IRC1 Register Bits 0 <sub>B</sub> No Single Transfer Interrupt has occurred. 1 <sub>B</sub> Single Transfer Ready Interrupt has occurred.

## Interrupt System

### DMAIRC2CLR

#### ADC1 Interrupt Control 2 Clear Register

(188<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>SDADC</b>	<b>GPT12C</b>	<b>SSC2C</b>	<b>SSC1C</b>	<b>TRSEQ2DYC</b>	<b>TRSEQ1DYC</b>	<b>Res</b>
r	r	w	w	w	w	w	r

Field	Bits	Type	Description
<b>Res</b>	7	r	<b>Reserved</b> Returns 0 if read; Should be written with 0.
<b>SDADCC</b>	6	w	<b>DMA SDADC Transfer Ready (DMA channel 13) Clear</b> Transfer of SDADC data has finished 0 <sub>B</sub> No DMA SDADC Transfer Ready Interrupt is cleared. 1 <sub>B</sub> DMA SDADC Transfer Ready Interrupt is cleared.
<b>GPT12C</b>	5	w	<b>DMA Channel 12 Interrupt Status Clear (GPT12/Timer3)</b> Transfer of data has finished cleared 0 <sub>B</sub> No DMA GPT12 Transfer Ready Interrupt is cleared. 1 <sub>B</sub> DMA GPT12 Transfer Ready Interrupt is cleared.
<b>SSC2C</b>	4	w	<b>DMA Channel 3 Interrupt Status Clear (SSCx Receive)</b> Transfer of data has finished cleared 0 <sub>B</sub> No DMA SSC2 Transfer Ready Interrupt is cleared. 1 <sub>B</sub> DMA SSC2 Transfer Ready Interrupt is cleared.
<b>SSC1C</b>	3	w	<b>DMA Channel 2 Interrupt Status Clear (SSCx Transmit)</b> Transfer of data has finished cleared 0 <sub>B</sub> No DMA SSC1 Transfer Ready Interrupt is cleared. 1 <sub>B</sub> DMA SSC1 Transfer Ready Interrupt is cleared.
<b>TRSEQ2DYC</b>	2	w	<b>DMA Channel 1 Interrupt Status Clear (ADC1 ESM)</b> Transfer of data has finished clear 0 <sub>B</sub> No Transfer Sequence Ready Interrupt is cleared. 1 <sub>B</sub> Transfer Sequence Ready Interrupt is cleared.
<b>TRSEQ1DYC</b>	1	w	<b>DMA Channel 0 Interrupt Status Clear (ADC1 Sequence)</b> Transfer of data has finished clear 0 <sub>B</sub> No Transfer Sequence Ready Interrupt is cleared. 1 <sub>B</sub> Transfer Sequence Ready Interrupt is cleared.
<b>Res</b>	0	r	<b>Reserved</b> Returns 0 if read; Should be written with 0.

Each NMI event and status flag is retained across these resets: 1) WDT reset, 2) soft reset. These include all the flags of NMISR register: FNMIWDT, FNMIPLL, FNMINVM, FNMIOT, FNMIOWD, FNMIMAP, and indirectly, FNMI ECC and FNMISSUP. In the case of NMIs with shared source i.e. watchdog, ECC or supply prewarning NMI, the respective indicator or event flags not located in NMISR are also retained. Refer to [Chapter 6.6.5](#) for identifying the NMI event.

## Interrupt System

### NMISR

#### NMI Status Register

(018<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
FNMISSUP	FNMIIECC	FNMIIMAP	FNMIOWD	FNMIOT	FNMINVM	FNMIPLL	FNMIWDT
r	r	r	r	r	r	r	r

Field	Bits	Type	Description
<b>FNMISSUP</b>	7	r	<p><b>Supply Prewarning NMI Flag</b></p> <p>This flag is cleared automatically by hardware when the corresponding event flags are cleared.</p> <p>0<sub>B</sub> No supply prewarning NMI has occurred. 1<sub>B</sub> Supply prewarning has occurred.</p>
<b>FNMIIECC</b>	6	r	<p><b>ECC Error NMI Flag</b></p> <p>This flag is cleared automatically by hardware when the corresponding enabled event flags are cleared.</p> <p>0<sub>B</sub> No uncorrectable ECC error has occurred on NVM, XRAM. 1<sub>B</sub> Uncorrectable ECC error has occurred on NVM, RAM.</p>
<b>FNMIIMAP</b>	5	r	<p><b>NVM Map Error NMI Flag</b></p> <p>This bit is set by hardware and can only be cleared by software.</p> <p>0<sub>B</sub> No NVM Map Error NMI has occurred. 1<sub>B</sub> NVM Map Error has occurred.</p>
<b>FNMIOWD</b>	4	r	<p><b>Oscillator Watchdog or MI_CLK Watchdog NMI Flag</b></p> <p>This bit is set by hardware and can only be cleared by software.</p> <p>0<sub>B</sub> No oscillator / MI_CLK watchdog NMI has occurred. 1<sub>B</sub> Oscillator / MI_CLK watchdog event has occurred.</p>
<b>FNMIOT</b>	3	r	<p><b>Over-temperature NMI Flag</b></p> <p>This bit is set by hardware and can only be cleared by software. As this is a shared NMI source, this flag should be cleared after checking and clearing the corresponding event flags.</p> <p>0<sub>B</sub> No OT NMI has occurred. 1<sub>B</sub> OT NMI event has occurred.</p>
<b>FNMINVM</b>	2	r	<p><b>NVM Operation Complete NMI Flag</b></p> <p>This bit is set by hardware and can only be cleared by software.</p> <p>0<sub>B</sub> No NVM NMI has occurred. 1<sub>B</sub> NVM operation complete event has occurred.</p>
<b>FNMIPLL</b>	1	r	<p><b>PLL NMI Flag</b></p> <p>This bit is set by hardware and can only be cleared by software.</p> <p>0<sub>B</sub> No PLL NMI has occurred. 1<sub>B</sub> PLL loss-of-lock has occurred.</p>
<b>FNMIWDT</b>	0	r	<p><b>Watchdog Timer NMI Flag</b></p> <p>This bit is set by hardware and can only be cleared by software. As this is a shared NMI source, this flag should be cleared after checking and clearing the corresponding event flags.</p> <p>0<sub>B</sub> No watchdog NMI has occurred. 1<sub>B</sub> WDT prewarning has occurred.</p>

## Interrupt System

This register NMISR is reset by RESET\_TYPE\_4.

### NMICLR

#### NMI Clear Register

(000<sub>H</sub>)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>NMISUPC</b>	<b>NMIECCC</b>	<b>NMIMAPC</b>	<b>NMIOWDC</b>	<b>NMIOTC</b>	<b>NMINVMC</b>	<b>NMIPLLC</b>	<b>NMIWDTC</b>
W	W	W	W	W	W	W	W

Field	Bits	Type	Description
<b>NMISUPC</b>	7	w	<b>Supply Prewarning NMI Clear</b> 0 <sub>B</sub> Supply NMI is not cleared. 1 <sub>B</sub> Supply NMI is cleared.
<b>NMIECCC</b>	6	w	<b>ECC Error NMI Clear</b> 0 <sub>B</sub> ECC Error NMI is not cleared. 1 <sub>B</sub> ECC Error NMI is cleared.
<b>NMIMAPC</b>	5	w	<b>NVM Map Error NMI Clear</b> 0 <sub>B</sub> NVM Map Error NMI is not cleared. 1 <sub>B</sub> NVM Map Error NMI is cleared.
<b>NMIOWDC</b>	4	w	<b>Oscillator Watchdog NMI Clear</b> 0 <sub>B</sub> Oscillator watchdog NMI is not cleared. 1 <sub>B</sub> Oscillator watchdog NMI is cleared.
<b>NMIOTC</b>	3	w	<b>NMI OT Clear</b> 0 <sub>B</sub> NMI OT is not cleared. 1 <sub>B</sub> NMI OT is cleared.
<b>NMINVMC</b>	2	w	<b>NVM Operation Complete NMI Clear</b> 0 <sub>B</sub> NVM operation complete NMI is not cleared. 1 <sub>B</sub> NVM operation complete NMI is cleared.
<b>NMIPLLC</b>	1	w	<b>PLL Loss of Lock NMI Clear</b> 0 <sub>B</sub> PLL Loss of Lock NMI is not cleared. 1 <sub>B</sub> PLL Loss of Lock NMI is cleared.
<b>NMIWDTC</b>	0	w	<b>Watchdog Timer NMI Clear</b> 0 <sub>B</sub> WDT NMI is not cleared. 1 <sub>B</sub> WDT NMI is cleared.

## 12.6 Interrupt Priority Registers

Each interrupt node can be individually programmed to one of the 16 priority levels available. The user can set them in the corresponding **NVIC\_IPRx** Register (see Core Chapter).

---

**Watchdog Timer (WDT1)****13 Watchdog Timer (WDT1)****13.1 Features**

There are two watchdog timers in the system. The Watchdog Timer (WDT) within the System Control Unit - Digital Modules (see SCU\_DM) and the Watchdog Timer (WDT1) located within the System Control Unit - Power Modules (see SCU\_PM). The Watchdog Timer WDT1 is described in this section.

In Active Mode, the WDT1 acts as a windowed watchdog timer, which provides a highly reliable and safe way to recover from software or hardware failures.

The WDT1 is always enabled in Active Mode. In Sleep Mode, Stop Mode and SWD Mode (Debug Mode) the WDT1 is automatically disabled.


**Functional Features**

- Windowed Watchdog Timer with programmable timing in Active Mode
- Long open window (typ. 80ms) after power-up, reset, wake-up
- Short open window (typ. 30ms) to facilitate Flash programming
- Disabled during debugging
- Safety shutdown to Sleep Mode after 5 missed WDT1 services

Watchdog Timer (WDT1)

13.2 Introduction

The behavior of the Watchdog Timer in Active Mode is illustrated in **Figure 65**.

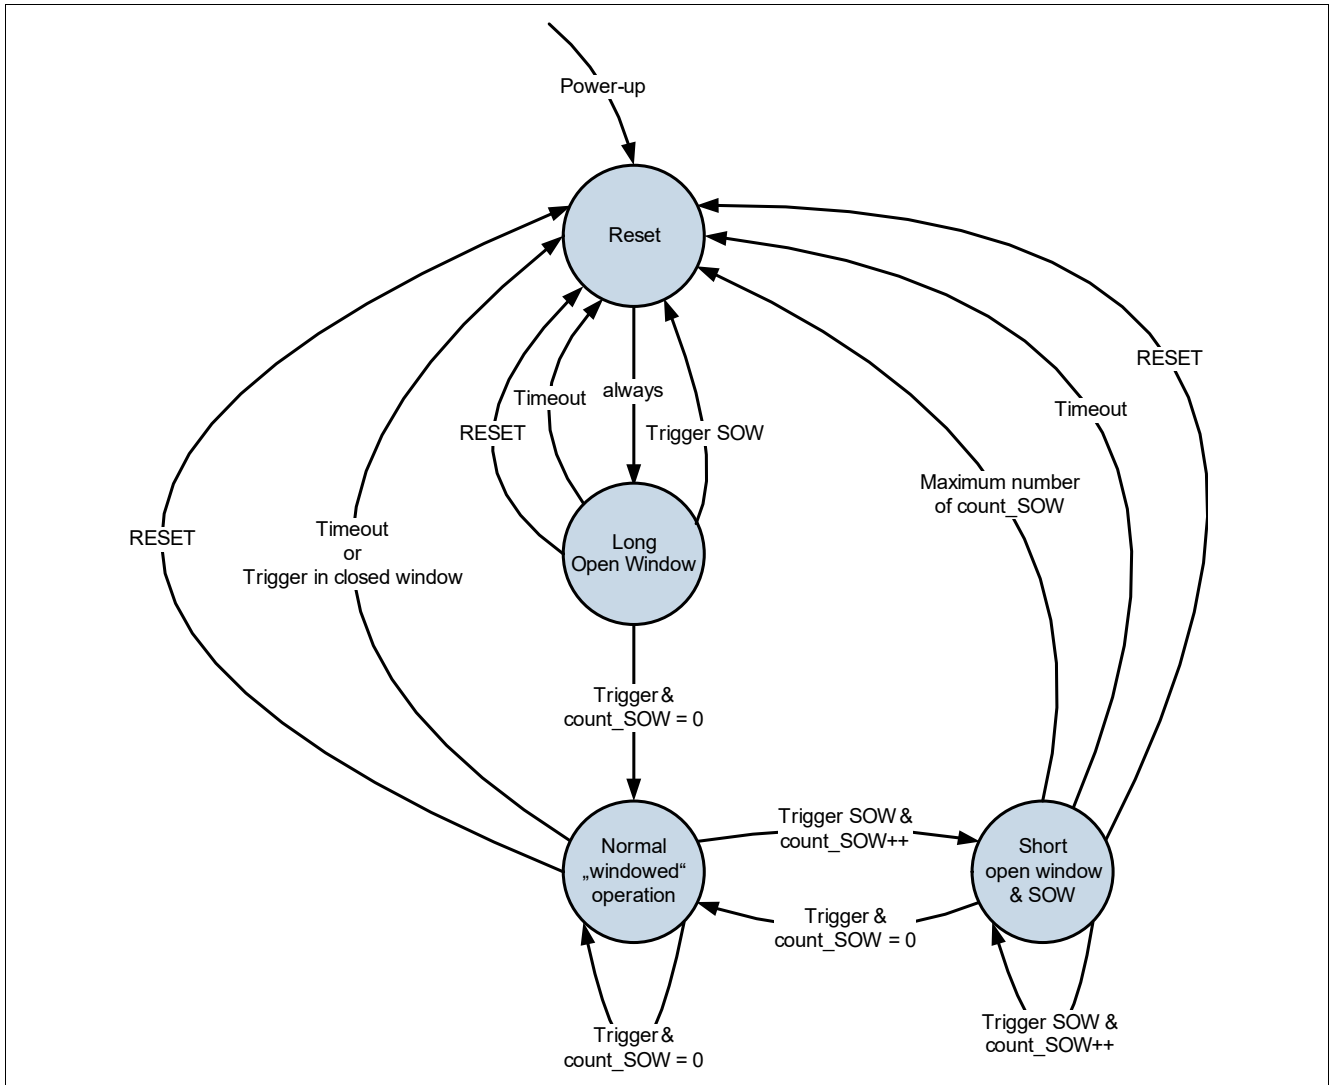

**Figure 65 Watchdog Timer Behavior**

## Watchdog Timer (WDT1)

### 13.3 Functional Description


#### 13.3.1 Modes of Operation

The mode transition from the low power modes (WDT1 off) to active (WDT1 on) automatically initializes WDT1 to start in long open window mode.

#### 13.3.2 Normal Operation

Software has to trigger the watchdog by writing to the **WDT1\_TRIG** register. By triggering the watchdog also the length of the next watchdog period is selected inherently. The next period starts immediately with the trigger.

After Reset the WDT1 is starting with a long open window. The WDT1 has to be triggered within this long open window, otherwise a reset will be generated at the end of the long open window. After this first trigger the WDT1 operates in a window watchdog mode. Triggering of a short open window during the long open window is not allowed and will also cause a WDT1 reset.

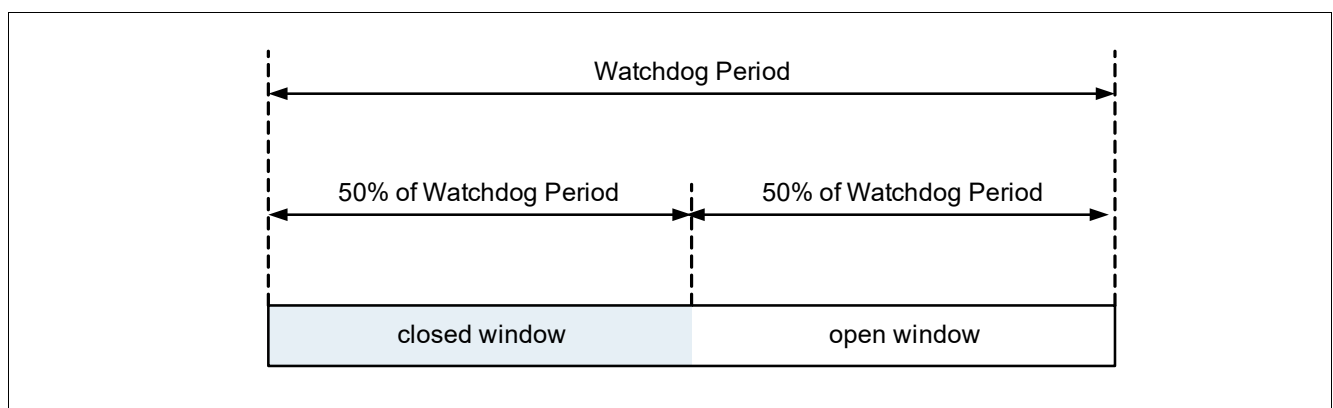

**Figure 66 Windowed Watchdog**


The first half of the watchdog period is the closed window and the second half is the open window. A trigger of the watchdog has to be done in the open window only. Any trigger in the closed window or failing to trigger the watchdog within the watchdog period will cause a reset. The reset will be indicated by the bit **PMU\_ExtWDT** inside **PMU\_RESET\_STS1** register located inside PMU.

#### Effective open window (safe trigger point)

Due to the variations in the clock source of the WDT1 the effective usable open window, and therefore a safe trigger point, is shorter than 50% of the watchdog period as shown in **Figure 67**.



**Watchdog Timer (WDT1)**

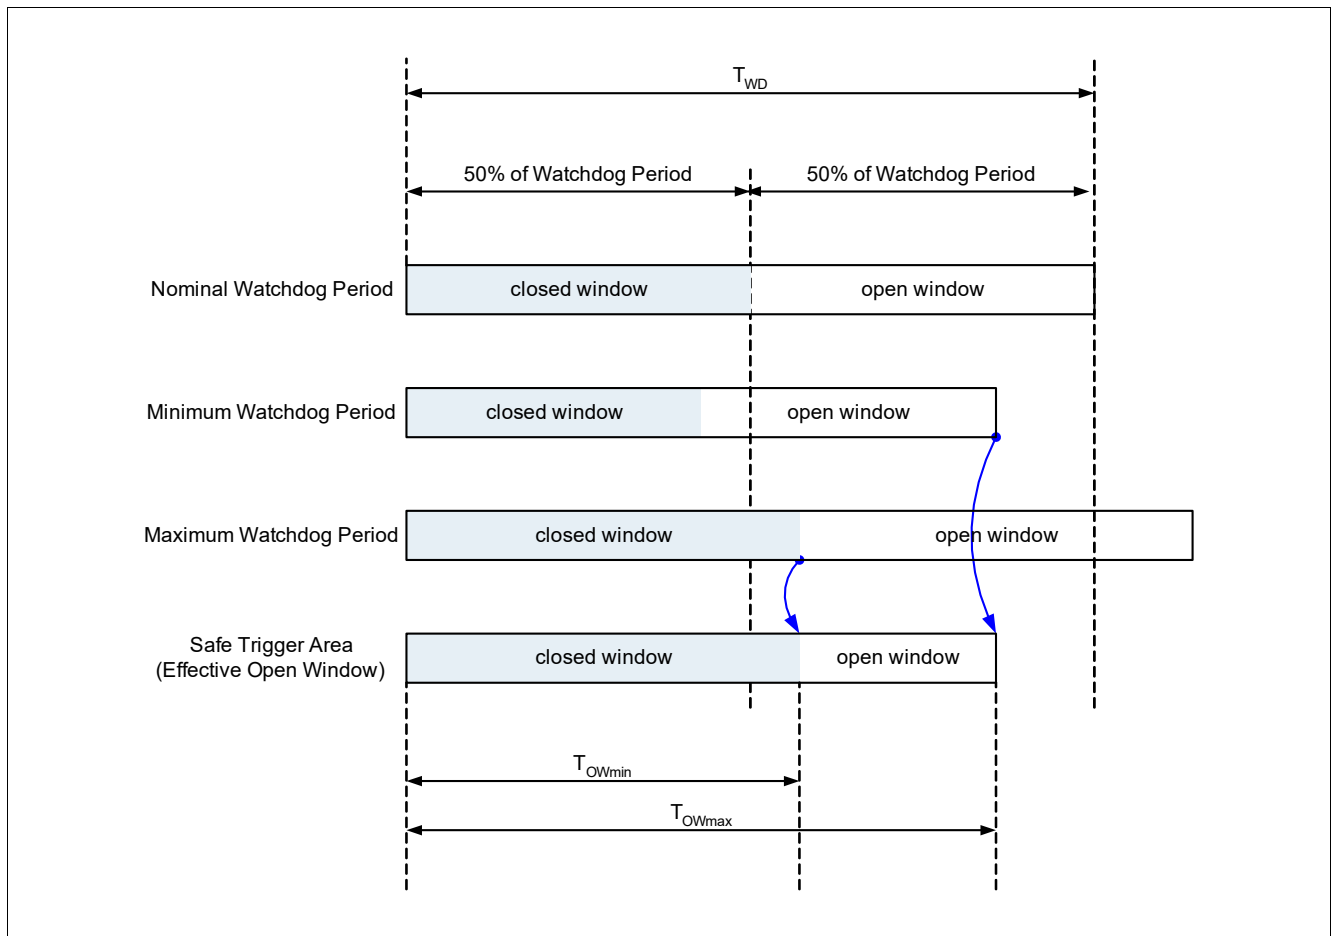


**Figure 67 Effective open window**

E.g. for a variation of 20% and a nominal watchdog period of  $T_{WD}$  the start of the effective open window  $T_{OWmin}$  is shifted back by 10%, and the end of the effective open window  $T_{OWmax}$  is shifted forward by 20%.


**Short open window**

Under certain programming conditions, e.g. NVM programming, it might be desired to interrupt the normal windowed watchdog operation. For this purpose a special trigger of a short open window (see [Figure 68](#)) allows to discard the current window period (also within the closed window) and immediately starts a short open window. The short open window has a fixed length of  $T_{SOW}$  (typ. 30 ms) independent of the settings of the  $WDP\_SEL$  bits.

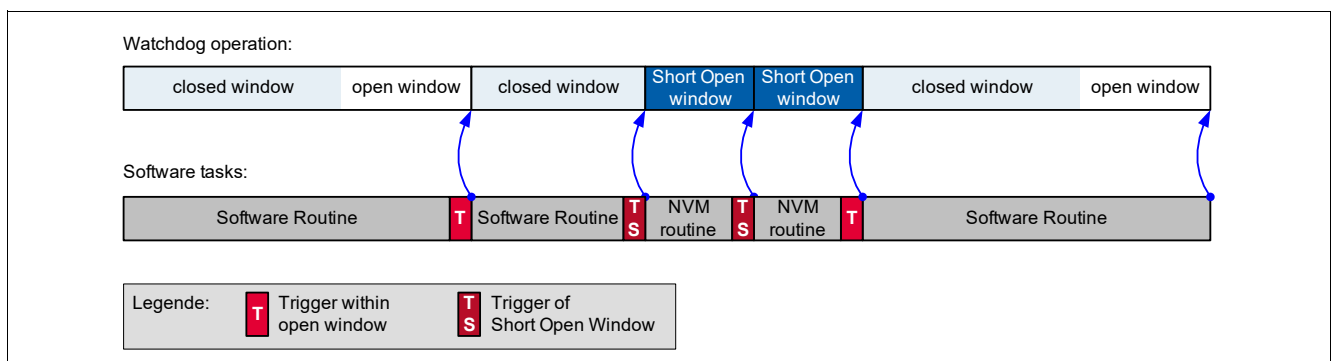

**Figure 68 Short Open Window**

**Watchdog Timer (WDT1)**

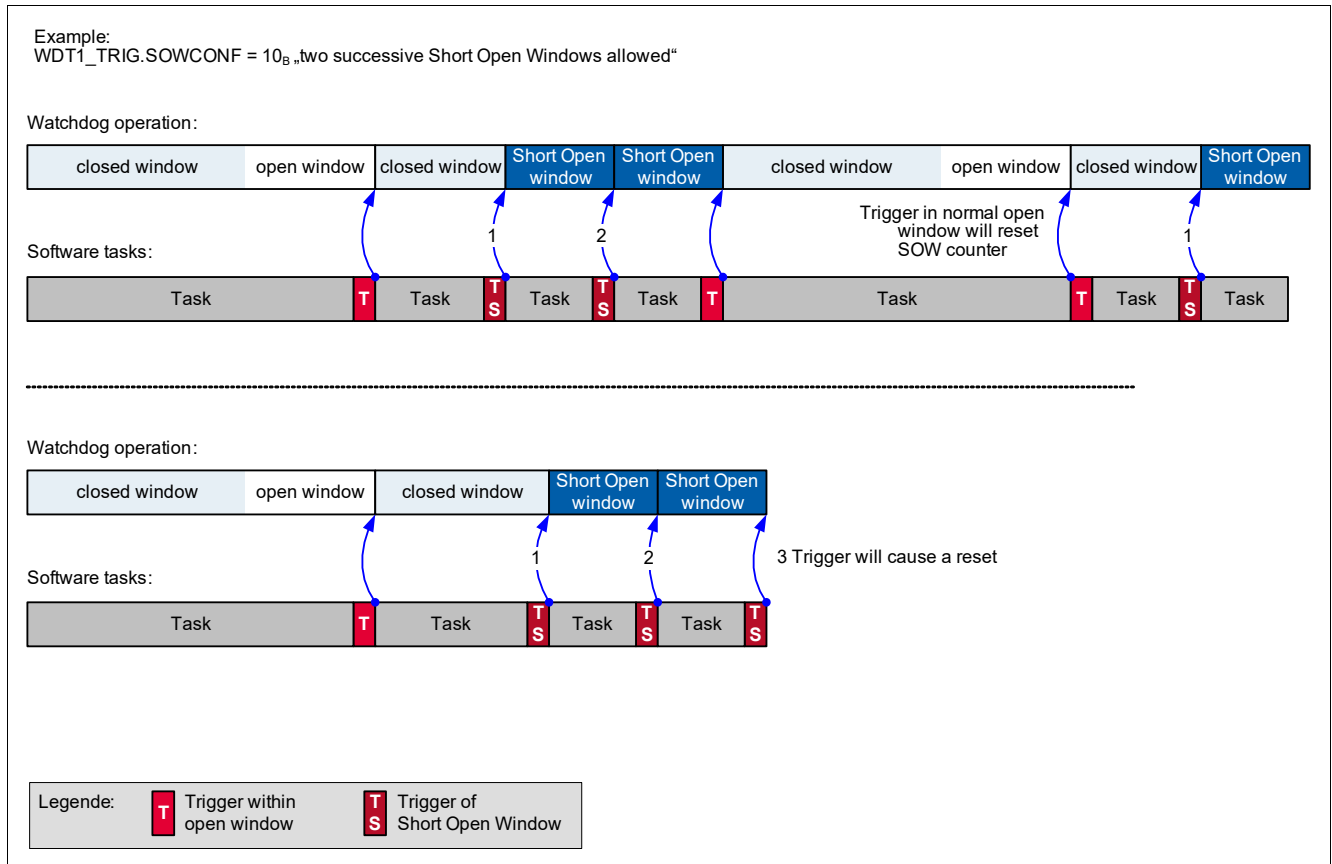

**Figure 69 SOW Counter**

The mechanism of inserting Short Open Windows has to be enabled/configured with the bits SOWCONF. The configuration allows to insert a maximum of three consecutive Short Open Windows. Each trigger of the Short Open Window will increase a SOW counter, if the SOW counter exceeds the maximum configured value a reset will be generated. The SOW counter value is reset to 0 by a normal trigger.

## Watchdog Timer (WDT1)

### 13.4 Register Definition

Table 75 shows the module base addresses.

**Table 75 Register Address Space: SCU\_PM Module Base Address List**

Module	Base Address	End Address	Note
SCUPM	50006000 <sub>H</sub>	50006FFF <sub>H</sub>	SCU Power Modules

**Table 76 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
---------------------	--------------------	----------------	-------------

#### Register Definition


<b>WDT1_TRIG</b>	WDT1 Watchdog Control	34 <sub>H</sub>	0000 0108 <sub>H</sub>
------------------	-----------------------	-----------------	------------------------

The registers are addressed wordwise.

#### WDT1 Watchdog Control

The register is reset by RESET\_TYPE\_3.

WDT1_TRIG	Offset	Reset Value
WDT1 Watchdog Control	34 <sub>H</sub>	0000 0108 <sub>H</sub>

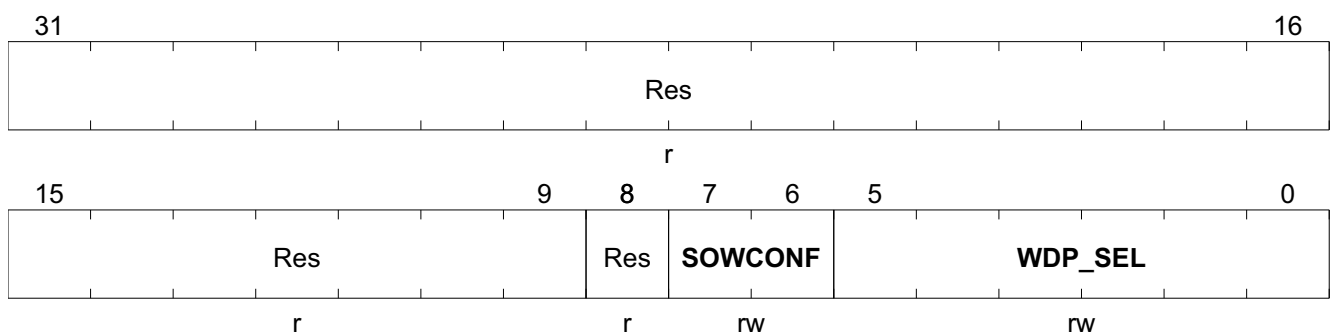

Field	Bits	Type	Description
Res	31:9	r	<b>Reserved</b> Always read as 0
Res	8	r	<b>Reserved</b> Always read as 1
SOWCONF	7:6	rw	<b>Short Open Window Configuration</b> 00 <sub>B</sub> <b>DIS</b> , Short Open Windows disabled <sup>1)</sup> 01 <sub>B</sub> <b>SOW1</b> , one successive Short Open Window allowed 10 <sub>B</sub> <b>SOW2</b> , two successive Short Open Windows allowed 11 <sub>B</sub> <b>SOW3</b> , three successive Short Open Windows allowed

## Watchdog Timer (WDT1)

Field	Bits	Type	Description
WDP_SEL	5:0	rw	<b>Watchdog Period Selection and trigger</b> Selects the time for the next Watchdog period and allows to trigger the Short Open Window.
			00 <sub>H</sub> <b>SOW_TRIG</b> , trigger short open window
			01 <sub>H</sub> <b>WP_1</b> , Watchdog period 16 ms
			02 <sub>H</sub> <b>WP_2</b> , Watchdog period 32 ms
			03 <sub>H</sub> <b>WP_3</b> , Watchdog period 48 ms
			04 <sub>H</sub> <b>WP_4</b> , Watchdog period 64 ms
			05 <sub>H</sub> <b>WP_5</b> , Watchdog period 80 ms
			06 <sub>H</sub> <b>WP_6</b> , Watchdog period 96 ms
			07 <sub>H</sub> <b>WP_7</b> , Watchdog period 112 ms
			08 <sub>H</sub> <b>WP_8</b> , Watchdog period 128 ms
			09 <sub>H</sub> <b>WP_9</b> , Watchdog period 144 ms
			0A <sub>H</sub> <b>WP_10</b> , Watchdog period 160 ms
			0B <sub>H</sub> <b>WP_11</b> , Watchdog period 176 ms
			0C <sub>H</sub> <b>WP_12</b> , Watchdog period 192 ms
			0D <sub>H</sub> <b>WP_13</b> , Watchdog period 208 ms
			0E <sub>H</sub> <b>WP_14</b> , Watchdog period 224 ms
			0F <sub>H</sub> <b>WP_15</b> , Watchdog period 240 ms
			10 <sub>H</sub> <b>WP_16</b> , Watchdog period 256 ms
			11 <sub>H</sub> <b>WP_17</b> , Watchdog period 272 ms
			12 <sub>H</sub> <b>WP_18</b> , Watchdog period 288 ms
			13 <sub>H</sub> <b>WP_19</b> , Watchdog period 304 ms
			14 <sub>H</sub> <b>WP_20</b> , Watchdog period 320 ms
			15 <sub>H</sub> <b>WP_21</b> , Watchdog period 336 ms
			16 <sub>H</sub> <b>WP_22</b> , Watchdog period 352 ms
			17 <sub>H</sub> <b>WP_23</b> , Watchdog period 368 ms
			18 <sub>H</sub> <b>WP_24</b> , Watchdog period 384 ms
			19 <sub>H</sub> <b>WP_25</b> , Watchdog period 400 ms
			1A <sub>H</sub> <b>WP_26</b> , Watchdog period 416 ms
			1B <sub>H</sub> <b>WP_27</b> , Watchdog period 432 ms
			1C <sub>H</sub> <b>WP_28</b> , Watchdog period 448 ms
			1D <sub>H</sub> <b>WP_29</b> , Watchdog period 464 ms
			1E <sub>H</sub> <b>WP_30</b> , Watchdog period 480 ms
			1F <sub>H</sub> <b>WP_31</b> , Watchdog period 496 ms
			20 <sub>H</sub> <b>WP_32</b> , Watchdog period 512 ms
			21 <sub>H</sub> <b>WP_33</b> , Watchdog period 528 ms
			22 <sub>H</sub> <b>WP_34</b> , Watchdog period 544 ms
			23 <sub>H</sub> <b>WP_35</b> , Watchdog period 560 ms
			24 <sub>H</sub> <b>WP_36</b> , Watchdog period 576 ms
			25 <sub>H</sub> <b>WP_37</b> , Watchdog period 592 ms
			26 <sub>H</sub> <b>WP_38</b> , Watchdog period 608 ms
			27 <sub>H</sub> <b>WP_39</b> , Watchdog period 624 ms
			28 <sub>H</sub> <b>WP_40</b> , Watchdog period 640 ms
			29 <sub>H</sub> <b>WP_41</b> , Watchdog period 656 ms
			2A <sub>H</sub> <b>WP_42</b> , Watchdog period 672 ms
			2B <sub>H</sub> <b>WP_43</b> , Watchdog period 688 ms
			2C <sub>H</sub> <b>WP_44</b> , Watchdog period 704 ms
			2D <sub>H</sub> <b>WP_45</b> , Watchdog period 720 ms
			2E <sub>H</sub> <b>WP_46</b> , Watchdog period 736 ms
			2F <sub>H</sub> <b>WP_47</b> , Watchdog period 752 ms
			30 <sub>H</sub> <b>WP_48</b> , Watchdog period 768 ms
			31 <sub>H</sub> <b>WP_49</b> , Watchdog period 784 ms
			32 <sub>H</sub> <b>WP_50</b> , Watchdog period 800 ms
			33 <sub>H</sub> <b>WP_51</b> , Watchdog period 816 ms
			34 <sub>H</sub> <b>WP_52</b> , Watchdog period 832 ms
			35 <sub>H</sub> <b>WP_53</b> , Watchdog period 848 ms
			36 <sub>H</sub> <b>WP_54</b> , Watchdog period 864 ms
			37 <sub>H</sub> <b>WP_55</b> , Watchdog period 880 ms
			38 <sub>H</sub> <b>WP_56</b> , Watchdog period 896 ms
			39 <sub>H</sub> <b>WP_57</b> , Watchdog period 912 ms
			3A <sub>H</sub> <b>WP_58</b> , Watchdog period 928 ms
			3B <sub>H</sub> <b>WP_59</b> , Watchdog period 944 ms
			3C <sub>H</sub> <b>WP_60</b> , Watchdog period 960 ms
			3D <sub>H</sub> <b>WP_61</b> , Watchdog period 976 ms
			3E <sub>H</sub> <b>WP_62</b> , Watchdog period 992 ms
3F <sub>H</sub> <b>WP_63</b> , Watchdog period 1008 ms			

1) Writing 0000 0000<sub>H</sub> to the WDT1\_TRIG register will cause a reset

## 14 GPIO Ports and Peripheral I/O

This chapter describes the GPIO Ports of the TLE987x. It contains the following sections:

- Functional description of the GPIO Ports (see [Section 14.2](#))
- GPIO Port register descriptions (see [Section 14.3](#))
- TLE987x implementation specific details and registers of the GPIO module (see [Section 14.4](#))

The TLE987x has 15 port pins organized into three parallel ports: Port 0 (P0), Port 1 (P1) and Port 2 (P2). Each port pin has a pair of internal pull-up and pull-down devices that can be individually enabled or disabled. P0 and P1 are bidirectional and can be used as general purpose input/output (GPIO) or to perform alternate input/output functions for the on-chip peripherals. When configured as an output, the open drain mode can be selected. On Port 2 (P2) analog inputs are shared with general purpose input.

### 14.1 Features

#### Bidirectional Port Features (P0, P1)

- Configurable pin direction
- Configurable pull-up/pull-down devices
- Configurable open drain mode
- Configurable drive strength
- Transfer of data through digital inputs and outputs (general purpose I/O)
- Alternate input/output for on-chip peripherals

#### Analog Port Features (P2)

- Configurable pull-up/pull-down devices
- Transfer of data through digital inputs
- Alternate inputs for on-chip peripherals

### 14.2 Introduction

#### 14.2.1 Port 0 and Port 1

[Figure 70](#) shows the block diagram of an TLE987x bidirectional port pin. Each port pin is equipped with a number of control and data bits, thus enabling very flexible usage of the pin. By defining the contents of the control register, each individual pin can be configured as an input or an output. The user can also configure each pin as an open drain pin with or without internal pull-up/pull-down device.

Each bidirectional port pin can be configured for input or output operation. Switching between input and output mode is accomplished through the register  $Px\_DIR$  ( $x = 0$  or  $1$ ), which enables or disables the output and input drivers. A port pin can only be configured as either input or output mode at any one time.

In input mode (default after reset), the output driver is switched off (high-impedance). The voltage level present at the port pin is translated into a logic 0 or 1 via a Schmitt trigger device and can be read via the register  $Px\_DATA$ .

In output mode, the output driver is activated and drives the value supplied through the multiplexer to the port pin. In the output driver, each port line can be switched to open drain mode or normal mode (push-pull mode) via the register  $Px\_OD$ .

---

## GPIO Ports and Peripheral I/O

The output multiplexer in front of the output driver enables the port output function to be used for different purposes. If the pin is used for general purpose output, the multiplexer is switched by software to the data register Px\_DATA. Software can set or clear the bit in Px\_DATA and therefore directly influence the state of the port pin. If an on-chip peripheral uses the pin for output signals, alternate output lines (AltDataOut) can be switched via the multiplexer to the output driver circuitry. Selection of the alternate output function is defined in registers Px\_ALTSEL0 and Px\_ALTSEL1. When a port pin is used as an alternate function, its direction must be set accordingly in the register Px\_DIR.


Each pin can also be programmed to activate an internal weak pull-up or pull-down device. Register Px\_PUDSEL selects whether a pull-up or the pull-down device is activated while register Px\_PUDEN enables or disables the pull device.

The port structure used in this device offers the possibility to select the output driver strength and the slew rate. These selections are independent from the output port functionality, such as open-drain, push/pull or input only. The driver strength for each pin can be adapted to the application requirements by registers Px\_POCONy (y = 0, 1 or 2) in SCU.

The temperature compensation signals TC[1:0] of all output drivers are connected to all outputs and are controlled by register TCCR in SCU.

*Note:* For the definition of Px\_POCONy and TCCR registers, refer to [Chapter 6.7](#) of SCU chapter.

**GPIO Ports and Peripheral I/O**

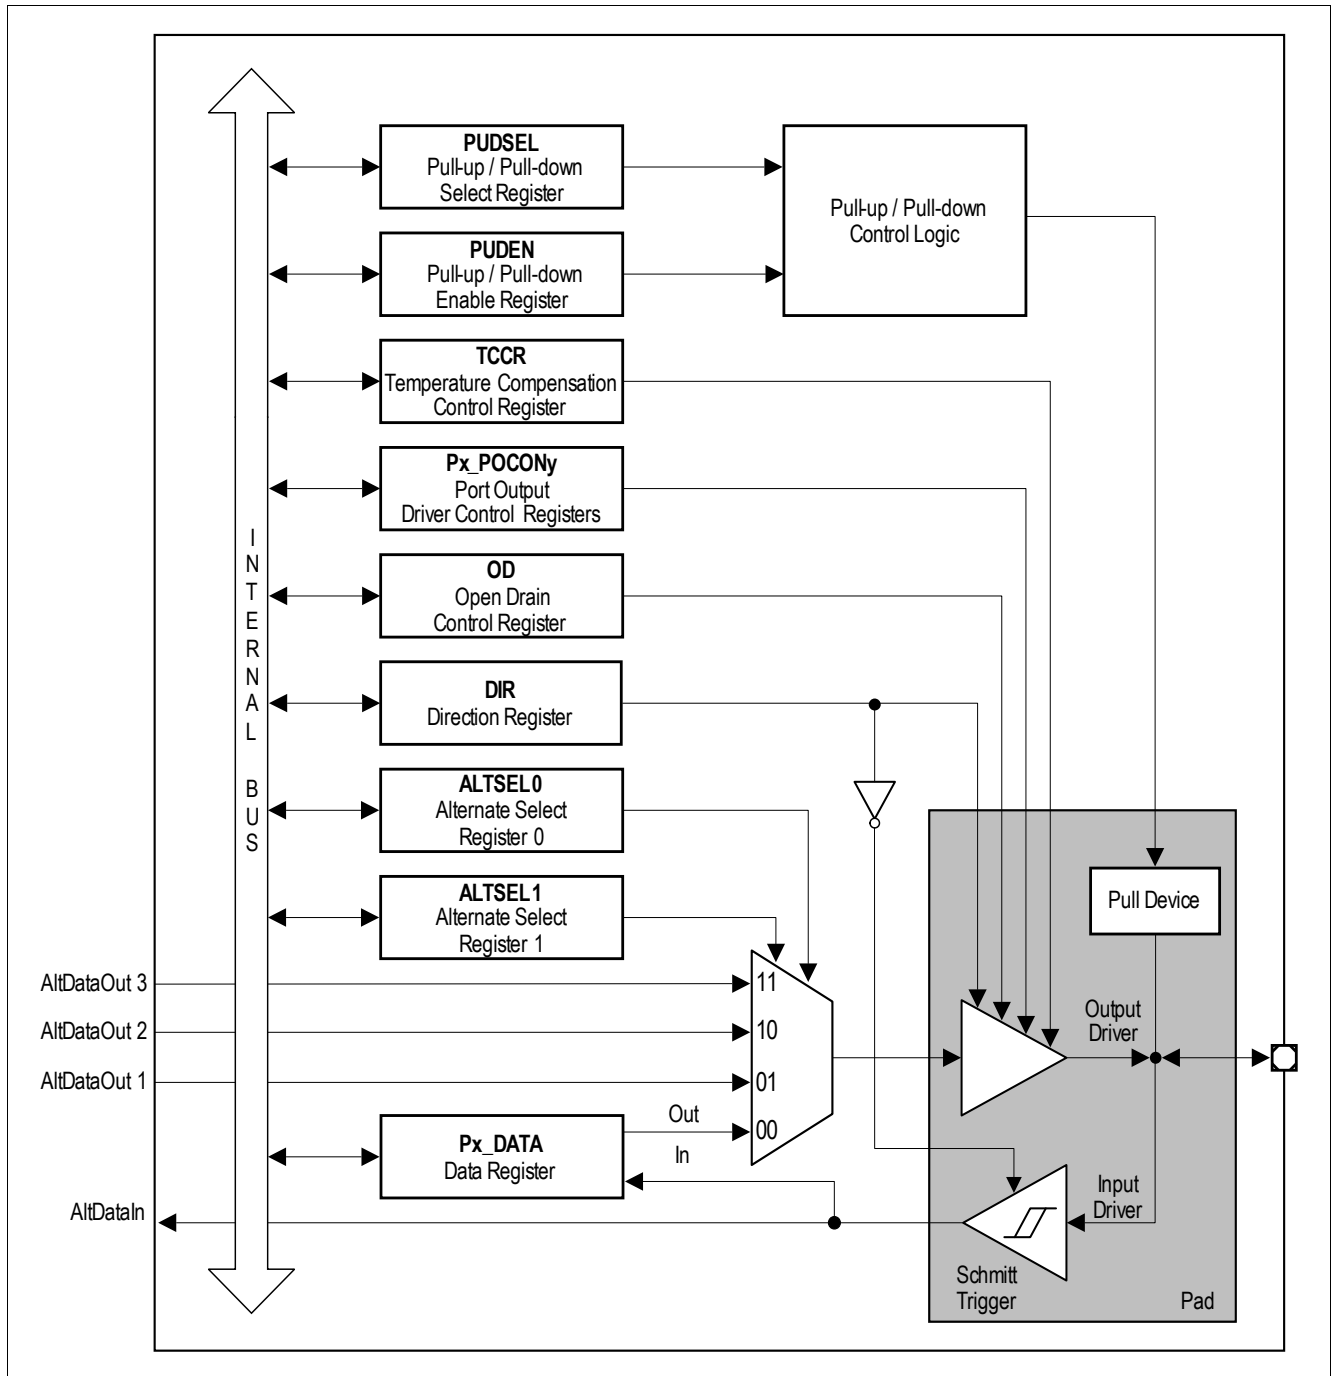


**Figure 70 General Structure of Bidirectional Port (P0, P1)**

**GPIO Ports and Peripheral I/O**

**14.2.2 Port 2**

**Figure 71** shows the structure of an input-only port pin. Each P2 pin can only function in input mode. Register P2\_DIR is provided to enable or disable the input driver. When the input driver is enabled, the actual voltage level present at the port pin is translated into a logic 0 or 1 via a Schmitt trigger device and can be read via register P2\_DATA. Each pin can also be programmed to activate an internal weak pull-up or pull-down device. Register P2\_PUDSEL selects whether a pull-up or the pull-down device is activated while register P2\_PUDEN enables or disables the pull device. The analog input (AnalogIn) bypasses the digital circuitry and Schmitt trigger device for direct feed-through to the ADC input channels.

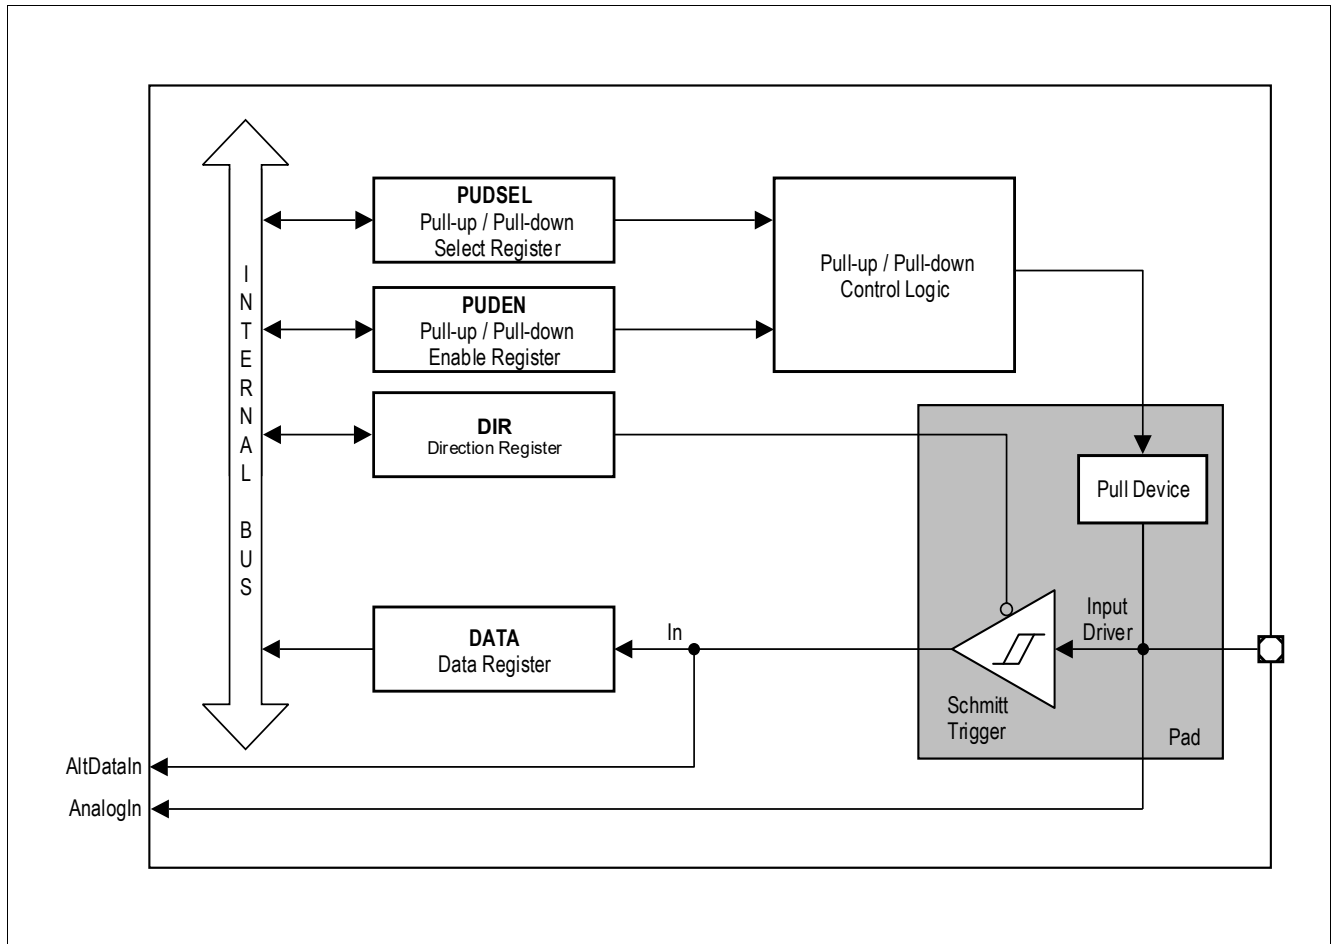


**Figure 71 General Structure of Input Port (P2)**



## GPIO Ports and Peripheral I/O

### 14.3 General Port Register Description

Each port consists of 8-bit control and data registers. The registers are defined in [Figure 72](#).

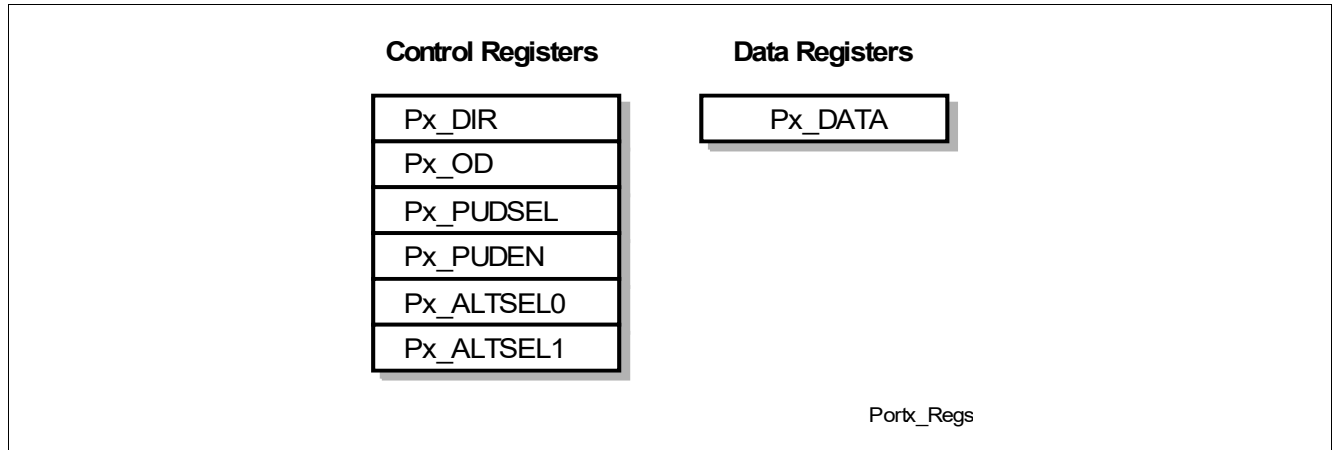

**Figure 72** Port Registers

**Table 77** Port Registers

Register Short Name	Register Long Name	Description
Px_DATA	Port x Data Register	<a href="#">394</a>
Px_DIR	Port x Direction Register	<a href="#">394</a>
Px_OD	Port x Open Drain Control Register	<a href="#">395</a>
Px_PUDSEL	Port x Pull-Up/Pull-Down Select Register	<a href="#">396</a>
Px_PUDEN	Port x Pull-Up/Pull-Down Enable Register	<a href="#">396</a>
Px_ALTSEL0	Port x Alternate Select Register 0	<a href="#">397</a>
Px_ALTSEL1	Port x Alternate Select Register 1	<a href="#">397</a>

*Note:* Not all the registers are implemented for each port.

*Note:* The Px\_DATA registers are not read-modify-write save.

## GPIO Ports and Peripheral I/O

### 14.3.1 Port Data Register

If a port pin is used as general purpose output, output data is written into register Px\_DATA of port x. When the port pin is used as general purpose input, the value at a port pin can be read through the register Px\_DATA. The data register Px\_DATA always contains a latched value of the assigned port pin.

#### Px\_DATA

##### Port x Data Register

Reset Value:  $\text{H}$

7	6	5	4	3	2	1	0
<b>P7</b>	<b>P6</b>	<b>P5</b>	<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
rw	rw	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Pn</b> (n = 0 - 7)	n	rw	<b>Portx Pin n Data Value</b> 0 Port x pin n data value = 0 1 Port x pin n data value = 1

Bit Px\_DATA.n can only be written if the corresponding pin is set to output, i.e. Px\_DIR.n = 1. The contents of Px\_DATA.n are output on the assigned pin if the pin is assigned as GPIO pin and the direction is switched/set to output. A read operation of Px\_DATA returns the register value and not the state of the Px\_DATA pins.

### 14.3.2 Direction Register

The direction of bidirectional port pins is controlled by the respective direction register Px\_DIR. For input-only port pins, register Px\_DIR is used to enable or disable the input drivers.

#### Px\_DIR

##### Port x Direction Register

Reset Value:  $\text{H}$

7	6	5	4	3	2	1	0
<b>P7</b>	<b>P6</b>	<b>P5</b>	<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
rw	rw	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Pn</b> (n = 0 - 7)	n	rw	<b>Bidirectional: Port x Pin n Direction Control</b> 0 Direction is set to input (default) 1 Direction is set to output or <b>Input-only: Port x Pin n Driver Control</b> 0 Input driver is enabled (default) 1 Input driver is disabled

---

**GPIO Ports and Peripheral I/O**
**14.3.3 Open Drain Control Register**

Each pin in output mode can be switched to Open Drain Mode. If driven with 1, no driver will be activated and the pin output state depends on the internal pull-up/pull-down device setting; if driven with 0, the driver's pull-down transistor will be activated.

The open drain mode is controlled by the register Px\_OD.

**Px\_OD**
**Port x Open Drain Control Register**
**Reset Value:  $\bar{H}$** 

7	6	5	4	3	2	1	0
<b>P7</b>	<b>P6</b>	<b>P5</b>	<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
rw	rw	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Py</b> (y = 0 - 7)	n	rw	<b>Port x Pin y Open Drain Mode</b> 0 Normal Mode, output is actively driven for 0 and 1 state (default) 1 Open Drain Mode, output is actively driven only for 0 state

## GPIO Ports and Peripheral I/O

### 14.3.4 Pull-Up/Pull-Down Device Register

Internal pull-up/pull-down devices can be optionally applied to a port pin. This offers the possibility to configure the following input characteristics:

- tristate
- high-impedance with a weak pull-up device
- high-impedance with a weak pull-down device

and the following output characteristics:

- push/pull (optional pull-up/pull-down)
- open drain with internal pull-up
- open drain with external pull-up

The pull-up/pull-down device can be fixed or controlled via the registers Px\_PUDSEL and Px\_PUDEN. Register Px\_PUDSEL selects the type of pull-up/pull-down device, while register Px\_PUDEN enables or disables it. The pull-up/pull-down device can be selected pinwise.

*Note:* The selected pull-up/pull-down device is enabled by setting the respective bit in the Px\_PUDEN register.

#### Px\_PUDSEL

##### Port x Pull-Up/Pull-Down Select Register

Reset Value:  $\text{H}$

7	6	5	4	3	2	1	0
<b>P7</b>	<b>P6</b>	<b>P5</b>	<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
rw	rw	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Py</b> (y = 0 - 7)	n	rw	<b>Pull-Up/Pull-Down Select Port x Bit y</b> 0 Pull-down device is selected 1 Pull-up device is selected

#### Px\_PUDEN

##### Port x Pull-Up/Pull-Down Enable Register

Reset Value:  $\text{H}$

7	6	5	4	3	2	1	0
<b>P7</b>	<b>P6</b>	<b>P5</b>	<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
rw	rw	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Py</b> (y = 0 - 7)	n	rw	<b>Pull-Up/Pull-Down Enable at Port x Bit y</b> 0 Pull-up or Pull-down device is disabled 1 Pull-up or Pull-down device is enabled

## GPIO Ports and Peripheral I/O

### 14.3.5 Alternate Input Functions

The number of alternate functions that uses a pin for input is not limited. Each port control logic of an I/O pin provides several input paths:

- Digital input value via register
- Direct digital input value

### 14.3.6 Alternate Output Functions

Alternate functions are selected via an output multiplexer which can select up to four output lines. This multiplexer can be controlled by the following signals:

- Register Px\_ALTSEL0
- Register Px\_ALTSEL1

Selection of alternate functions is defined in registers Px\_ALTSEL0 and Px\_ALTSEL1.

#### Px\_ALTSELy (y = 0, 1)

##### Port x Alternate Select Register

Reset Value:  $\text{H}$

7	6	5	4	3	2	1	0
<b>0</b>	<b>0</b>	<b>0</b>	<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
rw	rw	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Pn</b> (n = 0 - 4)	n	rw	See <a href="#">Table 78</a>

**Table 78** Function of Bits Px\_ALTSEL0.Pn and Px\_ALTSEL1.Pn

Px_ALTSEL0.Pn	Px_ALTSEL1.Pn	Function
0	0	Normal GPIO
1	0	Alternate Select 1
0	1	Alternate Select 2
1	1	Alternate Select 3

## GPIO Ports and Peripheral I/O

### 14.3.7 Register Map

**Table 79** shows the Ports module base addresses.

**Table 80** lists the addresses of the Ports SFRs and SCU SFRs.

**Table 79 Register Address Space**

Module	Base Address	End Address	Note
PORT	48028000 <sub>H</sub>	48029FFF <sub>H</sub>	
SCU	50005000 <sub>H</sub>	50005FFF <sub>H</sub>	

**Table 80 Register Overview Ports**

Register Short Name	Register Long Name	Offset Address	Reset Value
P0_DATA	Port 0 Data Register	00 <sub>H</sub>	<b>402</b>
P0_DIR	Port 0 Direction Register	04 <sub>H</sub>	<b>402</b>
P1_DATA	Port 1 Data Register	08 <sub>H</sub>	<b>409</b>
P1_DIR	Port 1 Direction Register	0C <sub>H</sub>	<b>409</b>
P2_DATA	Port 2 Data Register	10 <sub>H</sub>	<b>415</b>
P2_DIR	Port 2 Direction Register	14 <sub>H</sub>	<b>415</b>
P0_PUDSEL	Port 0 Pull-Up/Pull-Down Select Register	18 <sub>H</sub>	<b>403</b>
P0_PUDEN	Port 0 Pull-Up/Pull-Down Enable Register	1C <sub>H</sub>	<b>404</b>
P1_PUDSEL	Port 1 Pull-Up/Pull-Down Select Register	20 <sub>H</sub>	<b>411</b>
P1_PUDEN	Port 1 Pull-Up/Pull-Down Enable Register	24 <sub>H</sub>	<b>411</b>
P2_PUDSEL	Port 2 Pull-Up/Pull-Down Select Register	28 <sub>H</sub>	<b>416</b>
P2_PUDEN	Port 2 Pull-Up/Pull-Down Enable Register	2C <sub>H</sub>	<b>416</b>
P0_ALTSEL0	Port 0 Alternate Select Register 0	30 <sub>H</sub>	<b>405</b>
P0_ALTSEL1	Port 0 Alternate Select Register 1	34 <sub>H</sub>	<b>405</b>
P1_ALTSEL0	Port 1 Alternate Select Register 0	38 <sub>H</sub>	<b>412</b>
P1_ALTSEL1	Port 1 Alternate Select Register 1	3C <sub>H</sub>	<b>412</b>
P0_OD	Port 0 Open Drain Control Register	40 <sub>H</sub>	<b>403</b>
P1_OD	Port 1 Open Drain Control Register	44 <sub>H</sub>	<b>410</b>

**Table 81 Register Overview SCU Module**

Register Short Name	Register Long Name	Offset Address	Reset Value
P0_POCON0	P0 Control Register	0E8 <sub>H</sub>	<b>147</b>
P0_POCON1	P0 Control Register	0EC <sub>H</sub>	<b>148</b>
P0_POCON2	P0 Control Register	0F0 <sub>H</sub>	<b>149</b>
P1_POCON0	P1 Control Register	0F8 <sub>H</sub>	<b>150</b>
P1_POCON1	P1 Control Register	0FC <sub>H</sub>	<b>151</b>
P1_POCON2	P1 Control Register	100 <sub>H</sub>	<b>152</b>


## GPIO Ports and Peripheral I/O

### 14.4 TLE987x Port Module

#### 14.4.1 Port 0

##### 14.4.1.1 Overview

Port 0 is a general purpose bidirectional port. The port registers of Port 0 are shown in [Table 73](#).

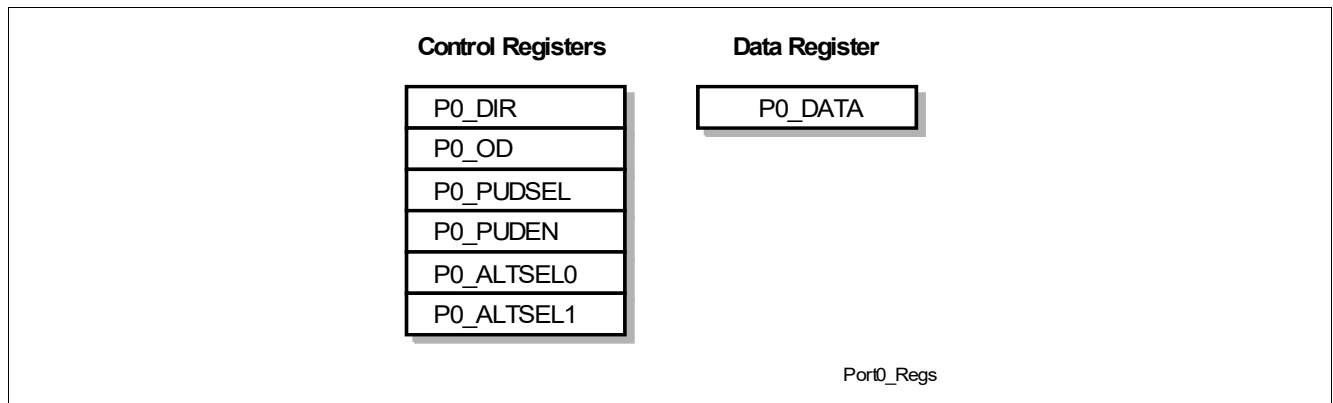

**Figure 73** Port 0 Registers

**Table 82** Port 0 Registers

Register Short Name	Register Long Name
P0_DATA	Port 0 Data Register
P0_DIR	Port 0 Direction Register
P0_OD	Port 0 Open Drain Control Register
P0_PUDSEL	Port 0 Pull-Up/Pull-Down Select Register
P0_PUDEN	Port 0 Pull-Up/Pull-Down Enable Register
P0_ALTSEL0	Port 0 Alternate Select Register 0
P0_ALTSEL1	Port 0 Alternate Select Register 1

---

**GPIO Ports and Peripheral I/O**
**14.4.1.2 Port 0 Functions**
**Table 83 Port 0 Input/Output Functions**

Port Pin	Input/Output	Select	Connected Signal(s)	From/to Module		
P0.0	Input	GPI	P0_DATA.P0			
		INP1	SWCLK / TCK_0	SW		
		INP2	T12HR_0	CCU6		
		INP3	T4INA	GPT12T4		
		INP4	T2_0	Timer 2		
		INP5	-	-		
		INP6	EXINT2_3	SCU		
	Output	GPO	P0_DATA.P0			
		ALT1	T3OUT	GPT12T3		
		ALT2	EXF21_0	Timer 21		
		ALT3	RXDO_2	UART2		
		P0.1	Input	GPI	P0_DATA.P1	
				INP1	T13HR_0	CCU6
INP2	TxD1			LIN_TxD		
INP3	CAPINA			GPT12CAP		
INP4	T21_0			Timer 21		
INP5	T4INC			GPT12T4		
INP6	MRST_1_2			SSC1		
INP7	EXINT0_2			SCU		
Output	GPO	P0_DATA.P1				
	ALT1	TxD1	UART1 / LIN_TxD			
	ALT2	-	-			
	ALT3	T6OUT	GPT12T6			



## GPIO Ports and Peripheral I/O

**Table 83** Port 0 Input/Output Functions (cont'd)

Port Pin	Input/Output	Select	Connected Signal(s)	From/to Module
P0.2	Input	GPI	P0_DATA.P2	
		INP1	CCPOS2_1	CCU6
		INP2	T2EUDA	GPT12T2
		INP3	MTSR_1	SSC1
		INP4	T21EX_0	Timer 21
		INP5	T6INA	GPT12T6
	Output	GPO	P0_DATA.P2	-
		ALT1	COOUT60_0	CCU6
		ALT2	MTSR_1	SSC1
		ALT3	EXF2_0	Timer 2
	P0.3	Input	GPI	P0_DATA.P3
INP1			SCK_1	SSC1
INP2			CAPINB	GPT12
INP3			T5INA	GPT12T5
INP4			T4EUDA	GPT12T4
INP5			CCPOS0_1	CCU6
Output		GPO	P0_DATA.P3	
		ALT1	SCK_1	SSC1
		ALT2	EXF21_2	Timer 21
		ALT3	T6OUT	GPT12T6
P0.4		Input	GPI	P0_DATA.P4
	INP1		MRST_1_0	SSC1
	INP2		CC60_0	CCU6
	INP3		T21_2	Timer 21
	INP4		EXINT2_2	SCU
	INP5		T3EUDA	GPT12T3
	INP6		CCPOS1_1	CCU6
	Output	GPO	P0_DATA.P4	
		ALT1	MRST_1_0	SSC1
		ALT2	CC60_0	CCU6
		ALT3	CLKOUT_0	SCU

## GPIO Ports and Peripheral I/O

## 14.4.1.3 Port 0 Register Description

## Data Register

## P0\_DATA

## Port 0 Data Register

(00<sub>H</sub>)Reset Value: XX<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>			<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
r			rwh	rwh	rwh	rwh	rwh

Field	Bits	Type	Description
<b>Px</b> (x = 0 - 4)	n	rwh	<b>Port 0 Pin x Data Value</b> 0 <sub>B</sub> Port 0 pin x data value = 0 1 <sub>B</sub> Port 0 pin x data value = 1
<b>Res</b>	[7:5]	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

## Direction Register

## P0\_DIR

## Port 0 Direction Register

(04<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>			<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
r			rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Px</b> (x = 0 - 4)	n	rw	<b>Port 0 Pin x Direction Control</b> 0 <sub>B</sub> Direction is set to input (default) 1 <sub>B</sub> Direction is set to output
<b>Res</b>	[7:5]	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

## GPIO Ports and Peripheral I/O

### Open Drain Control Register

#### P0\_OD

#### Port 0 Open Drain Control Register

(40<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
Res			P4	P3	P2	P1	P0
r			rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Px</b> (x = 0 - 4)	n	rw	<b>Port 0 Pin x Open Drain Mode</b> 0 <sub>B</sub> Normal Mode, output is actively driven for 0 and 1 state (default) 1 <sub>B</sub> Open Drain Mode, output is actively driven only for 0 state
<b>Res</b>	[7:5]	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

### Pull-Up/Pull-Down Device Register

#### P0\_PUDSEL

#### Port 0 Pull-Up/Pull-Down Select Register

(18<sub>H</sub>)Reset Value: 0B<sub>H</sub>

7	6	5	4	3	2	1	0
Res			P4	P3	P2	P1	P0
r			rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Px</b> (x = 0 - 4)	n	rw	<b>Pull-Up/Pull-Down Select Port 0 Bit x</b> 0 <sub>B</sub> Pull-down device is selected 1 <sub>B</sub> Pull-up device is selected
<b>Res</b>	[7:5]	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

---

**GPIO Ports and Peripheral I/O**
**P0\_PUDEN****Port 0 Pull-Up/Pull-Down Enable Register****(1C<sub>H</sub>)****Reset Value: 1F<sub>H</sub>**

7	6	5	4	3	2	1	0
	<b>Res</b>		<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
	r		rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Px</b> (x = 0 - 4)	n	rw	<b>Pull-Up/Pull-Down Enable at Port 0 Bit x</b> 0 <sub>B</sub> Pull-up or Pull-down device is disabled 1 <sub>B</sub> Pull-up or Pull-down device is enabled
<b>Res</b>	[7:5]	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

---

**GPIO Ports and Peripheral I/O**
**Alternate Output Select Register****P0\_ALTSELy (y = 0-1)****Port 0 Alternate Select Register****(30<sub>H</sub>+y\*4<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>			<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
r			rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Px</b> (x = 0 - 4)	n	rw	<b>Alternate Select Port 0 Bit x</b> See <a href="#">Table 84</a>
<b>Res</b>	[7:5]	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

**Table 84** Function of Bits P0\_ALTSEL0.Px and P0\_ALTSEL1.Px


P0_ALTSEL0.Px	P0_ALTSEL1.Px	Function
0	0	Normal GPIO
1	0	Alternate Select 1
0	1	Alternate Select 2
1	1	Alternate Select 3

## GPIO Ports and Peripheral I/O

### 14.4.2 Port 1

#### 14.4.2.1 Overview

Port 1 is a general purpose bidirectional port. The port registers of Port 1 are shown in [Table 74](#).

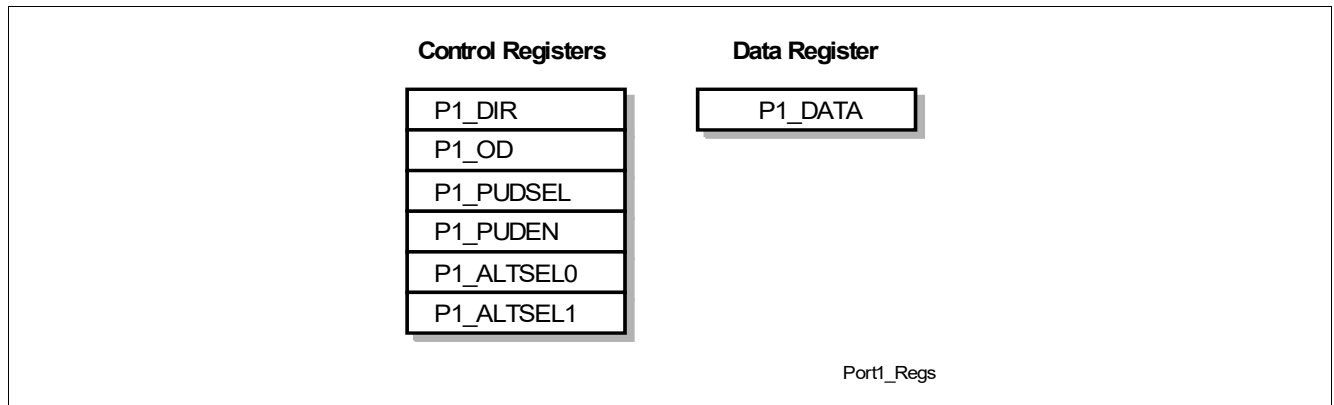

**Figure 74** Port 1 Registers

**Table 85** Port 1 Registers

Register Short Name	Register Long Name
P1_DATA	Port 1 Data Register
P1_DIR	Port 1 Direction Register
P1_OD	Port 1 Open Drain Control Register
P1_PUDSEL	Port 1 Pull-Up/Pull-Down Select Register
P1_PUDEN	Port 1 Pull-Up/Pull-Down Enable Register
P1_ALTSEL0	Port 1 Alternate Select Register 0
P1_ALTSEL1	Port 1 Alternate Select Register 1

## GPIO Ports and Peripheral I/O

## 14.4.2.2 Port 1 Functions

Table 86 Port 1 Input / Output Functions

Port Pin	Input/Output	Select	Connected Signal(s)	From/to Module	
P1.0	Input	GPI	P1_DATA.P0		
		INP1	T3INC	GPT12T3	
		INP2	T4EUDB	GPT12T4	
		INP3	CC61_0	CCU6	
		INP4	SCK_2	SSC2	
		INP5	EXINT1_2	SCU	
	Output	GPO	P1_DATA.P0		
		ALT1	SCK_2	SSC2	
		ALT2	CC61_0	CCU6	
		ALT3	EXF21_3	Timer 21	
	P1.1	Input	GPI	P1_DATA.P1	
			INP1	-	-
			INP2	T6EUDA	GPT12T6
INP3			-	-	
INP4			MTSR_2	SSC2	
INP5			T21_1	Timer 21	
INP6			EXINT1_0	SCU	
Output		GPO	P1_DATA.P1	-	
		ALT1	MTSR_2	SSC2	
		ALT2	COOUT61_0	CCU6	
		ALT3	TXD2_0	UART2	
P1.2		Input	GPI	P1_DATA.P2	
			INP1	T2INA	GPT12T2
	INP2		T2EX_1	Timer 2	
	INP3		T21EX_3	Timer 21	
	INP4		MRST_2_0	SSC2	
	INP5		RXD2_0	UART2	
	INP6		CCPOS2_2	CCU6	
	INP7		EXINT0_1	SCU	
	Output	GPO	P1_DATA.P2		
		ALT1	MRST_2_0	SSC2	
		ALT2	COOUT63_0	CCU6	
		ALT3	T3OUT	GPT12T3	

---

**GPIO Ports and Peripheral I/O**
**Table 86 Port 1 Input / Output Functions** (cont'd)

Port Pin	Input/Output	Select	Connected Signal(s)	From/to Module	
P1.3	Input	GPI	P1_DATA.P3		
		INP1	T6INB	GPT12T6	
		INP2	–		
		INP3	CC62_0	CCU6	
		INP4	T6EUIDB	GPT12T6	
		INP5	–		
		INP6	CCPOS0_2	CCU6	
		INP7	EXINT1_1	SCU	
	Output	GPO	P1_DATA.P3		
		ALT1	EXF21_1	Timer 21	
		ALT2	CC62_0	CCU6	
		ALT3	TXD2_1	UART2	
	P1.4	Input	GPI	P1_DATA.P4	
			INP1	EXINT2_1	SCU
INP2			T21EX_1	Timer 21	
INP3			T5EUDA	GPT12T5	
INP4			RxD1	UART1	
INP5			T2INB	GPT12T2	
INP6			CCPOS1_2	CCU6	
INP7			MRST_1_3	SSC1	
Output		GPO	P1_DATA.P4		
		ALT1	CLKOUT_1	SCU	
		ALT2	COU62_0	CCU6	
		ALT3	RxD1	UART1 / LIN_RxD	



## GPIO Ports and Peripheral I/O

## 14.4.2.3 Port 1 Register Description

## Data Register

## P1\_DATA

## Port 1 Data Register

(08<sub>H</sub>)Reset Value: XX<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>			<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
r			rwh	rwh	rwh	rwh	rwh

Field	Bits	Type	Description
<b>Px</b> (x = 0 - 4)	n	rwh	<b>Port 1 Pin n Data Value</b> 0 <sub>B</sub> Port 1 pin x data value = 0 1 <sub>B</sub> Port 1 pin x data value = 1
<b>Res</b>	[7:5]	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

## Direction Register

## P1\_DIR

## Port 1 Direction Register

(0C<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>			<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
r			rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Px</b> (x = 0 - 4)	n	rw	<b>Port 1 Pin x Direction Control</b> 0 <sub>B</sub> Direction is set to input (default) 1 <sub>B</sub> Direction is set to output
<b>Res</b>	[7:5]	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

---

**GPIO Ports and Peripheral I/O**
**Open Drain Control Register****P1\_OD****Port 1 Open Drain Control Register****(44<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>			<b>P4</b>	<b>P3/P2</b>	<b>P1</b>	<b>P0</b>	<b>Res</b>
r			rw	rw	rw	rw	r

Field	Bits	Type	Description
<b>Res</b>	0	r	reserved
<b>P0</b>	1	rw	<b>P1.0 Open Drain Mode</b> 0 <sub>B</sub> Normal Mode, output is actively driven for 0 and 1 state (default) 1 <sub>B</sub> Open Drain Mode, output is actively driven only for 0 state
<b>P1</b>	2	rw	<b>P1.1 Open Drain Mode</b> 0 <sub>B</sub> Normal Mode, output is actively driven for 0 and 1 state (default) 1 <sub>B</sub> Open Drain Mode, output is actively driven only for 0 state
<b>P3/P2</b>	3	rw	<b>P1.3 and P1.2 Open Drain Mode</b> 0 <sub>B</sub> Normal Mode, output is actively driven for 0 and 1 state (default) 1 <sub>B</sub> Open Drain Mode, output is actively driven only for 0 state
<b>P4</b>	4	rw	<b>P1.4 Open Drain Mode</b> 0 <sub>B</sub> Normal Mode, output is actively driven for 0 and 1 state (default) 1 <sub>B</sub> Open Drain Mode, output is actively driven only for 0 state
<b>Res</b>	[7:5]	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

---

**GPIO Ports and Peripheral I/O**
**Pull-Up/Pull-Down Device Register****P1\_PUDSEL****Port 1 Pull-Up/Pull-Down Select Register****(20<sub>H</sub>)****Reset Value: 1F<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>			<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
r			rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Px</b> <b>(x = 0 - 4)</b>	n	rw	<b>Pull-Up/Pull-Down Select Port 1 Bit x</b> 0 <sub>B</sub> Pull-down device is selected 1 <sub>B</sub> Pull-up device is selected (default)
<b>Res</b>	[7:5]	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

**P1\_PUDEN****Port 1 Pull-Up/Pull-Down Enable Register****(24<sub>H</sub>)****Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>			<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
r			rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Px</b> <b>(x = 0 - 4)</b>	n	rw	<b>Pull-Up/Pull-Down Enable at Port 1 Bit x</b> 0 <sub>B</sub> Pull-up or Pull-down device is disabled (default) 1 <sub>B</sub> Pull-up or Pull-down device is enabled
<b>Res</b>	[7:5]	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

---

**GPIO Ports and Peripheral I/O**
**Alternate Output Select Register****P1\_ALTSEL<sub>y</sub>** ( $y = 0-1$ )**Port 1 Alternate Select Register****( $38_H + y * 4_H$ )****Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>Res</b>			<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>P1</b>	<b>P0</b>
r			rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Px</b> ( $x = 0 - 4$ )	n	rw	<b>Alternate Select Port 1 Bit x</b> See <a href="#">Table 87</a>
<b>Res</b>	[7:5]	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

**Table 87** Function of Bits P1\_ALTSEL0.Px and P1\_ALTSEL1.Px


P1_ALTSEL0.Px	P1_ALTSEL1.Px	Function
0	0	Normal GPIO
1	0	Alternate Select 1
0	1	Alternate Select 2
1	1	Alternate Select 3

## GPIO Ports and Peripheral I/O

### 14.4.3 Port 2

#### 14.4.3.1 Overview

Port 2 is a general purpose input-only port. The port registers of Port 2 are shown in [Table 75](#).

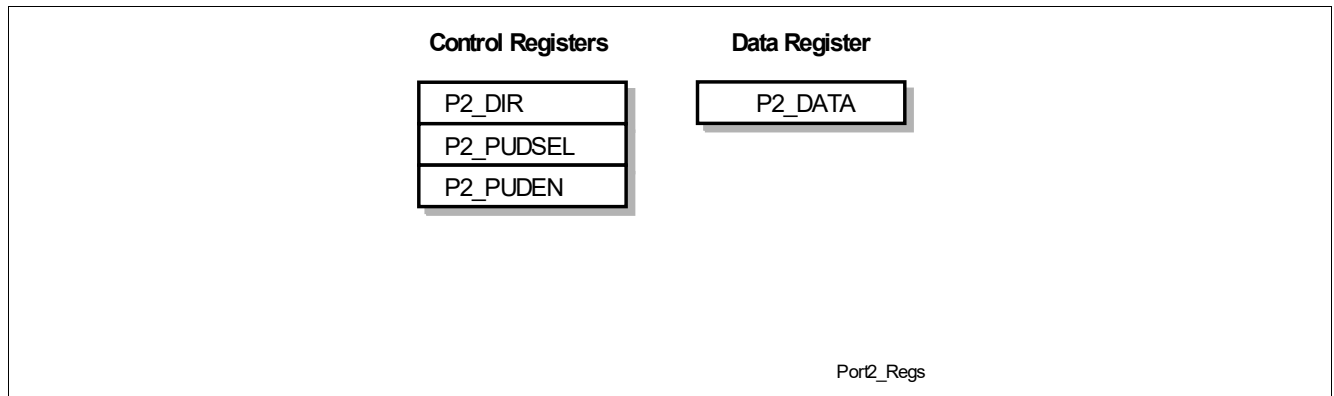

**Figure 75** Port 2 Registers

**Table 88** Port 2 Registers

Register Short Name	Register Long Name
P2_DATA	Port 2 Data Register
P2_DIR	Port 2 Direction Register
P2_PUSELECT	Port 2 Pull-Up/Pull-Down Select Register
P2_PUEN	Port 2 Pull-Up/Pull-Down Enable Register

#### 14.4.3.2 Port 2 Functions

**Table 89** Port 2 Input Functions

Port Pin	Input/Output	Select	Connected Signal(s)	From/to Module
P2.0	Input	GPI	P2_DATA.P0	
		INP1	CCPOS0_3	CCU6
		INP2	-	-
		INP3	T12HR_2	CCU6
		INP4	EXINT0_0	SCU
		INP5	CC61_2	CCU6
		ANALOG	AN0	ADC1
			XTAL (in)	XTAL
	IN	ADC3.P	SDADC <sup>1)</sup>	

## GPIO Ports and Peripheral I/O

**Table 89** Port 2 Input Functions (cont'd)

Port Pin	Input/Output	Select	Connected Signal(s)	From/to Module
P2.2	Input	GPI	P2_DATA.P2	
		INP1	CCPOS2_3	CCU6
		INP2	T13HR_2	CCU6
		INP3	-	
		INP4	CC62_2	CCU6
		ANALOG	AN2	ADC1
		OUT	XTAL (out)	XTAL
		IN	ADC3.N	SDADC <sup>1)</sup>
P2.3	Input	GPI	P2_DATA.P3	
		INP1	CCPOS1_0	CCU6
		INP2	CTRAP#_1	CCU6
		INP3	T21EX_2	Timer 21
		INP4	CC60_1	CCU6
		INP5	EXINT0_3	SCU
		ANALOG	AN3	ADC1
P2.4	Input	GPI	P2_DATA.P4	
		INP1	CTRAP#_0	CCU6
		INP2	T2EUDB	GPT12T2
		INP3	MRST_1_1	SSC1
		INP4	EXINT1_3	SCU
		ANALOG	AN4	ADC1
		IN	ADC4.P	SDADC <sup>1)</sup>
P2.5	Input	GPI	P2_DATA.P5	
		INP1	RXD2_1	UART2
		INP2	T3EUDB	GPT12T3
		INP3	MRST_2_1	SSC2
		INP4	T2_1	Timer 2
		ANALOG	AN5	ADC1
		IN	ADC4.N	SDADC <sup>1)</sup>

1) only available for TLE9879-2QXA40 variant

## GPIO Ports and Peripheral I/O

## 14.4.3.3 Port 2 Register Description

## Data Register

## P2\_DATA

## Port 2 Data Register

(10<sub>H</sub>)Reset Value: XX<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>Res</b>	<b>P5</b>	<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>Res</b>	<b>P0</b>
rh	r	rh	rh	rh	rh	rh	rh

Field	Bits	Type	Description
<b>Res</b>	1	rh	<b>Reserved</b> Returns 0 if read
<b>Px</b> (x = 0, 2- 5)	n	rh	<b>Port 2 Pin x Data Value</b> 0 <sub>B</sub> Port 2 pin x data value = 0 1 <sub>B</sub> Port 2 pin x data value = 1
<b>Res</b>	6	r	<b>Reserved</b> Returns 0 if read
<b>Res</b>	7	rh	<b>Reserved</b> Returns 0 if read

## Direction Register

This register is being initialized by the BootROM during the bootup process to a value of 8F<sub>H</sub>

## P2\_DIR

## Port 2 Direction Register

(14<sub>H</sub>)Reset Value: BF<sub>H</sub>

7	6	5	4	3	2	1	0
<b>Res</b>	<b>Res</b>	<b>P5</b>	<b>P4</b>	<b>P3</b>	<b>P2</b>	<b>Res</b>	<b>P0</b>
rw	r	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>Res</b>	1	rw	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>Px</b> (x = 0, 2- 5)	n	rw	<b>Port 2 Pin x Driver Control</b> 0 <sub>B</sub> Input driver is enabled 1 <sub>B</sub> Input driver is disabled (default)
<b>Res</b>	6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>Res</b>	7	rw	<b>Reserved</b> Returns 0 if read; should be written with 0.

## GPIO Ports and Peripheral I/O

### Pull-Up/Pull-Down Device Register

#### P2\_PUDSEL

##### Port 2 Pull-Up/Pull-Down Select Register

(28<sub>H</sub>)Reset Value: BF<sub>H</sub>

7	6	5	4	3	2	1	0
Res	Res	P5	P4	P3	P2	Res	P0
rw	r	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
Res	1	rw	<b>Reserved</b> Returns 0 if read; should be written with 0.
Px (x = 0, 2- 5)	n	rw	<b>Pull-Up/Pull-Down Select Port 2 Bit x</b> 0 <sub>B</sub> Pull-down device is selected 1 <sub>B</sub> Pull-up device is selected (default)
Res	6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
Res	7	rw	<b>Reserved</b> Returns 0 if read; should be written with 0.

#### P2\_PUDEN

##### Port 2 Pull-Up/Pull-Down Enable Register

(2C<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
Res	Res	P5	P4	P3	P2	Res	P0
rw	r	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
Res	1	rw	<b>Reserved</b> Returns 0 if read; should be written with 0.
Px (x = 0, 2- 5)	n	rw	<b>Pull-Up/Pull-Down Enable at Port 2 Bit x</b> 0 <sub>B</sub> Pull-up or Pull-down device is disabled (default) 1 <sub>B</sub> Pull-up or Pull-down device is enabled
Res	6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
Res	7	rw	<b>Reserved</b> Returns 0 if read; should be written with 0.

## 14.5 Alternate Function Map

The following figure displays the mapping of the alternate function of the GPIOs.



GPIO Ports and Peripheral I/O

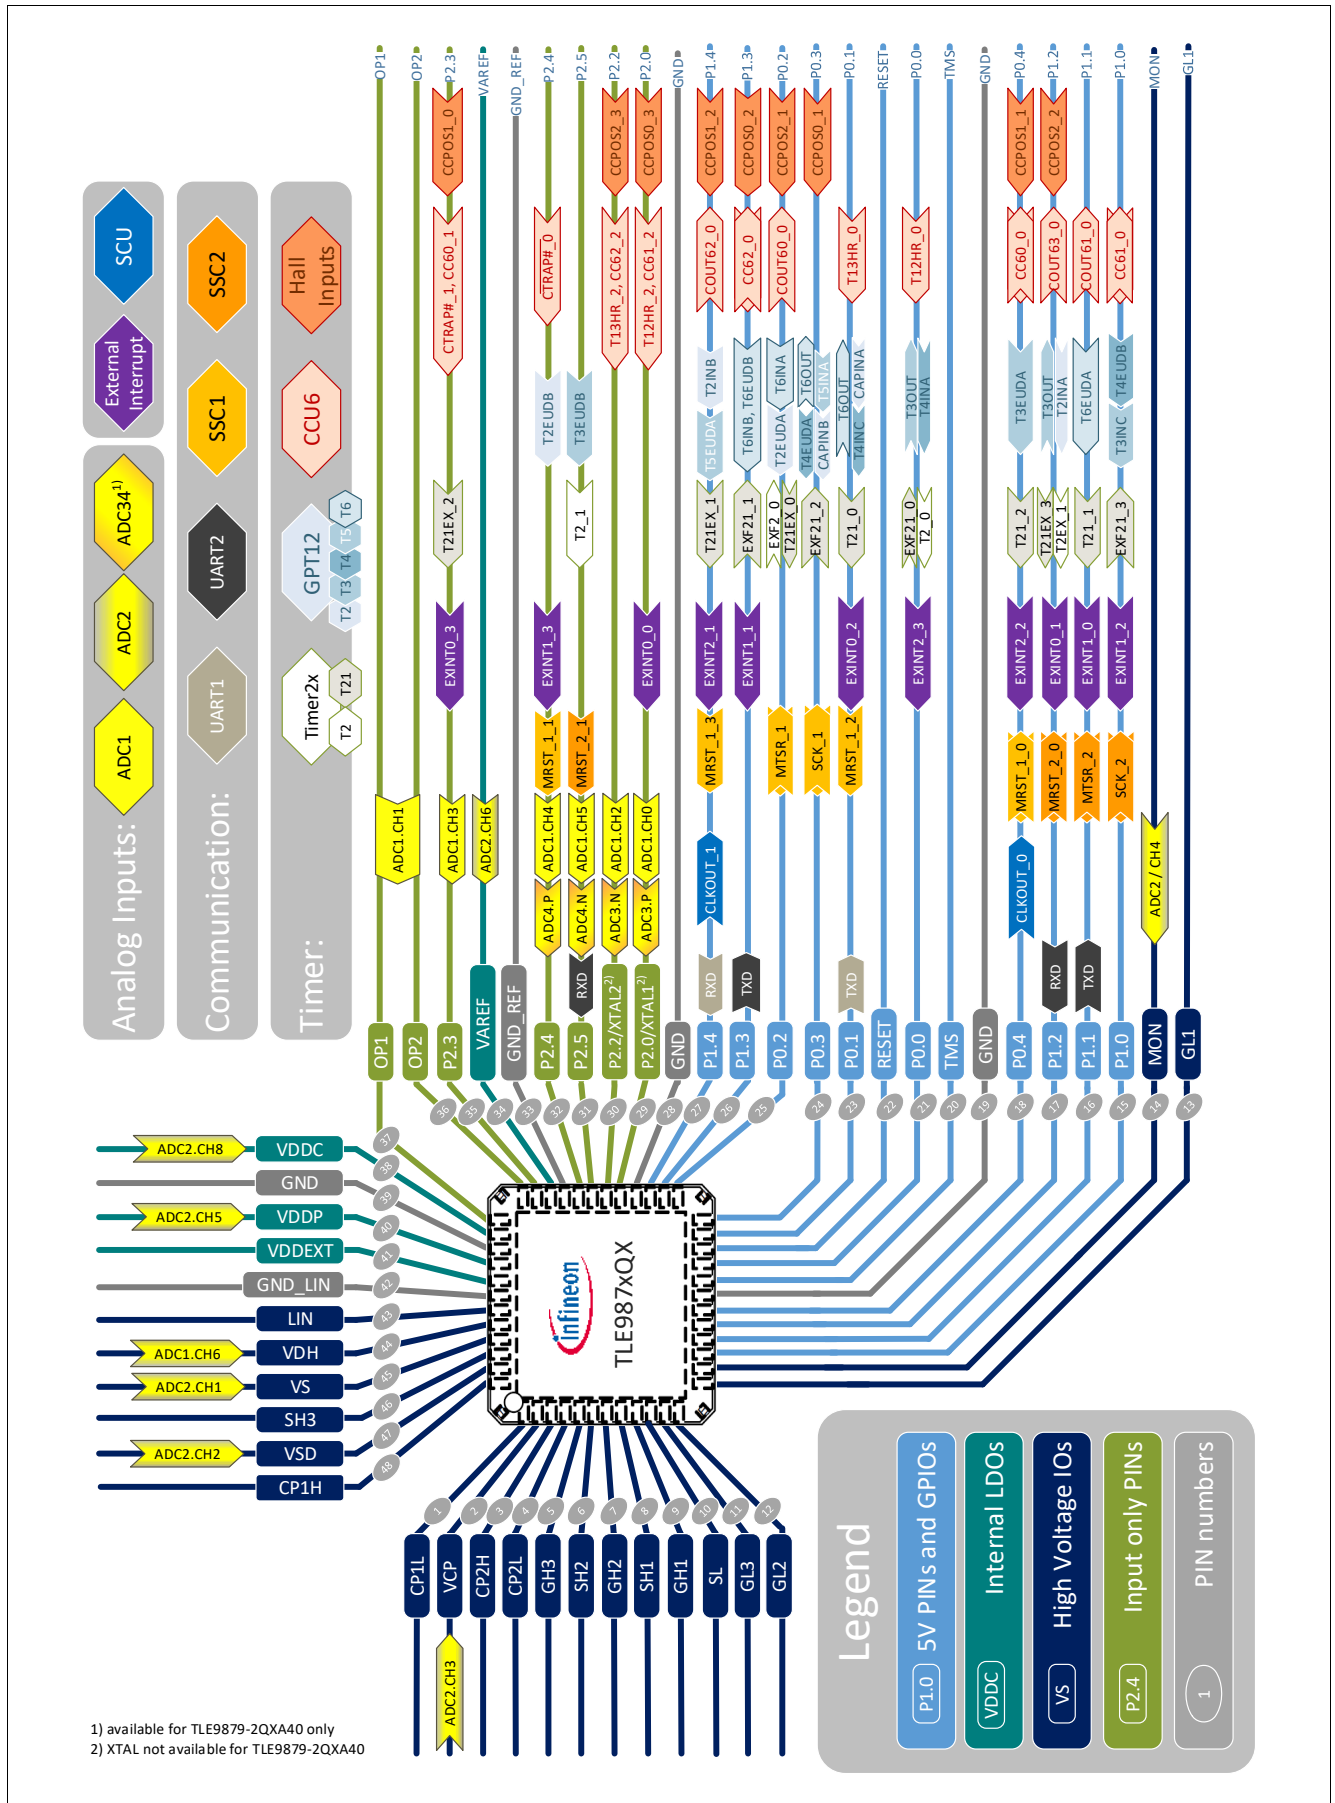


Figure 76 Alternate Function Map

---

**General Purpose Timer Units (GPT12)****15 General Purpose Timer Units (GPT12)****15.1 Features****15.1.1 Features Block GPT1**

The following list summarizes the supported features:

- $f_{\text{GPT}}$  is derived from PCLK
- $f_{\text{GPT}}/4$  maximum resolution
- 3 independent timers/counters
- Timers/counters can be concatenated
- 4 operating modes:
  - Timer Mode
  - Gated Timer Mode
  - Counter Mode
  - Incremental Interface Mode
- Reload and Capture functionality
- Shared interrupt: Node 0

**15.1.2 Features Block GPT2**

The following list summarizes the supported features:

- $f_{\text{GPT}}$  is derived from PCLK
- $f_{\text{GPT}}/2$  maximum resolution
- 2 independent timers/counters
- Timers/counters can be concatenated
- 3 operating modes:
  - Timer Mode
  - Gated Timer Mode
  - Counter Mode
- Extended capture/reload functions via 16-bit capture/reload register CAPREL
- Shared interrupt: Node 1

---

## General Purpose Timer Units (GPT12)

### 15.2 Introduction

The General Purpose Timer Unit blocks GPT1 and GPT2 have very flexible multifunctional timer structures which may be used for timing, event counting, pulse width measurement, pulse generation, frequency multiplication, and other purposes.

They incorporate five 16-bit timers that are grouped into the two timer blocks GPT1 and GPT2. Each timer in each block may operate independently in a number of different modes such as Gated timer or Counter Mode, or may be concatenated with another timer of the same block.

Each block has alternate input/output functions and specific interrupts associated with it. Input signals can be selected from several sources by register PISEL.

The GPT module is clocked with clock  $f_{\text{GPT}}$ .  $f_{\text{GPT}}$  is a clock derived from PCLK.

General Purpose Timer Units (GPT12)

15.2.1 Block Diagram GPT1

**Block GPT1** contains three timers/counters: The core timer T3 and the two auxiliary timers T2 and T4. The maximum resolution is  $f_{GPT}/4$ . The auxiliary timers of GPT1 may optionally be configured as reload or capture registers for the core timer. These registers are listed in [Section 15.3.7.1](#).

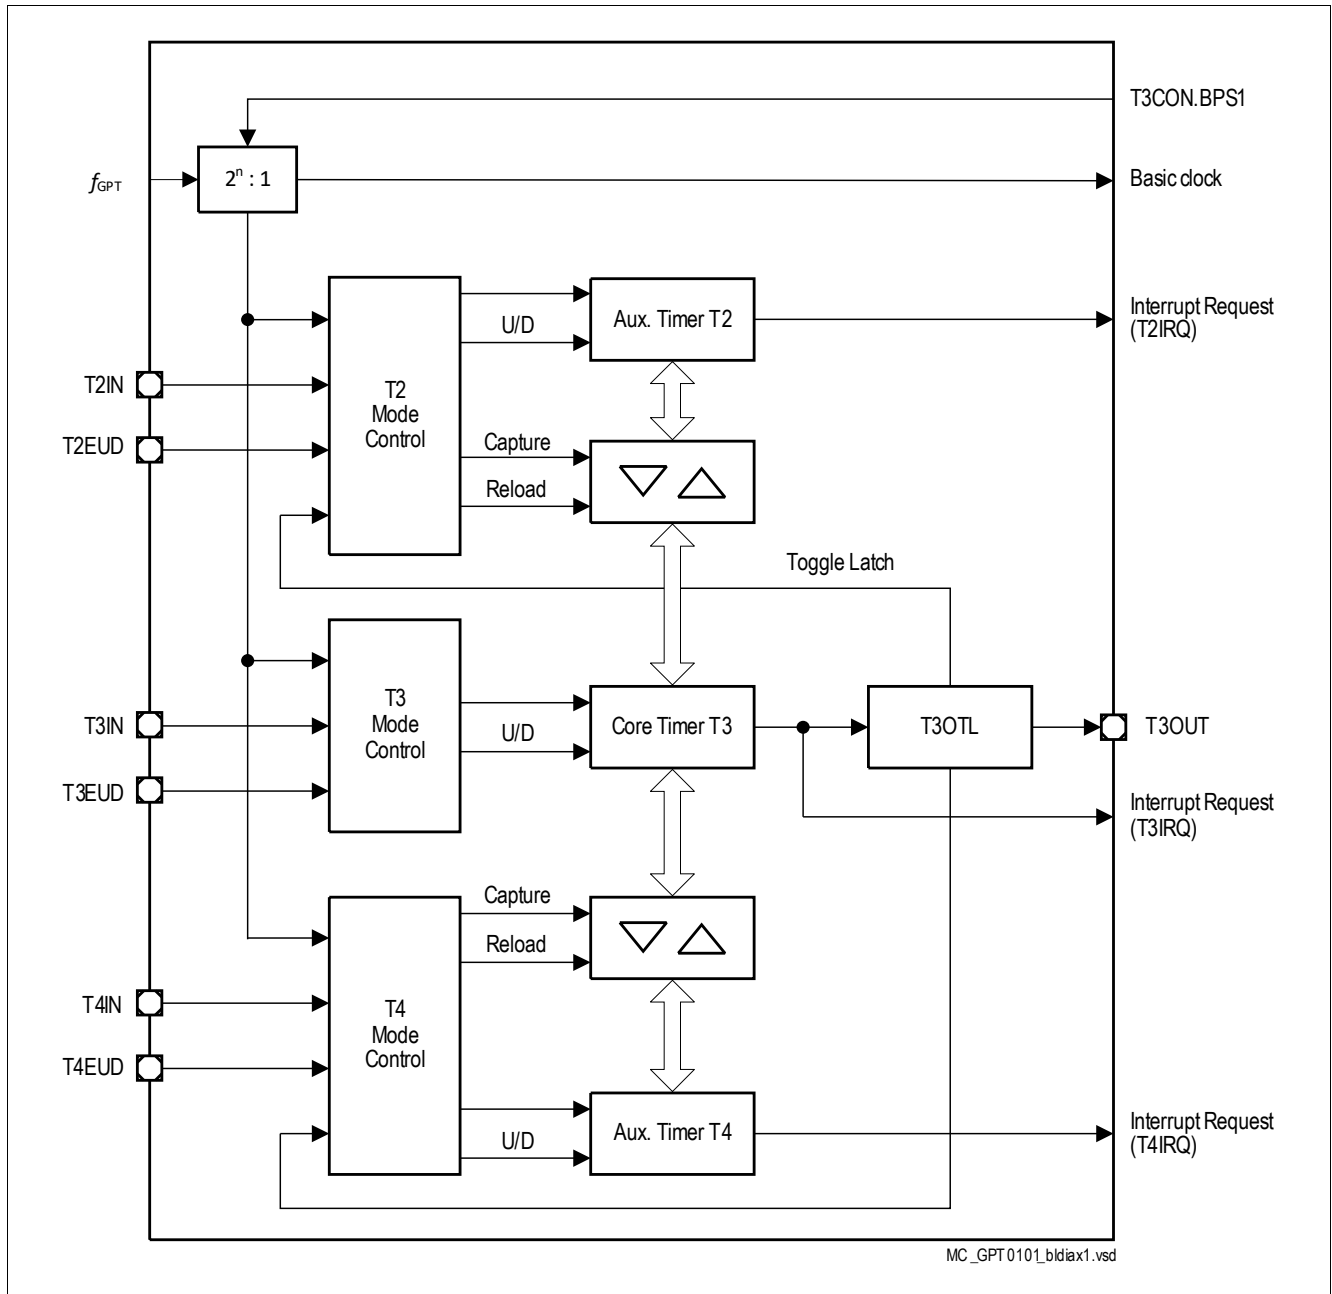


Figure 77 GPT1 Block Diagram (n = 2 ... 5)

General Purpose Timer Units (GPT12)

15.2.2 Block Diagram GPT2

**Block GPT2** contains two timers/counters: The core timer T6 and the auxiliary timer T5. The maximum resolution is  $f_{GPT}/2$ . An additional Capture/Reload register (CAPREL) supports capture and reload operation with extended functionality. These registers are listed in [Section 15.4.8.1](#).

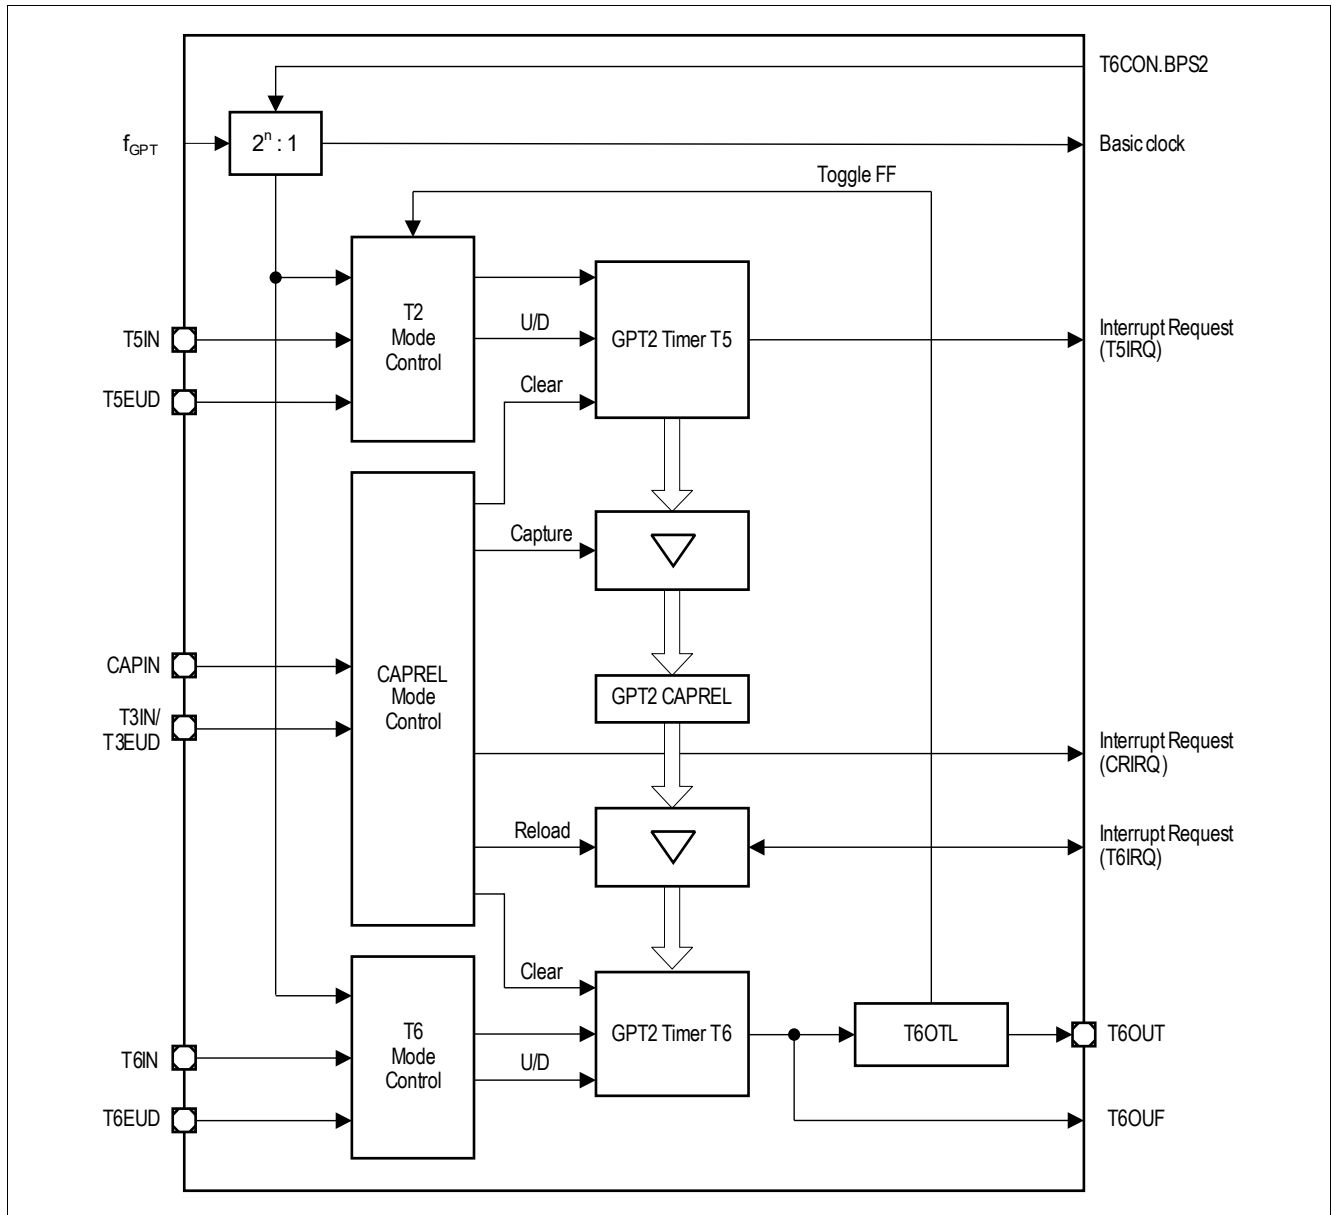


Figure 78 GPT2 Block Diagram (n = 1 ... 4)

## General Purpose Timer Units (GPT12)

### 15.3 Timer Block GPT1

From a programmer's point of view, the GPT1 block is composed of a set of SFRs as summarized below. Those portions of port and direction registers which are used for alternate functions by the GPT1 block are shaded.

Data Registers	Control Registers	Interrupt Registers	Miscellaneous
T2	T2CON	GPT12IEN	GPT12PISEL
T3	T3CON	GPT12IRC	PISEL
T4	T4CON	GPT12ICLR	ID

Tx	GPT1 timer x data register
TxCON	GPT1 timer x control register
GPT12IEN	GPT12 interrupt enable register (located in SCU)
GPT12IRC	GPT12 interrupt status register (located in SCU)
GPT12ICLR	GPT12 interrupt status clear register (located in SCU)
GPT12PISEL	GPT12 extended pin select register (located in SCU)
PISEL	GPT12 local pin select register
ID	GPT module identification register

**Figure 79 SFRs Associated with Timer Block GPT1**

All three timers of block GPT1 (T2, T3, T4) can run in one of 4 basic modes: Timer Mode, Gated Timer Mode, Counter Mode, or Incremental Interface Mode. All timers can count up or down. Each timer of GPT1 is controlled by a separate control register TxCON.

Each timer has an input pin TxIN (alternate pin function) associated with it, which serves as the gate control in Gated Timer Mode, or as the count input in Counter Mode. The count direction (up/down) may be programmed via software or may be dynamically altered by a signal at the External Up/Down control input TxEUD (alternate pin function). An overflow/underflow of core timer T3 is indicated by the Output Toggle Latch T3OTL, whose state may be output on the associated pin T3OUT (alternate pin function). The auxiliary timers T2 and T4 may additionally be concatenated with the core timer T3 (through T3OTL) or may be used as capture or reload registers for the core timer T3.

The current contents of each timer can be read or modified by the CPU by accessing the corresponding timer count registers T2, T3, or T4, located in the non-bitaddressable SFR space (see [Section 15.3.7.1](#)). When any of the timer registers is written to by the CPU in the state immediately preceding a timer increment, decrement, reload, or capture operation, the CPU write operation has priority in order to guarantee correct results.

The interrupts of GPT1 are controlled through the SCU.[GPT12IEN](#) and SCU.[GPT12IRC](#). These registers are not part of the GPT1 block.

The input and output lines of GPT1 are connected to pins. The control registers for the port functions are located in the respective port modules.

*Note:* The timing requirements for external input signals can be found in [Section 15.3.5](#), [Section 15.7.1](#) summarizes the module interface signals, including pins.

---

## General Purpose Timer Units (GPT12)

### 15.3.1 GPT1 Core Timer T3 Control

The current contents of the core timer T3 are reflected by its count register T3. This register can also be written to by the CPU, for example, to set the initial start value.

The core timer T3 is configured and controlled via its control register T3CON.

#### Timer T3 Run Control

The core timer T3 can be started or stopped by software through bit T3R (Timer T3 Run Bit). This bit is relevant in all operating modes of T3. Setting bit T3R will start the timer, clearing bit T3R stops the timer.

In Gated Timer Mode, the timer will only run if T3R = 1 and the gate is active (high or low, as programmed).

*Note: When bit T2RC or T4RC in timer control register T2CON or T4CON is set, bit T3R will also control (start and stop) the auxiliary timer(s) T2 and/or T4.*

#### Count Direction Control

The count direction of the GPT1 timers (core timer and auxiliary timers) can be controlled either by software or by the external input pin TxEUD (Timer Tx External Up/Down Control Input). These options are selected by bits TxUD and TxUDE in the respective control register TxCON. When the up/down control is provided by software (bit TxUDE = 0), the count direction can be altered by setting or clearing bit TxUD. When bit TxUDE = 1, pin TxEUD is selected to be the controlling source of the count direction. However, bit TxUD can still be used to reverse the actual count direction, as shown in [Table 94](#). The count direction can be changed regardless of whether or not the timer is running.

*Note: When pin TxEUD is used as external count direction control input, it must be configured as input.*

## General Purpose Timer Units (GPT12)


### Timer T3 Output Toggle Latch

The overflow/underflow signal of timer T3 is connected to a block named ‘Toggle Latch’, shown in the Timer Mode diagrams. **Figure 80** illustrates the details of this block. An overflow or underflow of T3 will clock two latches: The first latch represents bit T3OTL in control register T3CON. The second latch is an internal latch toggled by T3OTL’s output. Both latch outputs are connected to the input control blocks of the auxiliary timers T2 and T4. The output level of the shadow latch will match the output level of T3OTL, but is delayed by one clock cycle. When the T3OTL value changes, this will result in a temporarily different output level from T3OTL and the shadow latch, which can trigger the selected count event in T2 and/or T4.

When software writes to T3OTL, both latches are set or cleared simultaneously. In this case, both signals to the auxiliary timers carry the same level and no edge will be detected. Bit T3OE (overflow/underflow output enable) in register T3CON enables the state of T3OTL to be monitored via an external pin T3OUT. When T3OTL is linked to an external port pin (must be configured as output), T3OUT can be used to control external HW. If T3OE = 1, pin T3OUT outputs the state of T3OTL. If T3OE = 0, pin T3OUT outputs a high level (as long as the T3OUT alternate function is selected for the port pin).

The trigger signals can serve as an input for the counter function or as a trigger source for the reload function of the auxiliary timers T2 and T4.

As can be seen from **Figure 80**, when latch T3OTL is modified by software to determine the state of the output line, also the internal shadow latch is set or cleared accordingly. Therefore, no trigger condition is detected by T2/T4 in this case.

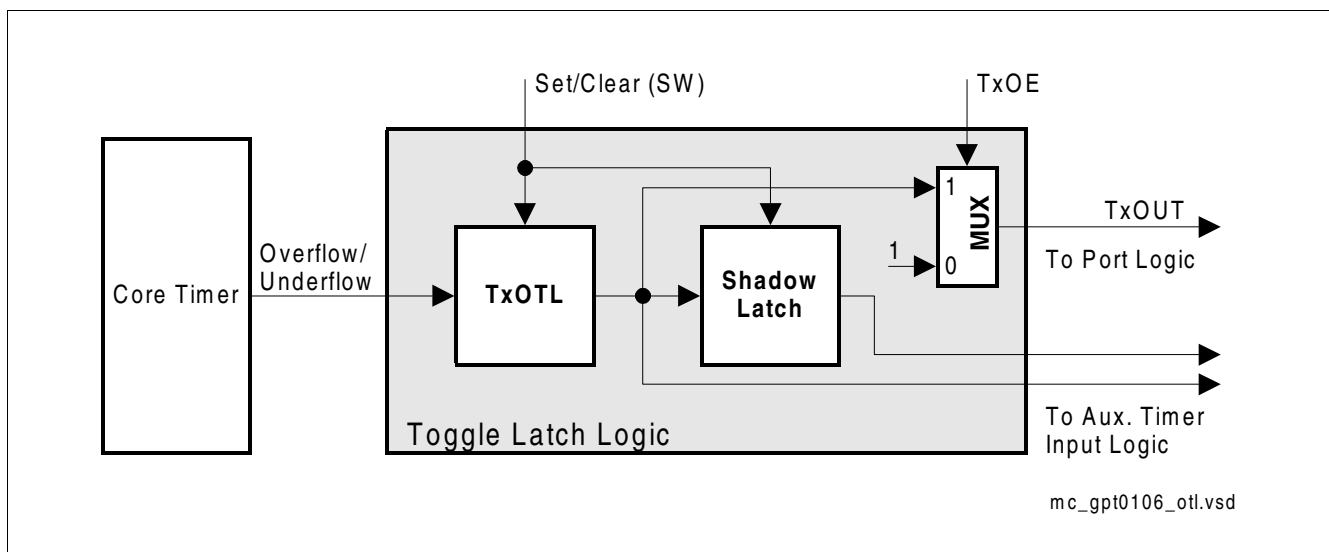

**Figure 80** Block Diagram of the Toggle Latch Logic of Core Timer T3 (x = 3)



General Purpose Timer Units (GPT12)

15.3.2 GPT1 Core Timer T3 Operating Modes

Timer T3 can operate in one of several modes.

Timer T3 in Timer Mode

Timer mode for the core timer T3 is selected by setting bitfield T3M in register T3CON to 000<sub>B</sub>. In Timer Mode, T3 is clocked with the module’s input clock  $f_{GPT}$  divided by two programmable prescalers controlled by bitfields BPS1 and T3I in register T3CON. Please see [Section 15.3.5](#) for details on the input clock options.

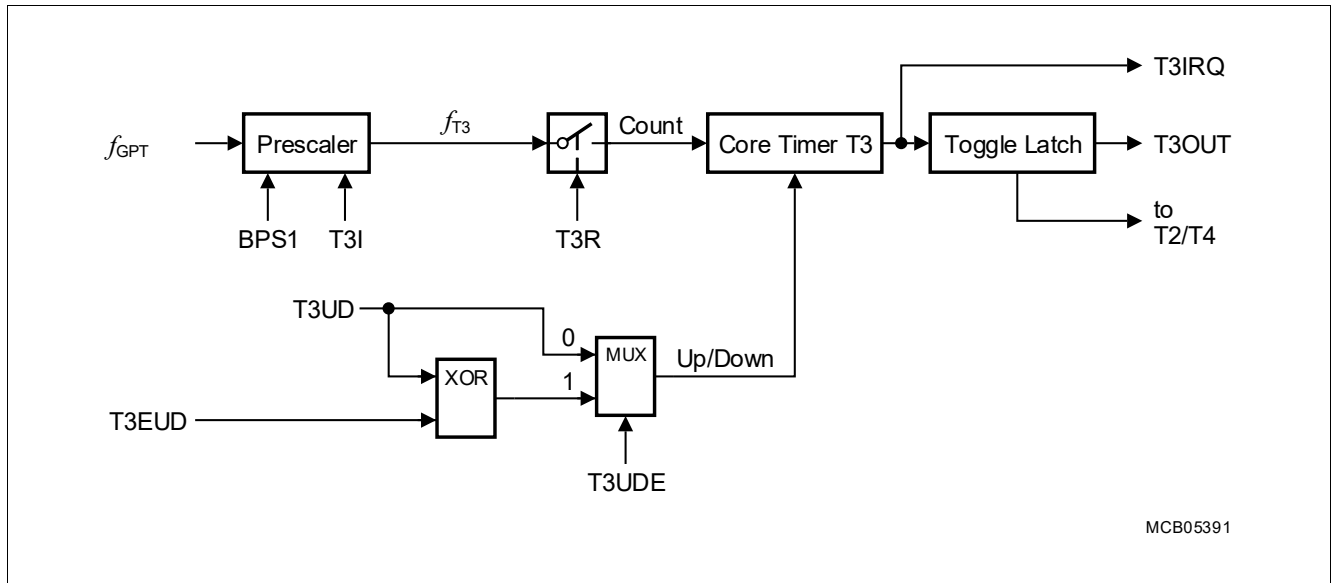



Figure 81 Block Diagram of Core Timer T3 in Timer Mode

## General Purpose Timer Units (GPT12)

### Timer T3 in Gated Timer Mode

Gated Timer Mode for the core timer T3 is selected by setting bitfield T3M in register T3CON to 010<sub>B</sub> or 011<sub>B</sub>. Bit T3M.0 (T3CON.3) selects the active level of the gate input. The same options for the input frequency are available in Gated Timer Mode as in Timer Mode (see [Section 15.3.5](#)). However, the input clock to the timer in this mode is gated by the external input pin T3IN (Timer T3 External Input).

To enable this operation, the associated pin T3IN must be configured as input.

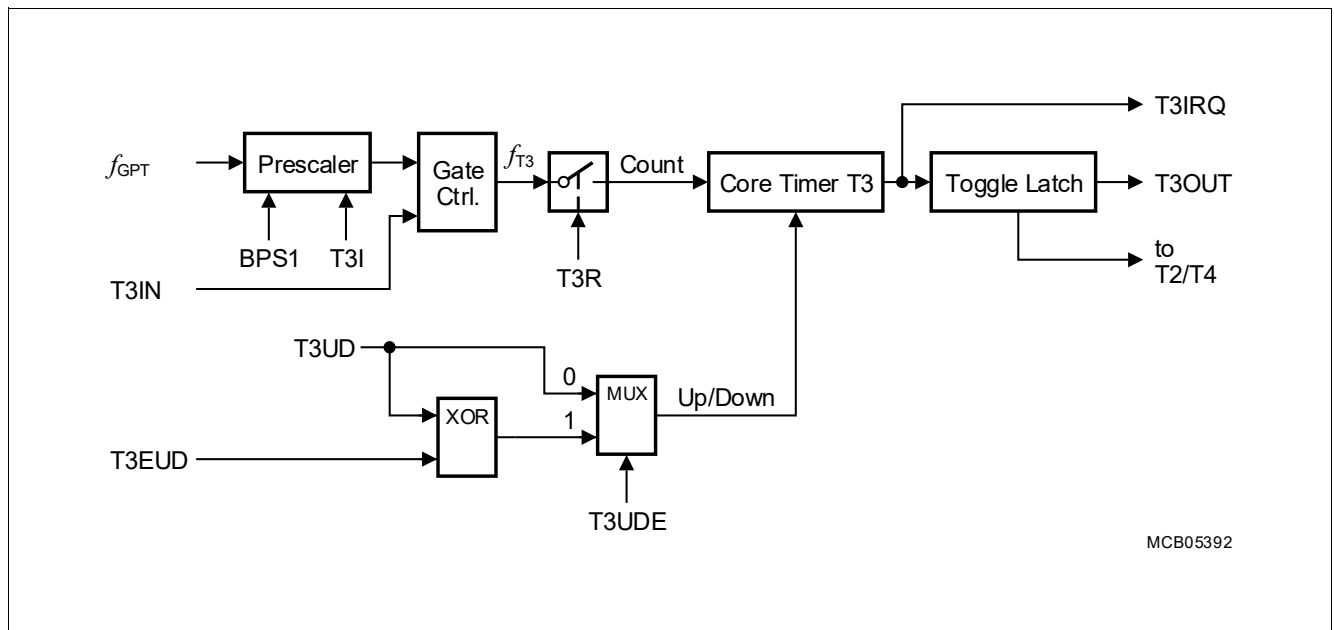

**Figure 82** Block Diagram of Core Timer T3 in Gated Timer Mode


If T3M = 010<sub>B</sub>, the timer is enabled when T3IN shows a low level. A high level at this line stops the timer. If T3M = 011<sub>B</sub>, line T3IN must have a high level in order to enable the timer. Additionally, the timer can be turned on or off by software using bit T3R. The timer will only run if T3R is 1 and the gate is active. It will stop if either T3R is 0 or the gate is inactive.

*Note:* A transition of the gate signal at pin T3IN does not cause an interrupt request.

## General Purpose Timer Units (GPT12)

### Timer T3 in Counter Mode

Counter Mode for the core timer T3 is selected by setting bitfield T3M in register T3CON to 001<sub>B</sub>. In Counter Mode, timer T3 is clocked by a transition at the external input pin T3IN. The event causing an increment or decrement of the timer can be a positive, a negative, or both a positive and a negative transition at this line. Bitfield T3I in control register T3CON selects the triggering transition (see [Table 96](#)).

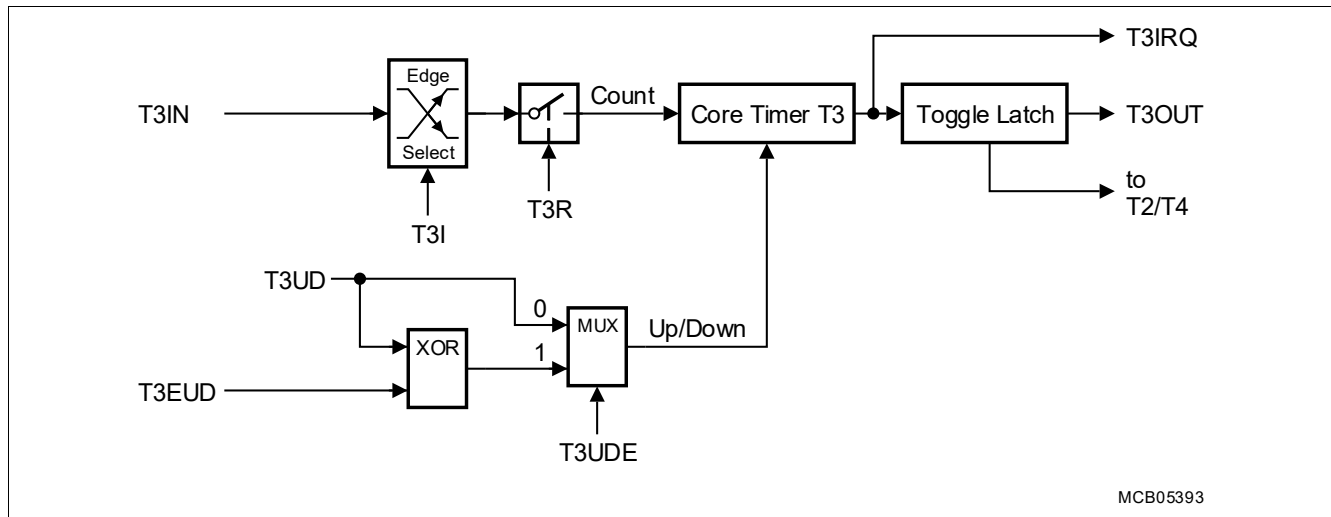


**Figure 83** Block Diagram of Core Timer T3 in Counter Mode

For Counter Mode operation, pin T3IN must be configured as input. The maximum input frequency allowed in Counter Mode depends on the selected prescaler value. To ensure that a transition of the count input signal applied to T3IN is recognized correctly, its level must be held high or low for a minimum number of module clock cycles before it changes. This information can be found in [Section 15.3.5](#).

### Timer T3 in Incremental Interface Mode

Incremental interface mode for the core timer T3 is selected by setting bitfield T3M in register T3CON to 110<sub>B</sub> or 111<sub>B</sub>. In Incremental Interface Mode, the two inputs associated with core timer T3 (T3IN, T3EUD) are used to interface to an incremental encoder. T3 is clocked by each transition on one or both of the external input pins to provide 2-fold or 4-fold resolution of the encoder input.

## General Purpose Timer Units (GPT12)

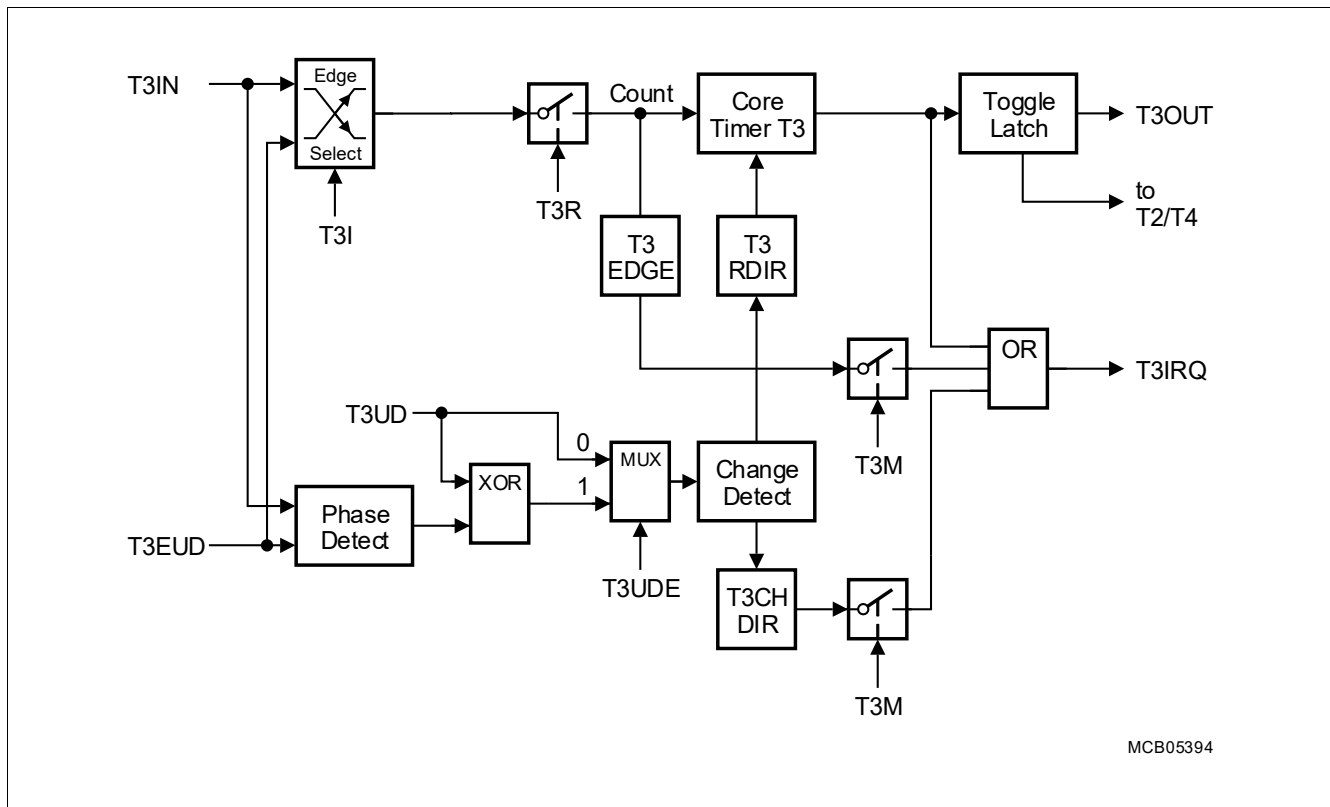

**Figure 84** Block Diagram of Core Timer T3 in Incremental Interface Mode

Bitfield T3I in control register T3CON selects the triggering transitions (see [Table 99](#)). The sequence of the transitions of the two input signals is evaluated and generates count pulses as well as the direction signal. So T3 is modified automatically according to the speed and the direction of the incremental encoder and, therefore, its contents always represent the encoder's current position.

The interrupt request (T3IRQ) generation mode can be selected: In Rotation Detection Mode (T3M = 110<sub>b</sub>), an interrupt request is generated each time the count direction of T3 changes. In Edge Detection Mode (T3M = 111<sub>b</sub>), an interrupt request is generated each time a count edge for T3 is detected. Count direction, changes in the count direction, and count requests are monitored by status bits T3RDIR, T3CHDIR, and T3EDGE in register T3CON.

The incremental encoder can be connected directly to the TLE987x without external interface logic. In a standard system, however, comparators will be employed to convert the encoder's differential outputs (such as A,  $\bar{A}$ ) to digital signals (such as A). This greatly increases noise immunity.

*Note:* The third encoder output T0, which indicates the mechanical zero position, may be connected to an external interrupt input and trigger a reset of timer T3. If input T4IN is available, T0 can be connected there and clear T3 automatically without requiring an interrupt.

General Purpose Timer Units (GPT12)

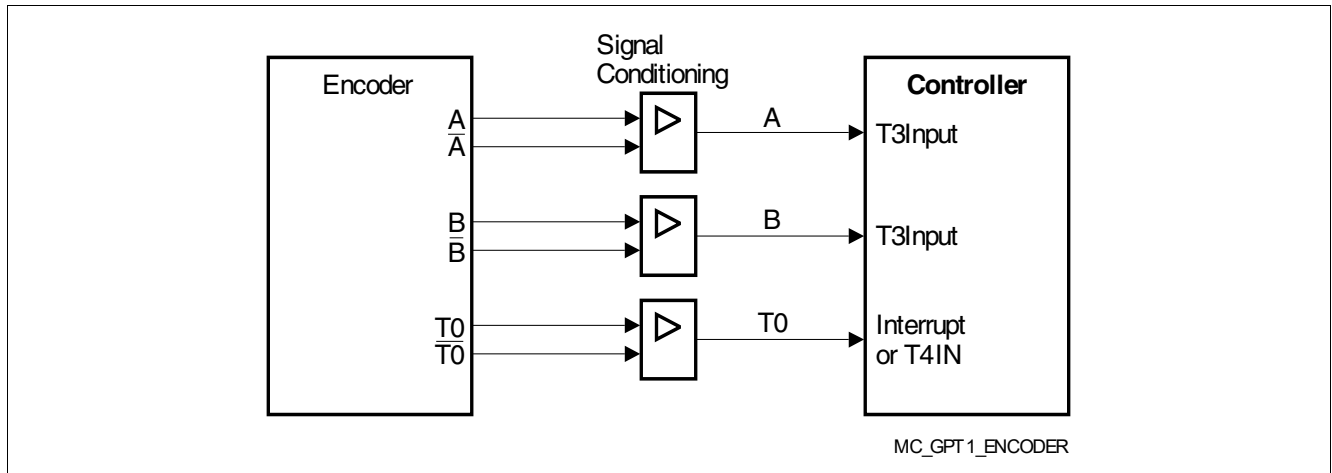


Figure 85 Connection of the Encoder to the TLE987x

For incremental interface operation, the following conditions must be met:

- Bitfield T3M must be 110<sub>B</sub> or 111<sub>B</sub>.
- Both pins T3IN and T3EUD must be configured as input.
- Pin T4IN must be configured as input, if used for T0.
- Bit T3UDE must be 1 to enable automatic external direction control.

The maximum count frequency allowed in Incremental Interface Mode depends on the selected prescaler value. To ensure that a transition of any input signal is recognized correctly, its level must be held high or low for a minimum number of module clock cycles before it changes. This information can be found in [Section 15.3.5](#).

As in Incremental Interface Mode two input signals with a 90° phase shift are evaluated, their maximum input frequency can be half the maximum count frequency.


In Incremental Interface Mode, the count direction is automatically derived from the sequence in which the input signals change, which corresponds to the rotation direction of the connected sensor. [Table 90](#) summarizes the possible combinations.

Table 90 GPT1 Core Timer T3 (Incremental Interface Mode) Count Direction


Level on Respective other Input	T3IN Input		T3EUD Input	
	Rising ↑	Falling ↓	Rising ↑	Falling ↓
High	Down	Up	Up	Down
Low	Up	Down	Down	Up

[Figure 86](#) and [Figure 87](#) give examples of T3’s operation, visualizing count signal generation and direction control. They also show how input jitter is compensated, which might occur if the sensor rests near to one of its switching points.

General Purpose Timer Units (GPT12)

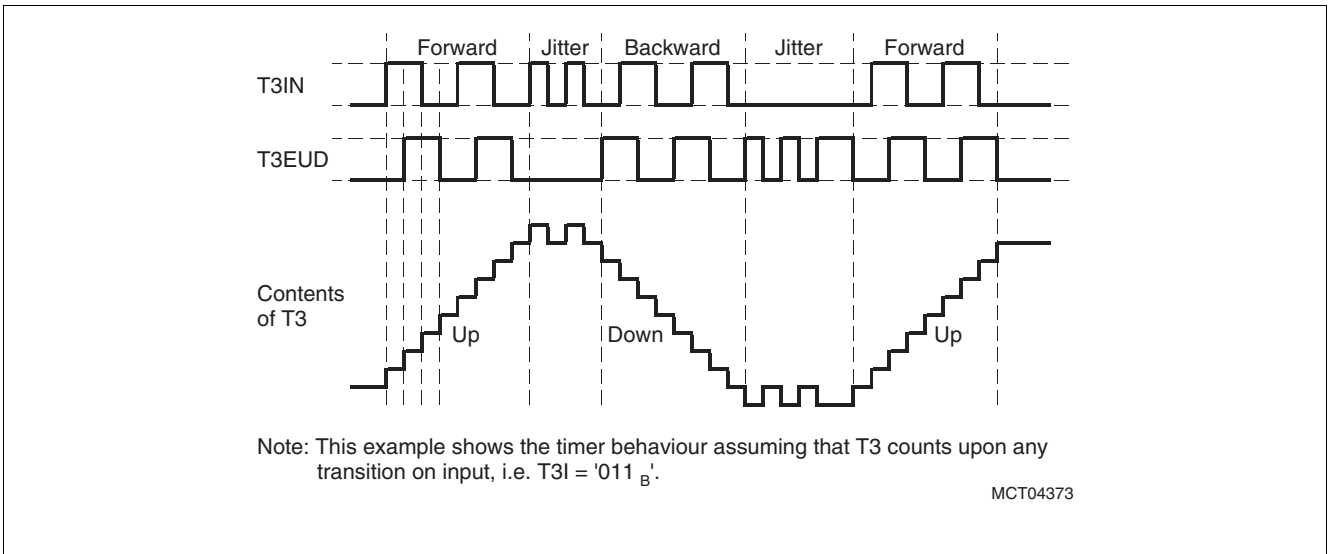

**Figure 86 Evaluation of Incremental Encoder Signals, 2 Count Inputs**

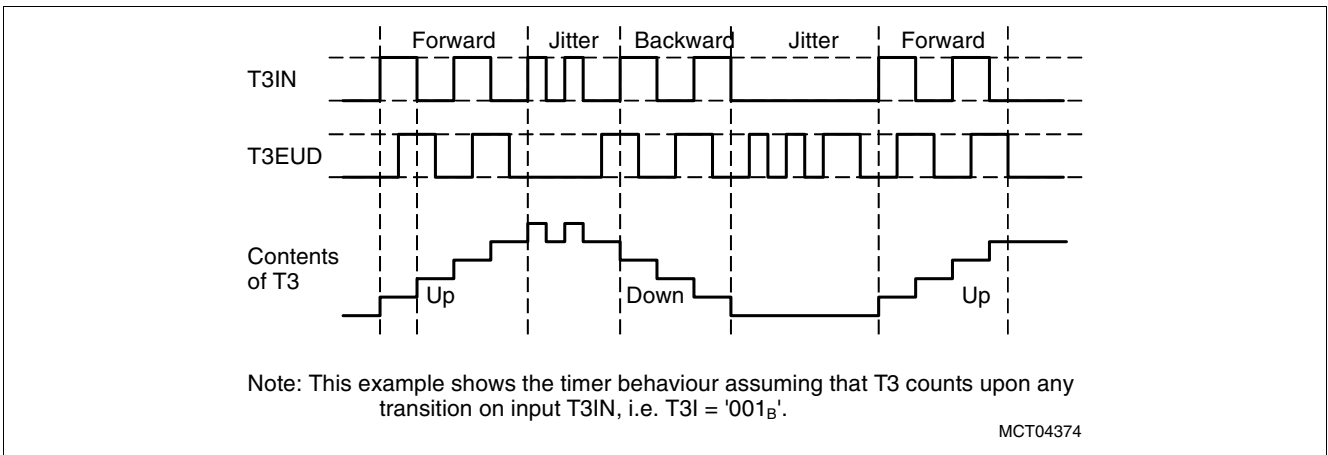

**Figure 87 Evaluation of Incremental Encoder Signals, 1 Count Input**

*Note: Timer T3 operating in Incremental Interface Mode automatically provides information on the sensor’s current position. Dynamic information (speed, acceleration, deceleration) may be obtained by measuring the incoming signal periods (see “Combined Capture Modes” on Page 468).*

## General Purpose Timer Units (GPT12)

### 15.3.3 GPT1 Auxiliary Timers T2/T4 Control

Auxiliary timers T2 and T4 have exactly the same functionality. They can be configured for Timer Mode, Gated Timer Mode, Counter Mode, or Incremental Interface Mode with the same options for the timer frequencies and the count signal as the core timer T3. In addition to these 4 counting modes, the auxiliary timers can be concatenated with the core timer, or they may be used as reload or capture registers in conjunction with the core timer. The start/stop function of the auxiliary timers can be remotely controlled by the T3 run control bit. Several timers may thus be controlled synchronously.

The current contents of an auxiliary timer are reflected by its count register T2 or T4, respectively. These registers can also be written to by the CPU, for example, to set the initial start value.

The individual configurations for timers T2 and T4 are determined by their control registers T2CON and T4CON, which are organized identically. Note that functions which are present in all 3 timers of block GPT1 are controlled in the same bit positions and in the same manner in each of the specific control registers.

*Note: The auxiliary timers have no output toggle latch and no alternate output function.*

#### Timer T2/T4 Run Control

Each of the auxiliary timers T2 and T4 can be started or stopped by software in two different ways:

- Through the associated timer run bit (T2R or T4R). In this case it is required that the respective control bit  $TxRC = 0$ .
- Through the core timer's run bit (T3R). In this case the respective remote control bit must be set ( $TxRC = 1$ ).

The selected run bit is relevant in all operating modes of T2/T4. Setting the bit will start the timer, clearing the bit stops the timer.

In Gated Timer Mode, the timer will only run if the selected run bit is set and the gate is active (high or low, as programmed).

*Note: If remote control is selected T3R will start/stop timer T3 and the selected auxiliary timer(s) synchronously.*

#### Count Direction Control

The count direction of the GPT1 timers (core timer and auxiliary timers) is controlled in the same way, either by software or by the external input pin TxEUD. Please refer to the description in [Table 94](#).

*Note: When pin TxEUD is used as external count direction control input, it must be configured as input.*

General Purpose Timer Units (GPT12)

15.3.4 GPT1 Auxiliary Timers T2/T4 Operating Modes

The operation of the auxiliary timers in the basic operating modes is almost identical with the core timer’s operation, with very few exceptions. Additionally, some combined operating modes can be selected.

Timers T2 and T4 in Timer Mode

Timer mode for an auxiliary timer Tx is selected by setting its bitfield TxM in register TxCON to 000<sub>B</sub>.

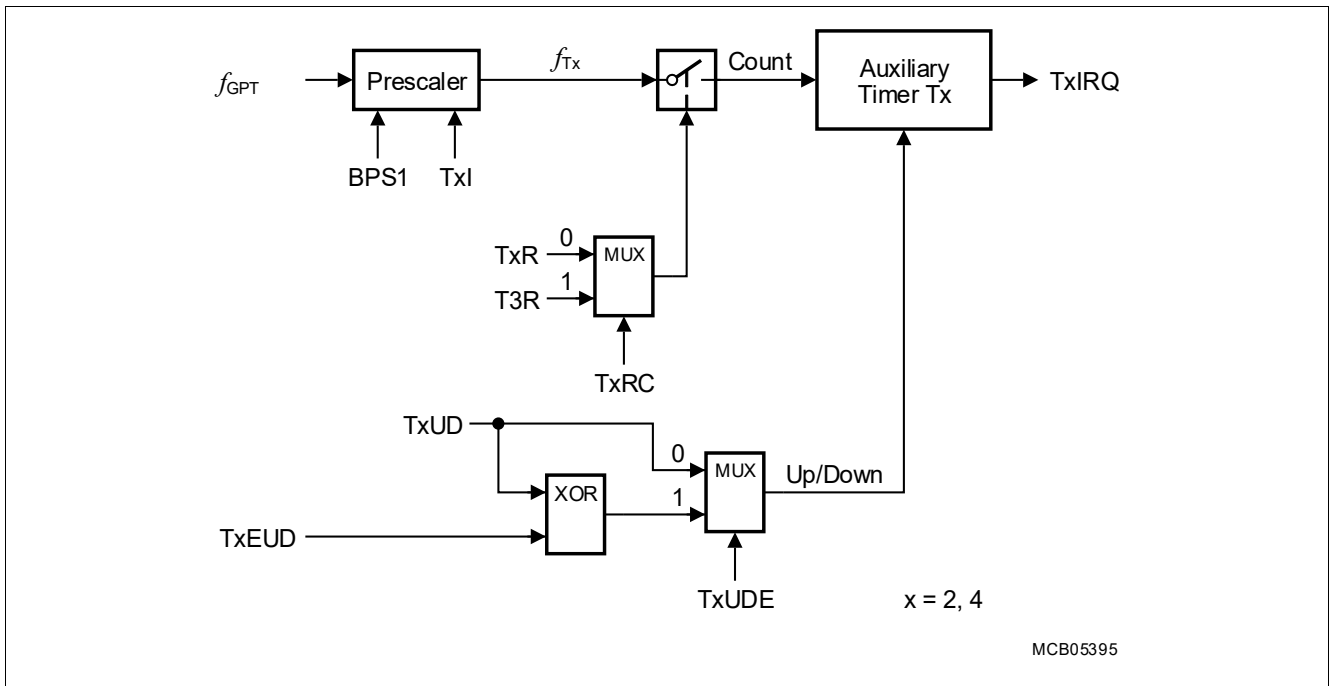


Figure 88 Block Diagram of an Auxiliary Timer in Timer Mode




**General Purpose Timer Units (GPT12)**

**Timers T2 and T4 in Gated Timer Mode**

Gated Timer Mode for an auxiliary timer Tx is selected by setting bitfield TxM in register TxCON to 010<sub>B</sub> or 011<sub>B</sub>. Bit TxM.0 (TxCON.3) selects the active level of the gate input.

*Note: A transition of the gate signal at line TxIN does not cause an interrupt request.*

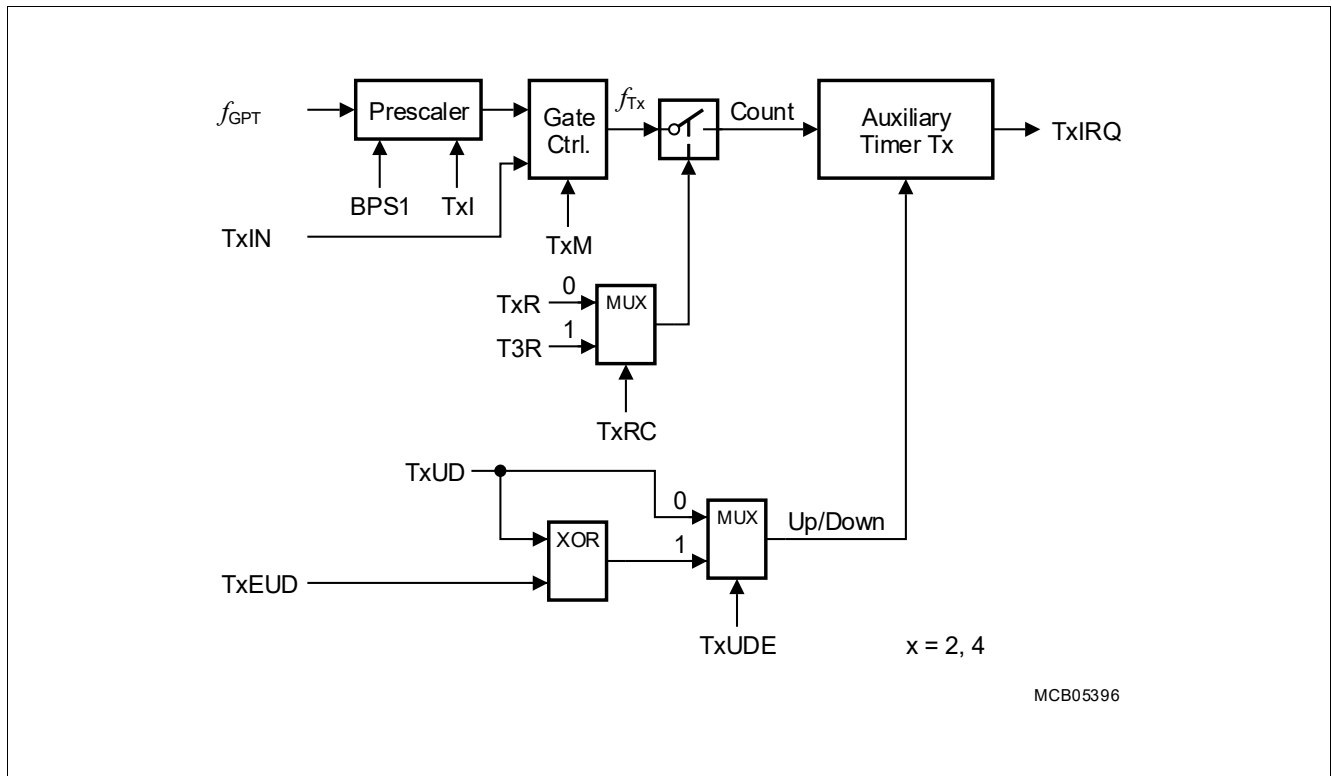


**Figure 89 Block Diagram of an Auxiliary Timer in Gated Timer Mode**

*Note: There is no output toggle latch for T2 and T4.  
Start/stop of an auxiliary timer can be controlled locally or remotely.*

## General Purpose Timer Units (GPT12)

### Timers T2 and T4 in Counter Mode

Counter Mode for an auxiliary timer Tx is selected by setting bitfield TxM in register TxCON to 001<sub>B</sub>. In Counter Mode, an auxiliary timer can be clocked either by a transition at its external input line TxIN, or by a transition of timer T3's toggle latch T3OTL. The event causing an increment or decrement of a timer can be a positive, a negative, or both a positive and a negative transition at either the respective input pin or at the toggle latch. Bitfield TxI in control register TxCON selects the triggering transition (see [Table 98](#)).

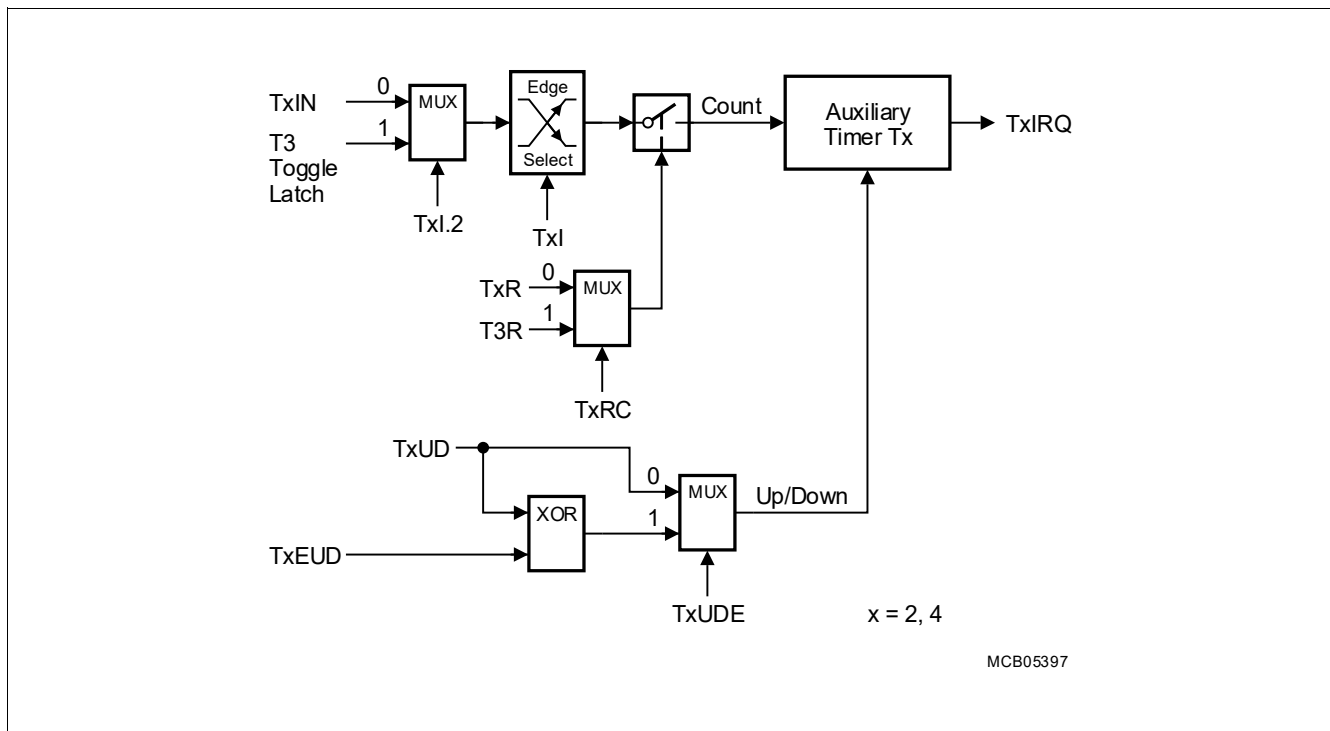

**Figure 90** Block Diagram of an Auxiliary Timer in Counter Mode

*Note:* Only state transitions of T3OTL which are caused by the overflows/underflows of T3 will trigger the counter function of T2/T4. Modifications of T3OTL via software will NOT trigger the counter function of T2/T4.

For counter operation, pin TxIN must be configured as input. The maximum input frequency allowed in Counter Mode depends on the selected prescaler value. To ensure that a transition of the count input signal applied to TxIN is recognized correctly, its level must be held high or low for a minimum number of module clock cycles before it changes. This information can be found in [Section 15.3.5](#).

### Timer Concatenation

Using the toggle bit T3OTL as a clock source for an auxiliary timer in Counter Mode concatenates the core timer T3 with the respective auxiliary timer. This concatenation forms either a 32-bit or a 33-bit timer/counter, depending on which transition of T3OTL is selected to clock the auxiliary timer.


- **32-bit Timer/Counter:** If both a positive and a negative transition of T3OTL are used to clock the auxiliary timer, this timer is clocked on every overflow/underflow of the core timer T3. Thus, the two timers form a 32-bit timer.
- **33-bit Timer/Counter:** If either a positive or a negative transition of T3OTL is selected to clock the auxiliary timer, this timer is clocked on every second overflow/underflow of the core timer T3. This configuration forms a 33-bit timer (16-bit core timer + T3OTL + 16-bit auxiliary timer).

**General Purpose Timer Units (GPT12)**

As long as bit T30TL is not modified by software, it represents the state of the internal toggle latch, and can be regarded as part of the 33-bit timer.

The count directions of the two concatenated timers are not required to be the same. This offers a wide variety of different configurations.

T3, which represents the low-order part of the concatenated timer, can operate in Timer Mode, Gated Timer Mode or Counter Mode in this case.

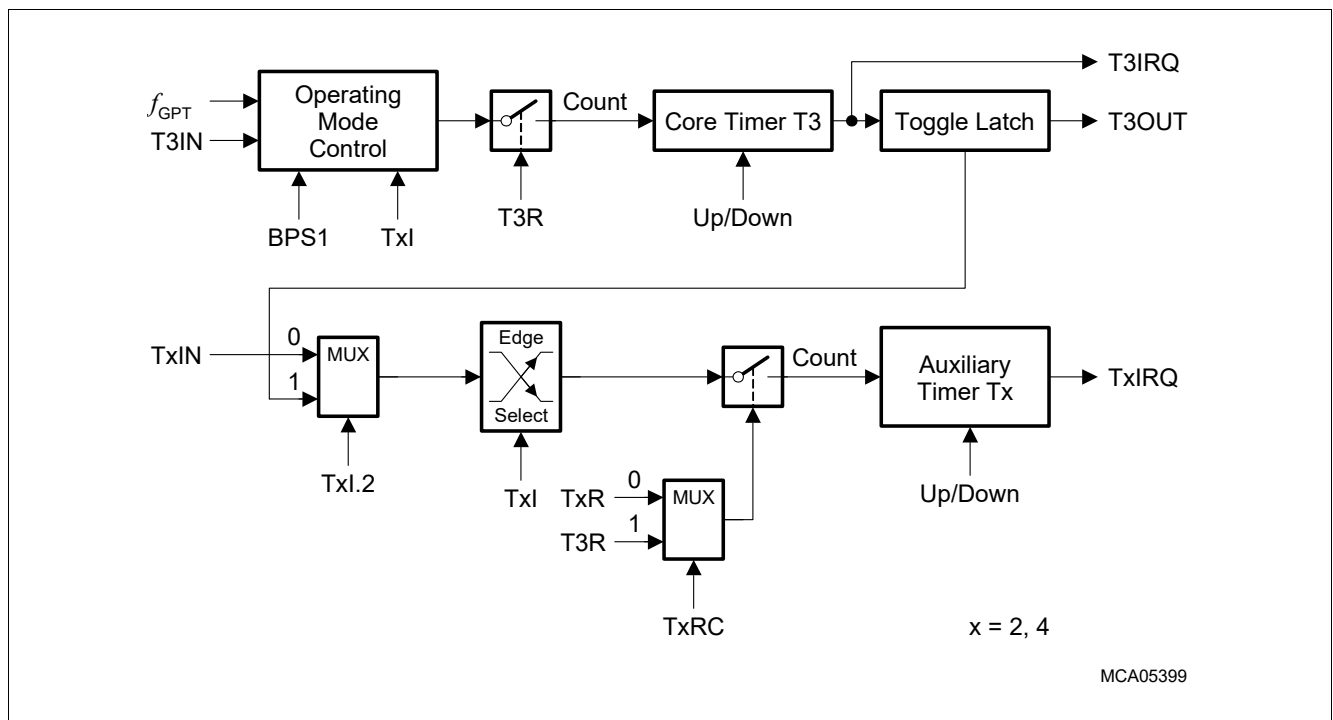

**Figure 91 Concatenation of Core Timer T3 and an Auxiliary Timer**


**General Purpose Timer Units (GPT12)**

**Timers T2 and T4 in Capture Mode**

Capture mode for an auxiliary timer Tx is selected by setting bitfield TxM in the respective register TxCON to 101<sub>B</sub>. In capture mode, the contents of the core timer T3 are latched into an auxiliary timer register in response to a signal transition at the respective auxiliary timer’s external input pin TxIN. The capture trigger signal can be a positive, a negative, or both a positive and a negative transition.

The two least significant bits of bitfield TxI select the active transition (see [Table 98](#)). Bit 2 of TxI is irrelevant for capture mode and must be cleared (TxI.2 = 0).

*Note: When programmed for capture mode, the respective auxiliary timer (T2 or T4) stops independently of its run flag T2R or T4R.*

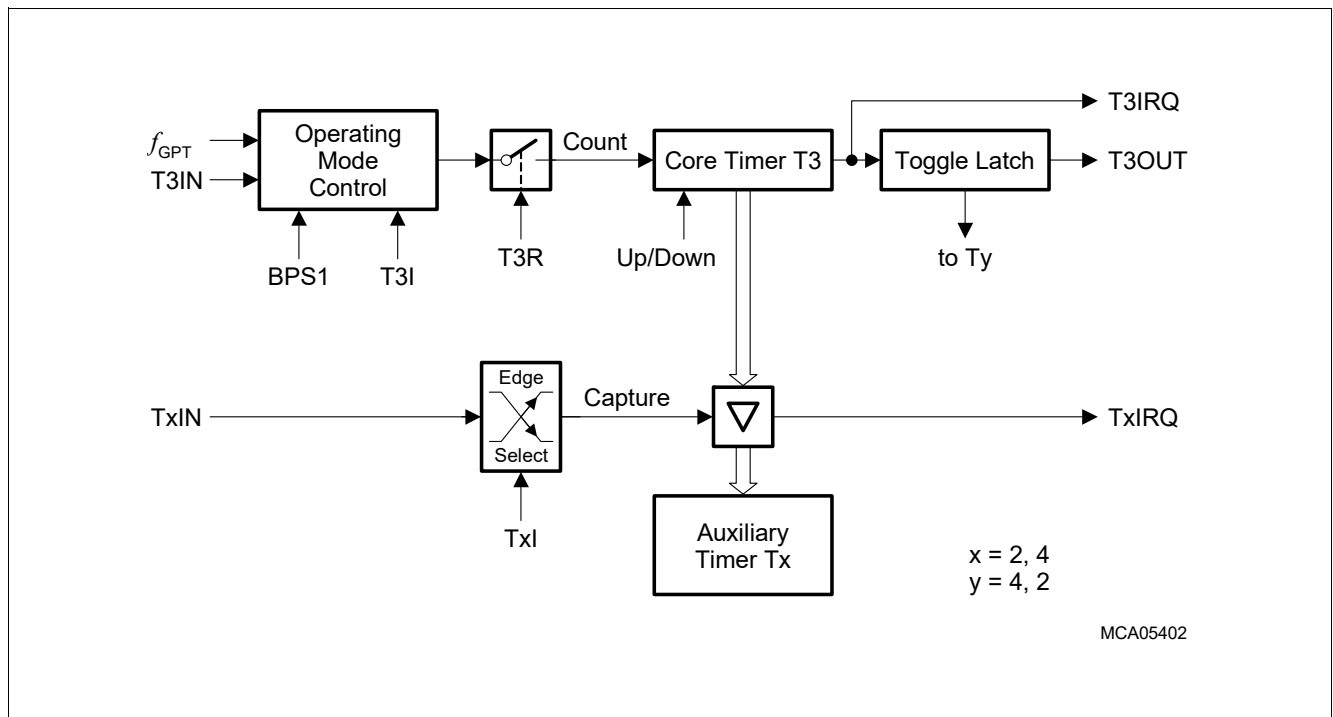

**Figure 92 GPT1 Auxiliary Timer in Capture Mode**

Upon a trigger (selected transition) at the corresponding input pin TxIN the contents of the core timer are loaded into the auxiliary timer register and the associated interrupt request flag TxIR will be set.

For capture mode operation, the respective timer input pin TxIN must be configured as input. To ensure that a transition of the capture input signal applied to TxIN is recognized correctly, its level must be held high or low for a minimum number of module clock cycles, detailed in [Section 15.3.5](#).

General Purpose Timer Units (GPT12)

Timers T2 and T4 in Incremental Interface Mode

Incremental interface mode for an auxiliary timer Tx is selected by setting bitfield TxM in the respective register TxCON to 110<sub>B</sub> or 111<sub>B</sub>. In Incremental Interface Mode, the two inputs associated with an auxiliary timer Tx (TxIN, TxEUD) are used to interface to an incremental encoder. Tx is clocked by each transition on one or both of the external input pins to provide 2-fold or 4-fold resolution of the encoder input.

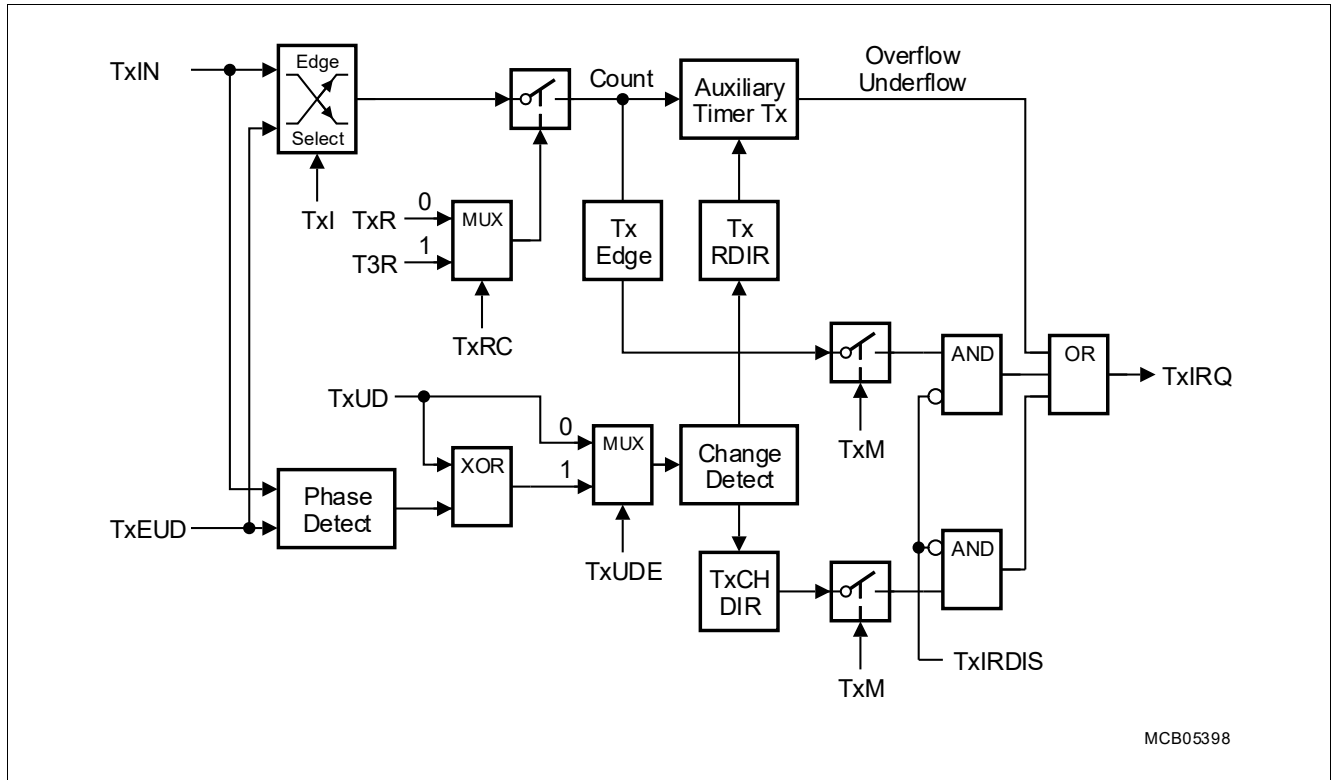


Figure 93 Block Diagram of an Auxiliary Timer in Incremental Interface Mode

The operation of the auxiliary timers T2 and T4 in Incremental Interface Mode and the interrupt generation are the same as described for the core timer T3. The descriptions, figures and tables apply accordingly.


Note: Timers T2 and T4 operating in Incremental Interface Mode automatically provide information on the sensor’s current position. For dynamic information (speed, acceleration, deceleration) see **“Combined Capture Modes” on Page 468**.

## General Purpose Timer Units (GPT12)

### Timers T2 and T4 in Reload Mode

Reload Mode for an auxiliary timer Tx is selected by setting bitfield TxM in the respective register TxCON to 100<sub>B</sub>. In reload mode, the core timer T3 is reloaded with the contents of an auxiliary timer register, triggered by one of two different signals. The trigger signal is selected the same way as the clock source for Counter Mode (see [Table 98](#)), i.e. a transition of the auxiliary timer's input TxIN or the toggle latch T3OTL may trigger the reload.

*Note:* When programmed for reload mode, the respective auxiliary timer (T2 or T4) stops independently of its run flag T2R or T4R.  
The timer input pin TxIN must be configured as input if it shall trigger a reload operation.

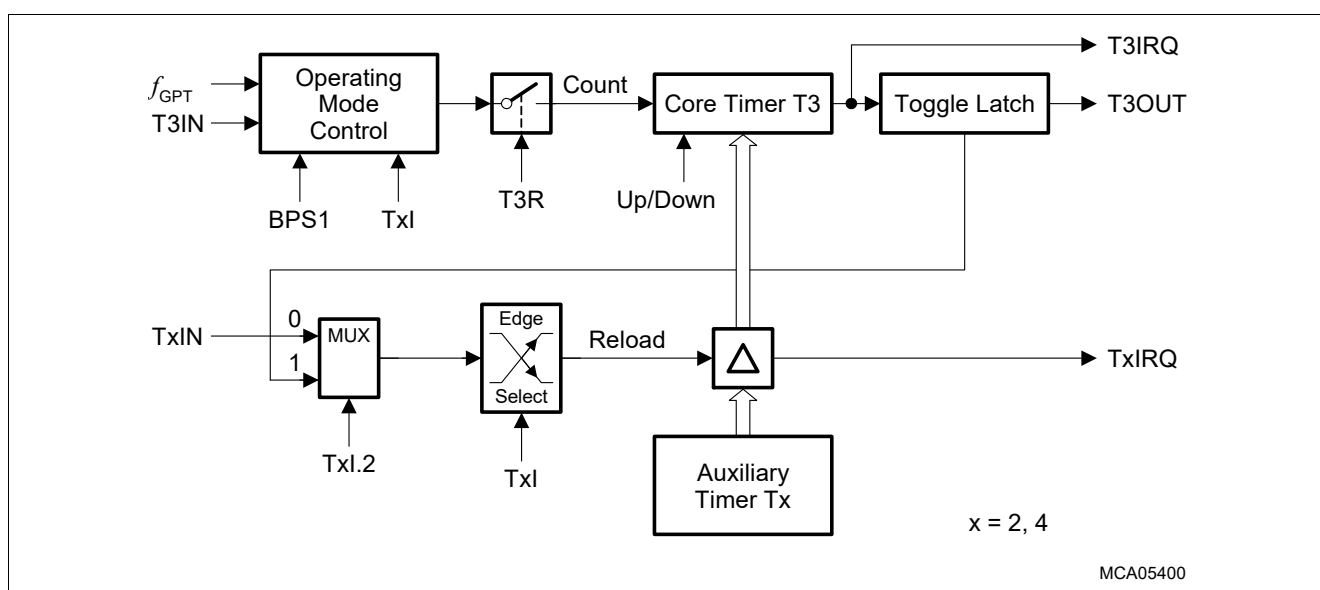

**Figure 94** GPT1 Auxiliary Timer in Reload Mode

Upon a trigger signal, T3 is loaded with the contents of the respective timer register (T2 or T4) and the respective interrupt request flag (T2IR or T4IR) is set.

*Note:* When a T3OTL transition is selected for the trigger signal, the interrupt request flag T3IR will also be set upon a trigger, indicating T3's overflow or underflow. Modifications of T3OTL via software will NOT trigger the counter function of T2/T4.

To ensure that a transition of the reload input signal applied to TxIN is recognized correctly, its level must be held high or low for a minimum number of module clock cycles, detailed in [Section 15.3.5](#).


The reload mode triggered by the T3 toggle latch can be used in a number of different configurations. The following functions can be performed, depending on the selected active transition:

- If both a positive and a negative transition of T3OTL are selected to trigger a reload, the core timer will be reloaded with the contents of the auxiliary timer each time it overflows or underflows. This is the standard reload mode (reload on overflow/underflow).
- If either a positive or a negative transition of T3OTL is selected to trigger a reload, the core timer will be reloaded with the contents of the auxiliary timer on every second overflow or underflow.
- Using this “single-transition” mode for both auxiliary timers allows to perform very flexible Pulse Width Modulation (PWM). One of the auxiliary timers is programmed to reload the core timer on a positive transition of T3OTL, the other is programmed for a reload on a negative transition of T3OTL. With this combination the core timer is alternately reloaded from the two auxiliary timers.

**General Purpose Timer Units (GPT12)**

**Figure 95** shows an example for the generation of a PWM signal using the “single-transition” reload mechanism. T2 defines the high time of the PWM signal (reloaded on positive transitions) and T4 defines the low time of the PWM signal (reloaded on negative transitions). The PWM signal can be output on pin T3OUT if T3OE = 1. With this method, the high and low time of the PWM signal can be varied in a wide range.

*Note:* The output toggle latch T3OTL is accessible via software and may be changed, if required, to modify the PWM signal.  
 However, this will NOT trigger the reloading of T3.

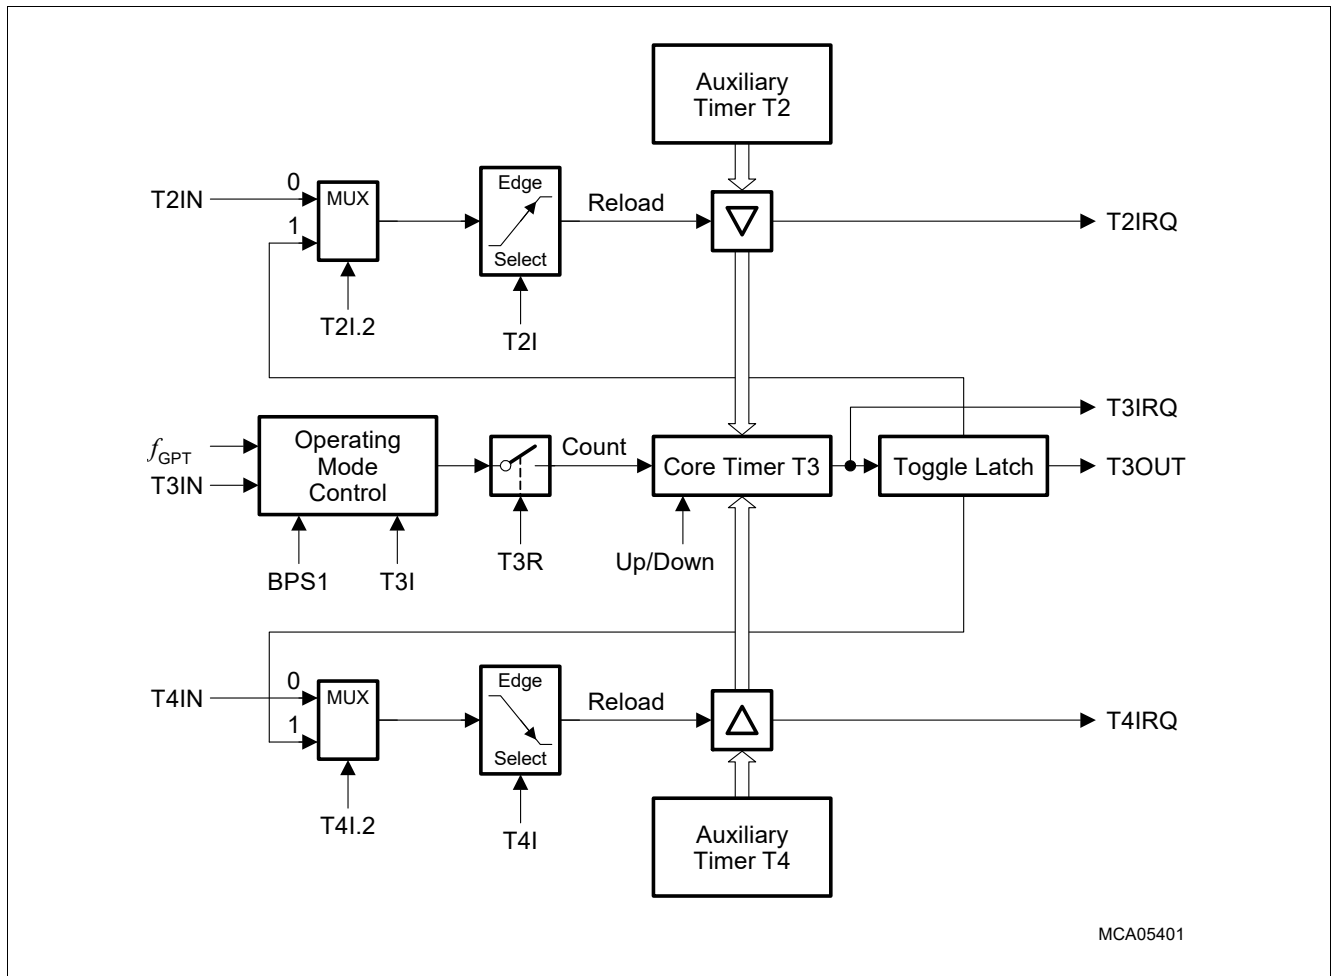

**Figure 95 GPT1 Timer Reload Configuration for PWM Generation**

*Note:* Although possible, selecting the same reload trigger event for both auxiliary timers should be avoided. In such a case, both reload registers would try to load the core timer at the same time. If this combination is selected, T2 is disregarded and the contents of T4 is reloaded.

## General Purpose Timer Units (GPT12)

### 15.3.5 GPT1 Clock Signal Control

All actions within the timer block GPT1 are triggered by transitions of its basic clock. This basic clock is derived from the system clock by a basic block prescaler, controlled by bitfield BPS1 in register T3CON (see [Figure 77](#)). The count clock can be generated in two different ways:

- **Internal count clock**, derived from GPT1's basic clock via a programmable prescaler, is used for (gated) Timer Mode.
- **External count clock**, derived from the timer's input pin(s), is used for Counter Mode.

For both ways, the basic clock determines the maximum count frequency and the timer's resolution:

**Table 91 Basic Clock Selection for Block GPT1**

Block Prescaler <sup>1)</sup>	BPS1 = 01 <sub>B</sub>	BPS1 = 00 <sub>B</sub> <sup>2)</sup>	BPS1 = 11 <sub>B</sub>	BPS1 = 10 <sub>B</sub>
<b>Prescaling Factor for GPT1: F(BPS1)</b>	F(BPS1) = 4	F(BPS1) = 8	F(BPS1) = 16	F(BPS1) = 32
<b>Maximum External Count Frequency</b>	$f_{GPT}/8$	$f_{GPT}/16$	$f_{GPT}/32$	$f_{GPT}/64$
<b>Input Signal Stable Time</b>	$4 \times t_{GPT}$	$8 \times t_{GPT}$	$16 \times t_{GPT}$	$32 \times t_{GPT}$

1) Please note the non-linear encoding of bitfield BPS1.

2) Default after reset.

*Note: When initializing the GPT1 block, and the block prescaler BPS1 in register T3CON needs to be set to a value different from its reset value (00<sub>B</sub>), it must be initialized first before any mode involving external trigger signals is configured. These modes include counter, incremental interface, capture, and reload mode. Otherwise, unintended count/capture/reload events may occur. In this case (e.g. when changing BPS1 during operation of the GPT1 block), disable related interrupts before modification of BPS1, and afterwards clear the corresponding service request flags and re-initialize those registers (T2, T3, T4) that might be affected by a count/capture/reload event.*



## General Purpose Timer Units (GPT12)

### Internal Count Clock Generation

In Timer Mode and Gated Timer Mode, the count clock for each GPT1 timer is derived from the GPT1 basic clock by a programmable prescaler, controlled by bitfield TxI in the respective timer's control register TxCON. The count frequency  $f_{Tx}$  for a timer Tx and its resolution  $r_{Tx}$  are scaled linearly with lower clock frequencies, as can be seen from the following formula:

$$f_{Tx} = \frac{f_{GPT}}{F(BPS1) \times 2^{<TxI>}} \quad r_{Tx}[\mu s] = \frac{F(BPS1) \times 2^{<TxI>}}{f_{GPT}[MHz]} \quad (15.1)$$

The effective count frequency depends on the common module clock prescaler factor F(BPS1) as well as on the individual input prescaler factor  $2^{<TxI>}$ . **Table 95** summarizes the resulting overall divider factors for a GPT1 timer that result from these cascaded prescalers.

**Table 92** lists GPT1 timer's parameters (such as count frequency, resolution, and period) resulting from the selected overall prescaler factor and the module clock  $f_{GPT}$ . Note that some numbers may be rounded.

**Table 92 GPT1 Timer Parameters**

Module Clock $f_{GPT} = 10 \text{ MHz}$			Overall Prescaler Factor	Module Clock $f_{GPT} = 40 \text{ MHz}$		
Frequency	Resolution	Period		Frequency	Resolution	Period
2.5 MHz	400 ns	26.21 ms	4	10.0 MHz	100 ns	6.55 ms
1.25 MHz	800 ns	52.43 ms	8	5.0 MHz	200 ns	13.11 ms
625.0 kHz	1.6 $\mu s$	104.9 ms	16	2.5 MHz	400 ns	26.21 ms
312.5 kHz	3.2 $\mu s$	209.7 ms	32	1.25 MHz	800 ns	52.43 ms
156.25 kHz	6.4 $\mu s$	419.4 ms	64	625.0 kHz	1.6 $\mu s$	104.9 ms
78.125 kHz	12.8 $\mu s$	838.9 ms	128	312.5 kHz	3.2 $\mu s$	209.7 ms
39.06 kHz	25.6 $\mu s$	1.678 s	256	156.25 kHz	6.4 $\mu s$	419.4 ms
19.53 kHz	51.2 $\mu s$	3.355 s	512	78.125 kHz	12.8 $\mu s$	838.9 ms
9.77 kHz	102.4 $\mu s$	6.711 s	1024	39.06 kHz	25.6 $\mu s$	1.678 s
4.88 kHz	204.8 $\mu s$	13.42 s	2048	19.53 kHz	51.2 $\mu s$	3.355 s
2.44 kHz	409.6 $\mu s$	26.84 s	4096	9.77 kHz	102.4 $\mu s$	6.711 s

## General Purpose Timer Units (GPT12)

### External Count Clock Input

The external input signals of the GPT1 block are sampled with the GPT1 basic clock (see [Figure 77](#)). To ensure that a signal is recognized correctly, its current level (high or low) must be held active for at least one complete sampling period, before changing. A signal transition is recognized if two subsequent samples of the input signal represent different levels. Therefore, a minimum of two basic clock periods are required for the sampling of an external input signal. Thus, the maximum frequency of an input signal must not be higher than half the basic clock.

[Table 93](#) summarizes the resulting requirements for external GPT1 input signals.

**Table 93 GPT1 External Input Signal Limits**

GPT1 Basic Clock = 10 MHz		Input Frequ. Factor	GPT1 Divider BPS1	Input Phase Duration	GPT1 Basic Clock = 40 MHz	
Max. Input Frequency	Min. Level Hold Time				Max. Input Frequency	Min. Level Hold Time
1.25 MHz	400 ns	$f_{GPT}/8$	01 <sub>B</sub>	$4 \times t_{GPT}$	5.0 MHz	100 ns
625.0 kHz	800 ns	$f_{GPT}/16$	00 <sub>B</sub>	$8 \times t_{GPT}$	2.5 MHz	200 ns
312.5 kHz	1.6 $\mu$ s	$f_{GPT}/32$	11 <sub>B</sub>	$16 \times t_{GPT}$	1.25 MHz	400 ns
156.25 kHz	3.2 $\mu$ s	$f_{GPT}/64$	10 <sub>B</sub>	$32 \times t_{GPT}$	625.0 kHz	800 ns

These limitations are valid for all external input signals to GPT1, including the external count signals in Counter Mode and Incremental Interface Mode, the gate input signals in Gated Timer Mode, and the external direction signals.

### 15.3.6 Interrupt Control for GPT1 Timers

When a timer overflows from FFFF<sub>H</sub> to 0000<sub>H</sub> (when counting up), or when it underflows from 0000<sub>H</sub> to FFFF<sub>H</sub> (when counting down), its interrupt request flag in register GPT12E\_T2, GPT12E\_T3, or GPT12E\_T4 will be set. This will cause an interrupt to the respective timer interrupt vector, if the respective interrupt enable bit is set.

In **Reload Mode**, upon a trigger signal, T3 is loaded with the contents of the respective timer (T2 or T4) and the respective interrupt request flag in register GPT12E\_T2 or GPT12E\_T4 is set.

In **Incremental Interface Mode**, the interrupt request generation can be selected as follows:

- In Rotation Detection Mode (T3M = 110<sub>B</sub>), an interrupt request is generated each time the count direction of T3 changes.
- In Edge Detection Mode (T3M = 111<sub>B</sub>), an interrupt request is generated each time a count edge for T3 is detected.

In **Capture Mode**, upon a trigger (selected transition) at the corresponding input pin the content of the core timer T3 are loaded into the auxiliary timer register Tx and the associated interrupt request flag in register GPT12E\_T2 or GPT12E\_T4 will be set.

General Purpose Timer Units (GPT12)

15.3.7 GPT1 Registers


15.3.7.1 GPT1 Timer Registers

T2

Timer T2 Count Register

(20<sub>H</sub>)

Reset Value: 0000<sub>H</sub>

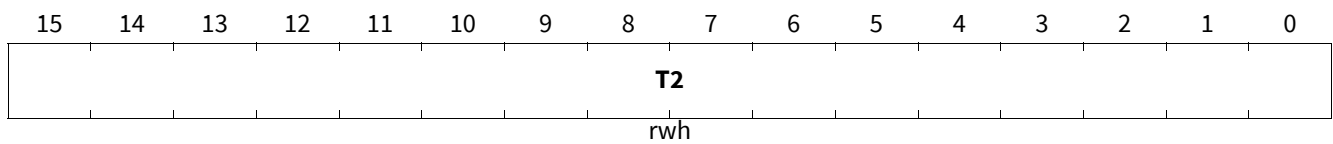


Field	Bits	Typ	Description
T2	[15:0]	rwh	<b>Timer T2 Current Value</b> Contains the current value of the timer T2

T3

Timer T3 Count Register

(24<sub>H</sub>)

Reset Value: 0000<sub>H</sub>

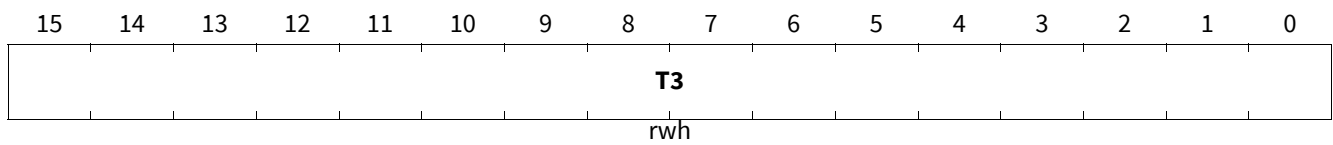


Field	Bits	Typ	Description
T3	[15:0]	rwh	<b>Timer T3 Current Value</b> Contains the current value of the timer T3

T4

Timer T4 Count Register

(28<sub>H</sub>)

Reset Value: 0000<sub>H</sub>

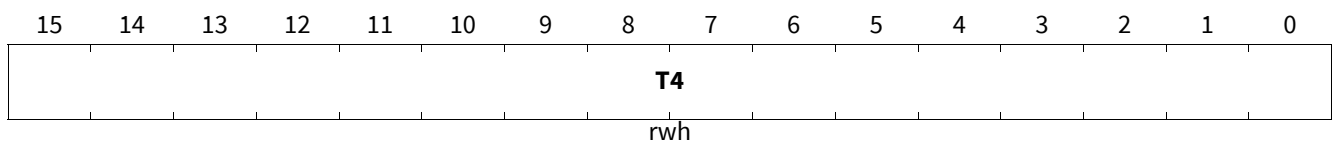

Field	Bits	Typ	Description
T4	[15:0]	rwh	<b>Timer T4 Current Value</b> Contains the current value of the timer T4

## General Purpose Timer Units (GPT12)

### 15.3.7.2 GPT1 Timer Control Registers

#### 15.3.7.2.1 GPT1 Core Timer T3 Control Register

##### T3CON

##### Timer T3 Control Register

(0C<sub>H</sub>)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
<b>T3 R DIR</b>	<b>T3 CH DIR</b>	<b>T3 EDGE</b>	<b>BPS1</b>	<b>T3 OTL</b>	<b>T3 OE</b>	<b>T3 UDE</b>	<b>T3 UD</b>	<b>T3 R</b>	<b>T3M</b>			<b>T3I</b>			
rh	rwh	rwh	rw	rwh	rw	rw	rw	rw	rw	rw			rw		

Field	Bits	Type	Description
<b>T3I</b>	[2:0]	rw	<b>Timer T3 Input Parameter Selection</b> Depends on the operating mode, see respective sections for encoding: <a href="#">Table 95</a> for Timer Mode and Gated Timer Mode <a href="#">Table 96</a> for Counter Mode <a href="#">Table 99</a> for Incremental Interface Mode
<b>T3M</b>	[5:3]	rw	<b>Timer T3 Mode Control</b> 000 <sub>B</sub> Timer Mode 001 <sub>B</sub> Counter Mode 010 <sub>B</sub> Gated Timer Mode with gate active low 011 <sub>B</sub> Gated Timer Mode with gate active high 100 <sub>B</sub> Reserved. Do not use this combination 101 <sub>B</sub> Reserved. Do not use this combination 110 <sub>B</sub> Incremental Interface Mode (Rotation Detection Mode) 111 <sub>B</sub> Incremental Interface Mode (Edge Detection Mode)
<b>T3R</b>	6	rw	<b>Timer T3 Run Bit</b> 0 <sub>B</sub> Timer T3 stops 1 <sub>B</sub> Timer T3 runs
<b>T3UD</b>	7	rw	<b>Timer T3 Up/Down Control<sup>1)</sup></b> 0 <sub>B</sub> Timer T3 counts up 1 <sub>B</sub> Timer T3 counts down  <i>Note: This bit only controls count direction of T3 if bit T3UDE = 0.</i>
<b>T3UDE</b>	8	rw	<b>Timer T3 External Up/Down Enable<sup>1)</sup></b> 0 <sub>B</sub> Count direction is controlled by bit T3UD; input T3EUD is disconnected 1 <sub>B</sub> Count direction is controlled by input T3EUD
<b>T3OE</b>	9	rw	<b>Overflow/Underflow Output Enable</b> 0 <sub>B</sub> Alternate Output Function Disabled 1 <sub>B</sub> State of T3 toggle latch is output on pin T3OUT

---

**General Purpose Timer Units (GPT12)**

Field	Bits	Type	Description
<b>T3OTL</b>	10	rwh	<b>Timer T3 Overflow Toggle Latch</b> Toggles on each overflow/underflow of T3. Can be set or cleared by software (see separate description)
<b>BPS1</b>	[12:11]	rw	<b>GPT1 Block Prescaler Control</b> Selects the basic clock for block GPT1 (see also <a href="#">Section 15.3.5</a> ) 00 <sub>B</sub> $f_{GPT}/8$ 01 <sub>B</sub> $f_{GPT}/4$ 10 <sub>B</sub> $f_{GPT}/32$ 11 <sub>B</sub> $f_{GPT}/16$
<b>T3EDGE</b>	13	rwh	<b>Timer T3 Edge Detection Flag</b> The bit is set each time a count edge is detected. T3EDGE must be cleared by software. 0 <sub>B</sub> No count edge was detected 1 <sub>B</sub> A count edge was detected
<b>T3CHDIR</b>	14	rwh	<b>Timer T3 Count Direction Change Flag</b> This bit is set each time the count direction of timer T3 changes. T3CHDIR must be cleared by software. 0 <sub>B</sub> No change of count direction was detected 1 <sub>B</sub> A change of count direction was detected
<b>T3RDIR</b>	15	rh	<b>Timer T3 Rotation Direction Flag</b> 0 <sub>B</sub> Timer T3 counts up 1 <sub>B</sub> Timer T3 counts down

1) See [Table 104](#) for encoding of bits T3UD and T3UDE.

## General Purpose Timer Units (GPT12)

### 15.3.7.2.2 GPT1 Auxiliary Timers T2/T4 Control Registers

#### T2CON

##### Timer T2 Control Register

(08<sub>H</sub>)Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
T2 R DIR	T2 CH DIR	T2 EDGE	T2 IR DIS	Res	T2 RC	T2 UDE	T2 UD	T2 R	T2M			T2I			
rh	rwh	rwh	rw	r	rw	rw	rw	rw	rw			rw			

Field	Bits	Type	Description
<b>T2I</b>	[2:0]	rw	<b>Timer T2 Input Parameter Selection</b> Depends on the operating mode, see respective sections for encoding: <a href="#">Table 95</a> for Timer Mode and Gated Timer Mode <a href="#">Table 98</a> for Counter Mode <a href="#">Table 99</a> for Incremental Interface Mode <a href="#">Table 98</a> for Reload Mode <a href="#">Table 97</a> for Capture Mode
<b>T2M</b>	[5:3]	rw	<b>Timer T2 Mode Control (Basic Operating Mode)</b> 000 <sub>B</sub> Timer Mode 001 <sub>B</sub> Counter Mode 010 <sub>B</sub> Gated Timer Mode with gate active low 011 <sub>B</sub> Gated Timer Mode with gate active high 100 <sub>B</sub> Reload Mode 101 <sub>B</sub> Capture Mode 110 <sub>B</sub> Incremental Interface Mode (Rotation Detection Mode) 111 <sub>B</sub> Incremental Interface Mode (Edge Detection Mode)
<b>T2R</b>	6	rw	<b>Timer T2 Run Bit</b> 0 <sub>B</sub> Timer T2 stops 1 <sub>B</sub> Timer T2 runs  <i>Note: This bit only controls timer T2 if bit T2RC = 0.</i>
<b>T2UD</b>	7	rw	<b>Timer T2 Up/Down Control<sup>1)</sup></b> 0 <sub>B</sub> Timer T2 counts up 1 <sub>B</sub> Timer T2 counts down  <i>Note: This bit only controls count direction of T2 if bit T2UDE = 0.</i>
<b>T2UDE</b>	8	rw	<b>Timer T2 External Up/Down Enable<sup>1)</sup></b> 0 <sub>B</sub> Count direction is controlled by bit T2UD; input T2EUD is disconnected 1 <sub>B</sub> Count direction is controlled by input T2EUD
<b>T2RC</b>	9	rw	<b>Timer T2 Remote Control</b> 0 <sub>B</sub> Timer T2 is controlled by its own run bit T2R 1 <sub>B</sub> Timer T2 is controlled by the run bit T3R of core timer T3, not by bit T2R

### General Purpose Timer Units (GPT12)

Field	Bits	Type	Description
<b>T2IRDIS</b>	12	rw	<b>Timer T2 Interrupt Disable</b> 0 <sub>B</sub> Interrupt generation for T2CHDIR and T2EDGE interrupts in Incremental Interface Mode is enabled 1 <sub>B</sub> Interrupt generation for T2CHDIR and T2EDGE interrupts in Incremental Interface Mode is disabled
<b>T2EDGE</b>	13	rwh	<b>Timer T2 Edge Detection</b> The bit is set each time a count edge is detected. T2EDGE must be cleared by software. 0 <sub>B</sub> No count edge was detected 1 <sub>B</sub> A count edge was detected
<b>T2CHDIR</b>	14	rwh	<b>Timer T2 Count Direction Change</b> The bit is set each time the count direction of timer T2 changes. T2CHDIR must be cleared by software. 0 <sub>B</sub> No change in count direction was detected 1 <sub>B</sub> A change in count direction was detected
<b>T2RDIR</b>	15	rh	<b>Timer T2 Rotation Direction</b> 0 <sub>B</sub> Timer T2 counts up 1 <sub>B</sub> Timer T2 counts down
<b>Res</b>	[11:10]	r	<b>Reserved</b> Read as 0; should be written with 0.

1) See [Table 104](#) for encoding of bits T2UD and T2UDE.

### T4CON

#### Timer T4 Control Register

(10<sub>H</sub>)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
<b>T4 R DIR</b>	<b>T4 CH DIR</b>	<b>T4 EDGE</b>	<b>T4 IR DIS</b>	<b>CLRT3 EN</b>	<b>CLRT2 EN</b>	<b>T4 RC</b>	<b>T4 UDE</b>	<b>T4 UD</b>	<b>T4 R</b>	<b>T4M</b>			<b>T4I</b>		
rh	rwh	rwh	rw	rw	rw	rw	rw	rw	rw	rw			rw		

Field	Bits	Type	Description
<b>T4I</b>	[2:0]	rw	<b>Timer T4 Input Parameter Selection</b> Depends on the operating mode, see respective sections for encoding: <a href="#">Table 95</a> for Timer Mode and Gated Timer Mode <a href="#">Table 98</a> for Counter Mode <a href="#">Table 99</a> for Incremental Interface Mode <a href="#">Table 98</a> for Reload Mode <a href="#">Table 97</a> for Capture Mode

---

**General Purpose Timer Units (GPT12)**

Field	Bits	Type	Description
<b>T4M</b>	[5:3]	rw	<b>Timer T4 Mode Control (Basic Operating Mode)</b> 000 <sub>B</sub> Timer Mode 001 <sub>B</sub> Counter Mode 010 <sub>B</sub> Gated Timer Mode with gate active low 011 <sub>B</sub> Gated Timer Mode with gate active high 100 <sub>B</sub> Reload Mode 101 <sub>B</sub> Capture Mode 110 <sub>B</sub> Incremental Interface Mode (Rotation Detection Mode) 111 <sub>B</sub> Incremental Interface Mode (Edge Detection Mode)
<b>T4R</b>	6	rw	<b>Timer T4 Run Bit</b> 0 <sub>B</sub> Timer T4 stops 1 <sub>B</sub> Timer T4 runs  <i>Note: This bit only controls timer T4 if bit T4RC = 0.</i>
<b>T4UD</b>	7	rw	<b>Timer T4 Up/Down Control<sup>1)</sup></b> 0 <sub>B</sub> Timer T4 counts up 1 <sub>B</sub> Timer T4 counts down  <i>Note: This bit only controls count direction of T4 if bit T4UDE = 0.</i>
<b>T4UDE</b>	8	rw	<b>Timer T4 External Up/Down Enable<sup>1)</sup></b> 0 <sub>B</sub> Count direction is controlled by bit T4UD; input T4EUD is disconnected 1 <sub>B</sub> Count direction is controlled by input T4EUD
<b>T4RC</b>	9	rw	<b>Timer T4 Remote Control</b> 0 <sub>B</sub> Timer T4 is controlled by its own run bit T4R 1 <sub>B</sub> Timer T4 is controlled by the run bit T3R of core timer T3, but not by bit T4R
<b>CLRT2EN</b>	10	rw	<b>Clear Timer T2 Enable</b> Enables the automatic clearing of timer T2 upon a falling edge of the selected T4EUD input. 0 <sub>B</sub> No effect of T4EUD on timer T2 1 <sub>B</sub> A falling edge on T4EUD clears timer T2
<b>CLRT3EN</b>	11	rw	<b>Clear Timer T3 Enable</b> Enables the automatic clearing of timer T3 upon a falling edge of the selected T4IN input. 0 <sub>B</sub> No effect of T4IN on timer T3 1 <sub>B</sub> A falling edge on T4IN clears timer T3
<b>T4IRDIS</b>	12	rw	<b>Timer T4 Interrupt Disable</b> 0 <sub>B</sub> Interrupt generation for T4CHDIR and T4EDGE interrupts in Incremental Interface Mode is enabled 1 <sub>B</sub> Interrupt generation for T4CHDIR and T4EDGE interrupts in Incremental Interface Mode is disabled



---

**General Purpose Timer Units (GPT12)**

Field	Bits	Type	Description
<b>T4EDGE</b>	13	rwh	<b>Timer T4 Edge Detection</b> The bit is set each time a count edge is detected. T4EDGE has to be cleared by software. 0 <sub>B</sub> No count edge was detected 1 <sub>B</sub> A count edge was detected
<b>T4CHDIR</b>	14	rwh	<b>Timer T4 Count Direction Change</b> The bit is set each time the count direction of timer T4 changes. T4CHDIR must be cleared by software. 0 <sub>B</sub> No change in count direction was detected 1 <sub>B</sub> A change in count direction was detected
<b>T4RDIR</b>	15	rh	<b>Timer T4 Rotation Direction</b> 0 <sub>B</sub> Timer T4 counts up 1 <sub>B</sub> Timer T4 counts down

1) See [Table 104](#) for encoding of bits T4UD and T4UDE.

---

**General Purpose Timer Units (GPT12)**
**15.3.7.2.3 Encoding of GPT1 Timer Count Direction Control**
**Table 94 GPT1 Timer Count Direction Control**

Pin TxEUD	Bit TxUDE	Bit TxUD	Count Direction	Bit TxRDIR
X	0	0	Count Up	0
X	0	1	Count Down	1
0	1	0	Count Up	0
1	1	0	Count Down	1
0	1	1	Count Down	1
1	1	1	Count Up	0

**15.3.7.2.4 Timer Mode and Gated Timer Mode: Encoding of GPT1 Overall Prescaler Factor**
**Table 95 GPT1 Overall Prescaler Factors for Internal Count Clock  
(Timer Mode and Gated Timer Mode)**

Individual Prescaler for Tx	Common Prescaler for Module Clock <sup>1)</sup>			
	BPS1 = 01 <sub>B</sub>	BPS1 = 00 <sub>B</sub>	BPS1 = 11 <sub>B</sub>	BPS1 = 10 <sub>B</sub>
Txl = 000 <sub>B</sub>	4	8	16	32
Txl = 001 <sub>B</sub>	8	16	32	64
Txl = 010 <sub>B</sub>	16	32	64	128
Txl = 011 <sub>B</sub>	32	64	128	256
Txl = 100 <sub>B</sub>	64	128	256	512
Txl = 101 <sub>B</sub>	128	256	512	1024
Txl = 110 <sub>B</sub>	256	512	1024	2048
Txl = 111 <sub>B</sub>	512	1024	2048	4096

1) Please note the non-linear encoding of bitfield BPS1.

---

**General Purpose Timer Units (GPT12)**
**15.3.7.2.5 Counter Mode: Encoding of GPT1 Input Edge Selection**
**Table 96 GPT1 Core Timer T3 Input Edge Selection (Counter Mode)**

<b>T3I</b>	<b>Triggering Edge for Counter Increment/Decrement</b>
000 <sub>B</sub>	None. Counter T3 is disabled
001 <sub>B</sub>	Positive transition (rising edge) on T3IN
010 <sub>B</sub>	Negative transition (falling edge) on T3IN
011 <sub>B</sub>	Any transition (rising or falling edge) on T3IN
1XX <sub>B</sub>	Reserved. Do not use this combination

**Table 97 GPT1 Auxiliary Timers T2/T4 Input Edge Selection (Capture Mode)**

<b>T2I/T4I</b>	<b>Triggering Edge for Counter Increment/Decrement</b>
000 <sub>B</sub>	None. Counter Tx is disabled
001 <sub>B</sub>	Positive transition (rising edge) on TxIN
010 <sub>B</sub>	Negative transition (falling edge) on TxIN
011 <sub>B</sub>	Any transition (rising or falling edge) on TxIN
1XX <sub>B</sub>	Reserved. Do not use this combination

**Table 98 GPT1 Auxiliary Timers T2/T4 Input Edge Selection (Counter Mode, Reload Mode)**

<b>T2I/T4I</b>	<b>Triggering Edge for Counter Increment/Decrement</b>
X00 <sub>B</sub>	None. Counter Tx is disabled
001 <sub>B</sub>	Positive transition (rising edge) on TxIN
010 <sub>B</sub>	Negative transition (falling edge) on TxIN
011 <sub>B</sub>	Any transition (rising or falling edge) on TxIN
101 <sub>B</sub>	Positive transition (rising edge) of T3 toggle latch T3OTL
110 <sub>B</sub>	Negative transition (falling edge) of T3 toggle latch T3OTL
111 <sub>B</sub>	Any transition (rising or falling edge) of T3 toggle latch T3OTL

---

**General Purpose Timer Units (GPT12)****15.3.7.2.6 Incremental Interface Mode: Encoding of Input Edge Selection****Table 99 GPT1 Core Timer T3 Input Edge Selection  
(Incremental Interface Mode)**

<b>T3I</b>	<b>Triggering Edge for Counter Increment/Decrement</b>
000 <sub>B</sub>	None. Counter T3 stops.
001 <sub>B</sub>	Any transition (rising or falling edge) on T3IN.
010 <sub>B</sub>	Any transition (rising or falling edge) on T3EUD.
011 <sub>B</sub>	Any transition (rising or falling edge) on any T3 input (T3IN or T3EUD).
1XX <sub>B</sub>	Reserved. Do not use this combination.


**15.3.7.3 GPT1 Timer Interrupt Control Registers**

The Interrupt Control and Status register are located in the SCU.[GPT12IEN](#) and SCU.[GPT12IRC](#).

## General Purpose Timer Units (GPT12)

### 15.4 Timer Block GPT2

From a programmer's point of view, the GPT2 block is represented by a set of SFRs as summarized below. Those portions of port and direction registers which are used for alternate functions by the GPT2 block are shaded.

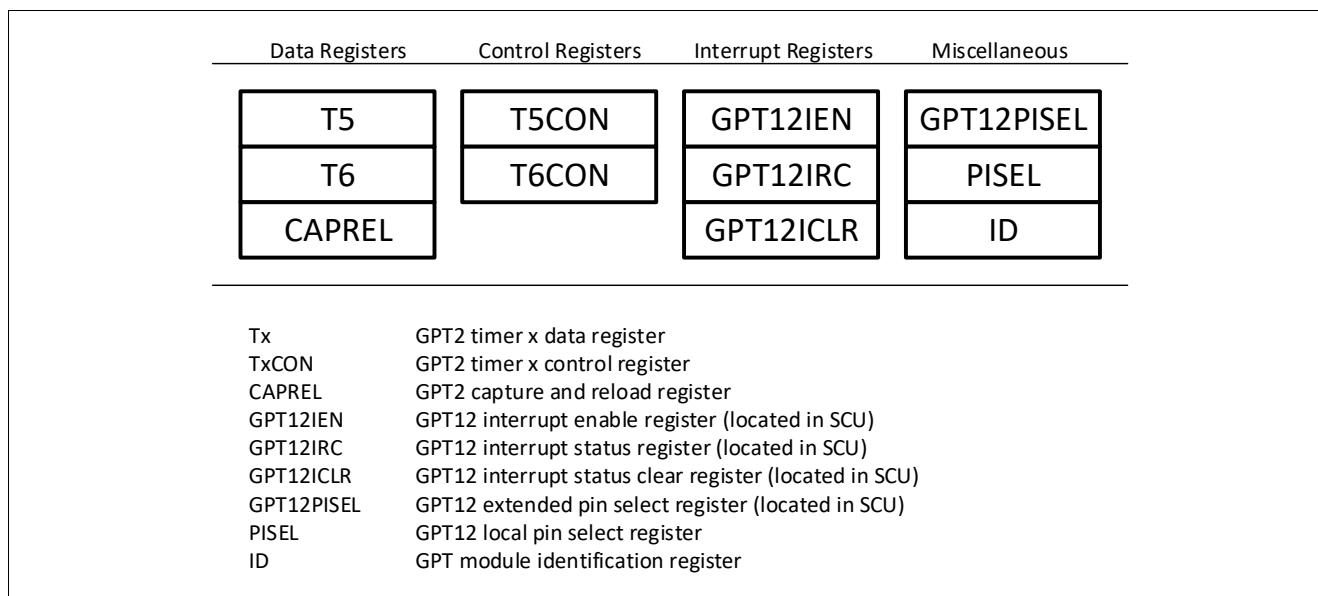

**Figure 96 SFRs Associated with Timer Block GPT2**

Both timers of block GPT2 (T5, T6) can run in one of 3 basic modes: Timer Mode, Gated Timer Mode, or Counter Mode. All timers can count up or down. Each timer of GPT2 is controlled by a separate control register TxCON. Each timer has an input pin TxIN (alternate pin function) associated with it, which serves as the gate control in Gated Timer Mode, or as the count input in Counter Mode. The count direction (up/down) may be programmed via software or may be dynamically altered by a signal at the External Up/Down control input TxEUD (alternate pin function). An overflow/underflow of core timer T6 is indicated by the Output Toggle Latch T6OTL, whose state may be output on the associated pin T6OUT (alternate pin function). The auxiliary timer T5 may additionally be concatenated with core timer T6 (through T6OTL).

The Capture/Reload register CAPREL can be used to capture the contents of timer T5, or to reload timer T6. A special mode facilitates the use of register CAPREL for both functions at the same time. This mode allows frequency multiplication. The capture function is triggered by the input pin CAPIN, or by GPT1 timer's T3 input lines T3IN and T3EUD. The reload function is triggered by an overflow or underflow of timer T6. Overflows/underflows of timer T6 may also clock the timers of the CAPCOM units.

The current contents of each timer can be read or modified by the CPU by accessing the corresponding timer count registers T5 or T6, located in the SFR space (see [Section 15.4.8.1](#)). When any of the timer registers is written to by the CPU in the state immediately preceding a timer increment, decrement, reload, or capture operation, the CPU write operation has priority in order to guarantee correct results.

The interrupts of GPT2 are controlled through the SCU.[GPT12IEN](#) and SCU.[GPT12IRC](#). These registers are not part of the GPT2 block.

The input and output lines of GPT2 are connected to pins. The control registers for the port functions are located in the respective port modules.

*Note:* The timing requirements for external input signals can be found in [Section 15.4.6](#), [Section 15.7.1](#) summarizes the module interface signals, including pins.

---

## General Purpose Timer Units (GPT12)

### 15.4.1 GPT2 Core Timer T6 Control

The current contents of the core timer T6 are reflected by its count register T6. This register can also be written to by the CPU, for example, to set the initial start value.

The core timer T6 is configured and controlled via its control register T6CON.

#### Timer T6 Run Control

The core timer T6 can be started or stopped by software through bit T6R (timer T6 run bit). This bit is relevant in all operating modes of T6. Setting bit T6R will start the timer, clearing bit T6R stops the timer.

In Gated Timer Mode, the timer will only run if T6R = 1 and the gate is active (high or low, as programmed).

*Note: When bit T5RC in timer control register T5CON is set, bit T6R will also control (start and stop) the Auxiliary Timer T5.*

#### Count Direction Control

The count direction of the GPT2 timers (core timer and auxiliary timer) can be controlled either by software or by the external input pin TxEUD (Timer Tx External Up/Down Control Input). These options are selected by bits TxUD and TxUDE in the respective control register TxCON. When the up/down control is provided by software (bit TxUDE = 0), the count direction can be altered by setting or clearing bit TxUD. When bit TxUDE = 1, pin TxEUD is selected to be the controlling source of the count direction. However, bit TxUD can still be used to reverse the actual count direction, as shown in [Table 104](#). The count direction can be changed regardless of whether or not the timer is running.

*Note: When pin TxEUD is used as external count direction control input, it must be configured as input.*


**General Purpose Timer Units (GPT12)**

**Timer T6 Output Toggle Latch**

The overflow/underflow signal of timer T6 is connected to a block named ‘Toggle Latch’, shown in the Timer Mode diagrams. **Figure 97** illustrates the details of this block. An overflow or underflow of T6 will clock two latches: The first latch represents bit T6OTL in control register T6CON. The second latch is an internal latch toggled by T6OTL’s output. Both latch outputs are connected to the input control block of the auxiliary timer T5. The output level of the shadow latch will match the output level of T6OTL, but is delayed by one clock cycle. When the T6OTL value changes, this will result in a temporarily different output level from T6OTL and the shadow latch, which can trigger the selected count event in T5.

When software writes to T6OTL, both latches are set or cleared simultaneously. In this case, both signals to the auxiliary timers carry the same level and no edge will be detected. Bit T6OE (overflow/underflow output enable) in register T6CON enables the state of T6OTL to be monitored via an external pin T6OUT. When T6OTL is linked to an external port pin (must be configured as output), T6OUT can be used to control external HW. If T6OE = 1, pin T6OUT outputs the state of T6OTL. If T6OE = 0, pin T6OUT outputs a high level (while it selects the timer output signal).

As can be seen from **Figure 97**, when latch T6OTL is modified by software to determine the state of the output line, also the internal shadow latch is set or cleared accordingly. Therefore, no trigger condition is detected by T5 in this case.

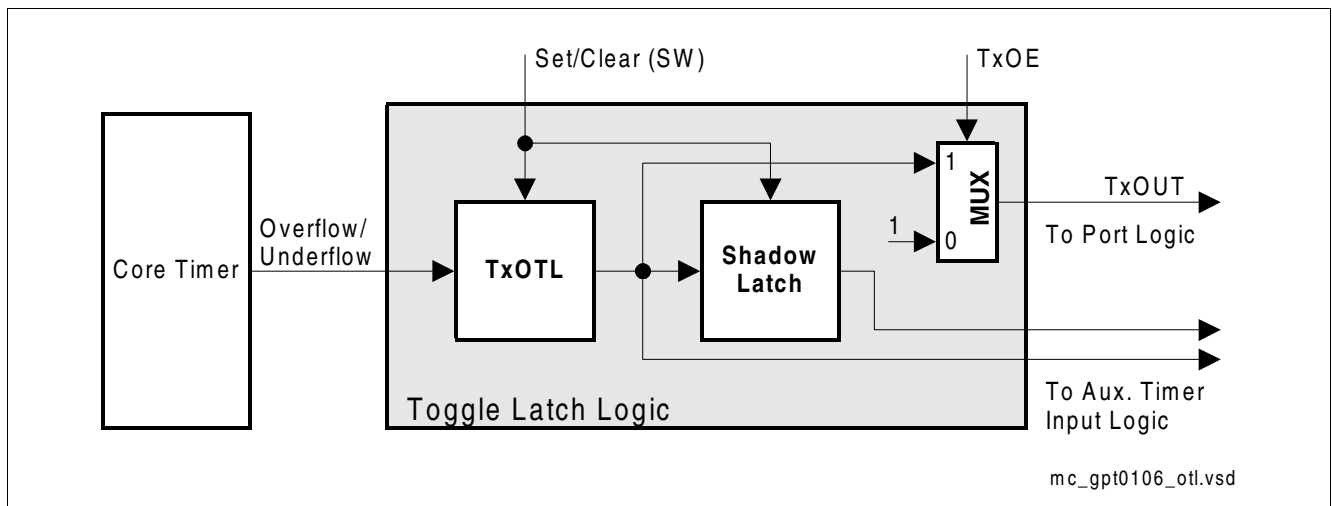

**Figure 97 Block Diagram of the Toggle Latch Logic of Core Timer T6 (x = 6)**

*Note: T6 is also used to clock the timers in the CAPCOM units. For this purpose, there is a direct internal connection between the T6 overflow/underflow line and the CAPCOM timers (signal T6OUF).*

General Purpose Timer Units (GPT12)

15.4.2 GPT2 Core Timer T6 Operating Modes

Timer T6 can operate in one of several modes.

Timer T6 in Timer Mode

Timer mode for the core timer T6 is selected by setting bitfield T6M in register T6CON to 000<sub>B</sub>. In this mode, T6 is clocked with the module's input clock  $f_{GPT}$  divided by two programmable prescalars controlled by bitfields BPS2 and T6I in register T6CON. Please see [Section 15.4.6](#) for details on the input clock options.

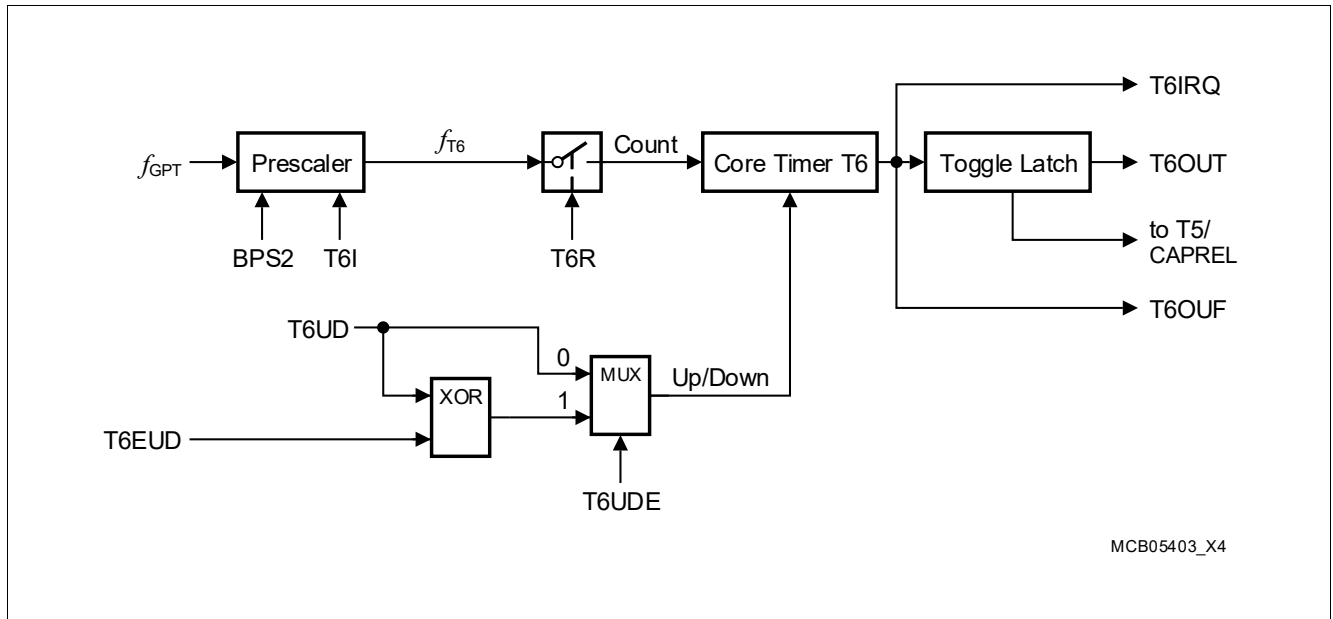


Figure 98 Block Diagram of Core Timer T6 in Timer Mode




## General Purpose Timer Units (GPT12)

### Timer T6 in Gated Timer Mode

Gated Timer Mode for the core timer T6 is selected by setting bitfield T6M in register T6CON to 010<sub>B</sub> or 011<sub>B</sub>. Bit T6M.0 (T6CON.3) selects the active level of the gate input. The same options for the input frequency are available in Gated Timer Mode as in Timer Mode (see [Section 15.4.6](#)). However, the input clock to the timer in this mode is gated by the external input pin T6IN (Timer T6 External Input).

To enable this operation, the associated pin T6IN must be configured as input.

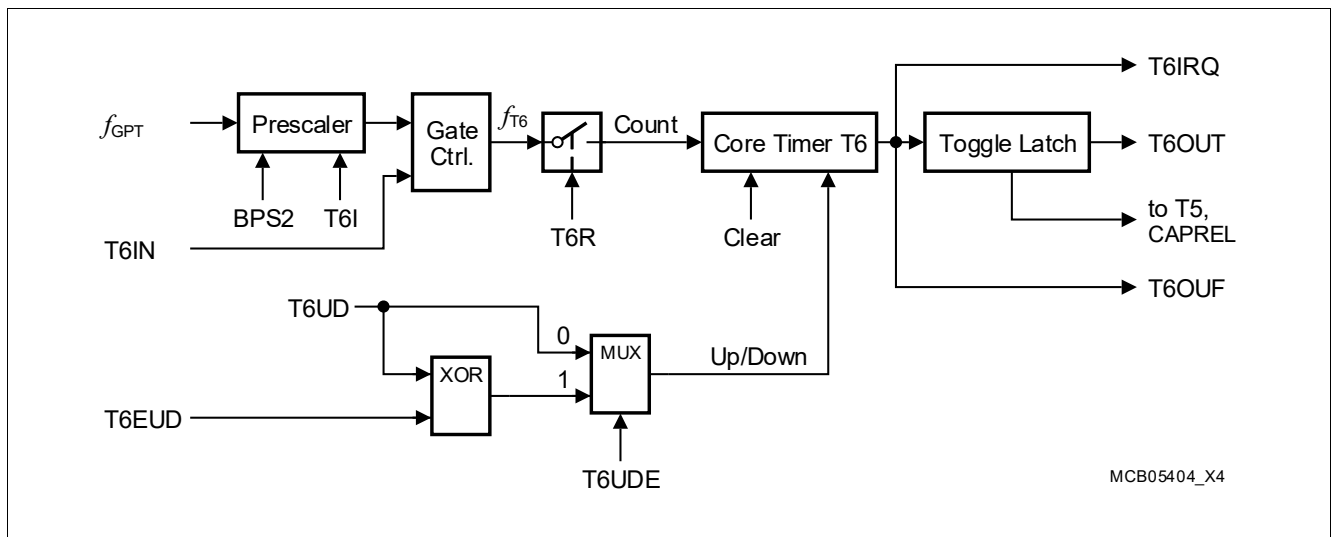

**Figure 99** Block Diagram of Core Timer T6 in Gated Timer Mode


If T6M = 010<sub>B</sub>, the timer is enabled when T6IN shows a low level. A high level at this line stops the timer. If T6M = 011<sub>B</sub>, line T6IN must have a high level in order to enable the timer. Additionally, the timer can be turned on or off by software using bit T6R. The timer will only run if T6R is 1 and the gate is active. It will stop if either T6R is 0 or the gate is inactive.

*Note:* A transition of the gate signal at pin T6IN does not cause an interrupt request.

## General Purpose Timer Units (GPT12)

### Timer T6 in Counter Mode

Counter Mode for the core timer T6 is selected by setting bitfield T6M in register T6CON to 001<sub>B</sub>. In Counter Mode, timer T6 is clocked by a transition at the external input pin T6IN. The event causing an increment or decrement of the timer can be a positive, a negative, or both a positive and a negative transition at this line. Bitfield T6I in control register T6CON selects the triggering transition (see [Table 106](#)).

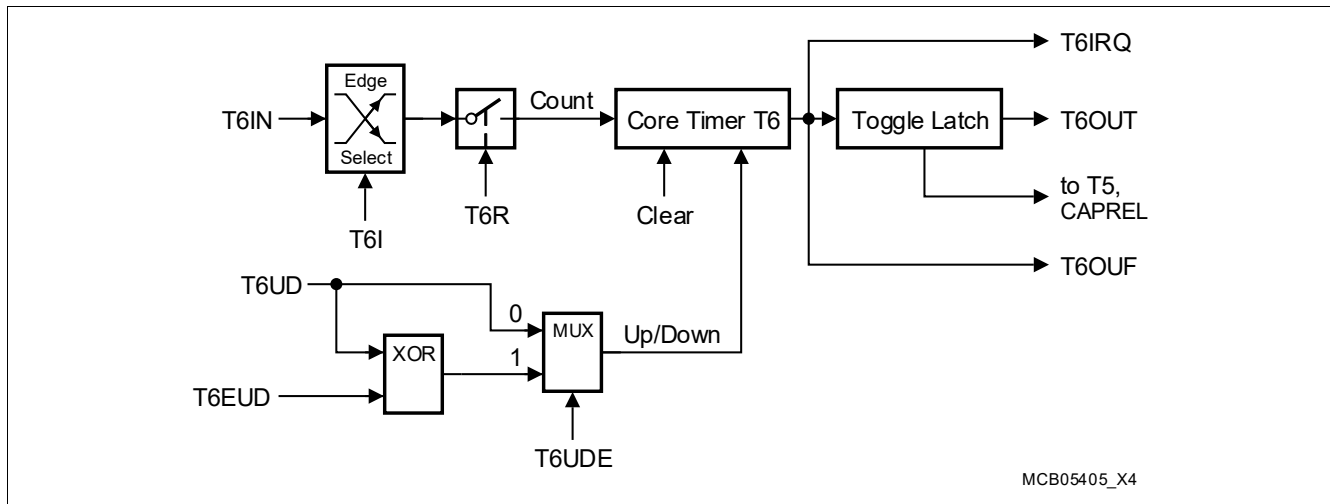

**Figure 100** Block Diagram of Core Timer T6 in Counter Mode

For Counter Mode operation, pin T6IN must be configured as input. The maximum input frequency allowed in Counter Mode depends on the selected prescaler value. To ensure that a transition of the count input signal applied to T6IN is recognized correctly, its level must be held high or low for a minimum number of module clock cycles before it changes. This information can be found in [Section 15.4.6](#).

---

## General Purpose Timer Units (GPT12)

### 15.4.3 GPT2 Auxiliary Timer T5 Control

Auxiliary timer T5 can be configured for Timer Mode, Gated Timer Mode, or Counter Mode with the same options for the timer frequencies and the count signal as the core timer T6. In addition to these 3 counting modes, the auxiliary timer can be concatenated with the core timer. The contents of T5 may be captured to register CAPREL upon an external or an internal trigger. The start/stop function of the auxiliary timers can be remotely controlled by the T6 run control bit. Several timers may thus be controlled synchronously.

The current contents of the auxiliary timer are reflected by its count register T5. This register can also be written to by the CPU, for example, to set the initial start value.

The individual configurations for timer T5 are determined by its control register T5CON. Some bits in this register also control the function of the CAPREL register. Note that functions which are present in all timers of block GPT2 are controlled in the same bit positions and in the same manner in each of the specific control registers.

*Note: The auxiliary timer has no output toggle latch and no alternate output function.*

#### Timer T5 Run Control

The auxiliary timer T5 can be started or stopped by software in two different ways:

- Through the associated timer run bit (T5R). In this case it is required that the respective control bit T5RC = 0.
- Through the core timer's run bit (T6R). In this case the respective remote control bit must be set (T5RC = 1).

The selected run bit is relevant in all operating modes of T5. Setting the bit will start the timer, clearing the bit stops the timer.

In Gated Timer Mode, the timer will only run if the selected run bit is set and the gate is active (high or low, as programmed).

*Note: If remote control is selected T6R will start/stop timer T6 and the auxiliary timer T5 synchronously.*

General Purpose Timer Units (GPT12)

15.4.4 GPT2 Auxiliary Timer T5 Operating Modes

The operation of the auxiliary timer in the basic operating modes is almost identical with the core timer’s operation, with very few exceptions. Additionally, some combined operating modes can be selected.

Timer T5 in Timer Mode

Timer Mode for the auxiliary timer T5 is selected by setting its bitfield T5M in register T5CON to 000<sub>B</sub>.

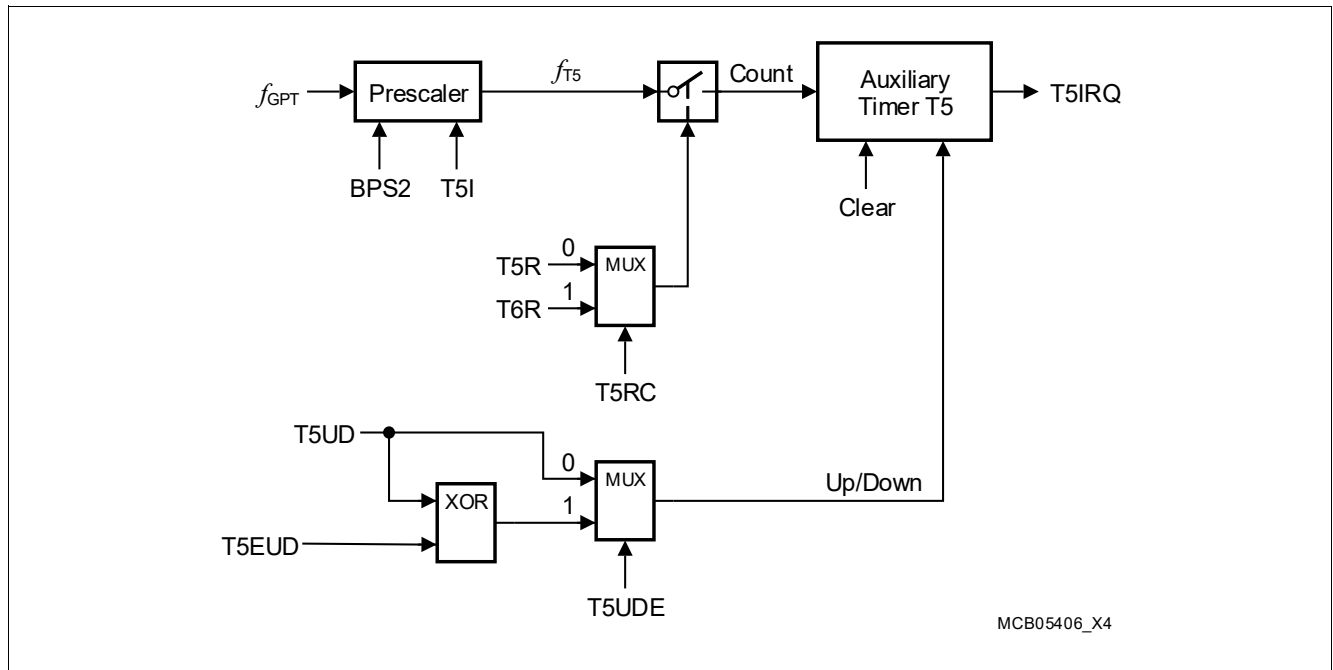



Figure 101 Block Diagram of Auxiliary Timer T5 in Timer Mode

**General Purpose Timer Units (GPT12)**

**Timer T5 in Gated Timer Mode**

Gated Timer Mode for the auxiliary timer T5 is selected by setting bitfield T5M in register T5CON to 010<sub>B</sub> or 011<sub>B</sub>. Bit T5M.0 (T5CON.3) selects the active level of the gate input.

*Note:* A transition of the gate signal at line T5IN does not cause an interrupt request.

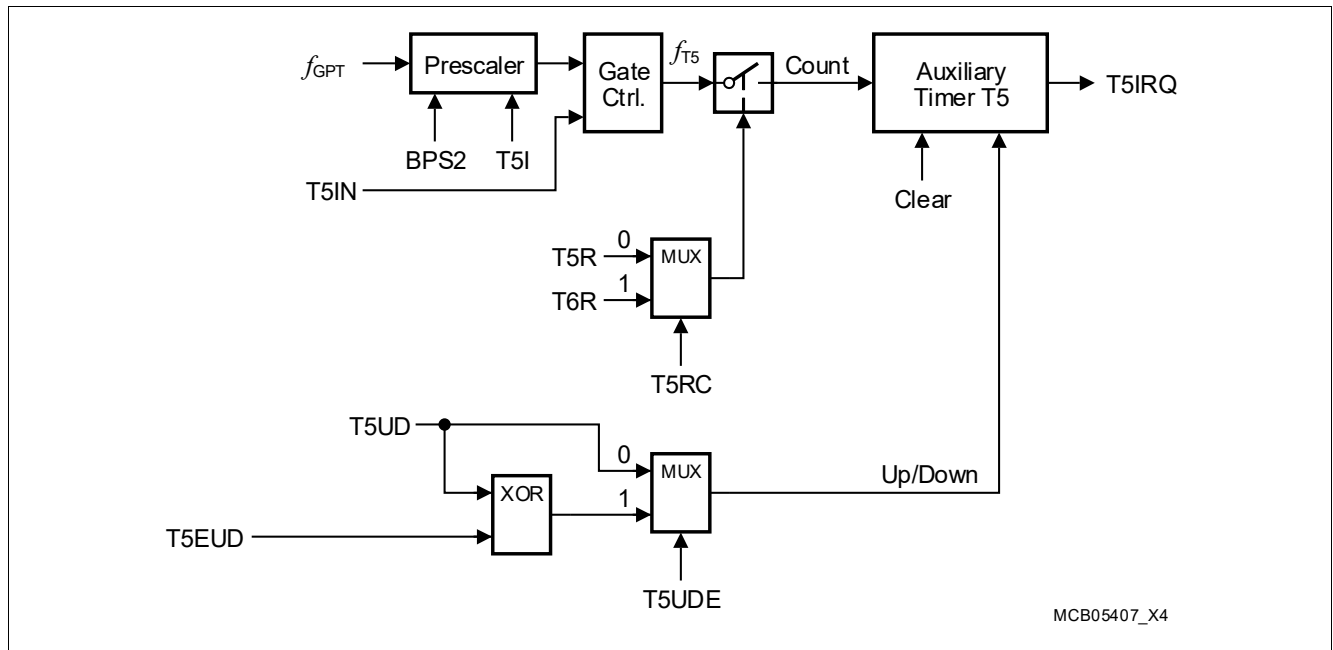


**Figure 102 Block Diagram of Auxiliary Timer T5 in Gated Timer Mode**

*Note:* There is no output toggle latch for T5. Start/stop of the auxiliary timer can be controlled locally or remotely.

## General Purpose Timer Units (GPT12)

### Timer T5 in Counter Mode

Counter Mode for auxiliary timer T5 is selected by setting bitfield T5M in register T5CON to 001<sub>B</sub>. In Counter Mode, the auxiliary timer can be clocked either by a transition at its external input line T5IN, or by a transition of timer T6's toggle latch T6OTL. The event causing an increment or decrement of a timer can be a positive, a negative, or both a positive and a negative transition at either the respective input pin or at the toggle latch. Bitfield T5I in control register T5CON selects the triggering transition (see [Table 107](#)).

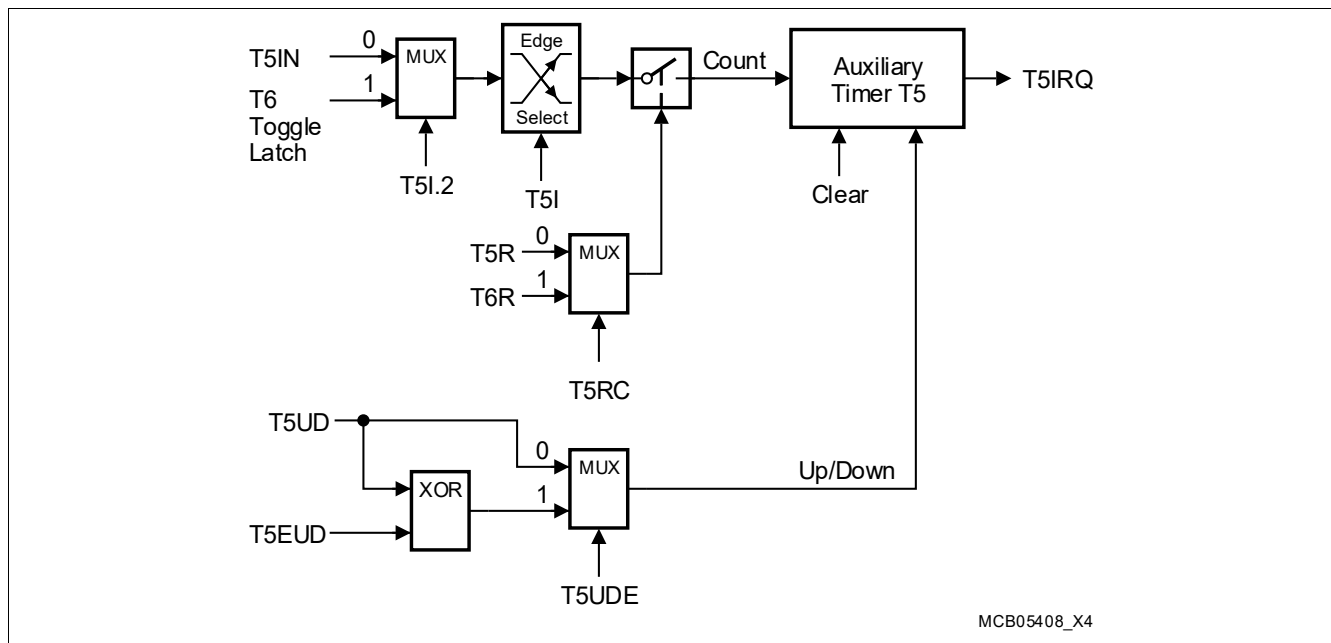

**Figure 103** Block Diagram of Auxiliary Timer T5 in Counter Mode

**Note:** Only state transitions of T6OTL which are caused by the overflows/underflows of T6 will trigger the counter function of T5. Modifications of T6OTL via software will NOT trigger the counter function of T5.

For counter operation, pin T5IN must be configured as input. The maximum input frequency allowed in Counter Mode depends on the selected prescaler value. To ensure that a transition of the count input signal applied to T5IN is recognized correctly, its level must be held high or low for a minimum number of module clock cycles before it changes. This information can be found in [Section 15.4.6](#).

**General Purpose Timer Units (GPT12)**

**Timer Concatenation**


Using the toggle bit T6OTL as a clock source for the auxiliary timer in Counter Mode concatenates the core timer T6 with the auxiliary timer T5. This concatenation forms either a 32-bit or a 33-bit timer/counter, depending on which transition of T6OTL is selected to clock the auxiliary timer.

- **32-bit Timer/Counter:** If both a positive and a negative transition of T6OTL are used to clock the auxiliary timer, this timer is clocked on every overflow/underflow of the core timer T6. Thus, the two timers form a 32-bit timer.
- **33-bit Timer/Counter:** If either a positive or a negative transition of T6OTL is selected to clock the auxiliary timer, this timer is clocked on every second overflow/underflow of the core timer T6. This configuration forms a 33-bit timer (16-bit core timer + T6OTL + 16-bit auxiliary timer).

As long as bit T6OTL is not modified by software, it represents the state of the internal toggle latch, and can be regarded as part of the 33-bit timer.

The count directions of the two concatenated timers are not required to be the same. This offers a wide variety of different configurations.

T6, which represents the low-order part of the concatenated timer, can operate in Timer Mode, Gated Timer Mode or Counter Mode in this case.

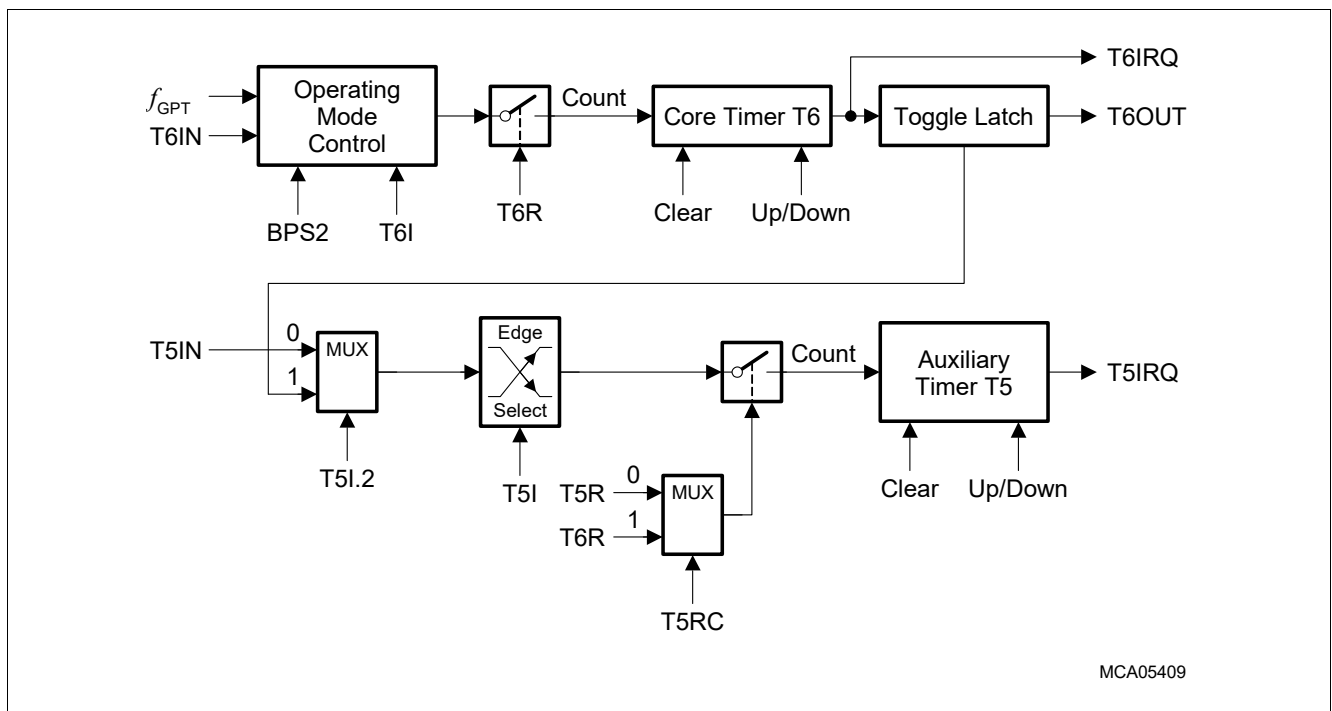

**Figure 104 Concatenation of Core Timer T6 and Auxiliary Timer T5**

## General Purpose Timer Units (GPT12)

### 15.4.5 GPT2 Register CAPREL Operating Modes

The Capture/Reload register CAPREL can be used to capture the contents of timer T5, or to reload timer T6. A special mode facilitates the use of register CAPREL for both functions at the same time. This mode allows frequency multiplication. The capture function is triggered by CAPIN, by T3IN and T3EUD, or by read GPT1 timers. The reload function is triggered by an overflow or underflow of timer T6.

In addition to the capture function, the capture trigger signal can also be used to clear the contents of timers T5 and T6 individually.

The functions of register CAPREL are controlled via several bit(field)s in the timer control registers T5CON and T6CON.

#### Capture/Reload Register CAPREL in Capture Mode

Capture mode for register CAPREL is selected by setting bit T5SC in control register T5CON (set bitfield CI in register T5CON to a non-zero value to select a trigger signal). In capture mode, the contents of the auxiliary timer T5 are latched into register CAPREL in response to a signal transition at the selected external input pin(s). Bit CT3 selects the external input line CAPIN or the input lines T3IN and/or T3EUD of GPT1 timer T3 as the source for a capture trigger. Either a positive, a negative, or both a positive and a negative transition at line CAPIN can be selected to trigger the capture function, or transitions on input T3IN or input T3EUD or both inputs, T3IN and T3EUD. The active edge is controlled by bitfield CI in register T5CON. [Table 100](#) summarizes these options.


**Table 100 CAPREL Register Input Edge Selection**

CT3	CI	Triggering Signal/Edge for Capture Mode
X	00 <sub>B</sub>	None. Capture Mode is disabled.
0	01 <sub>B</sub>	Positive transition (rising edge) on CAPIN. <sup>1)</sup>
0	10 <sub>B</sub>	Negative transition (falling edge) on CAPIN.
0	11 <sub>B</sub>	Any transition (rising or falling edge) on CAPIN.
1	01 <sub>B</sub>	Any transition (rising or falling edge) on T3IN.
1	10 <sub>B</sub>	Any transition (rising or falling edge) on T3EUD.
1	11 <sub>B</sub>	Any transition (rising or falling edge) on T3IN or T3EUD.

1) Rising edge must be selected if capturing is triggered by the internal GPT1 read signals (see register PISEL and [“Combined Capture Modes” on Page 468](#)).



## General Purpose Timer Units (GPT12)

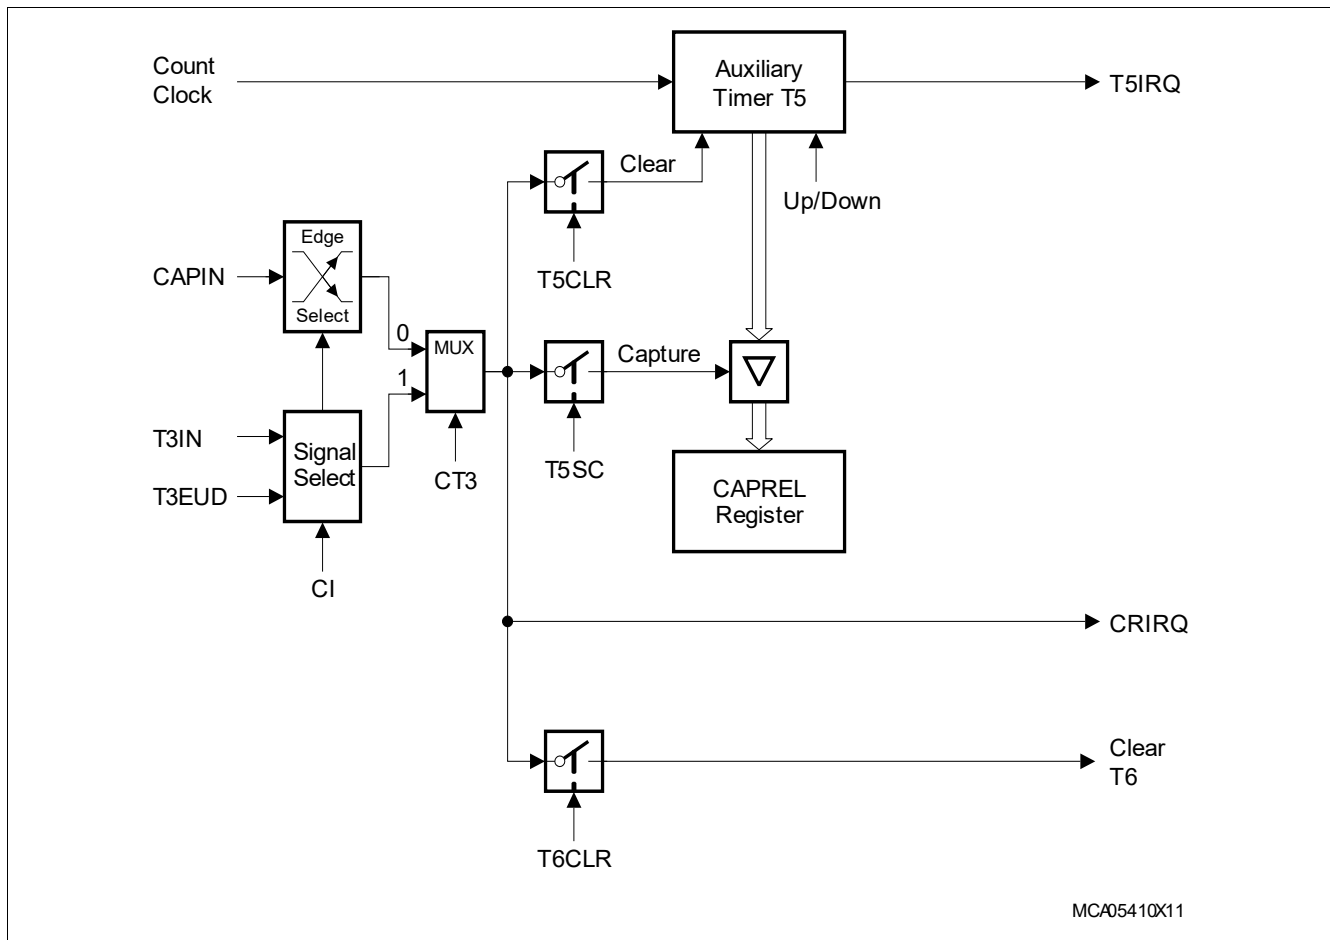

**Figure 105 Capture/Reload Register CAPREL in Capture Mode**

When a selected trigger is detected, the contents of the auxiliary timer T5 are latched into register CAPREL and the interrupt request line CRIRQ is activated. The same event can optionally clear timer T5 and/or timer T6. This option is enabled by bit T5CLR in register T5CON and bit T6CLR in register T6CON, respectively. If  $T_xCLR = 0$  the contents of timer  $T_x$  is not affected by a capture. If  $T_xCLR = 1$  timer  $T_x$  is cleared after the current timer T5 value has been latched into register CAPREL.

*Note:* Bit T5SC only controls whether or not a capture is performed. If T5SC is cleared the external input pin(s) can still be used to clear timer T5 and/or T6, or as external interrupt input(s). This interrupt is controlled by the CAPREL interrupt control register SCU.GPT12IEN and SCU.GPT12IRC.


When capture triggers T3IN or T3EUD are enabled ( $CT3 = 1$ ), register CAPREL captures the contents of T5 upon transitions of the selected input(s). These values can be used to measure T3's input signals. This is useful, for example, when T3 operates in Incremental Interface Mode, in order to derive dynamic information (speed, acceleration) from the input signals.

For capture mode operation, the selected pins CAPIN, T3IN, or T3EUD must be configured as input. To ensure that a transition of a trigger input signal applied to one of these inputs is recognized correctly, its level must be held high or low for a minimum number of module clock cycles, detailed in [Section 15.4.6](#).

**General Purpose Timer Units (GPT12)**

**Capture/Reload Register CAPREL in Reload Mode**

Reload mode for register CAPREL is selected by setting bit T6SR in control register T6CON. In reload mode, the core timer T6 is reloaded with the contents of register CAPREL, triggered by an overflow or underflow of T6. This will not activate the interrupt request line CRIRQ associated with the CAPREL register. However, interrupt request line T6IRQ will be activated, indicating the overflow/underflow of T6.

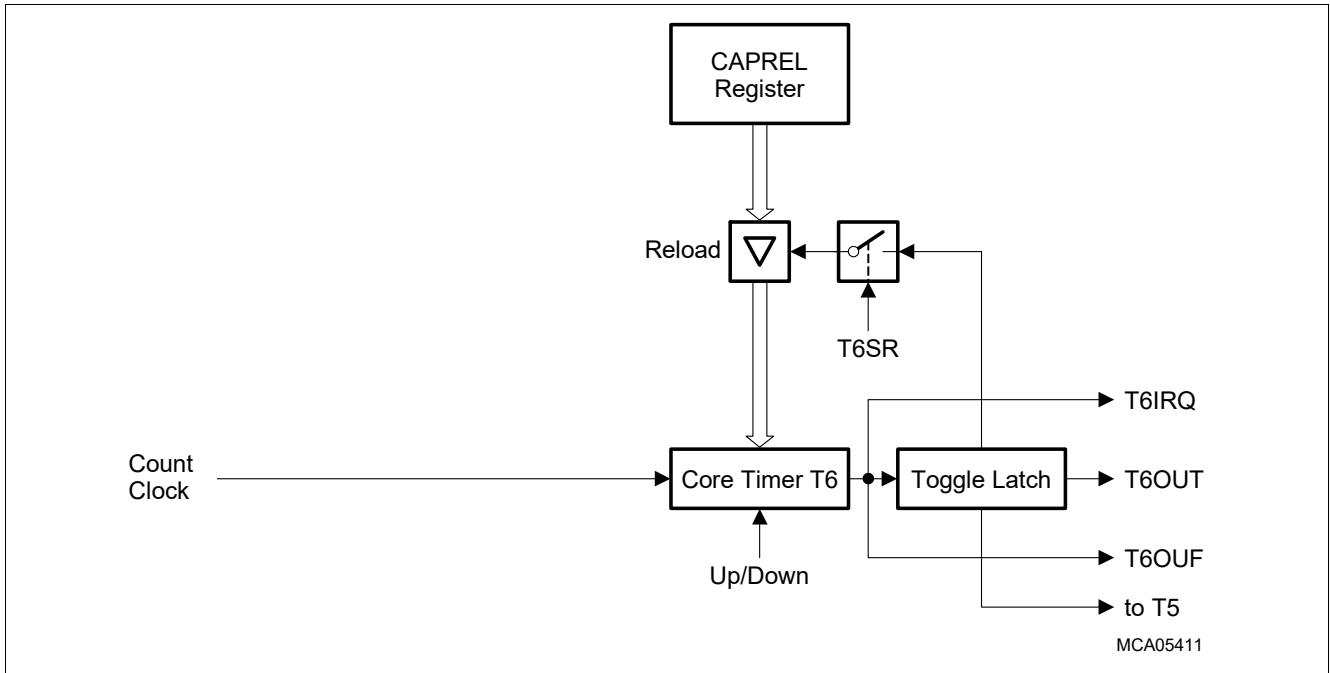


**Figure 106 Capture/Reload Register CAPREL in Reload Mode**

## General Purpose Timer Units (GPT12)

### Capture/Reload Register CAPREL in Capture-And-Reload Mode

Since the reload function and the capture function of register CAPREL can be enabled individually by bits T5SC and T6SR, the two functions can be enabled simultaneously by setting both bits. This feature can be used to generate an output frequency that is a multiple of the input frequency.

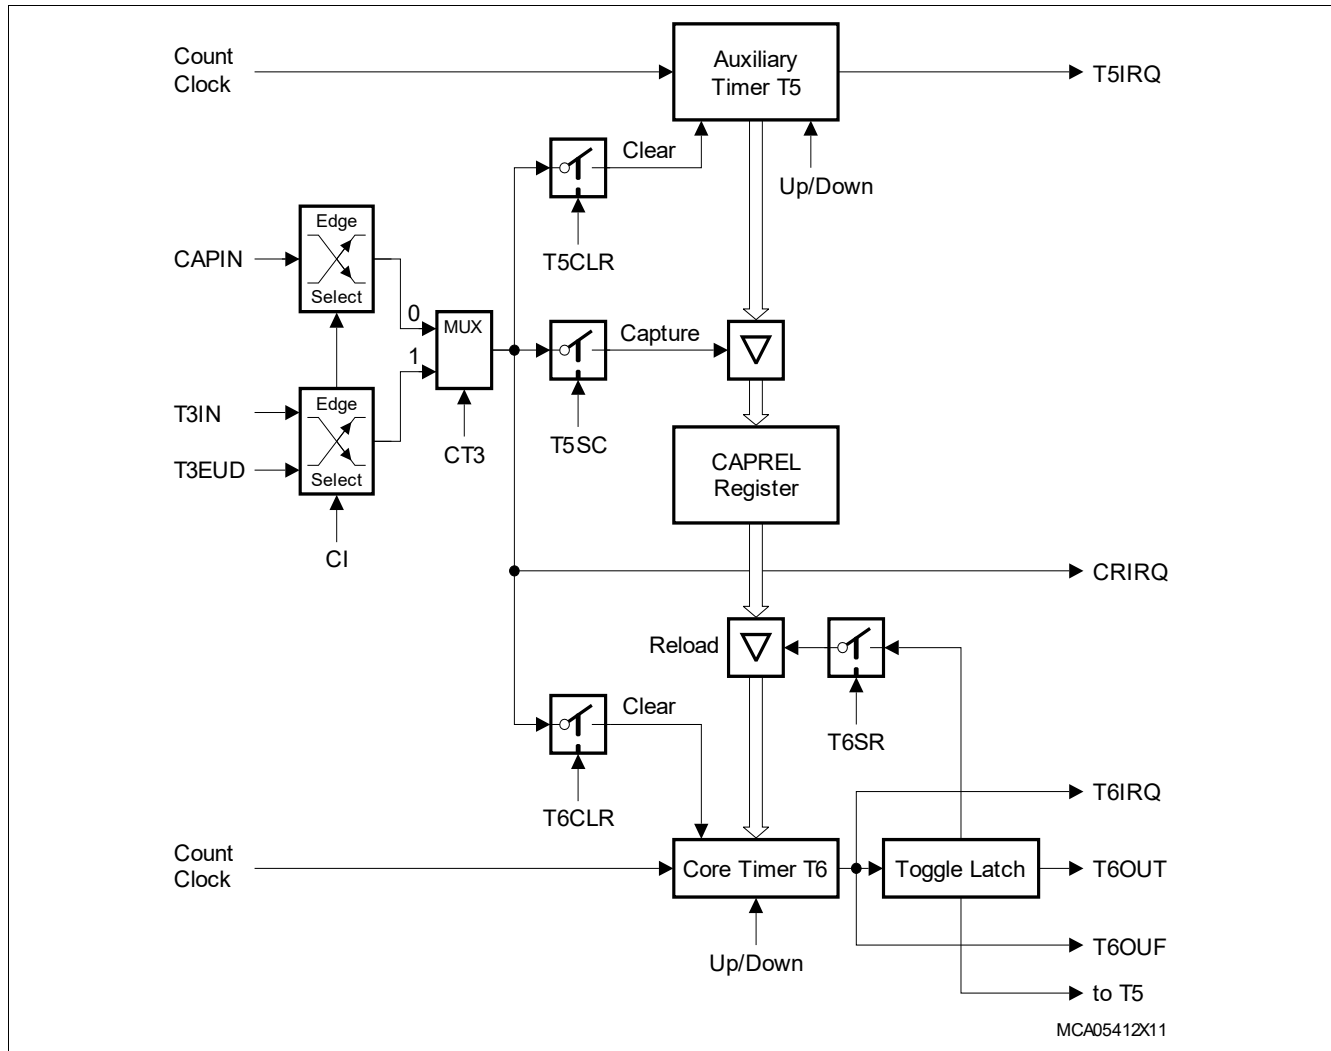

**Figure 107 Capture/Reload Register CAPREL in Capture-And-Reload Mode**

This combined mode can be used to detect consecutive external events which may occur aperiodically, but where a finer resolution, that means, more ‘ticks’ within the time between two external events is required.

For this purpose, the time between the external events is measured using timer T5 and the CAPREL register. Timer T5 runs in Timer Mode counting up with a frequency of e.g.  $f_{GPT}/32$ . The external events are applied to pin CAPIN. When an external event occurs, the contents of timer T5 are latched into register CAPREL and timer T5 is cleared ( $T5CLR = 1$ ). Thus, register always contains the correct time between two events, measured in timer T5 increments. Timer T6, which runs in Timer Mode counting down with a frequency of e.g.  $f_{GPT}/4$ , uses the value in register CAPREL to perform a reload on underflow. This means, the value in register CAPREL represents the time between two underflows of timer T6, now measured in timer T6 increments. Since (in this example) timer T6 runs 8 times faster than timer T5, it will underflow 8 times within the time between two external events. Thus, the underflow signal of timer T6 generates 8 ‘ticks’. Upon each underflow, the interrupt request line T6IRQ will be activated and bit T6OTL will be toggled. The state of T6OTL may be output on pin T6OUT. This signal has 8 times more transitions than the signal which is applied to pin CAPIN.

## General Purpose Timer Units (GPT12)

*Note: The underflow signal of Timer T6 can furthermore be used to clock one or more of the timers of the CAPCOM units, which gives the user the possibility to set compare events based on a finer resolution than that of the external events. This connection is accomplished via signal T6OUF.*

### Capture Correction

A certain deviation of the output frequency is generated by the fact that timer T5 will count actual time units (e.g. T5 running at 1 MHz will count up to the value  $64_H/100_D$  for a 10 kHz input signal), while T6OTL will only toggle upon an underflow of T6 (i.e. the transition from  $0000_H$  to  $FFFF_H$ ). In the above mentioned example, T6 would count down from  $64_H$ , so the underflow would occur after 101 timing ticks of T6. The actual output frequency then is 79.2 kHz, instead of the expected 80 kHz.

This deviation can be compensated for by using T6 overflows. In this case, T5 counts down and T6 counts up. Upon a signal transition on pin CAPIN, the count value in T5 is captured into CAPREL and T5 is cleared to  $0000_H$ . In its next clock cycle, T5 underflows to  $FFFF_H$ , and continues to count down with the following clocks. T6 is reloaded from CAPREL upon an overflow, and continues to count up with its following clock cycles (8 times faster in the above example). In this case, T5 and T6 count the same number of steps with their respective internal count frequency.

In the above example, T5 running at 1 MHz will count down to the value  $FF9C_H/-100_D$  for a 10 kHz input signal applied at CAPIN, while T6 counts up from  $FF9C_H$  through  $FFFF_H$  to  $0000_H$ . So the overflow occurs after 100 timing ticks of T6, and the actual output frequency at T6OUT then is the expected 80 kHz.

However, in this case CAPREL does not directly contain the time between two CAPIN events, but rather its 2's complement. Software will have to convert this value, if it is required for the operation.

### Combined Capture Modes

For incremental interface applications in particular, several timer features can be combined to obtain dynamic information such as speed, acceleration, or deceleration. The current position itself can be obtained directly from the timer register (T2, T3, T4).

The time information to determine the dynamic parameters is generated by capturing the contents of the free-running timer T5 into register CAPREL. Two trigger sources for this event can be selected:

- Capture trigger on sensor signal transitions
- Capture trigger on position read operations

Capturing on sensor signal transitions is available for timer T3 inputs. This mode is selected by setting bit CT3 and selecting the intended signal(s) via bitfield CI in register T5CON. CAPREL then indicates the time between two selected transitions (measured in T5 counts).

Capturing on position read operations is available for timers T2, T3, and T4. This mode is selected by clearing bit CT3 and selecting the rising edge via bitfield CI in register T5CON. Bitfield ISCAPIN in register PISEL then selects either a read access from T3 or a read access from any of T2 or T3 or T4. CAPREL then indicates the time between two read accesses.

These operating modes directly support the measurement of position and rotational speed. Acceleration and deceleration can then be determined by evaluating subsequent speed measurements.

## General Purpose Timer Units (GPT12)

### 15.4.6 GPT2 Clock Signal Control

All actions within the timer block GPT2 are triggered by transitions of its basic clock. This basic clock is derived from the module clock  $f_{\text{GPT}}$  by a basic block prescaler, controlled by bitfield BPS2 in register T6CON (see [Figure 78](#)). The count clock can be generated in two different ways:

- **Internal count clock**, derived from GPT2's basic clock via a programmable prescaler, is used for (gated) Timer Mode.
- **External count clock**, derived from the timer's input pin(s), is used for Counter Mode.

For both ways, the basic clock determines the maximum count frequency and the timer's resolution:

**Table 101 Basic Clock Selection for Block GPT2**

Block Prescaler <sup>1)</sup>	BPS2 = 01 <sub>B</sub>	BPS2 = 00 <sub>B</sub> <sup>2)</sup>	BPS2 = 11 <sub>B</sub>	BPS2 = 10 <sub>B</sub>
<b>Prescaling Factor for GPT2: F(BPS2)</b>	F(BPS2) = 2	F(BPS2) = 4	F(BPS2) = 8	F(BPS2) = 16
<b>Maximum External Count Frequency</b>	$f_{\text{GPT}}/4$	$f_{\text{GPT}}/8$	$f_{\text{GPT}}/16$	$f_{\text{GPT}}/32$
<b>Input Signal Stable Time</b>	$2 \times t_{\text{GPT}}$	$4 \times t_{\text{GPT}}$	$8 \times t_{\text{GPT}}$	$16 \times t_{\text{GPT}}$

1) Please note the non-linear encoding of bitfield BPS2.

2) Default after reset.

*Note:* When initializing the GPT2 block, and the block prescaler BPS2 in T6CON needs to be set to a value different from its reset value (00<sub>B</sub>), it must be initialized first before any mode involving external trigger signals is configured. These modes include counter, capture, and reload mode. Otherwise, unintended count/capture/reload events may occur.

*In this case (e.g. when changing BPS2 during operation of the GPT2 block), disable related interrupts before modification of BPS2, and afterwards clear the corresponding service request flags and re-initialize those registers (T5, T6, CAPREL) that might be affected by a count/capture/reload event.*

### Internal Count Clock Generation

In Timer Mode and Gated Timer Mode, the count clock for each GPT2 timer is derived from the GPT2 basic clock by a programmable prescaler, controlled by bitfield TxI in the respective timer's control register TxCON. The count frequency  $f_{\text{Tx}}$  for a timer Tx and its resolution  $r_{\text{Tx}}$  are scaled linearly with lower clock frequencies, as can be seen from the following formula:

$$f_{\text{Tx}} = \frac{f_{\text{GPT}}}{F(\text{BPS2}) \times 2^{\langle \text{TxI} \rangle}} \quad r_{\text{Tx}}[\mu\text{s}] = \frac{F(\text{BPS2}) \times 2^{\langle \text{TxI} \rangle}}{f_{\text{GPT}}[\text{MHz}]} \quad (15.2)$$

The effective count frequency depends on the common module clock prescaler factor F(BPS2) as well as on the individual input prescaler factor  $2^{\langle \text{TxI} \rangle}$ . [Table 105](#) summarizes the resulting overall divider factors for a GPT2 timer that result from these cascaded prescalers.

[Table 102](#) lists GPT2 timer's parameters (such as count frequency, resolution, and period) resulting from the selected overall prescaler factor and the module clock  $f_{\text{GPT}}$ . Note that some numbers may be rounded.

## General Purpose Timer Units (GPT12)

**Table 102 GPT2 Timer Parameters**

System Clock = 10 MHz			Overall Divider Factor	System Clock = 40 MHz		
Frequency	Resolution	Period		Frequency	Resolution	Period
5.0 MHz	200 ns	13.11 ms	2	20.0 MHz	50 ns	3.28 ms
2.5 MHz	400 ns	26.21 ms	4	10.0 MHz	100 ns	6.55 ms
1.25 MHz	800 ns	52.43 ms	8	5.0 MHz	200 ns	13.11 ms
625.0 kHz	1.6 $\mu$ s	104.9 ms	16	2.5 MHz	400 ns	26.21 ms
312.5 kHz	3.2 $\mu$ s	209.7 ms	32	1.25 MHz	800 ns	52.43 ms
156.25 kHz	6.4 $\mu$ s	419.4 ms	64	625.0 kHz	1.6 $\mu$ s	104.9 ms
78.125 kHz	12.8 $\mu$ s	838.9 ms	128	312.5 kHz	3.2 $\mu$ s	209.7 ms
39.06 kHz	25.6 $\mu$ s	1.678 s	256	156.25 kHz	6.4 $\mu$ s	419.4 ms
19.53 kHz	51.2 $\mu$ s	3.355 s	512	78.125 kHz	12.8 $\mu$ s	838.9 ms
9.77 kHz	102.4 $\mu$ s	6.711 s	1024	39.06 kHz	25.6 $\mu$ s	1.678 s
4.88 kHz	204.8 $\mu$ s	13.42 s	2048	19.53 kHz	51.2 $\mu$ s	3.355 s

### External Count Clock Input

The external input signals of the GPT2 block are sampled with the GPT2 basic clock (see [Figure 78](#)). To ensure that a signal is recognized correctly, its current level (high or low) must be held active for at least one complete sampling period, before changing. A signal transition is recognized if two subsequent samples of the input signal represent different levels. Therefore, a minimum of two basic clock periods are required for the sampling of an external input signal. Thus, the maximum frequency of an input signal must not be higher than half the basic clock.

[Table 103](#) summarizes the resulting requirements for external GPT2 input signals.

**Table 103 GPT2 External Input Signal Limits**

GPT2 Basic Clock = 10 MHz		Input Freq. Factor	GPT2 Divider BPS2	Input Phase Duration	GPT2 Basic Clock = 40 MHz	
Max. Input Frequency	Min. Level Hold Time				Max. Input Frequency	Min. Level Hold Time
2.5 MHz	200 ns	$f_{GPT}/4$	01 <sub>B</sub>	$2 \times t_{GPT}$	10.0 MHz	50 ns
1.25 MHz	400 ns	$f_{GPT}/8$	00 <sub>B</sub>	$4 \times t_{GPT}$	5.0 MHz	100 ns
625.0 kHz	800 ns	$f_{GPT}/16$	11 <sub>B</sub>	$8 \times t_{GPT}$	2.5 MHz	200 ns
312.5 kHz	1.6 $\mu$ s	$f_{GPT}/32$	10 <sub>B</sub>	$16 \times t_{GPT}$	1.25 MHz	400 ns

These limitations are valid for all external input signals to GPT2, including the external count signals in Counter Mode and the gate input signals in Gated Timer Mode.

---


**General Purpose Timer Units (GPT12)****15.4.7 Interrupt Control for GPT2 Timers and CAPREL**

When a timer overflows from  $FFFF_H$  to  $0000_H$  (when counting up), or when it underflows from  $0000_H$  to  $FFFF_H$  (when counting down), its interrupt request flag in register GPT2\_T5 or GPT2\_T6I will be set. This will cause an interrupt to the respective timer interrupt vector, if the respective interrupt enable bit is set.


Whenever a transition according to the selection in bit field CI is detected at pin CAPIN, interrupt request flag in register GPT12\_CR is set. Setting any request flag will cause an interrupt to the respective timer or CAPREL interrupt vector, if the respective interrupt enable bit is set.

There is an interrupt control register for each of the two timers (T5, T6) and for the CAPREL register. All interrupt control registers have the same structure described in section Interrupt Control.


---

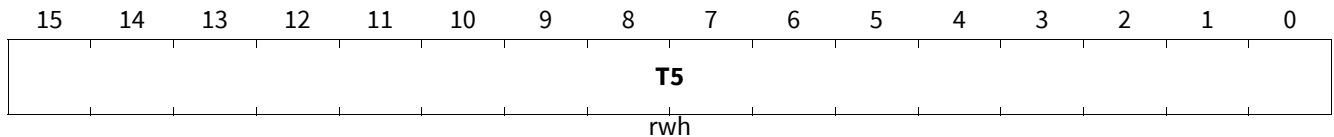**General Purpose Timer Units (GPT12)**
**15.4.8 GPT2 Registers****15.4.8.1 GPT2 Timer Registers****T5****Timer 5 Count Register****(2C<sub>H</sub>)****Reset Value: 0000<sub>H</sub>**

Field	Bits	Typ	Description
<b>T5</b>	[15:0]	rwh	<b>Timer T5 Current Value</b> Contains the current value of the timer T5

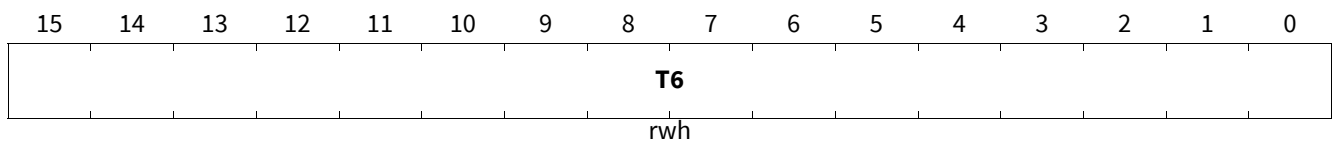**T6****Timer T6 Count Register****(30<sub>H</sub>)****Reset Value: 0000<sub>H</sub>**

Field	Bits	Typ	Description
<b>T6</b>	[15:0]	rwh	<b>Timer T6 Current Value</b> Contains the current value of the timer T6

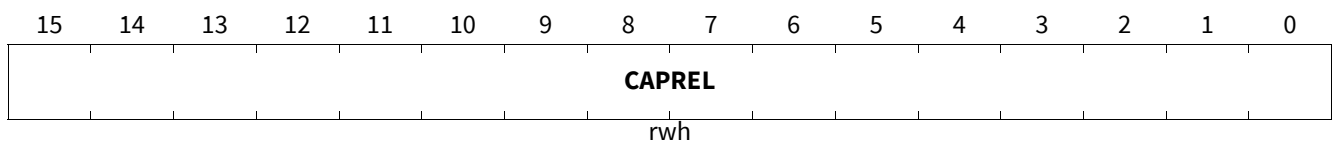**CAPREL****Capture/Reload Register****(1C<sub>H</sub>)****Reset Value: 0000<sub>H</sub>**

Field	Bits	Typ	Description
<b>CAPREL</b>	[15:0]	rwh	<b>Current reload value or Captured value</b> Contains the current value of the CAPREL register



## General Purpose Timer Units (GPT12)

### 15.4.8.2 GPT2 Timer Control Registers

#### 15.4.8.2.1 GPT2 Core Timer T6 Control Register

##### T6CON

##### Timer T6 Control Register

(18<sub>H</sub>)Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
<b>T6 SR</b>	<b>T6 CLR</b>	<b>Res</b>	<b>BPS2</b>	<b>T6 OTL</b>	<b>T6 OE</b>	<b>T6 UDE</b>	<b>T6 UD</b>	<b>T6R</b>	<b>T6M</b>			<b>T6I</b>			
rw	rw	r	rw	rwh	rw	rw	rw	rw	rw	rw			rw		

Field	Bits	Type	Description
<b>T6I</b>	[2:0]	rw	<b>Timer T6 Input Parameter Selection</b> Depends on the operating mode, see respective sections for encoding: <a href="#">Table 105</a> for Timer Mode and Gated Timer Mode <a href="#">Table 106</a> for Counter Mode
<b>T6M</b>	[5:3]	rw	<b>Timer T6 Mode Control</b> (Basic Operating Mode) 000 <sub>B</sub> Timer Mode 001 <sub>B</sub> Counter Mode 010 <sub>B</sub> Gated Timer Mode with gate active low 011 <sub>B</sub> Gated Timer Mode with gate active high 100 <sub>B</sub> Reserved. Do not use this combination. 101 <sub>B</sub> Reserved. Do not use this combination. 110 <sub>B</sub> Reserved. Do not use this combination. 111 <sub>B</sub> Reserved. Do not use this combination.
<b>T6R</b>	6	rw	<b>Timer T6 Run Bit</b> 0 <sub>B</sub> Timer T6 stops 1 <sub>B</sub> Timer T6 runs
<b>T6UD</b>	7	rw	<b>Timer T6 Up/Down Control<sup>1)</sup></b> 0 <sub>B</sub> Timer T6 counts up 1 <sub>B</sub> Timer T6 counts down  <i>Note:</i> This bit only controls count direction of T6 if bit T6UDE = 0.
<b>T6UDE</b>	8	rw	<b>Timer T6 External Up/Down Enable<sup>1)</sup></b> 0 <sub>B</sub> Count direction is controlled by bit T6UD; input T6EUD is disconnected 1 <sub>B</sub> Count direction is controlled by input T6EUD
<b>T6OE</b>	9	rw	<b>Overflow/Underflow Output Enable</b> 0 <sub>B</sub> Alternate Output Function Disabled 1 <sub>B</sub> State of timer T6 toggle latch is output on pin T6OUT
<b>T6OTL</b>	10	rwh	<b>Timer T6 Overflow Toggle Latch</b> Toggles on each overflow/underflow of timer T6. Can be set or reset by software (see separate description)

---

**General Purpose Timer Units (GPT12)**

Field	Bits	Type	Description
<b>BPS2</b>	[12:11]	rw	<b>GPT2 Block Prescaler Control</b> Selects the basic clock for block GPT2 (see also <a href="#">Section 15.4.6</a> ) $00_B$ $f_{GPT}/4$ $01_B$ $f_{GPT}/2$ $10_B$ $f_{GPT}/16$ $11_B$ $f_{GPT}/8$
<b>Res</b>	13	r	<b>Reserved</b> Read as 0; should be written with 0.
<b>T6CLR</b>	14	rw	<b>Timer T6 Clear Enable Bit</b> $0_B$ Timer T6 is not cleared on a capture event $1_B$ Timer T6 is cleared on a capture event
<b>T6SR</b>	15	rw	<b>Timer T6 Reload Mode Enable</b> $0_B$ Reload from register CAPREL disabled $1_B$ Reload from register CAPREL enabled

1) See [Table 104](#) for encoding of bits T6UD and T6UDE.

## General Purpose Timer Units (GPT12)

### 15.4.8.2.2 GPT2 Auxiliary Timer T5 Control Registers

#### T5CON

#### Timer 5 Control Register

(14<sub>H</sub>)Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
<b>T5 SC</b>	<b>T5 CLR</b>	<b>CI</b>	<b>Res</b>	<b>CT3</b>	<b>T5 RC</b>	<b>T5 UDE</b>	<b>T5 UD</b>	<b>T5R</b>	<b>Res</b>	<b>T5M</b>	<b>T5I</b>				
rw	rw	rw	r	rw	rw	rw	rw	rw	r	rw	rw				

Field	Bits	Type	Description
<b>T5I</b>	[2:0]	rw	<b>Timer T5 Input Parameter Selection</b> Depends on the operating mode, see respective sections for encoding: <a href="#">Table 105</a> for Timer Mode and Gated Timer Mode <a href="#">Table 107</a> for Counter Mode
<b>T5M</b>	[4:3]	rw	<b>Timer T5 Mode Control</b> (Basic Operating Mode) 00 <sub>B</sub> Timer Mode 01 <sub>B</sub> Counter Mode 10 <sub>B</sub> Gated Timer Mode with gate active low 11 <sub>B</sub> Gated Timer Mode with gate active high
<b>Res</b>	5	r	<b>Reserved</b> Read as 0; should be written with 0.
<b>T5R</b>	6	rw	<b>Timer T5 Run Bit</b> 0 <sub>B</sub> Timer T5 stops 1 <sub>B</sub> Timer T5 runs  <i>Note:</i> This bit only controls timer T5 if bit T5RC = 0.
<b>T5UD</b>	7	rw	<b>Timer T5 Up/Down Control<sup>1)</sup></b> 0 <sub>B</sub> Timer T5 counts up 1 <sub>B</sub> Timer T5 counts down  <i>Note:</i> This bit only controls count direction of T5 if bit T5UDE = 0.
<b>T5UDE</b>	8	rw	<b>Timer T5 External Up/Down Enable<sup>1)</sup></b> 0 <sub>B</sub> Count direction is controlled by bit T5UD; input T5EUD is disconnected 1 <sub>B</sub> Count direction is controlled by input T5EUD
<b>T5RC</b>	9	rw	<b>Timer T5 Remote Control</b> 0 <sub>B</sub> Timer T5 is controlled by its own run bit T5R 1 <sub>B</sub> Timer T5 is controlled by the run bit T6R of core timer T6, not by bit T5R
<b>CT3</b>	10	rw	<b>Timer T3 Capture Trigger Enable</b> 0 <sub>B</sub> Capture trigger from input line CAPIN 1 <sub>B</sub> Capture trigger from T3 input lines T3IN and/or T3EUD
<b>Res</b>	11	r	<b>Reserved</b> Read as 0; should be written with 0.

---

**General Purpose Timer Units (GPT12)**

Field	Bits	Type	Description
<b>CI</b>	[13:12]	rw	<b>Register CAPREL Capture Trigger Selection<sup>2)</sup></b> 00 <sub>B</sub> Capture disabled 01 <sub>B</sub> Positive transition (rising edge) on CAPIN <sup>3)</sup> or any transition on T3IN 10 <sub>B</sub> Negative transition (falling edge) on CAPIN or any transition on T3EUD 11 <sub>B</sub> Any transition (rising or falling edge) on CAPIN or any transition on T3IN or T3EUD
<b>T5CLR</b>	14	rw	<b>Timer T5 Clear Enable Bit</b> 0 <sub>B</sub> Timer T5 is not cleared on a capture event 1 <sub>B</sub> Timer T5 is cleared on a capture event
<b>T5SC</b>	15	rw	<b>Timer T5 Capture Mode Enable</b> 0 <sub>B</sub> Capture into register CAPREL disabled 1 <sub>B</sub> Capture into register CAPREL enabled

1) See [Table 104](#) for encoding of bits T5UD and T5UDE.

2) To define the respective trigger source signal, also bit CT3 must be regarded (see [Table 100](#)).

3) Rising edge must be selected if capturing is triggered by the internal GPT1 read signals (see register PISEL and **“Combined Capture Modes” on Page 468**).

---

**General Purpose Timer Units (GPT12)**
**15.4.8.2.3 Encoding of Timer Count Direction Control**
**Table 104 GPT2 Timer Count Direction Control**

Pin TxEUD	Bit TxUDE	Bit TxUD	Count Direction
X	0	0	Count Up
X	0	1	Count Down
0	1	0	Count Up
1	1	0	Count Down
0	1	1	Count Down
1	1	1	Count Up

**15.4.8.2.4 Timer Mode and Gated Timer Mode: Encoding of Overall Prescaler Factor**
**Table 105 GPT2 Overall Prescaler Factors for Internal Count Clock  
(Timer Mode and Gated Timer Mode)**

Individual Prescaler for Tx	Common Prescaler for Module Clock <sup>1)</sup>			
	BPS2 = 01 <sub>B</sub>	BPS2 = 00 <sub>B</sub>	BPS2 = 11 <sub>B</sub>	BPS2 = 10 <sub>B</sub>
<b>Txl = 000<sub>B</sub></b>	2	4	8	16
<b>Txl = 001<sub>B</sub></b>	4	8	16	32
<b>Txl = 010<sub>B</sub></b>	8	16	32	64
<b>Txl = 011<sub>B</sub></b>	16	32	64	128
<b>Txl = 100<sub>B</sub></b>	32	64	128	256
<b>Txl = 101<sub>B</sub></b>	64	128	256	512
<b>Txl = 110<sub>B</sub></b>	128	256	512	1024
<b>Txl = 111<sub>B</sub></b>	256	512	1024	2048

1) Please note the non-linear encoding of bitfield BPS2.

---

**General Purpose Timer Units (GPT12)**
**15.4.8.2.5 Counter Mode: Encoding of Input Edge Selection**
**Table 106 GPT2 Core Timer T6 Input Edge Selection (Counter Mode)**

<b>T6I</b>	<b>Triggering Edge for Counter Increment/Decrement</b>
000 <sub>B</sub>	None. Counter T6 is disabled
001 <sub>B</sub>	Positive transition (rising edge) on T6IN
010 <sub>B</sub>	Negative transition (falling edge) on T6IN
011 <sub>B</sub>	Any transition (rising or falling edge) on T6IN
1XX <sub>B</sub>	Reserved. Do not use this combination

**Table 107 GPT2 Auxiliary Timer T5 Input Edge Selection (Counter Mode)**

<b>T5I</b>	<b>Triggering Edge for Counter Increment/Decrement</b>
X00 <sub>B</sub>	None. Counter T5 is disabled
001 <sub>B</sub>	Positive transition (rising edge) on T5IN
010 <sub>B</sub>	Negative transition (falling edge) on T5IN
011 <sub>B</sub>	Any transition (rising or falling edge) on T5IN
101 <sub>B</sub>	Positive transition (rising edge) of T6 toggle latch T6OTL
110 <sub>B</sub>	Negative transition (falling edge) of T6 toggle latch T6OTL
111 <sub>B</sub>	Any transition (rising or falling edge) of T6 toggle latch T6OTL

**15.4.8.3 GPT2 Timer and CAPREL Interrupt Control Registers**

The Interrupt control register for GPT2 and CAPREL are located in the SCU.[GPT12IEN](#) and SCU. [GPT12IRC](#).

## General Purpose Timer Units (GPT12)

### 15.5 Miscellaneous GPT12 Registers

The following registers are not assigned to a specific timer block. They control general functions and/or give general information.

Register PISEL selects timer input signal from several sources under software control.

#### PISEL

#### Port Input Select Register

(04<sub>H</sub>)Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ISCAPIN		IST6 EUD	IST6 IN	IST5 EUD	IST5 IN	IST4EUD		IST4IN		IST3EUD		IST3IN		IST2E UD	IST2 IN
rw		rw	rw	rw	rw	rw		rw		rw		rw		rw	rw

Field	Bits	Typ	Description
IST2IN	0	rw	<b>Input Select for T2IN</b> 0 <sub>B</sub> Signal T2INA is selected 1 <sub>B</sub> Signal T2INB is selected
IST2EUD	1	rw	<b>Input Select for T2EUD</b> 0 <sub>B</sub> Signal T2EUDA is selected 1 <sub>B</sub> Signal T2EADB is selected
IST3IN	[3:2]	rw	<b>Input Select for T3IN</b> 00 <sub>B</sub> Signal T3INA is selected 01 <sub>B</sub> Signal T3INB is selected 10 <sub>B</sub> Signal T3INC is selected 11 <sub>B</sub> Signal T3IND is selected
IST3EUD	[5:4]	rw	<b>Input Select for T3EUD</b> 00 <sub>B</sub> Signal T3EUDA is selected 01 <sub>B</sub> Signal T3EADB is selected 10 <sub>B</sub> Signal T3EUDC is selected 11 <sub>B</sub> Signal T3EUDD is selected
IST4IN	[7:6]	rw	<b>Input Select for T4IN</b> 00 <sub>B</sub> Signal T4INA is selected 01 <sub>B</sub> Signal T4INB is selected 10 <sub>B</sub> Signal T4INC is selected 11 <sub>B</sub> Signal T4IND is selected
IST4EUD	[9:8]	rw	<b>Input Select for T4EUD</b> 00 <sub>B</sub> Signal T4EUDA is selected 01 <sub>B</sub> Signal T4EADB is selected 10 <sub>B</sub> Signal T4EUDC is selected 11 <sub>B</sub> Signal T4EUDD is selected
IST5IN	10	rw	<b>Input Select for T5IN</b> 0 <sub>B</sub> Signal T5INA is selected 1 <sub>B</sub> Signal T5INB is selected
IST5EUD	11	rw	<b>Input Select for T5EUD</b> 0 <sub>B</sub> Signal T5EUDA is selected 1 <sub>B</sub> Signal T5EADB is selected

## General Purpose Timer Units (GPT12)

Field	Bits	Typ	Description
<b>IST6IN</b>	12	rw	<b>Input Select for T6IN</b> 0 <sub>B</sub> Signal T6INA is selected 1 <sub>B</sub> Signal T6INB is selected
<b>IST6EUD</b>	13	rw	<b>Input Select for T6EUD</b> 0 <sub>B</sub> Signal T6EUDA is selected 1 <sub>B</sub> Signal T6EUDB is selected
<b>ISCAPIN</b>	[15:14]	rw	<b>Input Select for CAPIN</b> 00 <sub>B</sub> Signal CAPINA is selected 01 <sub>B</sub> Signal CAPINB is selected P0.3 if <b>MODPISEL1</b> .GPT12CAPINB = 0 BEMF status if <b>MODPISEL1</b> .GPT12CAPINB = 1 10 <sub>B</sub> Signal CAPINC (Read trigger from T3) is selected 11 <sub>B</sub> Signal CAPIND (Read trigger from T2 or T3 or T4) is selected

Note: *PISEL's reset value represents the connections available in previous versions.*


Register ID indicates the module version.

### ID

#### Module Identification Register

(00<sub>H</sub>)

Reset Value: 5804<sub>H</sub>

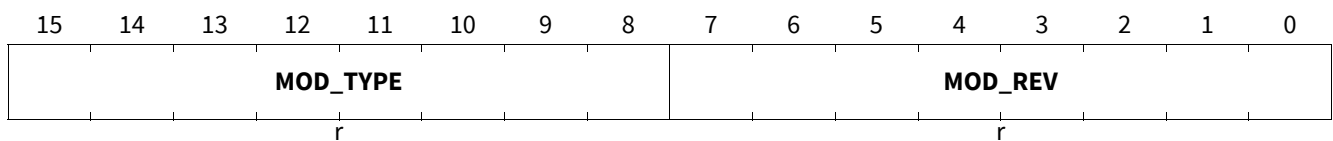

Field	Bits	Type	Description
<b>MOD_REV</b>	[7:0]	r	<b>Module Revision Number</b> MOD_REV defines the revision number. The value of a module revision starts with 01 <sub>H</sub> (first revision).
<b>MOD_TYPE</b>	[15:8]	r	<b>Module Identification Number</b> This bitfield defines the module identification number (58 <sub>H</sub> = GPT12E).



## General Purpose Timer Units (GPT12)

### 15.6 Register Map

**Table 108 Register Address Space**

Module	Base Address	End Address	Note
GPT12E	40010000 <sub>H</sub>	40013FFF <sub>H</sub>	

**Table 109** shows all registers which are required for programming of the GPT12E module. It summarizes the GPT12E kernel registers and the module external registers and defines their addresses and reset values.

**Table 109 GPT12E Module Register Summary**

Name	Description	GPT12 Offset Address <sup>1)</sup>	Reset Value
<b>General Purpose Timer Unit (GPT12E)</b>			
<b>ID</b>	GPT12E Module ID Register	00 <sub>H</sub>	5804 <sub>H</sub>
<b>PISEL</b>	Input Signal Selection	04 <sub>H</sub>	0000 <sub>H</sub>
<b>T2CON</b>	GPT12E Timer T2 Control Register	08 <sub>H</sub>	0000 <sub>H</sub>
<b>T3CON</b>	GPT12E Timer T3 Control Register	0C <sub>H</sub>	0000 <sub>H</sub>
<b>T4CON</b>	GPT12E Timer T4 Control Register	10 <sub>H</sub>	0000 <sub>H</sub>
<b>T5CON</b>	GPT12E Timer T5 Control Register	14 <sub>H</sub>	0000 <sub>H</sub>
<b>T6CON</b>	GPT12E Timer T6 Control Register	18 <sub>H</sub>	0000 <sub>H</sub>
<b>CAPREL</b>	GPT12E Capture/Reload Register	1C <sub>H</sub>	0000 <sub>H</sub>
<b>T2</b>	GPT12E Timer T2 Register	20 <sub>H</sub>	0000 <sub>H</sub>
<b>T3</b>	GPT12E Timer T3 Register	24 <sub>H</sub>	0000 <sub>H</sub>
<b>T4</b>	GPT12E Timer T4 Register	28 <sub>H</sub>	0000 <sub>H</sub>
<b>T5</b>	GPT12E Timer T5 Register	2C <sub>H</sub>	0000 <sub>H</sub>
<b>T6</b>	GPT12E Timer T6 Register	30 <sub>H</sub>	0000 <sub>H</sub>

1) The absolute register address is calculated as follows:

Module Base Address + Offset Address (shown in this column)

General Purpose Timer Units (GPT12)

### 15.7 Implementation of the GPT12 Module

This chapter describes the implementation of the GPT12 module in the TLE987x device.

#### 15.7.1 Module Connections

Besides the described intra-module connections, the timer unit blocks GPT1 and GPT2 are connected to their environment in two basic ways:

- **Internal connections** interface the timers with on-chip resources such as clock generation unit, interrupt controller, or other timers.  
The GPT module is clocked with the TLE987x system clock, so  $f_{GPT} = f_{SYS}$ .
- **External connections** interface the timers with external resources via port pins.

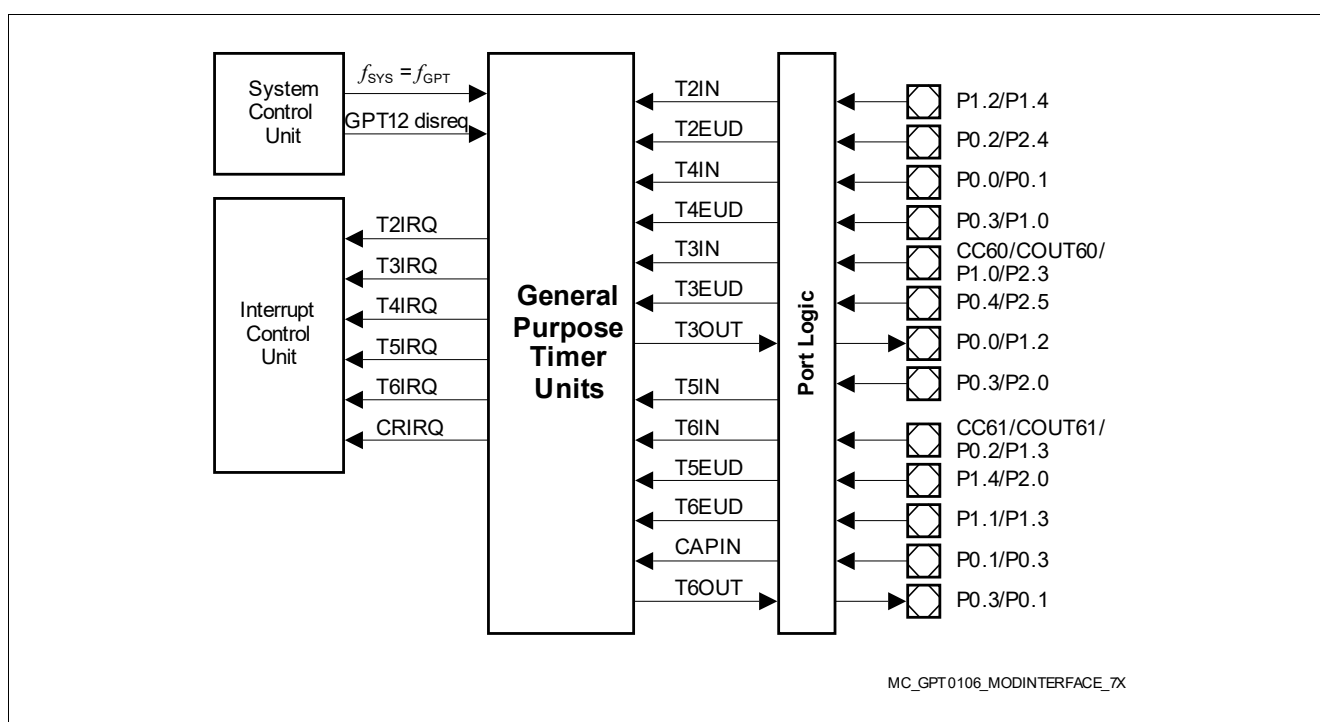


Figure 108 GPT Module Interfaces

The following table **Table 110** (GPT12) shows the digital connections of the GPT12 module with other modules or pins in the TLE987x device.

Table 110 GPT12 Digital Connections in TLE987x

Signal	from/to Module	I/O to GPT	Can be used to/as
T2INA	P1.2	I	count input signals for timer T2
T2INB	P1.4	I	
T2EUDA	P0.2	I	direction input signals for timer T2
T2EADB	P2.4	I	
T2IRQ	ICU/SCU	O	interrupt request from timer T2

**General Purpose Timer Units (GPT12)**
**Table 110 GPT12 Digital Connections in TLE987x (cont'd)**

Signal	from/to Module	I/O to GPT	Can be used to/as
T3INA	CC60	I	count input signals for timer T3
T3INB	GPT12PISEL	I	
T3INC	P1.0	I	
T3IND	MON	I	
T3EUDA	P0.4	I	direction input signals for timer T3
T3EUDB	P2.5	I	
T3EUDC		I	
T3EUDD		I	
T3OUT	P0.0	O	count output signal for timer T3
	P1.2	O	
T3IRQ	ICU/SCU	O	interrupt request from timer T3
T4INA	P0.0	I	count input signals for timer T4
T4INB	CC60	I	
T4INC	P0.1	I	
T4IND	GPT12PISEL	I	
T4EUDA	P0.3	I	direction input signals for timer T4
T4EUDB	P1.0	I	
T4EUDC		I	
T4EUDD		I	
T4IRQ	ICU/SCU	O	interrupt request from timer T4
T5INA	P0.3	I	count input signals for timer T5
T5INB	P2.0	I	
T5EUDA	P1.4	I	direction input signals for timer T5
T5EUDB	P2.0	I	
T5IRQ	ICU/SCU	O	interrupt request from timer T5
T6INA	P0.2	I	count input signals for timer T6
T6INB	P1.3	I	
T6EUDA	P1.1	I	direction input signals for timer T6
T6EUDB	P1.3	I	
T6OUT	P0.3	O	count output signal for timer T6
	P0.1	O	
T6IRQ	ICU/SCU	O	interrupt request from timer T6
T6OFL		O	over/under-flow signal from timer T6
CAPINA	P0.1	I	input capture signals
CAPINB	P0.3	I	
CAPINC	read trigger from T3	I	

---

**General Purpose Timer Units (GPT12)**
**Table 110 GPT12 Digital Connections in TLE987x (cont'd)**

Signal	from/to Module	I/O to GPT	Can be used to/as
CAPIND	read trigger from T2 or T3 or T4	I	
CRIRQ	ICU/SCU	O	interrupt request from capture control

**Port Control**

Port pins to be used for timer input signals must be switched to input (bitfield PC in the respective port control register must be 0xxx<sub>B</sub>) and must be selected via register PISEL.

Port pins to be used for timer output signals must be switched to output and the alternate timer output signal must be selected (bitfield PC in the respective port control register must be 1xxx<sub>B</sub>).

*Note:* For a description of the port control registers, please refer to chapter “Parallel Ports”.

**Interrupts**

The GPT12 has six interrupt request lines.

Interrupt nodes to be used for timer interrupt requests must be enabled and programmed to a specific interrupt level.

**Debug Details**

While the module GPT is disabled, its registers can still be read. While disabled the following registers can be written: PISEL, T5CON.

## 16 Timer2 and Timer21

This chapter describes the Timer2 and Timer21. Each timer is a 16-bit timer which additionally can function as a counter. Each Timer 2 module also provides a single channel 16-bit capture.

### 16.1 Features

- 16-bit auto-reload mode
  - selectable up or down counting
- One channel 16-bit capture mode

### 16.2 Introduction

The timer modules are general-purpose 16-bit timers. Timer 2/21 can function as a timer or counter in each of its modes. As a timer, it counts with an input clock of  $f_{PCLK}/12$  (if prescaler is disabled). As a counter, Timer 2 counts 1-to-0 transitions on pin T2. In the counter mode, the maximum resolution for the count is  $f_{PCLK}/24$  (if prescaler is disabled).

*Note:* “Timer 2” is generally referred in the following description which is applicable to each of the Timer2 and Timer21.

---

**Timer2 and Timer21**
**16.2.1 Timer2 and Timer21 Modes Overview**
**Table 111 Timer2 and Timer21 Modes**

Mode	Description
<b>Auto-reload</b>	<b>Up/Down Count Disabled</b> <ul style="list-style-type: none"> <li>• Count up only</li> <li>• Start counting from 16-bit reload value, overflow at FFFF<sub>H</sub></li> <li>• Reload event configurable for trigger by overflow condition only, or by negative/positive edge at input pin T2EX as well</li> <li>• Programmable reload value in register RC2</li> <li>• Interrupt is generated with reload events.</li> </ul>
<b>Auto-reload</b>	<b>Up/Down Count Enabled</b> <ul style="list-style-type: none"> <li>• Count up or down, direction determined by level at input pin T2EX</li> <li>• No interrupt is generated</li> <li>• Count up <ul style="list-style-type: none"> <li>– Start counting from 16-bit reload value, overflow at FFFF<sub>H</sub></li> <li>– Reload event triggered by overflow condition</li> <li>– Programmable reload value in register RC2</li> </ul> </li> <li>• Count down <ul style="list-style-type: none"> <li>– Start counting from FFFF<sub>H</sub>, underflow at value defined in register RC2</li> <li>– Reload event triggered by underflow condition</li> <li>– Reload value fixed at FFFF<sub>H</sub></li> </ul> </li> </ul>
<b>Channel capture</b>	<ul style="list-style-type: none"> <li>• Count up only</li> <li>• Start counting from 0000<sub>H</sub>, overflow at FFFF<sub>H</sub></li> <li>• Reload event triggered by overflow condition</li> <li>• Reload value fixed at 0000<sub>H</sub></li> <li>• Capture event triggered by falling/rising edge at pin T2EX</li> <li>• Captured timer value stored in register RC2</li> <li>• Interrupt is generated by reload or capture events</li> </ul>

Timer 2 can be started by using TR2 bit by hardware or software. Timer 2 can be started by setting TR2 bit by software. If bit T2RHEN is set, Timer 2 can be started by hardware. Bit T2REGS defines the event on pin T2EX: falling edge or rising edge, that can set the run bit TR2 by hardware. Timer 2 can only be stopped by resetting TR2 bit by software.

## 16.3 Functional Description

### 16.3.1 Auto-Reload Mode

The auto-reload mode is selected when the bit CP\_RL2 in register **T2CON** is zero. In the auto-reload mode, Timer 2 counts to an overflow value and then reloads its register contents with a 16-bit start value for a fresh counting sequence. The overflow condition is indicated by setting bit TF2 in the **T2CON** register. This will then generate an interrupt request to the core. The overflow flag TF2 must be cleared by software.

The auto-reload mode is further classified into two categories depending upon the DCEN control bit.

#### 16.3.1.1 Up/Down Count Disabled

If DCEN = 0, the up-down count selection is disabled. The timer, therefore, functions as a pure up counter/timer only. The operational block diagram is shown in **Figure 109**.


In this mode, if EXEN2 = 0, the timer starts to count up to a maximum of  $FFFF_H$ , once TR2 is set. Upon overflow, bit TF2 is set and the timer register is reloaded with the 16-bit reload value of the RC2 register. This reload value is chosen by software, prior to the occurrence of an overflow condition. A fresh count sequence is started and the timer counts up from this reload value as in the previous count sequence.

If EXEN2 = 1, the timer counts up to a maximum of  $FFFF_H$  once TR2 is set. A 16-bit reload of the timer registers from register RC2 is triggered either by an overflow condition or by a negative/positive edge (chosen by T2MOD.EDGESEL) at input pin T2EX. If an overflow caused the reload, the overflow flag TF2 is set. If a negative/positive transition at pin T2EX caused the reload, bit EXF2 is set. In either case, an interrupt is generated to the core and the timer proceeds to its next count sequence. The EXF2 flag, similar to the TF2, must be cleared by software.

If bit T2RHEN is set, Timer 2 is started by first falling edge/rising edge at pin T2EX, which is defined by bit T2REGS. If bit EXEN2 is set, bit EXF2 is also set at the same point when Timer2 is started with the same falling edge/rising edge at pin T2EX, which is defined by bit EDGESEL. The reload will happen with the following negative/positive transitions at pin T2EX, which is defined by bit EDGESEL.

*Note: In counter mode, if the reload via T2EX and the count clock T2 are detected simultaneously, the reload takes precedence over the count. The counter increments its value with the following T2 count clock.*

## Timer2 and Timer21

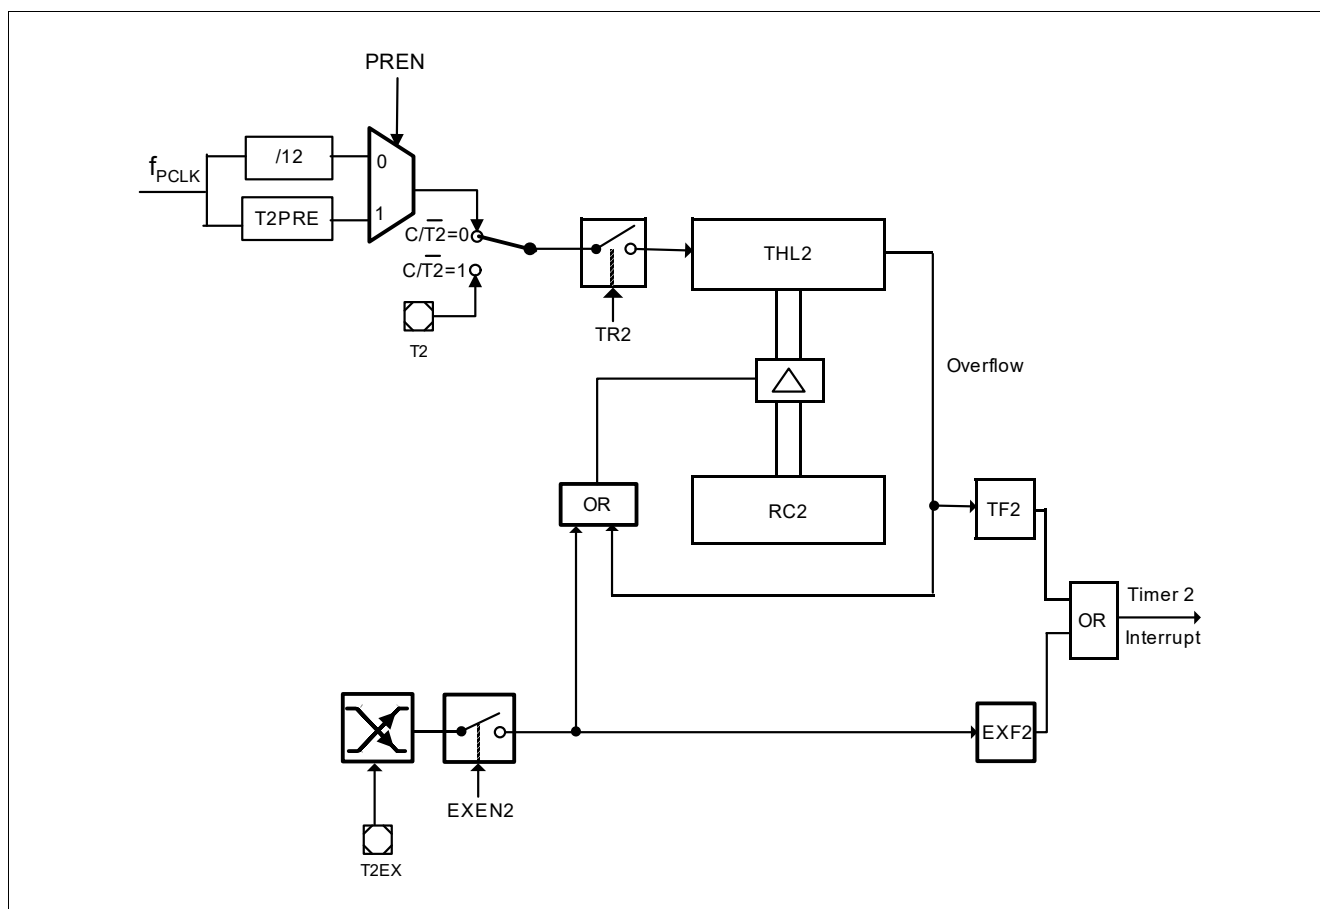

**Figure 109 Auto-Reload Mode (DCEN = 0)**

### 16.3.1.2 Up/Down Count Enabled

If  $DCEN = 1$ , the up-down count selection is enabled. The direction of count is determined by the level at input pin T2EX. The operational block diagram is shown in [Figure 110](#).

A logic 1 at pin T2EX sets the Timer 2 to up counting mode. The timer, therefore, counts up to a maximum of  $FFFF_H$ . Upon overflow, bit TF2 is set and the timer register is reloaded with a 16-bit reload value of the RC2 register. A fresh count sequence is started and the timer counts up from this reload value as in the previous count sequence. This reload value is chosen by software, prior to the occurrence of an overflow condition.

A logic 0 at pin T2EX sets the Timer 2 to down counting mode. The timer counts down and underflows when the THL2 value reaches the value stored at register RC2. The underflow condition sets the TF2 flag and causes  $FFFF_H$  to be reloaded into the THL2 register. A fresh down counting sequence is started and the timer counts down as in the previous counting sequence.

If bit T2RHEN is set, Timer 2 can only be started either by rising edge ( $T2REGS = 1$ ) at pin T2EX and then do the up counting, or be started by falling edge ( $T2REGS = 0$ ) at pin T2EX and then do the down counting.

In this mode, bit EXF2 toggles whenever an overflow or an underflow condition is detected. This flag, however, does not generate an interrupt request.



Timer2 and Timer21

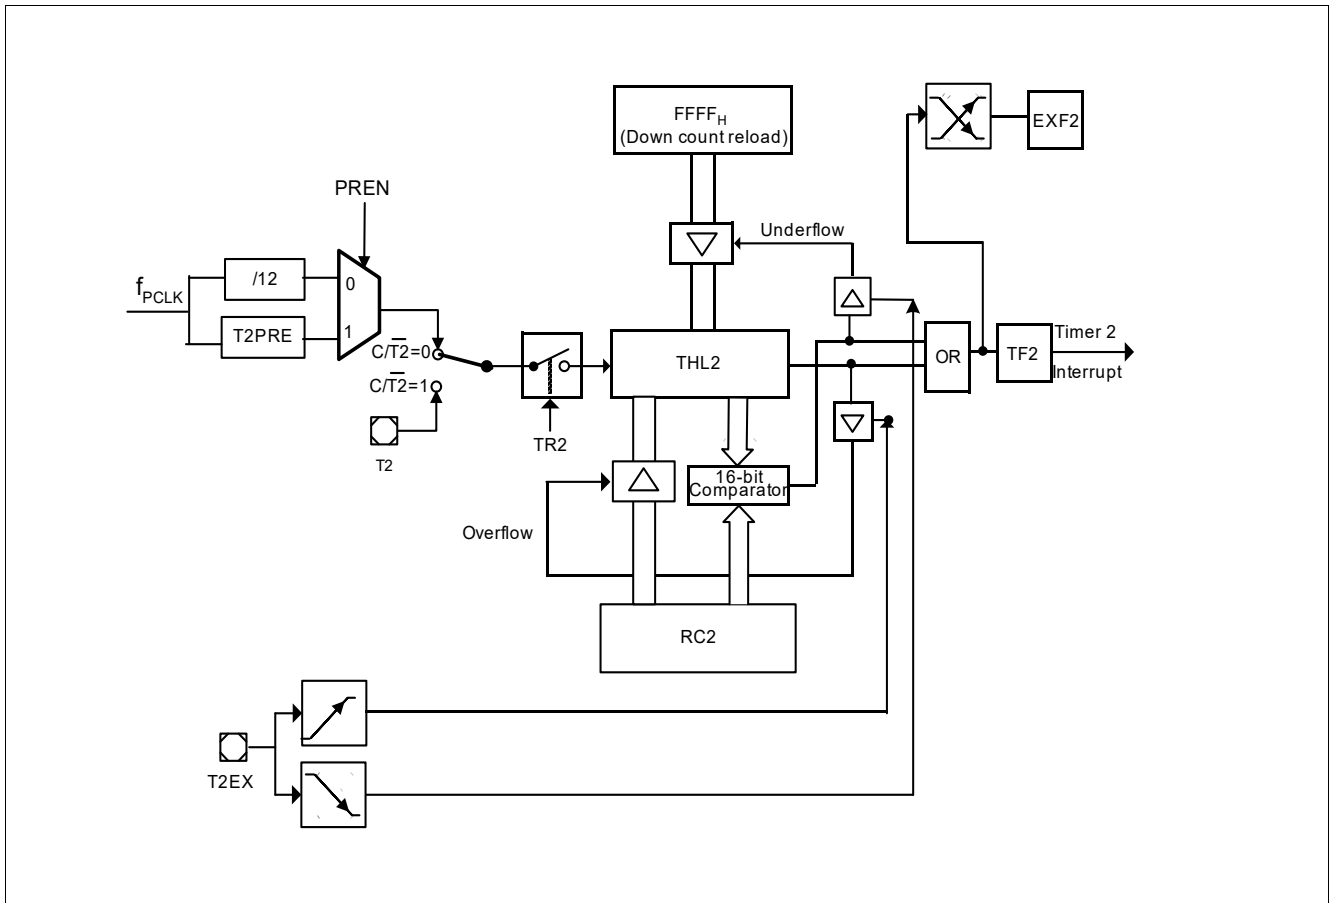


Figure 110 Auto-Reload Mode (DCEN = 1)

## Timer2 and Timer21


### 16.3.2 Capture Mode

In order to enter the 16-bit capture mode, bits CP\_RL2 and EXEN2 in register **T2CON** must be set. In this mode, the down count function must remain disabled. The timer functions as a 16-bit timer or counter and always counts up to  $FFFF_H$  and overflows. Upon an overflow condition, bit TF2 is set and the timer reloads its registers with  $0000_H$ . The setting of TF2 generates an interrupt request to the core.

Additionally, with a falling/rising edge on pin T2EX (chosen by T2MOD.EDGESEL) the contents of the timer register (THL2) are captured into the RC2 register. The external input is sampled in every PCLK cycle. When a sampled input shows a low (high) level in one PCLK cycle and a high (low) in the next PCLK cycle, a transition is recognized. If the capture signal is detected while the counter is being incremented, the counter is first incremented before the capture operation is performed. This ensures that the latest value of the timer register is always captured.

If bit T2RHEN is set, Timer 2 is started by first falling edge/rising edge at pin T2EX, which is defined by bit T2REGS. If bit EXEN2 is set, bit EXF2 is also set at the same point when Timer2 is started with the same falling edge/rising edge at pin T2EX, which is defined by bit EDGESEL. The capture will happen with the following negative/positive transitions at pin T2EX, which is defined by bit EDGESEL.

When the capture operation is completed, bit EXF2 is set and can be used to generate an interrupt request. **Figure 111** describes the capture function of Timer 2.

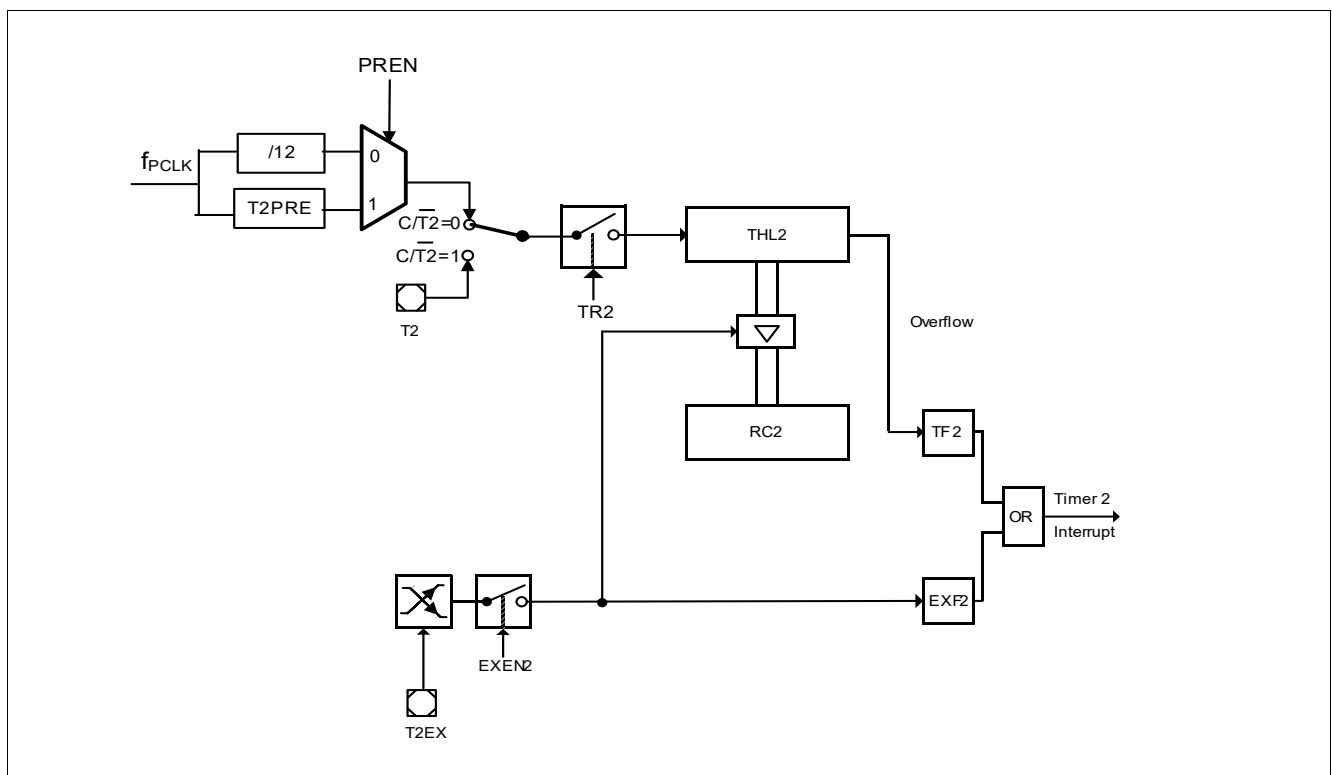

**Figure 111** Capture Mode

---

**Timer2 and Timer21****16.3.3 Count Clock**

The count clock for the auto-reload mode is chosen by the bit C\_T2 in register **T2CON**. If C\_T2 = 0, a count clock of PCLK/12 (if prescaler is disabled) is used for the count operation.

If C\_T2 = 1, Timer 2 behaves as a counter that counts 1-to-0 transitions of input pin T2. The counter samples pin T2 over 2 PCLK cycles. If a 1 was detected during the first clock and a 0 was detected in the following clock, then the counter increments by one. Therefore, the input levels should be stable for at least 1 clock.

If bit T2RHEN is set, Timer 2 can be started by the falling edge/rising edge on pin T2EX, which is defined by bit T2REGS.

*Note: If pin T2 is not connected, counting clock function on pin T2 cannot be used.*

Timer2 and Timer21

16.4 Module Interfaces

This section describes:

- the TLE987x module related interfaces such as port connections and interrupt control
- all TLE987x module related registers with their addresses

16.4.1 Interfaces of the Timer2 and Timer21

Overviews of the Timer2 and Timer21 kernel I/O interfaces and interrupt signals are shown in **Figure 112** and **Figure 113**.

Timer2 and Timer21 can be suspended when Debug Mode enters Monitor Mode and has the Debug Suspend signal activated, provided the timer suspend bits, T2SUSP and T21SUSP (in SCU SFR MODSUSP) are set. Refer to SCU chapter.

The interrupt request of the Timer2 and Timer21 is not connected directly to the CPU's Interrupt Controller, but via the System Control Unit (SCU). The General Purpose IO (GPIO) Port provides the interface from the Timer2 and Timer21 to the external world.

The external trigger and counter inputs of the two Timer 2 modules can be selected from several different sources. This selection is performed by the SCU via the corresponding input control and select bits in SFR MODPISEL1 and MODPISEL2.

In the TLE987x, Timer2 and Timer21 allow additionally to trigger ADC1 conversions through the t2(1)\_adc\_trigger signals. These trigger signals are generated while the timer is working in timer mode (C\_T2 = 0).

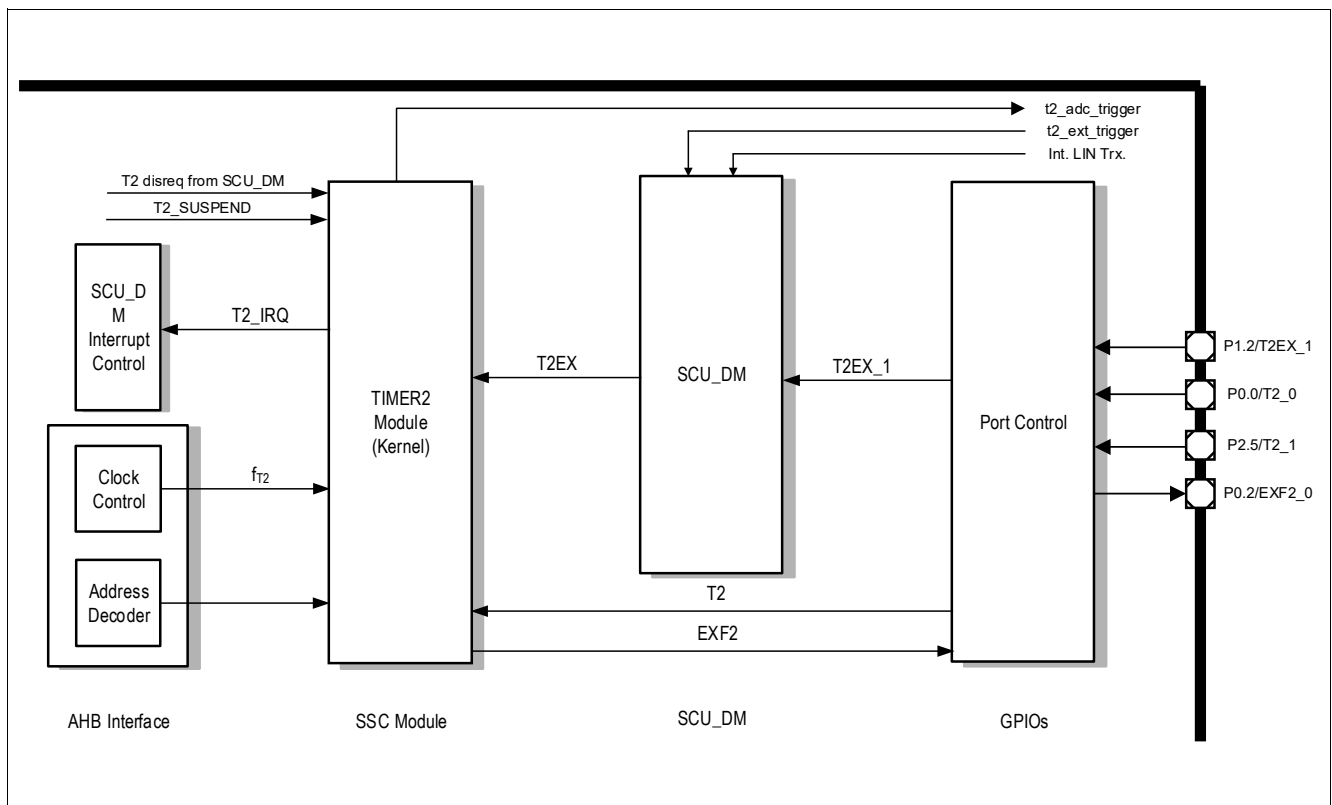


Figure 112 Timer 2 Module I/O Interface

Timer2 and Timer21

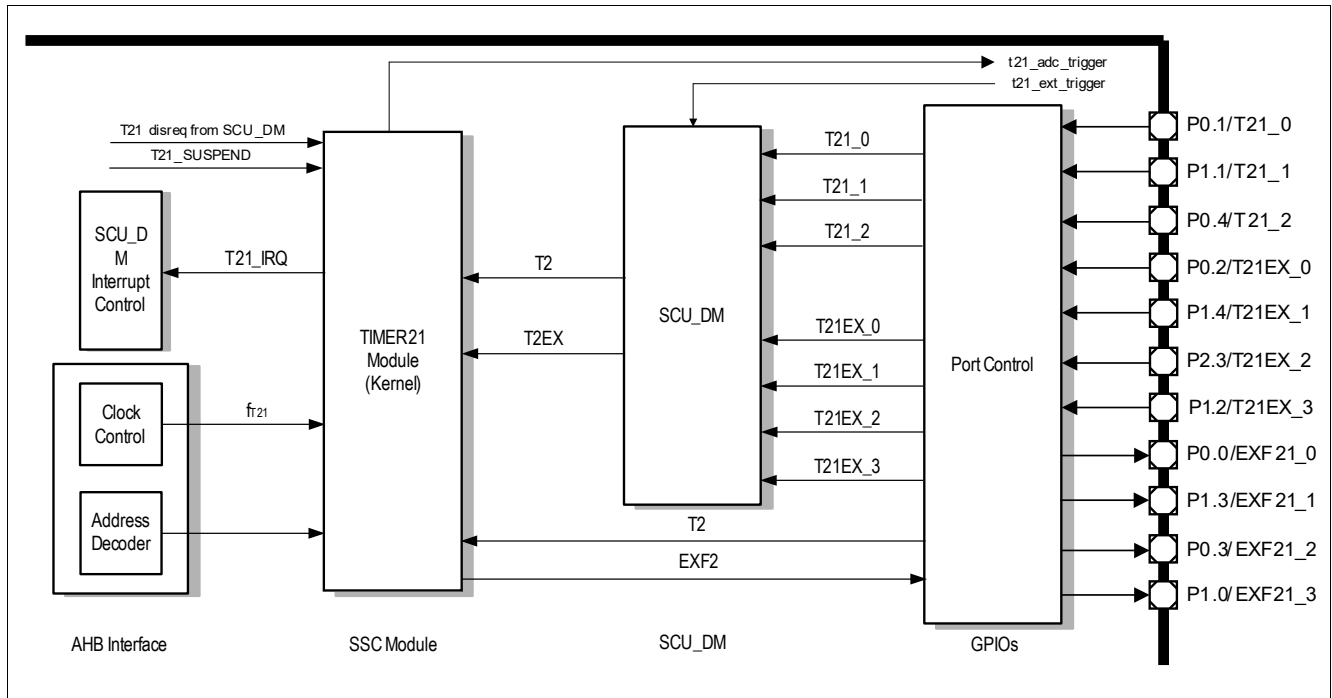


Figure 113 Timer 21 Module I/O Interface

### 16.5 Interrupt Generation

When an interrupt event happened, the corresponding interrupt flag bit EXF2/TF2 is set; an interrupt for the interrupt event EXF2/TF2 will be generated.

*Note: When the timer/counter is stopped and while the module remains enabled, it is possible for an external event at T2EX to generate an interrupt. For this to occur, bit EXEN2 in SFR **T2CON** must be set. In this case, a dummy reload or capture happens depending on the CP\_RL2 bit selection. The resulting interrupt could therefore be used in the product as an external falling/rising edge triggered interrupt.*

## Timer2 and Timer21

### 16.6 Register Definition

#### 16.6.1 Timer 2 Registers

All Timer2 and Timer21 register names described in the following sections will be referenced in other chapters with the module name prefix “T2\_” and “T21\_”, respectively.

##### 16.6.1.1 Mode Register

The T2MOD is used to configure Timer 2 for various modes of operation.

#### T2MOD

##### Timer 2 Mode Register

(04H)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>T2REGS</b>	<b>T2RHEN</b>	<b>EDGESEL</b>	<b>PREN</b>	<b>T2PRE</b>		<b>DCEN</b>	
rw	rw	rw	rw	rw		rw	

Field	Bits	Type	Description
<b>DCEN</b>	0	rw	<b>Up/Down Counter Enable</b> 0 <sub>B</sub> Up/Down Counter function is disabled 1 <sub>B</sub> Up/Down Counter function is enabled and controlled by pin T2EX (Up = 1, Down = 0)
<b>T2PRE</b>	3:1	rw	<b>Timer 2 Prescaler Bit</b> Selects the input clock for Timer 2 which is derived from the peripheral clock. 000 <sub>B</sub> $f_{T2} = f_{PCLK}$ 001 <sub>B</sub> $f_{T2} = f_{PCLK} / 2$ 010 <sub>B</sub> $f_{T2} = f_{PCLK} / 4$ 011 <sub>B</sub> $f_{T2} = f_{PCLK} / 8$ 100 <sub>B</sub> $f_{T2} = f_{PCLK} / 16$ 101 <sub>B</sub> $f_{T2} = f_{PCLK} / 32$ 110 <sub>B</sub> $f_{T2} = f_{PCLK} / 64$ 111 <sub>B</sub> $f_{T2} = f_{PCLK} / 128$
<b>PREN</b>	4	rw	<b>Prescaler Enable</b> 0 <sub>B</sub> Prescaler is disabled and the by 12-divider takes effect. 1 <sub>B</sub> Prescaler is enabled (see T2PRE bit) and the by 12-divider is bypassed.
<b>EDGESEL</b>	5	rw	<b>Edge Select in Capture Mode/Reload Mode</b> 0 <sub>B</sub> The falling edge at Pin T2EX is selected. 1 <sub>B</sub> The rising edge at Pin T2EX is selected.
<b>T2RHEN</b>	6	rw	<b>Timer 2 External Start Enable</b> 0 <sub>B</sub> Timer 2 External Start is disabled. 1 <sub>B</sub> Timer 2 External Start is enabled.
<b>T2REGS</b>	7	rw	<b>Edge Select for Timer 2 External Start</b> 0 <sub>B</sub> The falling edge at Pin T2EX is selected. 1 <sub>B</sub> The rising edge at Pin T2EX is selected.

## Timer2 and Timer21

### 16.6.1.2 Control Register

Control register is used to control the operating modes and interrupt of Timer 2.

#### T2CON

#### Timer 2 Control Register

(00H)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>TF2</b>	<b>EXF2</b>	<b>Res</b>	<b>Res</b>	<b>EXEN2</b>	<b>TR2</b>	<b>C_T2</b>	<b>CP_RL2</b>
r	r	r	r	rw	rwh	rw	rw

Field	Bits	Type	Description
<b>CP_RL2</b>	0	rw	<b>Capture/Reload Select</b> 0 <sub>B</sub> Reload upon overflow or upon negative/positive transition at pin T2EX (when EXEN2 = 1). 1 <sub>B</sub> Capture Timer 2 data register contents on the negative/positive transition at pin T2EX, provided EXEN2 = 1. The negative or positive transition at Pin T2EX is selected by bit EDGESEL.
<b>C_T2</b>	1	rw	<b>Timer or Counter Select</b> 0 <sub>B</sub> Timer function selected. 1 <sub>B</sub> Count upon negative edge at pin T2.
<b>TR2</b>	2	rwh	<b>Timer 2 Start/Stop Control</b> 0 <sub>B</sub> Stop Timer 2. 1 <sub>B</sub> Start Timer 2.
<b>EXEN2</b>	3	rw	<b>Timer 2 External Enable Control</b> 0 <sub>B</sub> External events are disabled. 1 <sub>B</sub> External events are enabled in Capture/Reload Mode.
<b>Res</b>	4:5	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>EXF2</b>	6	r	<b>Timer 2 External Flag</b> In Capture/Reload Mode, this bit is set by hardware when a negative/positive transition occurs at pin T2EX, if bit EXEN2 = 1. This bit must be cleared by software.  <i>Note: When bit DCEN = 1 in auto-reload mode, no interrupt request to the core is generated.</i>
<b>TF2</b>	7	r	<b>Timer 2 Overflow/Underflow Flag</b> Set by a Timer 2 overflow/underflow. Must be cleared by software.

## Timer2 and Timer21

### T2ICLR

Timer 2 Interrupt Clear Register

(1CH)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0	
TF2CLR	EXF2CLR	Res						
w	w	r						

Field	Bits	Type	Description
Res	5:0	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
EXF2CLR	6	w	<b>External Interrupt Clear Flag</b> 0 <sub>B</sub> External interrupt is not cleared. 1 <sub>B</sub> External interrupt is cleared.
TF2CLR	7	w	<b>Overflow/Underflow Interrupt Clear Flag</b> 0 <sub>B</sub> Overflow/underflow interrupt is not cleared. 1 <sub>B</sub> Overflow/underflow interrupt is cleared.

**T2CON1:** This register is being initialized by the BootROM during the bootup process to a value of 00<sub>H</sub>

### T2CON1

Timer 2 Control Register 1

(18H)

Reset Value: 03<sub>H</sub>

7	6	5	4	3	2	1	0
Res						TF2EN	EXF2EN
r						rw	rw

Field	Bits	Type	Description
EXF2EN	0	rw	<b>External Interrupt Enable</b> 0 <sub>B</sub> External interrupt is disabled. 1 <sub>B</sub> External interrupt is enabled.
TF2EN	1	rw	<b>Overflow/Underflow Interrupt Enable</b> 0 <sub>B</sub> Overflow/underflow interrupt is disabled. 1 <sub>B</sub> Overflow/underflow interrupt is enabled.
Res	7:2	r	<b>Reserved</b> Returns 0 if read; should be written with 0.




## Timer2 and Timer21

### 16.6.1.3 Timer 2 Reload/Capture Register

The RC2 register is used for a 16-bit reload of the timer count upon overflow or a capture of current timer count depending on the mode selected.

#### RC2L


**Timer 2 Reload/Capture Register, Low Byte (08H) Reset Value: 00<sub>H</sub>**

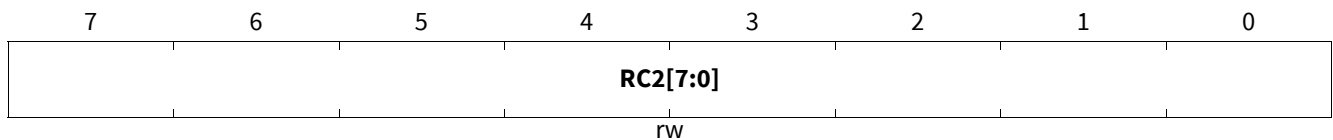

Field	Bits	Type	Description
RC2	[7:0]	rw	<b>Reload/Capture Value</b> Note: Reload/Capture Value can be set by software (highest priority) and is updated by hardware during capture mode. These contents are loaded into the timer register upon an overflow condition, if CP_RL2 = 0. If CP_RL2 = 1, this register is loaded with the current timer count upon a negative/positive transition at pin T2EX when EXEN2 = 1.

#### RC2H

**Timer 2 Reload/Capture Register, High Byte (0CH) Reset Value: 00<sub>H</sub>**

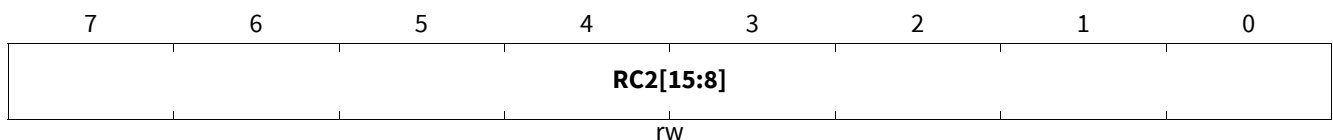


Field	Bits	Type	Description
RC2	[7:0]	rw	<b>Reload/Capture Value</b> Note: Reload/Capture Value can be set by software (highest priority) and is updated by hardware during capture mode. These contents are loaded into the timer register upon an overflow condition, if CP_RL2 = 0. If CP_RL2 = 1, this register is loaded with the current timer count upon a negative/positive transition at pin T2EX when EXEN2 = 1.


---

**Timer2 and Timer21**
**16.6.1.4 Timer 2 Count Register**

The T2L/T2H register holds the current 16-bit value of the Timer 2 count.

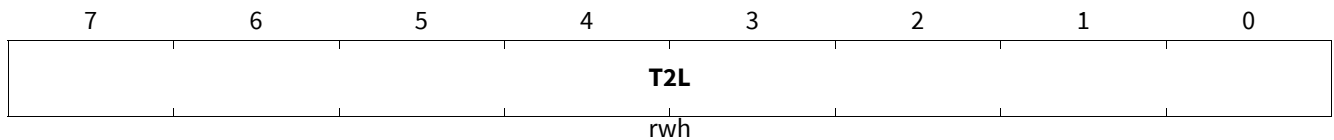**T2L****Timer 2, Low Byte****(10H)****Reset Value: 00<sub>H</sub>**

Field	Bits	Type	Description
<b>T2L</b>	[7:0]	rwh	<b>Timer 2 Value</b> These bits indicate the current timer value T2[7:0]. Note: Timer 2 can be updated of software (highest priority) and is updated by hardware if T2R is set

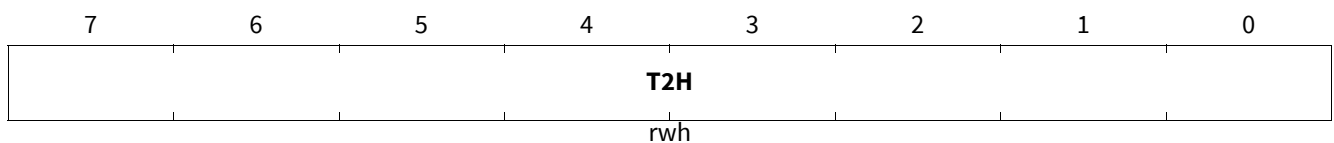**T2H****Timer 2, High Byte****(14H)****Reset Value: 00<sub>H</sub>**

Field	Bits	Type	Description
<b>T2H</b>	[7:0]	rw	<b>Timer 2 Value</b> These bits indicate the current timer value T2[15:8]. Note: Timer 2 can be updated of software (highest priority) and is updated by hardware if T2R is set

## Timer2 and Timer21

### 16.6.2 Register Map

There are two kernels in the TLE987x, namely Timer2 and Timer21. [Table 112](#) shows the Timer2 and Timer21 module base addresses.

[Table 113](#) lists the addresses of the Timer2 and Timer21 SFRs.

**Table 112 Register Address Space**

Module	Base Address	End Address	Note
TIMER2	48004000 <sub>H</sub>	48004FFF <sub>H</sub>	
TIMER21	48005000 <sub>H</sub>	48005FFF <sub>H</sub>	

**Table 113 Register Overview Timer2 and Timer21**

Register Short Name	Register Long Name	Offset Address	Reset Value
T2CON	Timer 2 Control Register	00 <sub>H</sub>	<a href="#">495</a>
T2MOD	Timer 2 Mode Register	04 <sub>H</sub>	<a href="#">494</a>
RC2L	Timer 2 Reload/Capture Register, Low Byte	08 <sub>H</sub>	<a href="#">497</a>
RC2H	Timer 2 Reload/Capture Register, High Byte	0C <sub>H</sub>	<a href="#">497</a>
T2L	Timer 2, Low Byte	10 <sub>H</sub>	<a href="#">498</a>
T2H	Timer 2, High Byte	14 <sub>H</sub>	<a href="#">498</a>
T2CON1	Timer 2 Control Register 1	18 <sub>H</sub>	<a href="#">496</a>
T2ICLR	Timer 2 Interrupt Clear Register	1C <sub>H</sub>	<a href="#">496</a>

## Timer3

# 17 Timer3

## 17.1 Features

- 16-bit incremental timer/counter (counting up)
- Counting frequency up to  $f_{\text{sys}}$
- Selectable clock prescaler
- 6 modes of operation
- Interrupt up on overflow
- Interrupt on compare

## 17.2 Introduction

The possible applications for the timer include measuring the time interval between events, counting events and generating a signal at regular intervals.

Timer3 can function as timer or counter. When functioning as a timer, Timer3 is incremented in periods based on the MI\_CLK or LP\_CLK clock. When functioning as a counter, Timer3 is incremented in response to a 1-to-0 transition (falling edge) at its respective input. Timer3 can be configured in four different operating modes to use in a variety of applications, see [Table 114](#).

Several operating modes can be used for different tasks such as the following:

- simple time measurement between two events
- triggering of the measuring unit upon PWM/CCU6 unit
- measurement of the 100kHz LP\_CLK2

## 17.3 Functional Description

Six modes of operation are provided to fulfill various tasks using this timer. In every mode the clocking source can be selected between MI\_CLK and LP\_CLK. A prescaler provides in addition capability to divide the selected clock source by 2, 4 or 8. The clocking source and the prescaler can be set in the register [APCLK\\_CTRL2.T3CLK\\_DIV](#) (SCU). The timer counts upwards, starting with the value in the timer count registers, until the maximum count value which depends on the selected mode of operation. Timer 3 provides two individual interrupts upon counter overflow, one for the low-byte and one for the high-byte counter register. The run control of the Timer3 is controlled by software by setting the bits TR3L/TR3H in the register [CTRL](#). Some modes of operation are providing in addition to the software a run control triggered by various hardware sources coming from other modules within the device. Furthermore the Timer 3 provides a 16-bit compare register, [CMP](#). The compare register can be used by some operation modes to issue an overflow interrupt upon matching of the timer counter register to the compare register. The entire Timer 3 module will be enabled by resetting bit T3\_DIS in the register [PMCON2](#).

### Timer Overflow

When a timer overflow occurs, the timer overflow flag, [T3L\\_OVF\\_STS](#) or [T3H\\_OVF\\_STS](#), is set, and an interrupt may be raised if the interrupt enable control bit, in the System Control Unit-Power Management is set. The overflow flag has to be cleared when the interrupt service routine is entered.

*Note:* When Timer3 operates in Mode 3, the Timer3 control bit **TR3L** is reserved for TL3 and **TR3H** is reserved for TH3. For details see in [Section 17.3.6](#).

## Timer3

### 17.3.1 Timer3 Modes Overview

The Timer 3 provides six modes of operation, which are described in the following chapters. The six modes of operations are divided into four main modes. Some of the four main modes are further separated into sub-modes. The bit field T3M in the register **MODE\_CONF** selects one out of the four main modes. The bit field T3\_SUBM in the register **MODE\_CONF** selects a sub-mode of the selected main mode, if applicable. The following table provides an overview of the timer modes together with the reasonable configuration options in **Table 114**.

When the bit **T3\_PD\_N** is set the timer is reset and the module clock gating is active (valid for all main operating modes).

**Table 114 Timer3 Modes**

Mode	Sub-Mode	Operation
0	No Sub-Mode	<b>13-bit Timer</b> The timer is essentially an 8-bit counter with a divide-by-32 prescaler.
1	a	<b>16-bit Timer</b> The timer registers, TL3 and TH3, are concatenated to form a 16-bit counter.
1	b	<b>16-bit Timer triggered by an event</b> The timer registers, TL3 and TH3, are concatenated to form a 16-bit counter, which is triggered by an event to enable a single shot measurement on a preset channel with the measurement unit.
2	No Sub-Mode	<b>8-bit Timer with auto-reload</b> The timer register TL3 is reloaded with a user-defined 8-bit value in TH3 upon overflow.
3	a	<b>Timer3 operates as two 8-bit timers</b> The timer registers TL3 and TH3, operate as two separate 8-bit counters.
3	b	<b>Timer3 operates as Two 8-bit timers for clock measurement</b> The timer registers, TL3 and TH3 operate as two separate 8-bit counters. In this mode the LP_CLK2 Low Power Clock can be measured. TL3 acts as an edge counter for the clock edges and TH3 as a counter which counts the time between the edges.

The modes are determined in **MODE\_CONF**.

## Timer3

Table 115 Timer 3, List of Options

		0	1a	1b	2	3a	3b
<b>Mode Config</b>	<b>T3M</b>	0	1	1	2	3	3
	<b>T3_SUBM</b>	0	0	1	0	0	2
<b>Run Control</b>	<b>TR3L</b>	1	1	1	1	1	1
	<b>TR3H</b>	n/a	n/a	n/a	n/a	1	1
<b>Trigger Source</b>	<b>CCU6_CC60</b>	n/a	n/a	1	n/a	n/a	n/a
	<b>CCU6_CC61</b>	n/a	n/a	1	n/a	n/a	n/a
	<b>CCU6_CC62</b>	n/a	n/a	1	n/a	n/a	n/a
	<b>CCU6_PM</b>	n/a	n/a	1	n/a	n/a	n/a
	<b>CCU6_ZM</b>	n/a	n/a	1	n/a	n/a	n/a
	<b>CCU6_COUT60</b>	n/a	n/a	1	n/a	n/a	n/a
	<b>CCU6_COUT61</b>	n/a	n/a	1	n/a	n/a	n/a
	<b>CCU6_COUT62</b>	n/a	n/a	1	n/a	n/a	n/a
<b>Interrupt Status</b>	<b>LP_CLK2</b>	n/a	n/a	n/a	n/a	n/a	1
	<b>T3L_OVF_STS</b>	1	1	1	1	1	1
	<b>T3H_OVF_STS</b>	1	1	n/a	0	1	1
<b>Compare</b>	<b>Compare</b>	0	0	1	1	0	1

Timer3

17.3.2 Mode 0

Mode 0 implements a 13-bit-timer/counter compatible to the 8048 microcontroller. **HI** holds the upper 8 bits of the 13-bit timer value. **LO** holds the lower 5 bits of the 13-bit timer value. The bits **LO** [7:5] are not defined and should not be used in this mode of operation. An overflow will be generated by the transition of the timer value from 0x1FFF to 0x0000.

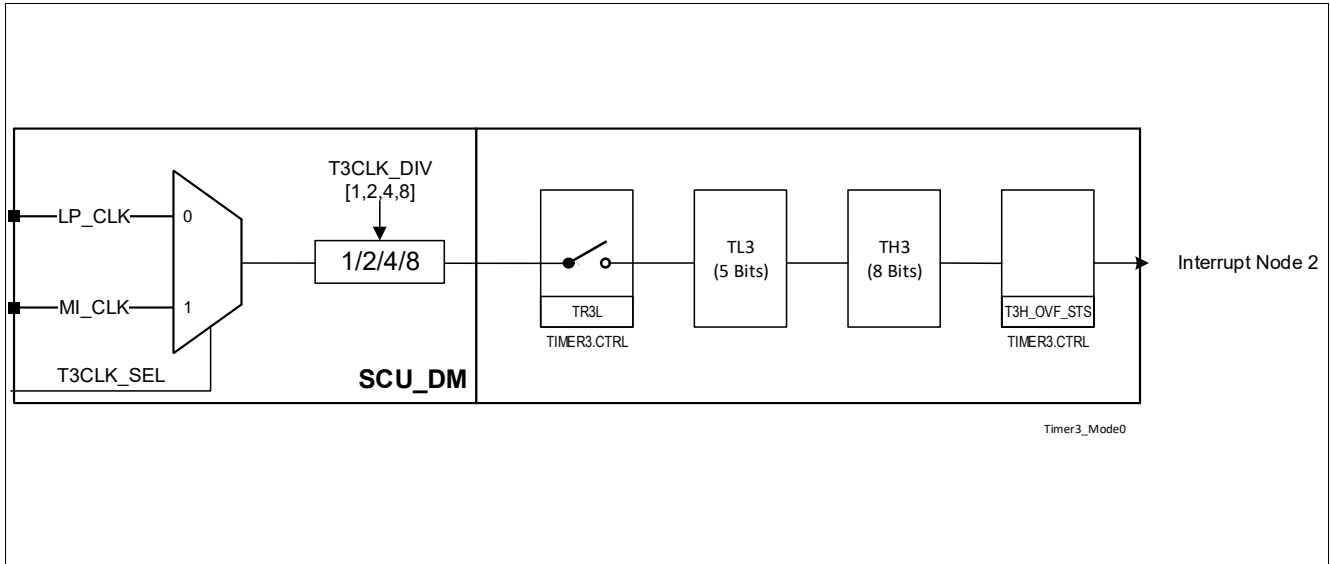


Figure 114 Timer3, Mode 0: 13-Bit Timer

Timer3

17.3.3 Mode 1a

Mode 1a implements a 16-bit-timer/counter. TIMER3\_HI holds the upper 8 bits while TIMER3\_LO holds the lower 8 bits of the 16-bit timer value. An overflow will be generated by the transition of the timer value from 0xFFFF to 0x0000.

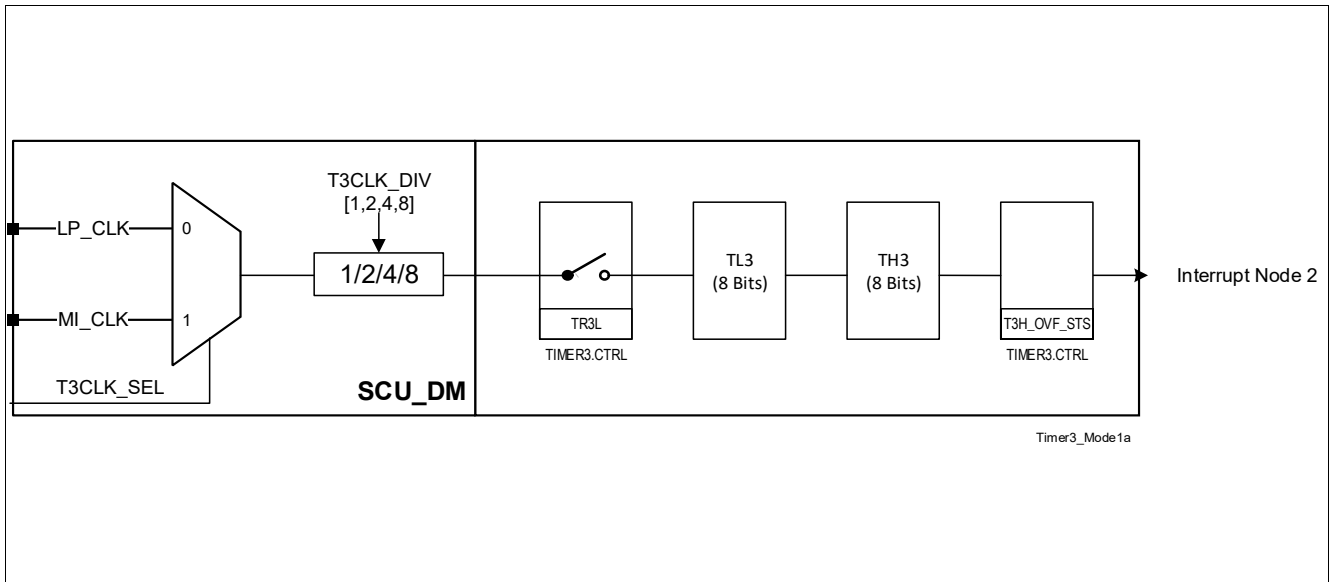


Figure 115 Timer3, Mode 1a: 16-Bit Timer



Timer3

17.3.4 Mode 1b

Mode 1b is intended to delay certain actions based on a PWM trigger source. The timer operates as a 16-bit-timer. The timer starts counting upwards upon trigger by the selected trigger source. The trigger source has to be selected in the register **T3\_TRIGG\_CTRL**, bits T3\_TRIGG\_INP\_SEL. To enable a repetitive operation a reset of the timer counter can be defined on the rising edge, falling edge or on both edges of the selected trigger source. The desired selection can be taken in the register **T3\_TRIGG\_CTRL**, bits T3\_RES\_CONF. An interrupt will be issued upon overflow, or if the compare value is reached. The compare value may be defined in the registers **CMP**. In this mode the preload of the timer count registers **TIMER3\_HI** and **TIMER3\_LO** has no effect, the counting always starts with 0x0000 until the set compare value.

This mode can be used to trigger the measurement unit with a desired delay based on a PWM edge to perform measurements synchronous to the selected PWM source. The working principle of this mode is shown in **Figure 116**.

Note: If **TIMER3\_CMP\_LO** and **TIMER3\_CMP\_HI** specify a delay that is greater than the pulse width of the PWM signal, the **ccu6\_int** is not issued.

Note: The **TIMER3\_CMP** value is stored internally (shadowed) on the trigger edge. This means, if the **TIMER3\_CMP** value changes during a current PWM period, the change takes effect with the next PWM period.

Note: trigger select **T12\_PM** and **T12\_ZM** (in **T3\_TRIGG\_INP\_SEL**) shall be only operated with rising edge **T3\_RES\_CONF**.

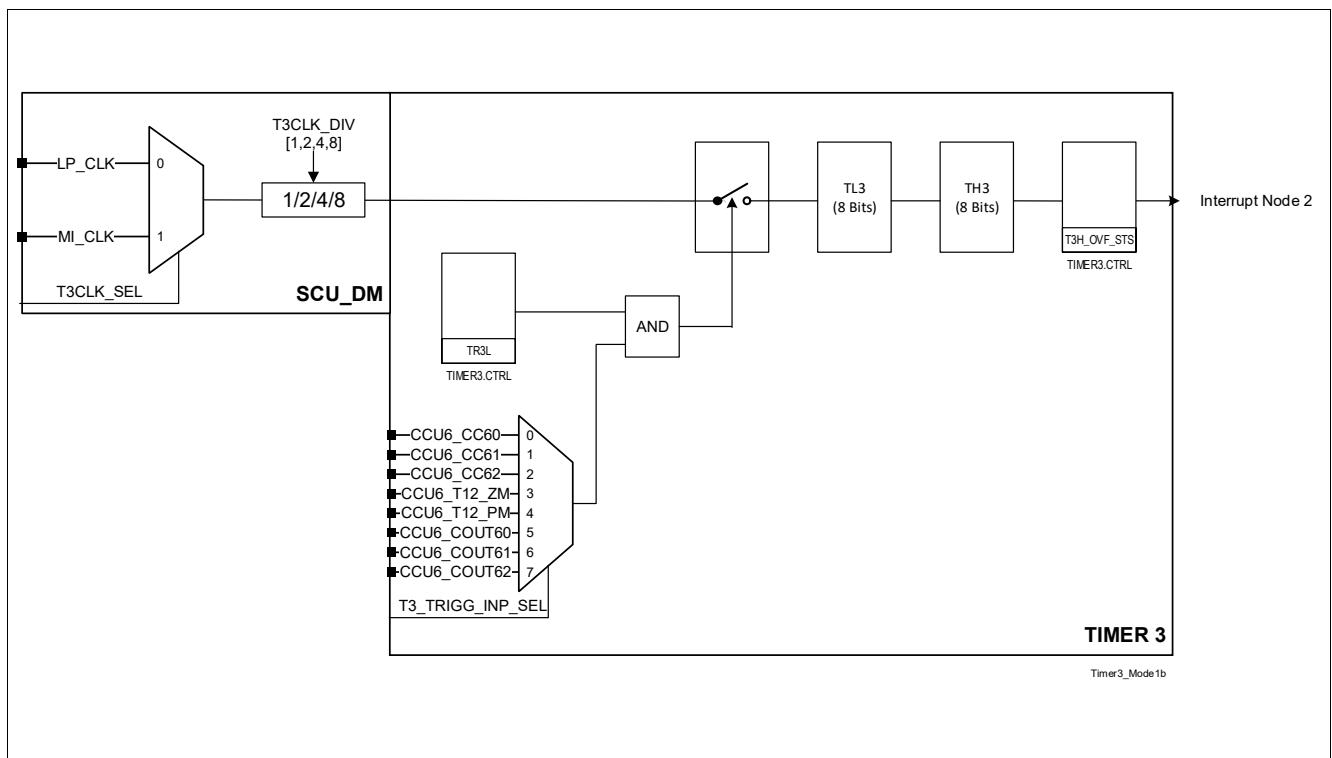


Figure 116 Timer3, Mode 1b: 16-Bit Timer triggered by an event

The retrigger option can be used for CCU6 PM and ZM to be retrigger with the **ccu6\_int** output. T3 is using the inverted ZM/PM signals, and falling edge is recommended as a trigger

Timer3

17.3.5 Mode 2

In Mode 2 the timer operates as a 8-bit-timer with reload. The register TIMER3\_LOW is the timer value count register, while the register TIMER3\_HIGH holds the reload value. Upon an overflow of the TIMER3\_LOW register from 0xFF to 0x00 an interrupt gets issued. Simultaneously the TIMER3\_LOW register gets loaded with the value in the TIMER3\_HIGH register. The working principle is shown in **Figure 117**.

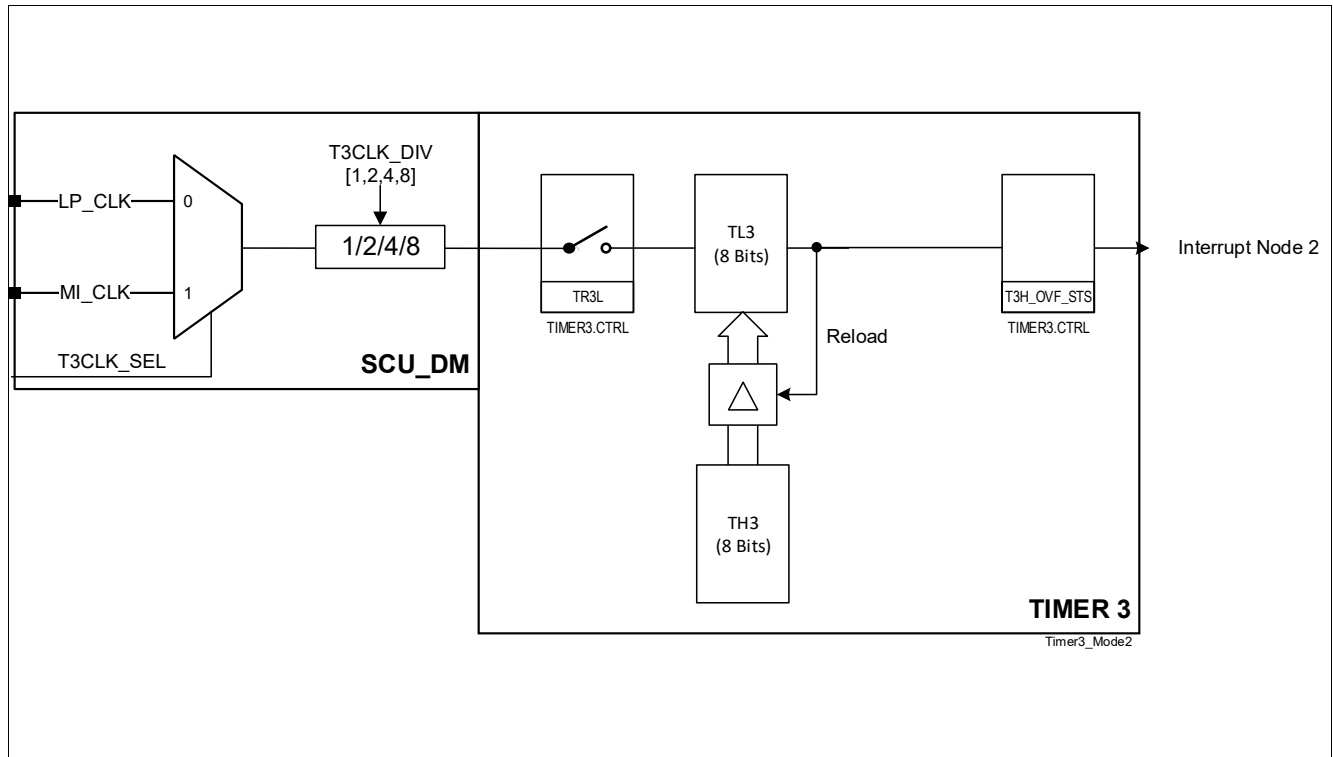


Figure 117 Timer 3, Mode 2: 8-Bit Timer with Auto-Reload

Timer3

17.3.6 Mode 3a

In Mode 3a, the two Timer 3 registers, TL3 and TH3, function as two separate 8-bit counters. The 8-bit counter, TL3, uses the Timer 3 control bits TR3 and T3L\_OVF\_STS, while the other 8-bit counter, TH3, is locked into a timer function (counting machine cycles). Furthermore, TH3 sets the Timer 3 flag bit T3H\_OVF\_STS, upon overflow and generates an interrupt if it is set. Mode 3a is provided for applications requiring an extra 8-bit timer.

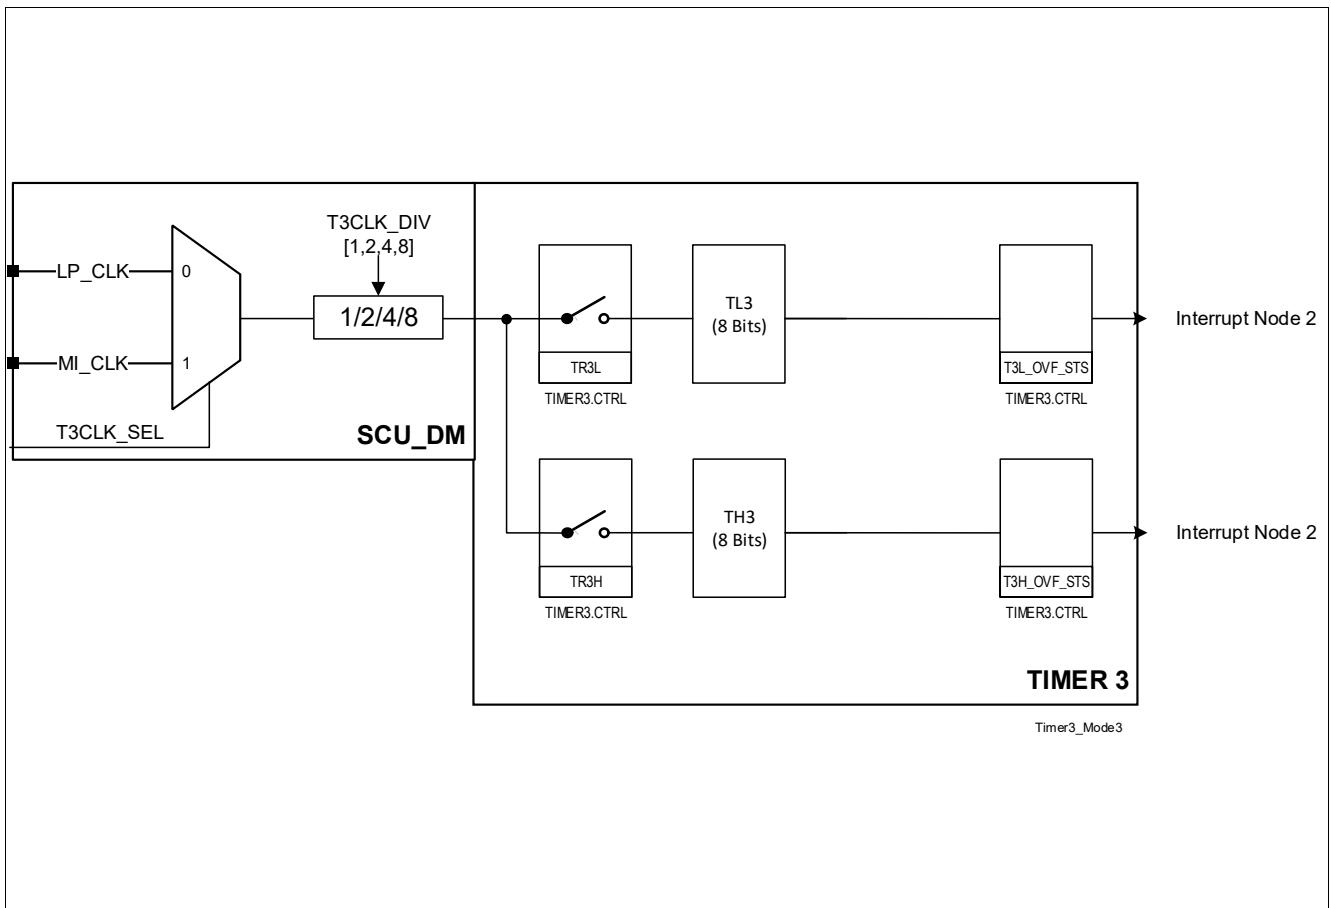


Figure 118 Timer 3, Mode 3a: Two 8-Bit Timers

Timer3

17.3.7 Mode 3b

The Mode 3b is used to measure the period of the LP\_CLK2. The Timer 3 is split up into an 8-bit counter (TIMER3\_LO) and an 8-bit timer (TIMER3\_HI). The TIMER3\_LO counts falling edges of the LP\_CLK2, no trigger source selection is required. The TIMER3\_CMP\_LO defines how many falling edges shall be counted. The TIMER3\_HI runs with the selected clocking source and starts counting with the next falling edge on LP\_CLK2. Once TIMER3\_LO has counted the desired number of edges of the LP\_CLK2, by hitting the TIMER3\_CMP\_LO value an interrupt will be issued and TIMER3\_HI stops.

The recommended sequence in order to obtain correct results in the following:

disable the LP\_CLK2 in PMU.CNF\_CYC\_SENSE.OSC\_100kHz\_EN

configure mode 3b

start the timer3 with the RUN bit

enable the LP\_CLK2 in PMU.CNF\_CYC\_SENSE.OSC\_100kHz\_EN

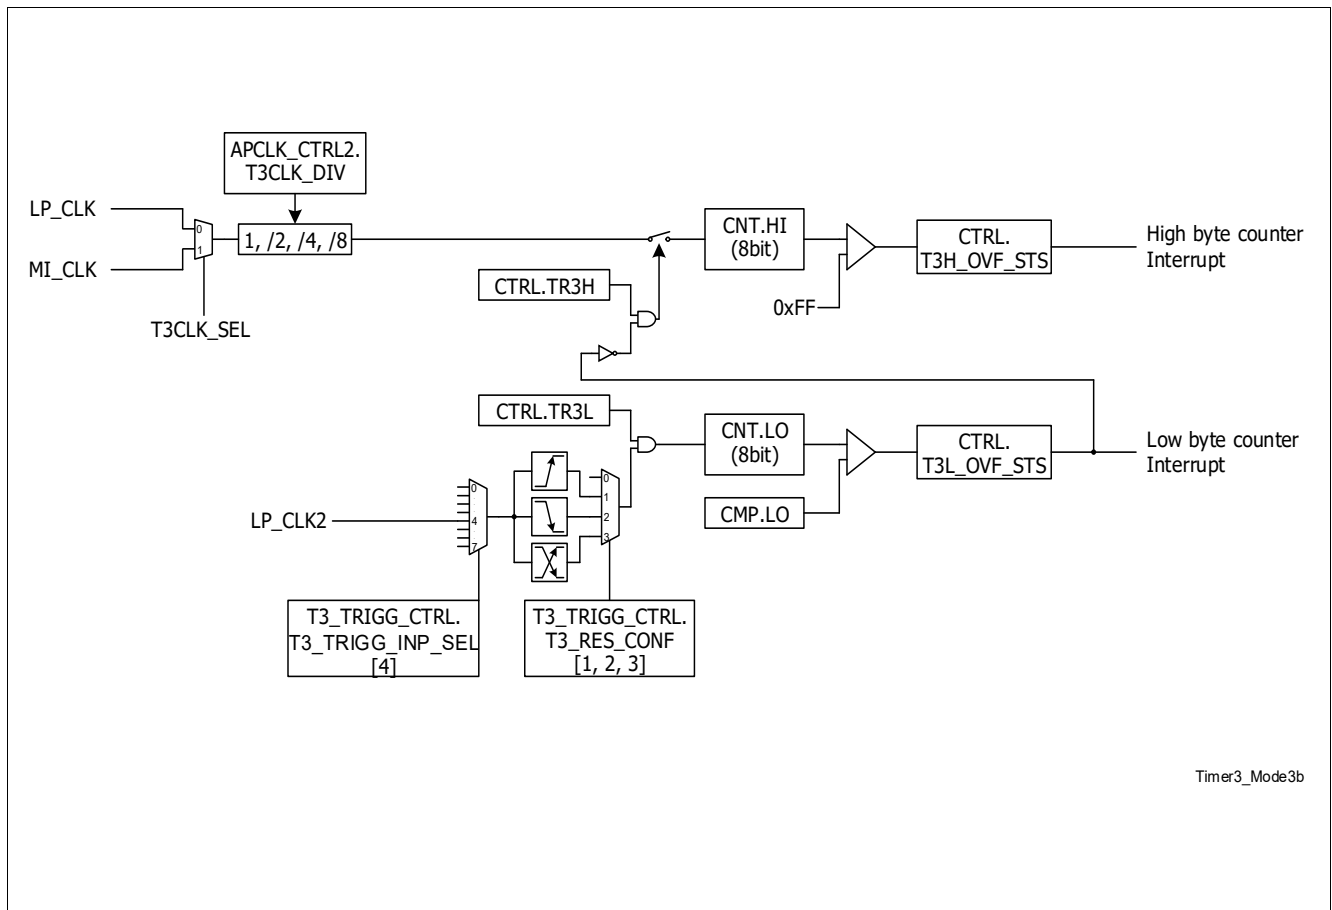


Figure 119 Timer 3, Mode 3b: Two 8-Bit Timers for clock measurement

Timer3

17.4 Interrupts

Figure 120 shows the interrupt generation of Timer3.

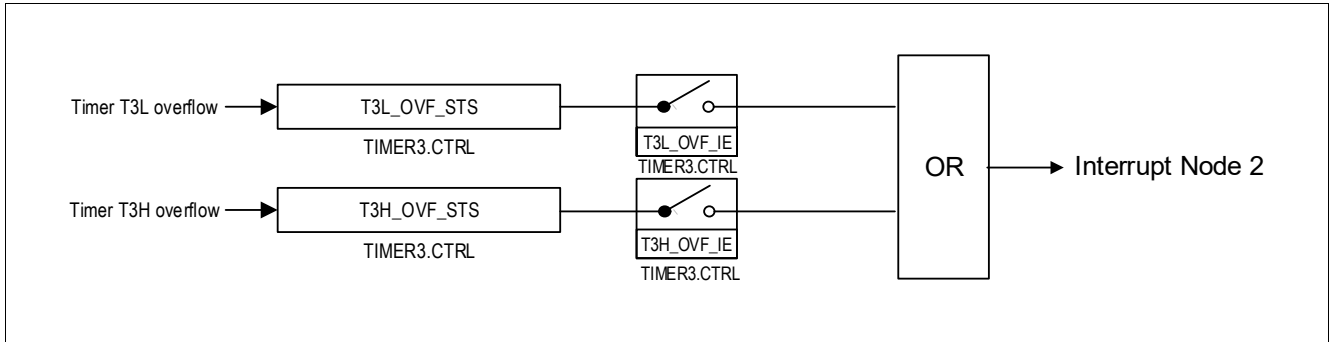


Figure 120 Timer3 Interrupt Generation

The module generates two interrupts. One is assigned to the overflow of lower 8 bit timer, while the other interrupt signals the overflow of the higher 8 bit counter.

## Timer3

### 17.5 Register Definition

A total of six **SFR** Registers control the operation of Timer 3. TL3/TH3 are the low and high timer registers. **CTRL** and **MODE\_CONF** are the mode selection register.

The addresses of the kernel SFRs are listed in [Table 117](#).

[Table 116](#) shows the module base addresses.

**Table 116 Register Address Space**

Module	Base Address	End Address	Note
TIMER3	4800 6000 <sub>H</sub>	4800 6020 <sub>H</sub>	

**Table 117 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Register Definition, Timer 3 Control Registers</b>			
<b>T3_TRIGG_CTRL</b>	Timer 3 Trigger Control Register	00 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CMP</b>	Timer 3 Compare Value	04 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CNT</b>	Timer 3	08 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CTRL</b>	Timer 3 Control Register	0C <sub>H</sub>	0000 0001 <sub>H</sub>
<b>MODE_CONF</b>	Timer 3 Mode Configuration Register	10 <sub>H</sub>	0000 0001 <sub>H</sub>
<b>ISRCLR</b>	Timer 3 Interrupt Status Clear Register	14 <sub>H</sub>	0000 0000 <sub>H</sub>

The registers are addressed wordwise.

#### 17.5.1 Timer 3 Control Registers


After each write access the AHB bus is stalled for at least 2 (timer3\_clk) and 3 (hclk) cycles.

##### Timer 3 Trigger Control Register

The register is reset by RESET\_TYPE\_3.

<b>T3_TRIGG_CTRL</b>	<b>Offset</b>	<b>Reset Value</b>
Timer 3 Trigger Control Register	00 <sub>H</sub>	0000 0000 <sub>H</sub>

## Timer3

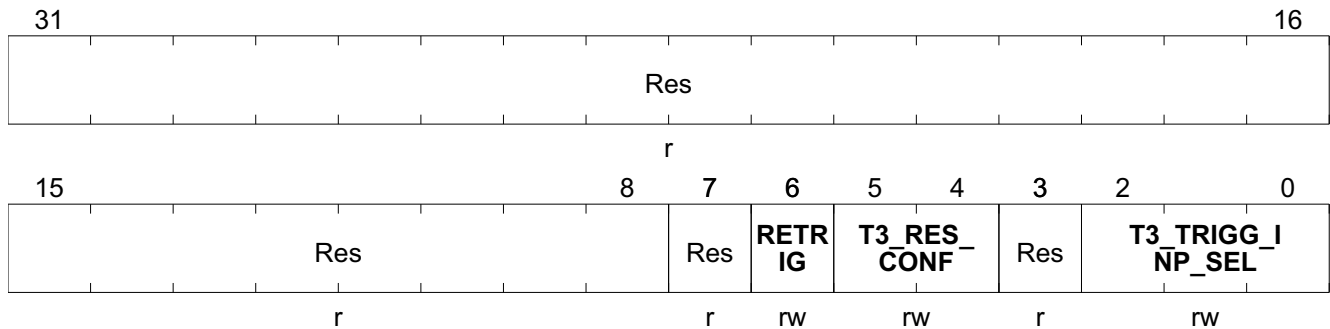


Field	Bits	Type	Description
Res	31:8	r	<b>Reserved</b> Always read as 0
Res	7	r	<b>Reserved</b> Always read as 0
RETRIG	6	rw	<b>Retrigger Condition (in Mode 1b) for CCU6-T12 ZM and CCU6-T12 PM</b> For CCU6-T12 ZM and PM the ccu6_int output will retrigger the timer in Mode 1b. 0 <sub>B</sub> <b>DIS</b> , Retrigger disabled 1 <sub>B</sub> <b>EN</b> , Retrigger enabled
T3_RES_CONF	5:4	rw	<b>Timer 3 Trigger Reset Selection for Mode 1b</b> 0 <sub>H</sub> <b>No Reset on PWM Edge</b> , Counter is not reset while PWM Module is running. 1 <sub>H</sub> <b>Reset On Rising Edge</b> , Counter is reset on rising edge input 2 <sub>H</sub> <b>Reset On Falling Edge</b> , Counter is reset on falling edge input. 3 <sub>H</sub> <b>Reset on both Edges</b> , Counter is reset on both edge inputs.
Res	3	r	<b>Reserved</b> Always read as 0
T3_TRIGG_INP_SEL	2:0	rw	<b>Timer 3 Trigger Input Event Selection in Mode 1b</b> 0 <sub>H</sub> <b>CCU6-CC6 0</b> , Capture Compare Unit Channel 0 (CC60). 1 <sub>H</sub> <b>CCU6-CC61</b> , Capture Compare Unit Channel 1 (CC61). 2 <sub>H</sub> <b>CCU6-CC62</b> , Capture Compare Unit Channel 2 (CC62). 3 <sub>H</sub> <b>CCU6-T12 ZM</b> , Capture Compare Unit T12 Zero Match. 4 <sub>H</sub> <b>CCU6-T12 PM</b> , Capture Compare Unit T12 Period Match. 5 <sub>H</sub> <b>CCU6-COUT60</b> , Capture Compare Unit Channel 0 (COUT60). 6 <sub>H</sub> <b>CCU6-COUT61</b> , Capture Compare Unit Channel 1 (COUT61). 7 <sub>H</sub> <b>CCU6-COUT62</b> , Capture Compare Unit Channel 2 (COUT62). <b>Timer 3 Trigger Input Event Selection in Mode 3b</b> 4 <sub>H</sub> <b>LP_CLK2</b> , 100kHz low precision clock, enable it here <a href="#">CNF_CYC_SENSE</a> .

### Timer3

#### Timer 3 Compare Value

The register is reset by RESET\_TYPE\_3.

CMP	Offset	Reset Value
Timer 3 Compare Value	04 <sub>H</sub>	0000 0000 <sub>H</sub>

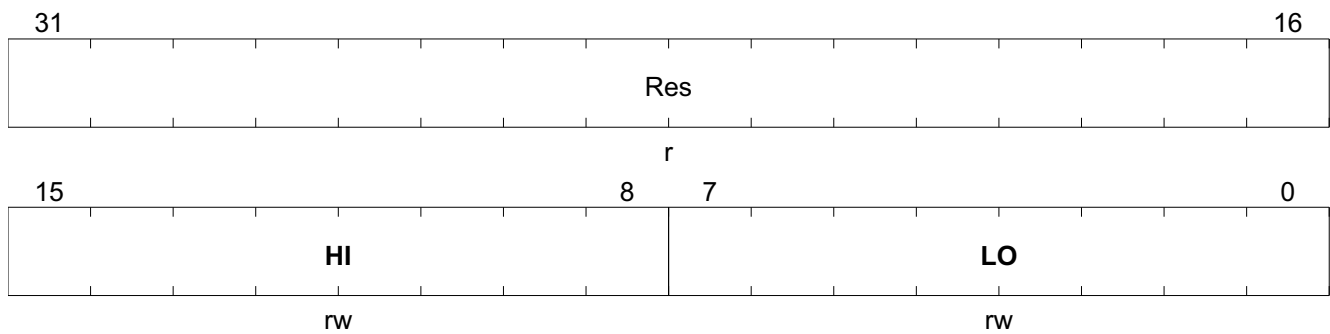

Field	Bits	Type	Description
Res	31:16	r	<b>Reserved</b> Always read as 0
HI	15:8	rw	<b>Timer 3 Compare Value High Byte</b> 00000000 <sub>B</sub> TIMER3_CMP_HI, holds the compare value of high byte for Measurement Interface Trigger.
LO	7:0	rw	<b>Timer 3 Compare Value Low Byte</b> 00000000 <sub>B</sub> TIMER3_CMP_LO, holds the compare value of low byte for Measurement Interface Trigger.




### Timer3

#### Timer 3

The register is reset by RESET\_TYPE\_3.

CNT	Offset	Reset Value
Timer 3	08 <sub>H</sub>	0000 0000 <sub>H</sub>

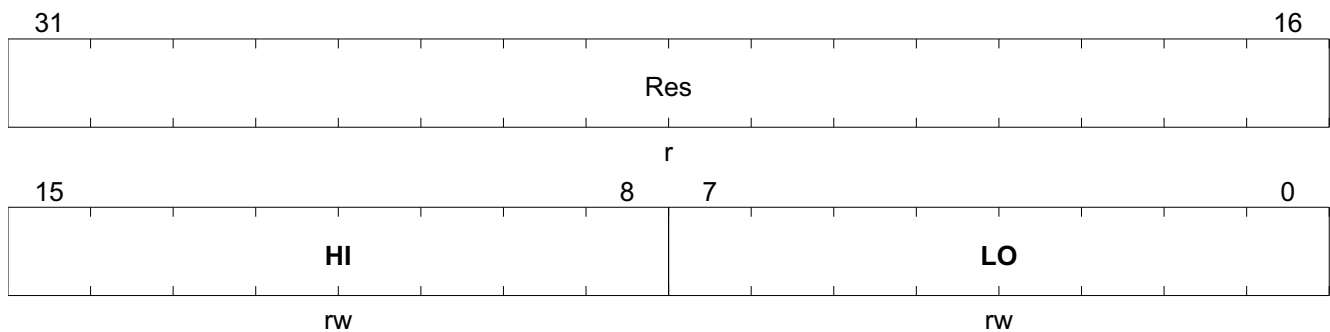

Field	Bits	Type	Description
Res	31:16	r	<b>Reserved</b> Always read as 0
HI	15:8	rw	<b>Timer 3 High Register or Preload Value</b> 00 <sub>B</sub> <b>TIMER3_HI</b> , holds the higher 8-bit part of the 13-bit timer value. 01 <sub>B</sub> <b>TIMER3_HI</b> , holds the higher 8-bit part of the 16-bit timer value. 10 <sub>B</sub> <b>TIMER3_HI</b> , holds the 8-bit reload value. 11 <sub>B</sub> <b>TIMER3_HI</b> , holds the 8-bit timer value.
LO	7:0	rw	<b>Timer 3 Low Register or Preload Value<sup>1)</sup></b> 00 <sub>B</sub> <b>TIMER3_LO</b> , holds the lower 5-bit part of the 13-bit timer value. 01 <sub>B</sub> <b>TIMER3_LO</b> , holds the lower 8-bit part of the 16-bit timer value. 10 <sub>B</sub> <b>TIMER3_LO</b> , holds the 8-bit timer value. 11 <sub>B</sub> <b>TIMER3_LO</b> , holds the 8-bit timer value.


1) TIMER3\_LO corresponds to the selected timer main operating mode which can be changed by writing [MODE\\_CONF](#)

## Timer3

## Timer 3 Control Register

The register is reset by RESET\_TYPE\_3.

CTRL	Offset	Reset Value
Timer 3 Control Register	0C <sub>H</sub>	0000 0001 <sub>H</sub>

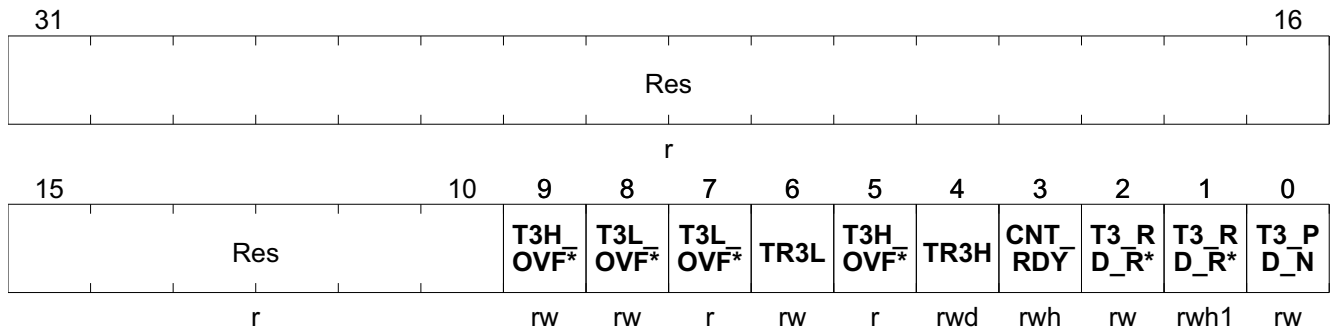

Field	Bits	Type	Description
Res	31:10	r	<b>Reserved</b> Always read as 0
T3H_OVF_IE	9	rw	<b>Timer 3 Overflow Interrupt Enable (High Byte Timer)</b> 0 <sub>B</sub> <b>DIS</b> , Interrupt disabled 1 <sub>B</sub> <b>EN</b> , Interrupt enabled
T3L_OVF_IE	8	rw	<b>Timer 3 Overflow Interrupt Enable (Low Byte Timer)</b> 0 <sub>B</sub> <b>DIS</b> , Interrupt disabled. 1 <sub>B</sub> <b>EN</b> , Interrupt enabled
T3L_OVF_STS	7	r	<b>Timer 3 Overflow Flag (Low Byte Timer)</b> 0 <sub>B</sub> <b>T3L_OVF_STS</b> , No overflow occurred. 1 <sub>B</sub> <b>T3L_OVF_STS</b> , Overflow occurred. Set by hardware when Low Byte of Timer 3 overflows. Cleared by software.
TR3L	6	rw	<b>Timer 3 Run Control (Low Byte Timer)</b> 0 <sub>B</sub> <b>TR3L</b> , Timer is halted 1 <sub>B</sub> <b>TR3L</b> , Timer runs
T3H_OVF_STS	5	r	<b>Timer 3 Overflow Flag (High Byte Timer)</b> 0 <sub>B</sub> <b>T3H_OVF_STS</b> , No Overflow occurred. 1 <sub>B</sub> <b>T3H_OVF_STS</b> , Overflow occurred. Set by hardware when High Byte of Timer 3 overflows. Cleared by software.
TR3H	4	rwd	<b>Timer 3 Run Control (High Byte Timer)</b> 0 <sub>B</sub> <b>TR3H</b> , Timer is halted 1 <sub>B</sub> <b>TR3H</b> , Timer runs
CNT_RDY	3	rwh	<b>Timer 3 Count Ready</b> 0 <sub>B</sub> <b>CNT_RDY</b> , Timer hasn't finished counting in Mode 1b, 3b 1 <sub>B</sub> <b>CNT_RDY</b> , Timer has finished counting in Mode 1b, 3b

## Timer3


Field	Bits	Type	Description
<b>T3_RD_REQ_CONF</b>	2	rw	<p><b>Timer 3 Read Mode</b></p> <p>0<sub>B</sub> <b>T3_RD_REQ_CONF</b>, Timer 3 Read Request can be triggered by software</p> <p>1<sub>B</sub> <b>T3_RD_REQ_CONF</b>, Timer 3 Read Request can be triggered by hardware (in Mode 3b)</p> <p><i>Note: Hardware read request is ignored in modes other than Mode 3b. T3_RD_REQ_CONF and T3_RD_REQ need to be updated in two separate write accesses.</i></p>
<b>T3_RD_REQ</b>	1	rwh1	<p><b>Timer 3 Value Read Request</b></p> <p>0<sub>B</sub> <b>T3_RD_REQ</b>, Timer value is not read from Timer 3</p> <p>1<sub>B</sub> <b>T3_RD_REQ</b>, Timer value is read from Timer 3</p> <p><i>Note: Only possible if T3_RD_REQ_CONF = 0 This bit T3_RD_REQ remains set until the read request is finished, and only then is cleared to 0</i></p>
<b>T3_PD_N</b>	0	rw	<p><b>Timer 3 Power Down</b></p> <p>0<sub>B</sub> <b>Power Down</b>, Timer 3 is in Power Down</p> <p>1<sub>B</sub> <b>no Power Down</b>, Timer 3 is not in Power Down</p> <p><i>Note: In Power Down Mode, the Timer 3 is reset and the module clock gating is active</i></p>

Timer3

Timer 3 Interrupt Status Clear Register

The register is reset by RESET\_TYPE\_3.

<b>ISRCLR</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Timer 3 Interrupt Status Clear Register</b>	<b>14<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

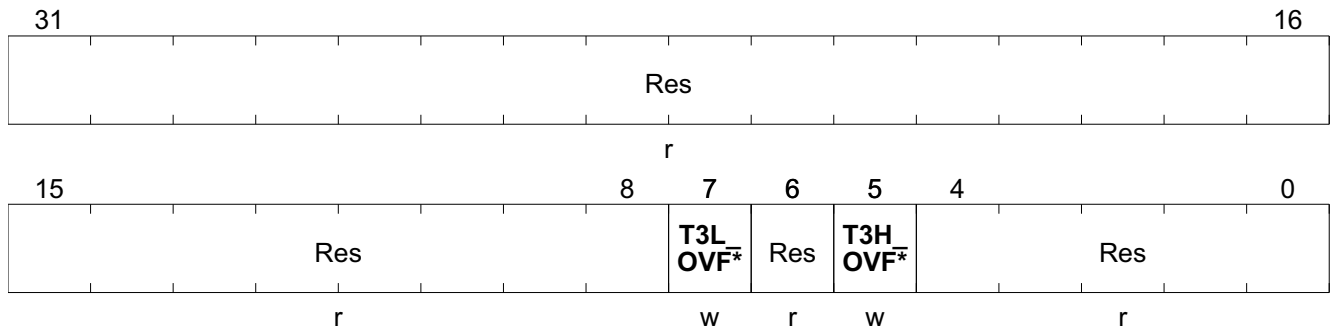


Field	Bits	Type	Description
<b>Res</b>	31:8	r	<b>Reserved</b> Always read as 0
<b>T3L_OVF_ICLR</b>	7	w	<b>Timer 3 Overflow Flag (Low Byte Timer) Interrupt Clear</b> 0 <sub>B</sub> <b>T3L_OVF_ ICLR</b> , Overflow not cleared. 1 <sub>B</sub> <b>T3L_OVF_ ICLR</b> , Overflow cleared. Set by software, cleared by hardware.
<b>Res</b>	6	r	<b>Reserved</b> Always read as 0
<b>T3H_OVF_ICLR</b>	5	w	<b>Timer 3 Overflow Flag (High Byte Timer) Interrupt Clear</b> 0 <sub>B</sub> <b>T3H_OVF_ ICLR</b> , Overflow not cleared. 1 <sub>B</sub> <b>T3H_OVF_ ICLR</b> , Overflow cleared. Set by software, cleared by hardware
<b>Res</b>	4:0	r	<b>Reserved</b> Always read as 0

### Timer3

#### Timer 3 Mode Configuration Register

The register is reset by RESET\_TYPE\_3.

MODE_CONF	Offset	Reset Value
Timer 3 Mode Configuration Register	10 <sub>H</sub>	0000 0001 <sub>H</sub>

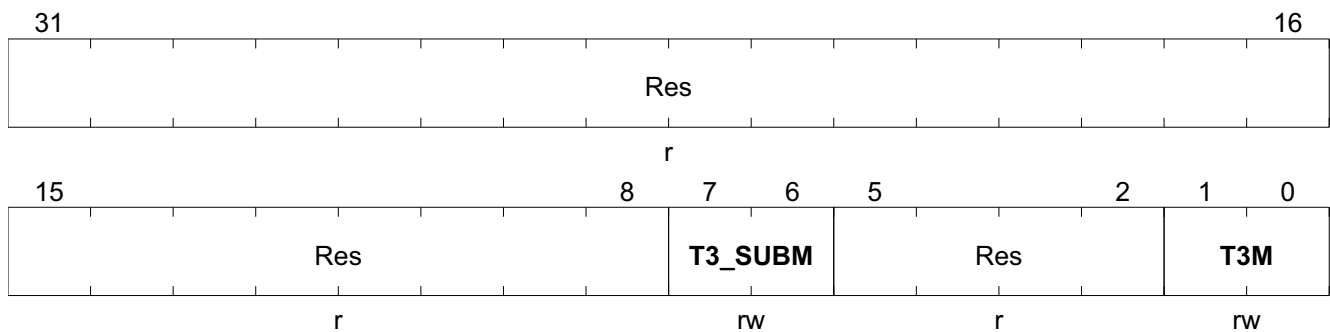

Field	Bits	Type	Description
Res	31:8	r	<b>Reserved</b> Always read as 0
T3_SUBM	7:6	rw	<b>Sub-Mode Select Bits</b> 00 <sub>B</sub> <b>No Sub-Mode</b> , no Sub-Mode enabled 01 <sub>B</sub> <b>Mode 1b</b> , enables 16-bit Timer triggered by an event. This mode has only an effect with Mode 1 (16-Bit Mode) 10 <sub>B</sub> <b>Mode 3b</b> , enables two 8-Bit Timers for clock measurement. This Mode has only an effect with Mode 3. 11 <sub>B</sub> <b>RES</b> , Reserved.
Res	5:2	r	<b>Reserved</b> Always read as 0
T3M	1:0	rw	<b>Mode Select Bits</b> 00 <sub>B</sub> <b>T3M</b> , 13-bit timer 01 <sub>B</sub> <b>T3M</b> , 16-bit timer 10 <sub>B</sub> <b>T3M</b> , 8-bit auto-reload timer 11 <sub>B</sub> <b>T3M</b> , Timer 3 is split into two halves. TL3 is an 8-bit timer controlled by the standard Timer 3 low byte control bits, and TH3 is the other 8-bit timer controlled by the standard Timer 3 high byte control bits.

---

**Capture/Compare Unit 6 (CCU6)****18 Capture/Compare Unit 6 (CCU6)**

The CCU6 is a high-resolution 16-bit capture and compare unit with application specific modes, mainly for AC drive control. Special operating modes support the control of brushless DC-motors using Hall sensors or Back-EMF detection. Furthermore, block commutation and control mechanisms for multi-phase machines are supported.

It also supports inputs to start several timers synchronously, an important feature in devices with several CCU6 modules.

This chapter is structured as follows:

- Functional description of the CCU6 kernel (see [Section 18.2](#))
  - Introduction (see [Section 18.2](#))
  - Operating T12 (see [Section 18.3](#))
  - Operating T13 (see [Section 18.4](#))
  - Trap handling (see [Section 18.5](#))
  - Multi-Channel mode (see [Section 18.6](#))
  - Hall sensor mode (see [Section 18.7](#))
  - Interrupt handling (see [Section 18.10](#))
  - General module operation (see [Section 18.8](#))
- CCU6 kernel registers description (see [Section 18.11.1](#))
- TLE987x implementation specific details (see [Section 18.9](#))

**18.1 Feature Set Overview**

This section gives an overview over the different building blocks and their main features.

**Timer 12 Block Features**

- Three capture/compare channels, each channel can be used either as capture or as compare channel
- Generation of a three-phase PWM supported (six outputs, individual signals for high-side and low-side switches)
- 16-bit resolution, maximum count frequency = peripheral clock
- Dead-time control for each channel to avoid short-circuits in the power stage
- Concurrent update of T12 registers
- Center-aligned and edge-aligned PWM can be generated
- Single-shot mode supported
- Start can be controlled by external events
- Capability of counting external events
- Multiple interrupt request sources
- Hysteresis-like control mode

---

## Capture/Compare Unit 6 (CCU6)

### Timer 13 Block Features

- One independent compare channel with one output
- 16-bit resolution, maximum count frequency = peripheral clock
- Concurrent update of T13 registers
- Can be synchronized to T12
- Interrupt generation at period-match and compare-match
- Single-shot mode supported
- Start can be controlled by external events
- Capability of counting external events

### Additional Specific Functions

- Block commutation for brushless DC-drives implemented
- Position detection via hall-sensor pattern
- Noise filter supported for position input signals
- Automatic rotational speed measurement and commutation control for block commutation
- Integrated error handling
- Fast emergency stop without CPU load via external signal ( $\overline{\text{CTRAP}}$ )
- Control modes for multi-channel AC-drives
- Output levels can be selected and adapted to the power stage

## 18.2 Introduction

The CCU6 unit is made up of a Timer T12 block with three capture/compare channels and a Timer T13 block with one compare channel. The T12 channels can independently generate PWM signals or accept capture triggers, or they can jointly generate control signal patterns to drive DC-motors or inverters.

A rich set of status bits, synchronized updating of parameter values via shadow registers, and flexible generation of interrupt request signals provide efficient software-control.

*Note: The capture/compare module itself is referred to as CCU6 (capture/compare unit 6). A capture/compare channel inside this module is referred to as CC6x.*

The timer T12 can work in capture and/or compare mode for its three channels. The modes can also be combined (e.g. a channel works in compare mode, whereas another channel works in capture mode). The timer T13 can work in compare mode only. The multi-channel control unit generates output patterns which can be modulated by T12 and/or T13. The modulation sources can be selected and combined for the signal modulation.

Capture/Compare Unit 6 (CCU6)

18.2.1 Block Diagram

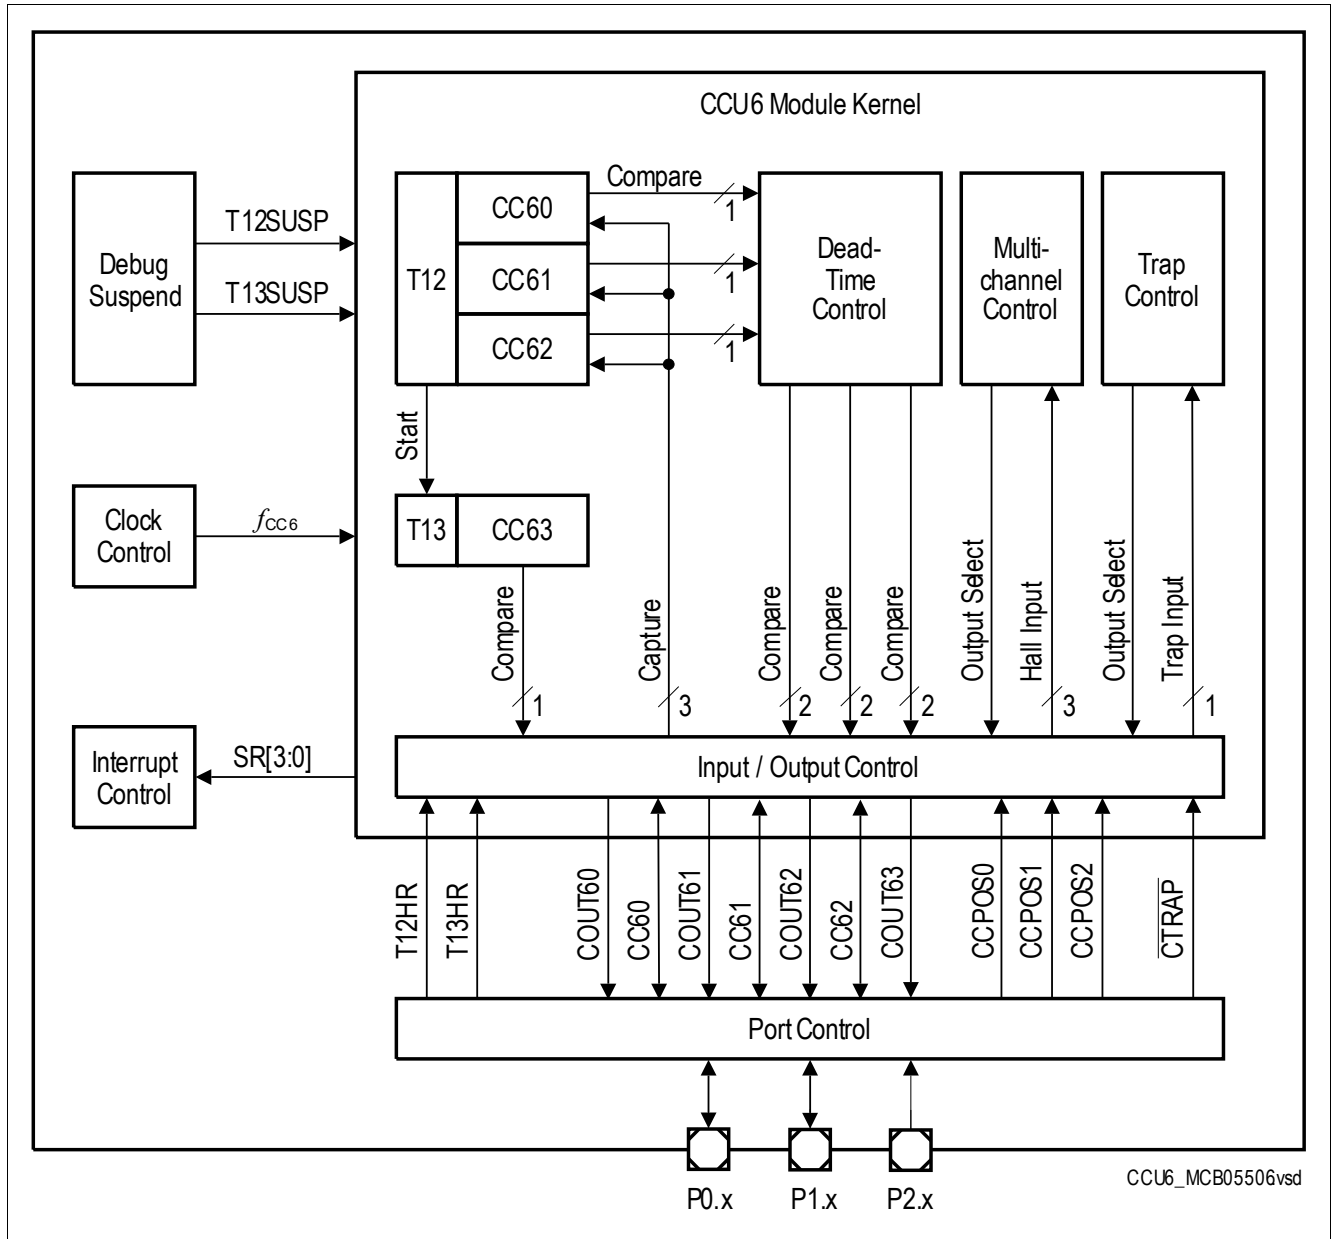


Figure 121 CCU6 Block Diagram



## Capture/Compare Unit 6 (CCU6)


### 18.3 Operating Timer T12

The timer T12 block is the main unit to generate the 3-phase PWM signals. A 16-bit counter is connected to 3 channel registers via comparators, that generate a signal when the counter contents match one of the channel register contents. A variety of control functions facilitate the adaptation of the T12 structure to different application needs.

Besides the 3-phase PWM generation, the T12 block offers options for individual compare and capture functions, as well as dead-time control and hysteresis-like compare mode.

This section provides information about:

- T12 overview (see [Section 18.3.1](#))
- Counting scheme (see [Section 18.3.2](#))
- Compare modes (see [Section 18.3.3](#))
- Compare mode output path (see [Section 18.3.4](#))
- Capture modes (see [Section 18.3.5](#))
- Shadow transfer (see [Section 18.3.6](#))
- T12 operating mode selection (see [Section 18.3.7](#))

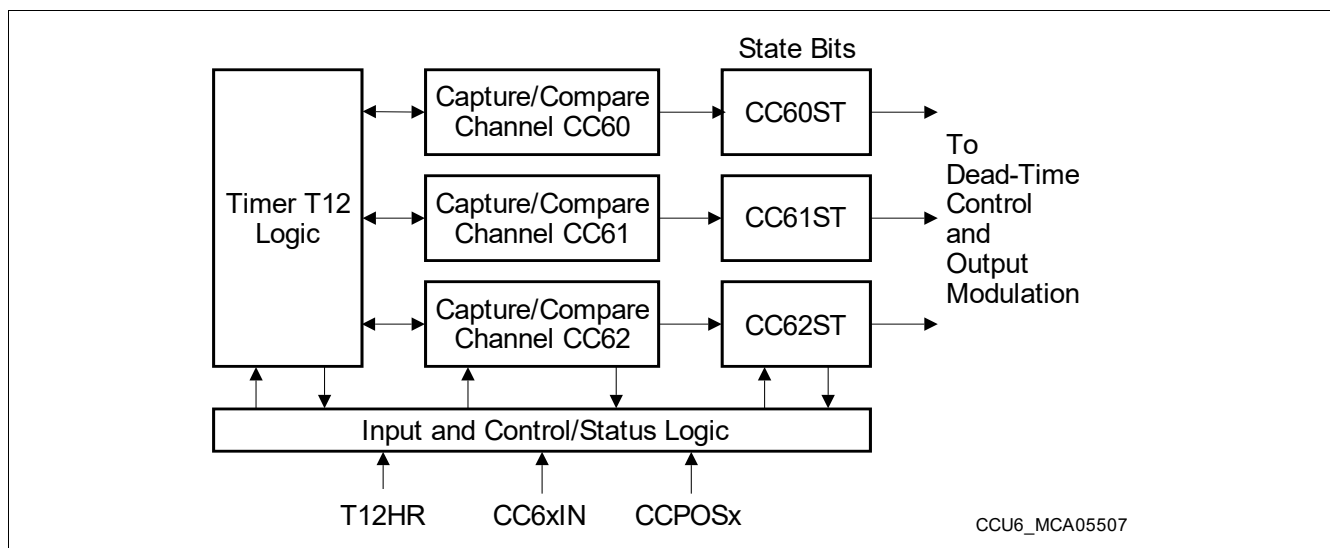

**Figure 122 Overview Diagram of the Timer T12 Block**



---

## Capture/Compare Unit 6 (CCU6)

transfer enable bit STE12. Providing a shadow register for the period value as well as for other values related to the generation of the PWM signal allows a concurrent update by software for all relevant parameters.

Two further signals indicate whether the counter contents are equal to 0000<sub>H</sub> (T12\_ZM = zero match) or 0001<sub>H</sub> (T12\_OM = one match). These signals control the counting and switching behavior of T12.

The basic operating mode of T12, either Edge-Aligned mode ([Figure 124](#)) or Center-Aligned mode ([Figure 125](#)), is selected via bit CTM. A Single-Shot control bit, T12SSC, enables an automatic stop of the timer when the current counting period is finished (see [Figure 126](#) and [Figure 127](#)).

The start or stop of T12 is controlled by the Run bit T12R that can be modified by bits in register TCTR4. The run bit can be set/cleared by software via the associated set/clear bits T12RS or T12RR, it can be set by a selectable edge of the input signal T12HR (TCTR2.T12RSEL), or it is cleared by hardware according to preselected conditions.

The timer T12 run bit T12R must not be set while the applied T12 period value is zero. Timer T12 can be cleared via control bit T12RES. Setting this write-only bit does only clear the timer contents, but has no further effects, for example, it does not stop the timer.

The generation of the T12 shadow transfer control signal, T12\_ST, is enabled via bit STE12. This bit can be set or reset by software indirectly through its associated set/clear control bits T12STR and T12STD.

While Timer T12 is running, write accesses to the count register T12 are not taken into account. If T12 is stopped and the Dead-Time counters are 0, write actions to register T12 are immediately taken into account.

## Capture/Compare Unit 6 (CCU6)

### 18.3.2 T12 Counting Scheme

This section describes the clocking and counting capabilities of T12.

#### 18.3.2.1 Clock Selection

In **Timer Mode** (PISEL2.ISCNT12 = 00<sub>B</sub>), the input clock  $f_{T12}$  of Timer T12 is derived from the internal module clock  $f_{CC6}$  through a programmable prescaler and an optional 1/256 divider. The resulting prescaler factors are listed in **Table 118**. The prescaler of T12 is cleared while T12 is not running (TCTR0.T12R = 0) to ensure reproducible timings and delays.

**Table 118** Timer T12 Input Frequency Options

T12CLK	Resulting Input Clock $f_{T12}$ Prescaler Off (T12PRE = 0)	Resulting Input Clock $f_{T12}$ Prescaler On (T12PRE = 1)
000 <sub>B</sub>	$f_{CC6}$	$f_{CC6} / 256$
001 <sub>B</sub>	$f_{CC6} / 2$	$f_{CC6} / 512$
010 <sub>B</sub>	$f_{CC6} / 4$	$f_{CC6} / 1024$
011 <sub>B</sub>	$f_{CC6} / 8$	$f_{CC6} / 2048$
100 <sub>B</sub>	$f_{CC6} / 16$	$f_{CC6} / 4096$
101 <sub>B</sub>	$f_{CC6} / 32$	$f_{CC6} / 8192$
110 <sub>B</sub>	$f_{CC6} / 64$	$f_{CC6} / 16384$
111 <sub>B</sub>	$f_{CC6} / 128$	$f_{CC6} / 32768$


In **Counter Mode**, timer T12 counts one step:

- If a 1 is written to TCTR4.T12CNT and PISEL2.ISCNT12 = 01<sub>B</sub>
- If a rising edge of input signal T12HR is detected and PISEL2.ISCNT12 = 10<sub>B</sub>
- If a falling edge of input signal T12HR is detected and PISEL2.ISCNT12 = 11<sub>B</sub>

## Capture/Compare Unit 6 (CCU6)

### 18.3.2.2 Edge-Aligned / Center-Aligned Mode

In **Edge-Aligned Mode** (CTM = 0), timer T12 is always counting upwards (CDIR = 0). When reaching the value given by the period register (period-match T12\_PM), the value of T12 is cleared with the next counting step (saw tooth shape).

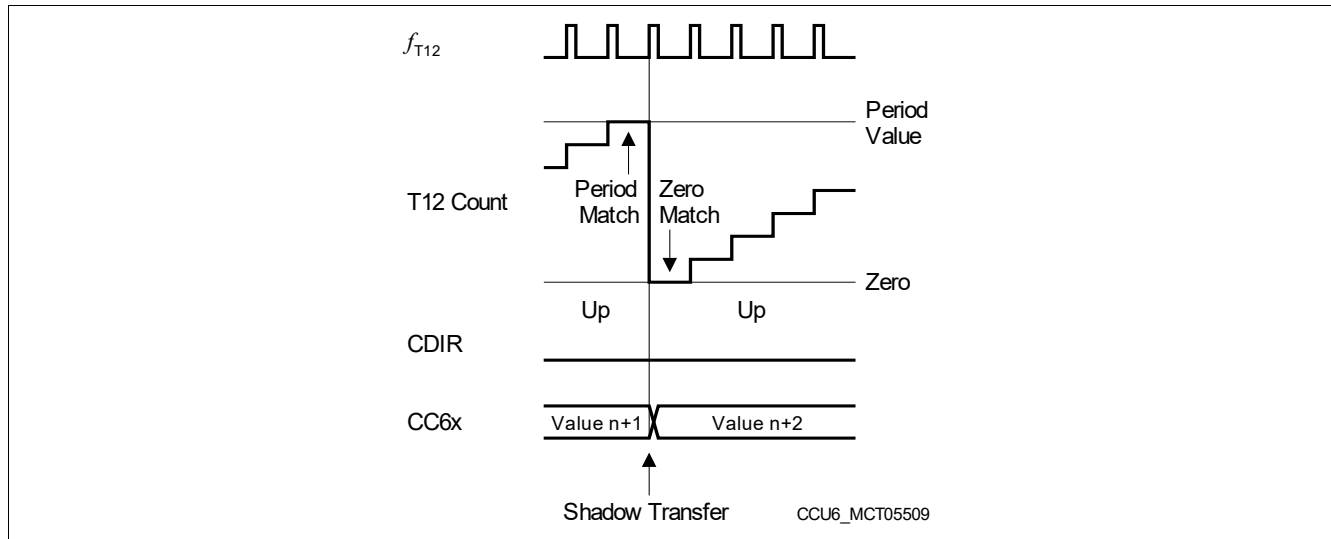

**Figure 124 T12 Operation in Edge-Aligned Mode**

As a result, in Edge-Aligned mode, the timer period is given by:

$$T12_{PER} = \langle \text{Period-Value} \rangle + 1; \text{ in } T12 \text{ clocks } (f_{T12}) \quad (18.1)$$

In **Center-Aligned Mode** (CTM = 1), timer T12 is counting upwards or downwards (triangular shape). When reaching the value given by the period register (period-match T12\_PM) while counting upwards (CDIR = 0), the counting direction control bit CDIR is changed to downwards (CDIR = 1) with the next counting step.

When reaching the value 0001<sub>H</sub> (one-match T12\_OM) while counting downwards, the counting direction control bit CDIR is changed to upwards with the next counting step.

As a result, in Center-Aligned mode, the timer period is given by:

$$T12_{PER} = (\langle \text{Period-Value} \rangle + 1) \times 2; \text{ in } T12 \text{ clocks } (f_{T12}) \quad (18.2)$$

- With the next clock event of  $f_{T12}$  the count direction is set to counting up (CDIR = 0) when the counter reaches 0001<sub>H</sub> while counting down.
- With the next clock event of  $f_{T12}$  the count direction is set to counting down (CDIR = 1) when the Period-Match is detected while counting up.
- With the next clock event of  $f_{T12}$  the counter counts up while CDIR = 0 and it counts down while CDIR = 1.

Capture/Compare Unit 6 (CCU6)

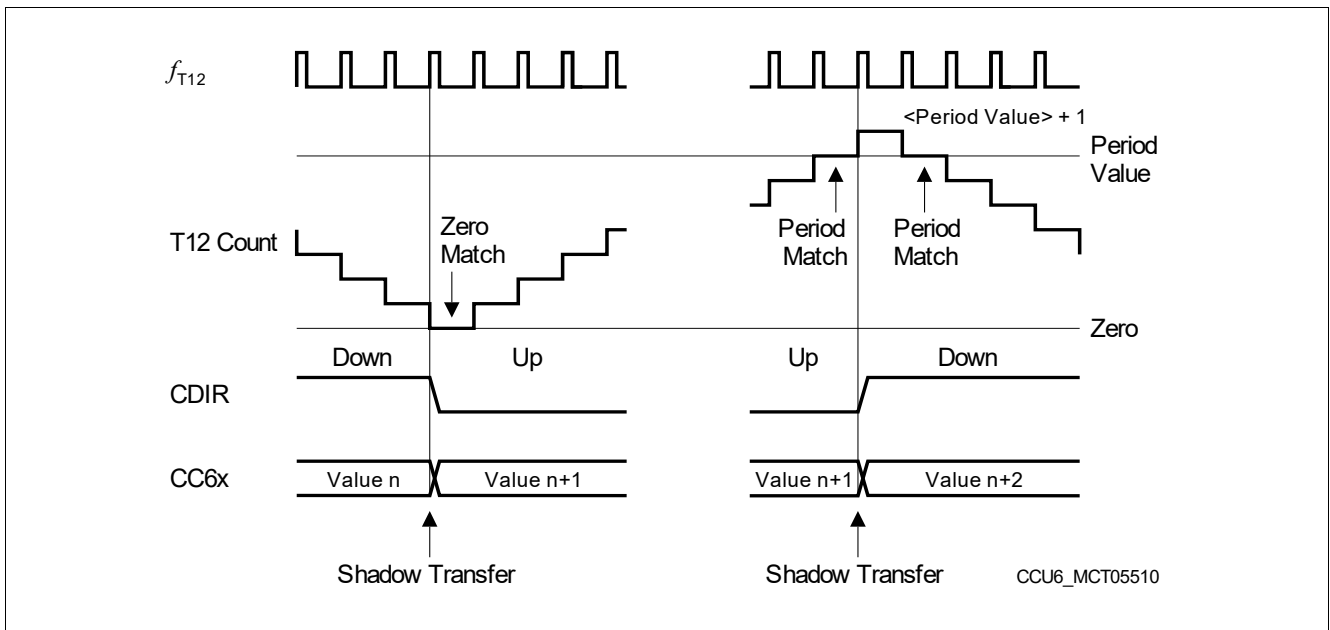


Figure 125 T12 Operation in Center-Aligned Mode

Note: Bit CDIR changes with the next timer clock event after the one-match or the period-match. Therefore, the timer continues counting in the previous direction for one cycle before actually changing its direction (see Figure 125).

Capture/Compare Unit 6 (CCU6)

18.3.2.3 Single-Shot Mode

In Single-Shot Mode, the timer run bit T12R is cleared by hardware. If bit T12SSC = 1, the timer T12 will stop when the current timer period is finished.

In Edge-Aligned mode, T12R is cleared when the timer becomes zero after having reached the period value (see [Figure 126](#)).

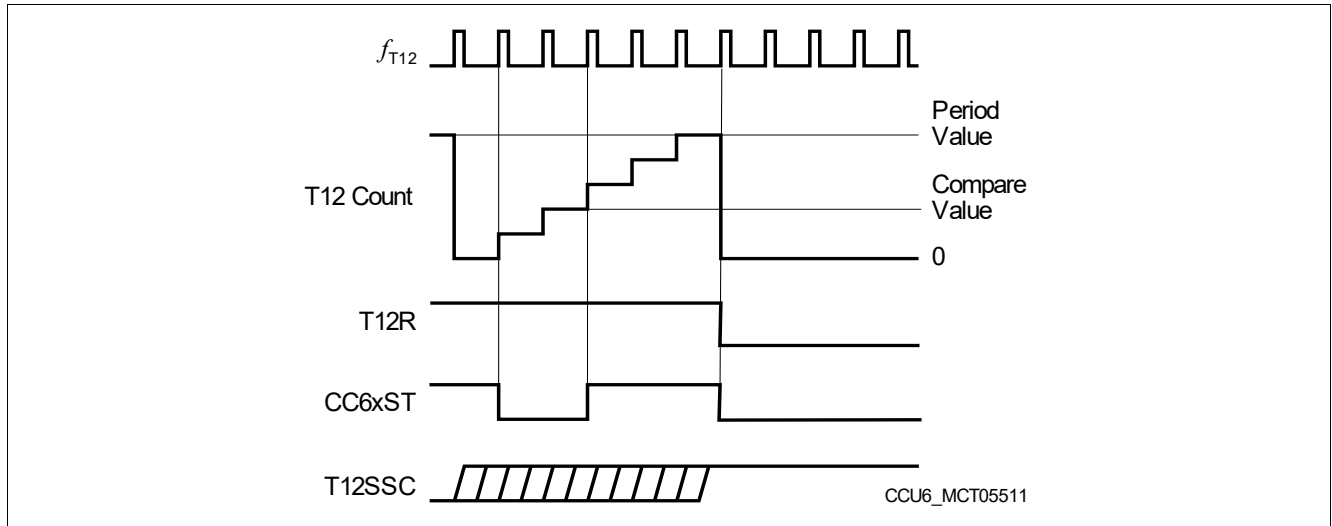


Figure 126 Single-Shot Operation in Edge-Aligned Mode

In Center-Aligned mode, the period is finished when the timer has counted down to zero (one clock cycle after the one-match while counting down, see [Figure 127](#)).

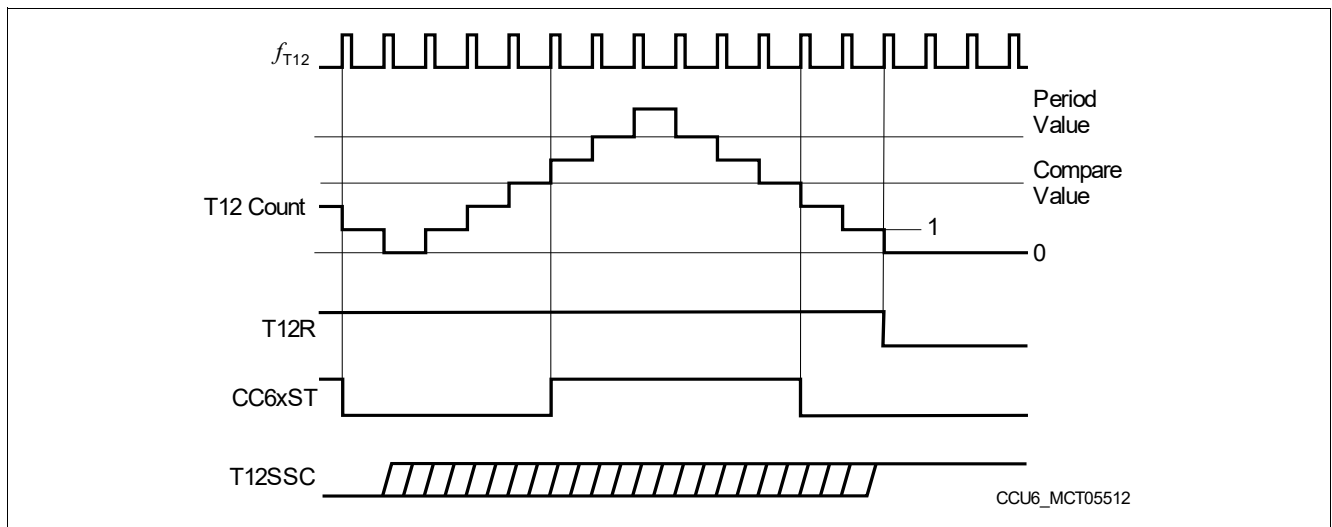


Figure 127 Single-Shot Operation in Center-Aligned Mode


## Capture/Compare Unit 6 (CCU6)

### 18.3.3 T12 Compare Mode

Associated with Timer T12 are three individual capture/compare channels, that can perform compare or capture operations with regard to the contents of the T12 counter. The capture functions are explained in [Section 18.3.5](#).

#### 18.3.3.1 Compare Channels

In Compare Mode (see [Figure 128](#)), the three individual compare channels CC60, CC61, and CC62 can generate a three-phase PWM pattern.

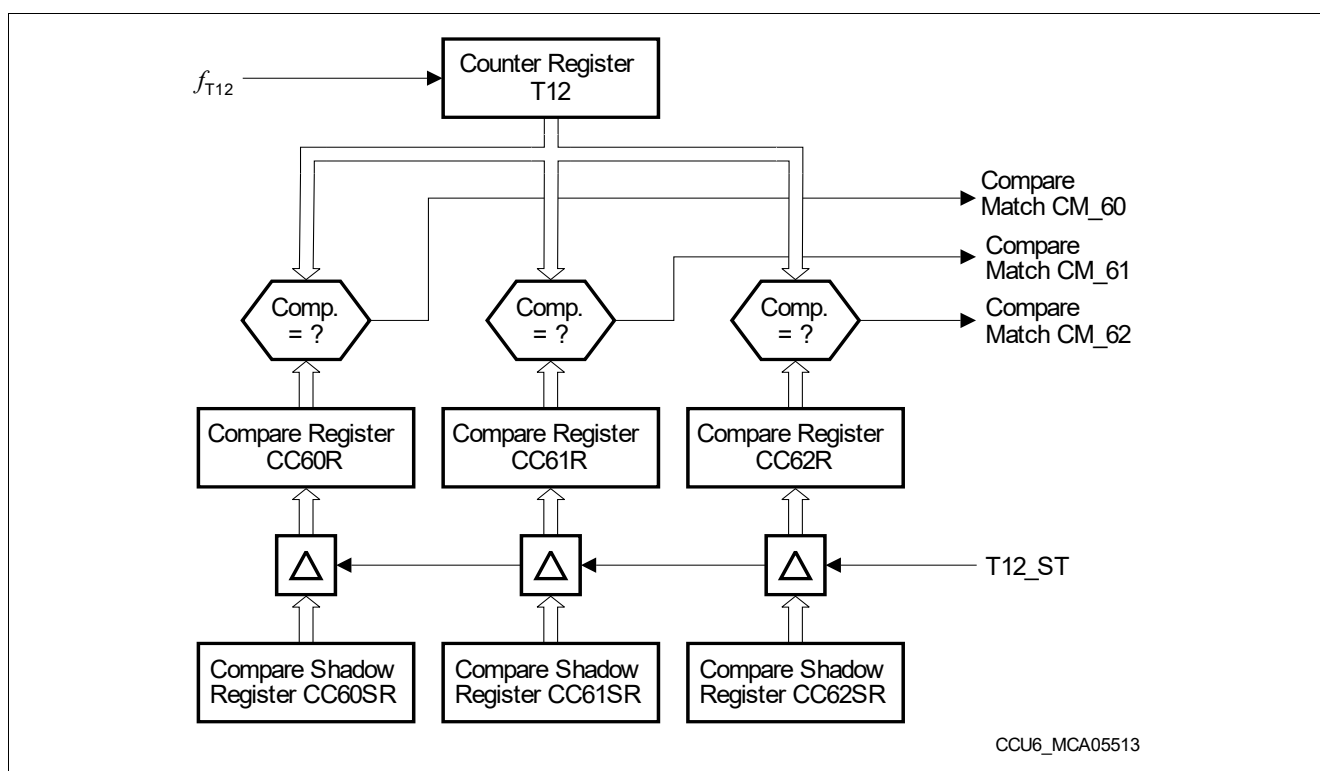

**Figure 128 T12 Channel Comparators**


Each compare channel is connected to the T12 counter register via its individual equal-to comparator, generating a match signal when the contents of the counter matches the contents of the associated compare register. Each channel consists of the comparator and a double register structure - the actual compare register CC6xR, feeding the comparator, and an associated shadow register CC6xSR, that is preloaded by software and transferred into the compare register when signal T12 shadow transfer, T12\_ST, gets active. Providing a shadow register for the compare value as well as for other values related to the generation of the PWM signal facilitates a concurrent update by software for all relevant parameters of a three-phase PWM.



## Capture/Compare Unit 6 (CCU6)

### 18.3.3.2 Channel State Bits

Associated with each (compare) channel is a State Bit, CMPSTAT.CC6xST, holding the status of the compare (or capture) operation (see [Figure 129](#)). In compare mode, the State Bits are modified according to a set of switching rules, depending on the current status of timer T12.

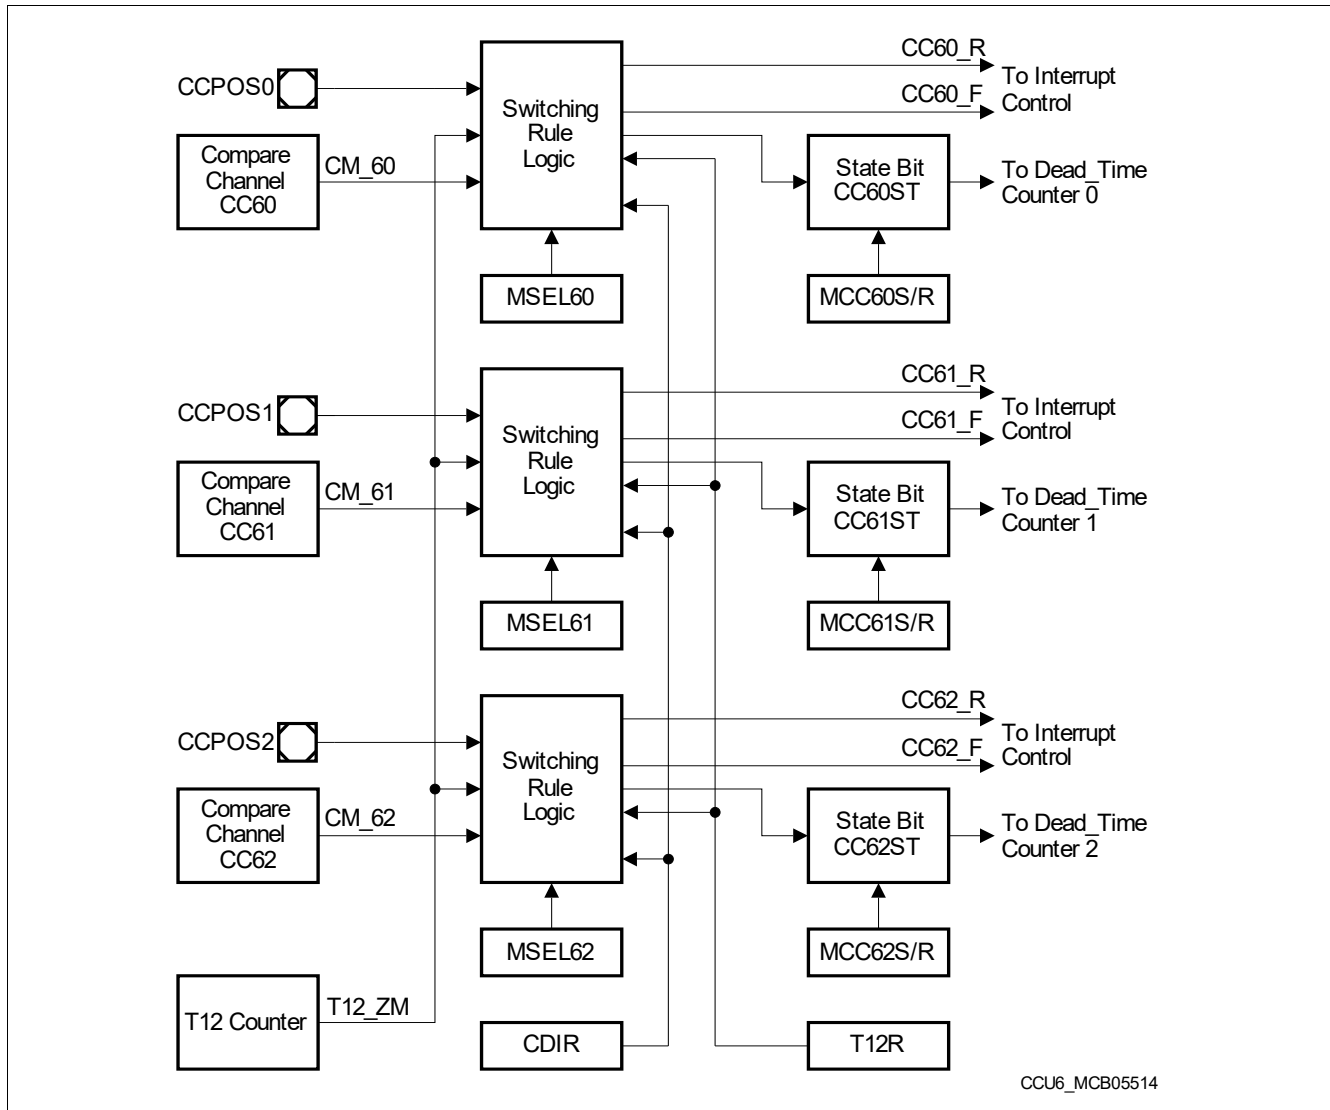

**Figure 129 Compare State Bits for Compare Mode**

The inputs to the switching rule logic for the CC6xST bits are the timer direction (CDIR), the timer run bit (T12R), the timer T12 zero-match signal (T12\_ZM), and the actual individual compare-match signals CM\_6x as well as the mode control bits, T12MSEL.MSEL6x.

In addition, each state bit can be set or cleared by software via the appropriate set and reset bits in register CMPMODIF, MCC6xS and MCC6xR. The input signals CCPOSx are used in hysteresis-like compare mode, whereas in normal compare mode, these inputs are ignored.

*Note:* In Hall Sensor, single shot or capture modes, additional/different rules are taken into account (see related sections).

**Capture/Compare Unit 6 (CCU6)**

A compare interrupt event  $CC6x\_R$  is signaled when a compare match is detected while counting upwards, whereas the compare interrupt event  $CC6x\_F$  is signaled when a compare match is detected while counting down. The actual setting of a State Bit has no influence on the interrupt generation in compare mode.


A modification of a State Bit  $CC6xST$  by the switching rule logic due to a compare action is only possible while Timer T12 is running ( $T12R = 1$ ). If this is the case, the following switching rules apply for setting and clearing the State Bits in Compare Mode (illustrated in **Figure 130** and **Figure 131**):

A State Bit **CC6xST is set** to 1:

- with the next T12 clock ( $f_{T12}$ ) after a compare-match when T12 is counting up (i.e., when the counter is incremented above the compare value);
- with the next T12 clock ( $f_{T12}$ ) after a zero-match AND a parallel compare-match when T12 is counting up.


A State Bit **CC6xST is cleared** to 0:

- with the next T12 clock ( $f_{T12}$ ) after a compare-match when T12 is counting down (i.e., when the counter is decremented below the compare value in center-aligned mode);
- with the next T12 clock ( $f_{T12}$ ) after a zero-match AND NO parallel compare-match when T12 is counting up.

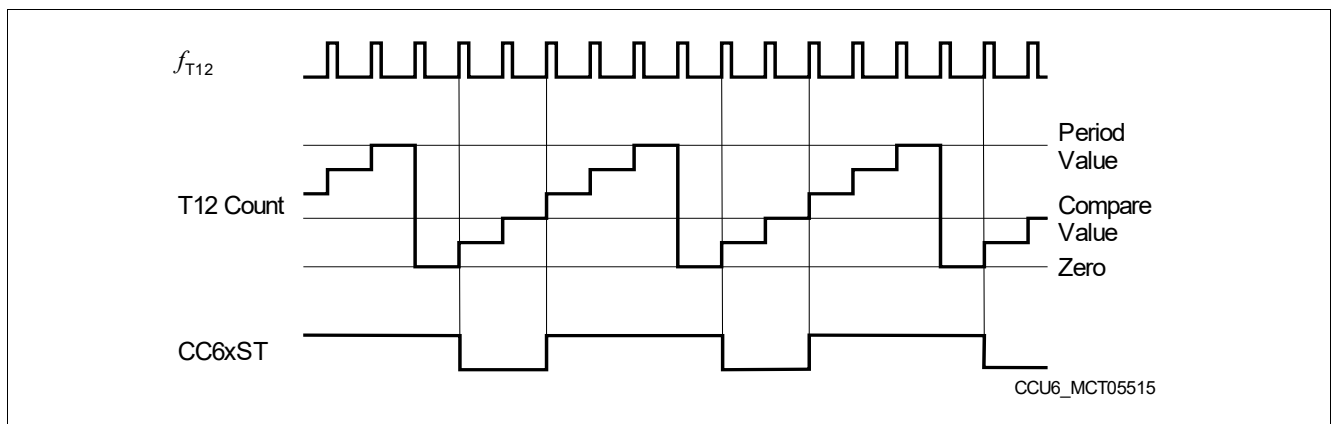


**Figure 130 Compare Operation, Edge-Aligned Mode**

**Figure 132** illustrates some more examples for compare waveforms. It is important to note that in these examples, it is assumed that some of the compare values are changed while the timer is running. This change is performed via a software preload of the Shadow Register,  $CC6xSR$ . The value is transferred to the actual Compare Register  $CC6xR$  with the T12 Shadow Transfer signal,  $T12\_ST$ , that is assumed to be enabled.

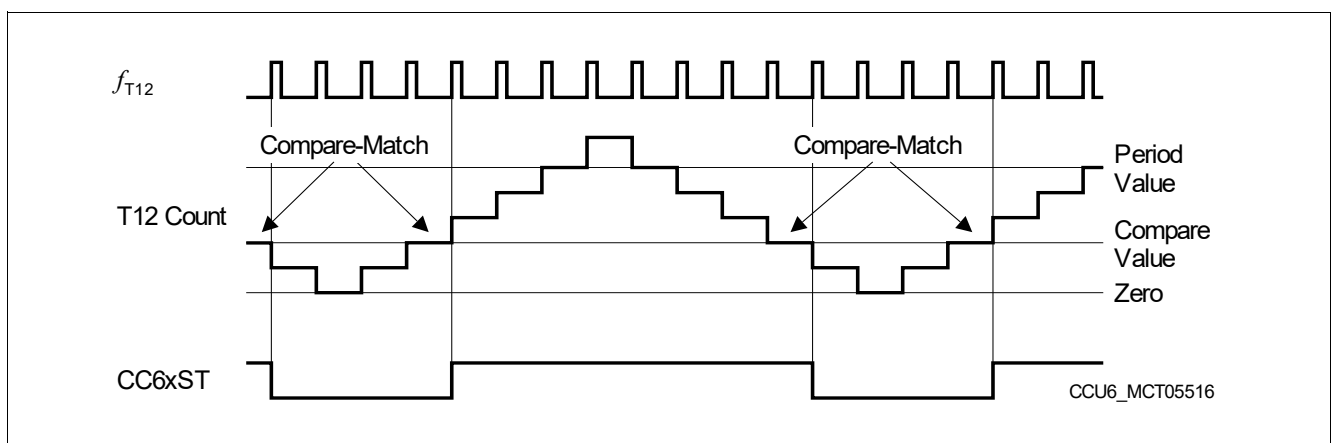

**Figure 131 Compare Operation, Center-Aligned Mode**

Capture/Compare Unit 6 (CCU6)

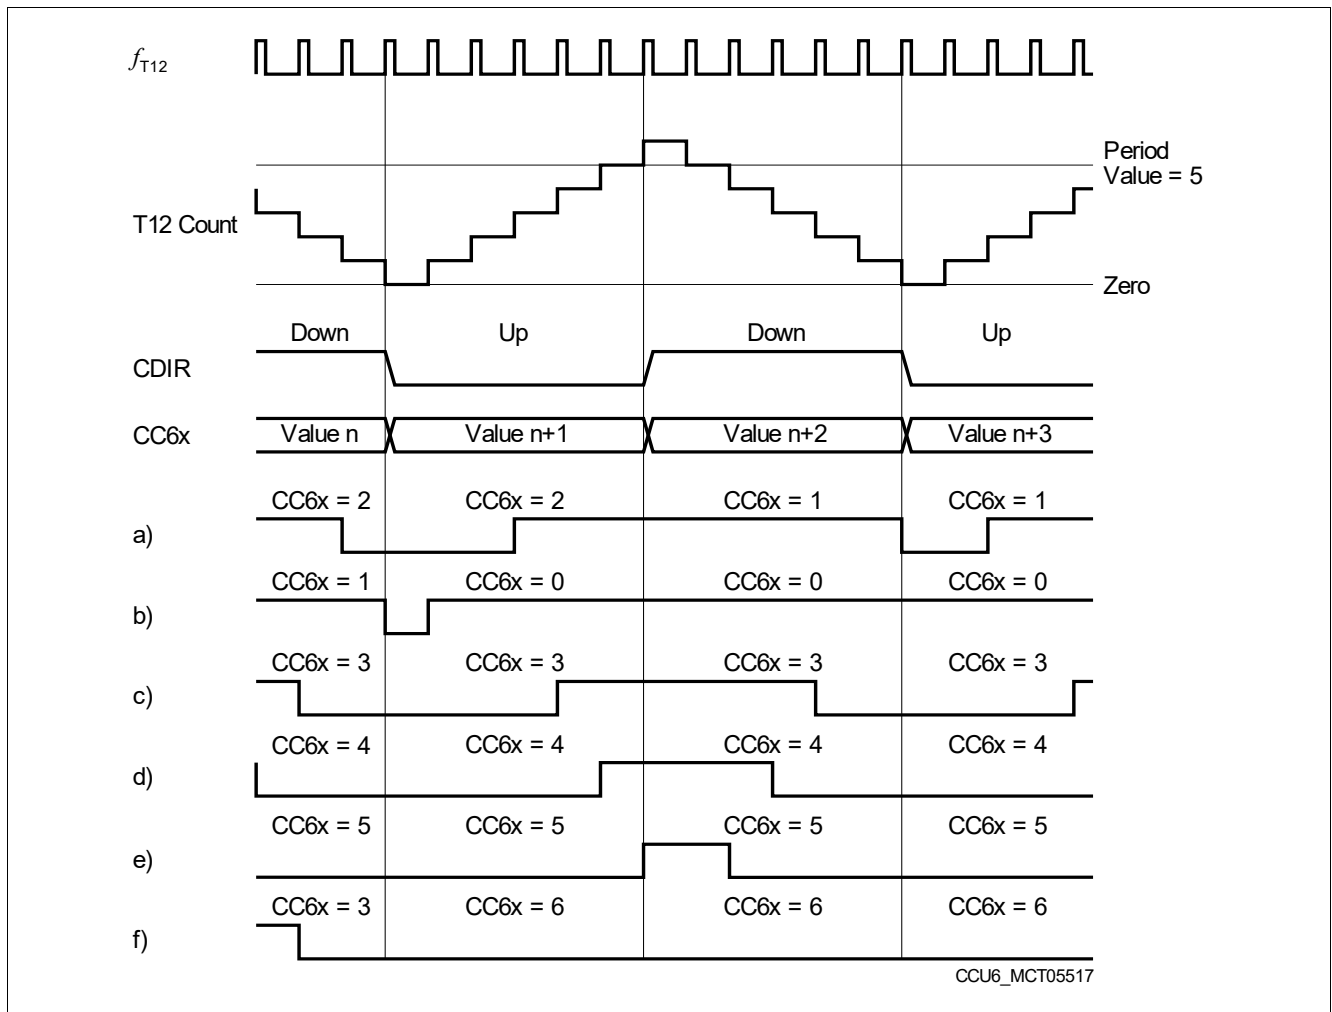

**Figure 132 Compare Waveform Examples**

Example b) illustrates the transition to a duty cycle of 100%. First, a compare value of 0001<sub>H</sub> is used, then changed to 0000<sub>H</sub>. Please note that a low pulse with the length of one T12 clock is still produced in the cycle where the new value 0000<sub>H</sub> is in effect; this pulse originates from the previous value 0001<sub>H</sub>. In the following timer cycles, the State Bit CC6xST remains at 1, producing a 100% duty cycle signal. In this case, the compare rule 'zero-match AND compare-match' is in effect.

Example f) shows the transition to a duty cycle of 0%. The new compare value is set to <Period-Value> + 1, and the State Bit CC6ST remains cleared.

**Figure 133** illustrates an example for the waveforms of all three channels. With the appropriate dead-time control and output modulation, a very efficient 3-phase PWM signal can be generated.

Capture/Compare Unit 6 (CCU6)

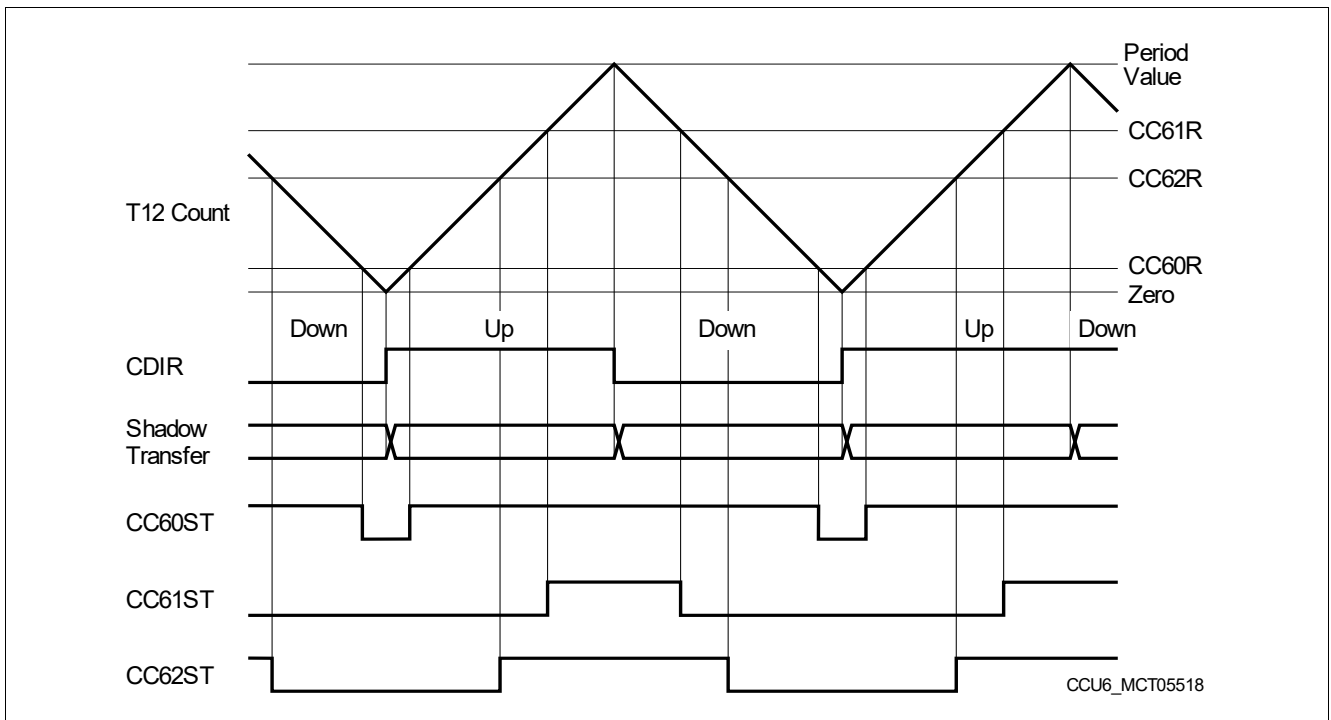


Figure 133 Three-Channel Compare Waveforms

---

**Capture/Compare Unit 6 (CCU6)****18.3.3.3 Hysteresis-Like Control Mode**

The hysteresis-like control mode ( $T12MSEL.MSEL6x = 1001_B$ ) offers the possibility to switch off the PWM output if the input CCPOSx becomes 0 by clearing the State Bit CC6xST. This can be used as a simple motor control feature by using a comparator indicating, e.g., overcurrent. While CCPOSx = 0, the PWM outputs of the corresponding channel are driving their passive levels, because the setting of bit CC6xST is only possible while CCPOSx = 1.

As long as input CCPOSx is 0, the corresponding State Bit is held 0. When CCPOSx is at high level, the outputs can be in active state and are determined by bit CC6xST (see [Figure 129](#) for the state bit logic and [Figure 134](#) for the output paths). The CCPOSx inputs are evaluated with  $f_{CC6}$ .

This mode can be used to introduce a timing-related behavior to a hysteresis controller. A standard hysteresis controller detects if a value exceeds a limit and switches its output according to the compare result. Depending on the operating conditions, the switching frequency and the duty cycle are not fixed, but change permanently.


If (outer) time-related control loops based on a hysteresis controller in an inner loop should be implemented, the outer loops show a better behavior if they are synchronized to the inner loops. Therefore, the hysteresis-like mode can be used, that combines timer-related switching with a hysteresis controller behavior. For example, in this mode, an output can be switched on according to a fixed time base, but it is switched off as soon as a falling edge is detected at input CCPOSx.

This mode can also be used for standard PWM with overcurrent protection. As long as there is no low level signal at pin CCPOSx, the output signals are generated in the normal manner as described in the previous sections. Only if input CCPOSx shows a low level, e.g. due to the detection of overcurrent, the outputs are shut off to avoid harmful stress to the system.

## Capture/Compare Unit 6 (CCU6)

### 18.3.4 Compare Mode Output Path

**Figure 134** gives an overview on the signal path from a channel State Bit to its output pin in its simplest form. As illustrated, a user has a variety of controls to determine the desired output signal switching behavior in relation to the current state of the State Bit, CC6xST. Please refer to **Section 18.3.4.3** for details on the output modulation.

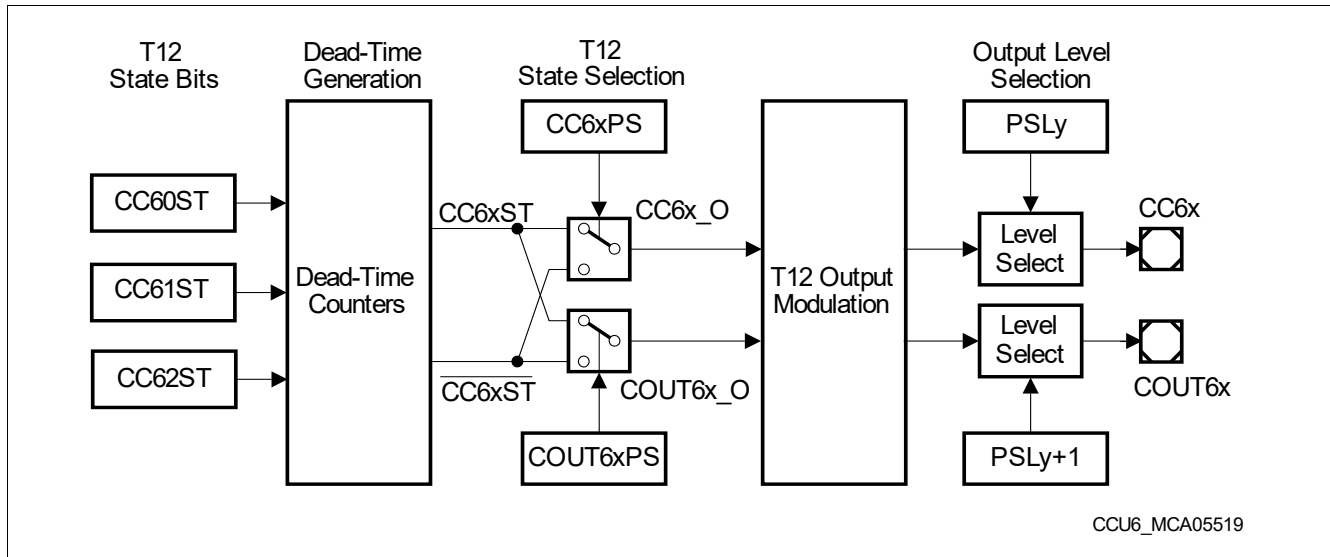

**Figure 134** Compare Mode Simplified Output Path Diagram

The output path is based on signals that are defined as active or passive. The terms active and passive are not related to output levels, but to internal actions. This mainly applies for the modulation, where T12 and T13 signals are combined with the multi-channel signals and the trap function. The Output level Selection allows the user to define the output level at the output pin for the passive state (inverted level for the active state). It is recommended to configure this block in a way that an external power switch is switched off while the CCU6 delivers an output signal in the passive state.


#### 18.3.4.1 Dead-Time Generation

The generation of (complementary) signals for the high-side and the low-side switches of one power inverter phase is based on the same compare channel. For example, if the high-side switch should be active while the T12 counter value is above the compare value (State Bit = 1), then the low-side switch should be active while the counter value is below the compare value (State Bit = 0).

In most cases, the switching behavior of the connected power switches is not symmetrical concerning the switch-on and switch-off times. A general problem arises if the time for switch-on is smaller than the time for switch-off of the power device. In this case, a short-circuit can occur in the inverter bridge leg, which may damage the complete system. In order to solve this problem by HW, this capture/compare unit contains a programmable Dead-Time Generation Block, that delays the passive to active edge of the switching signals by a programmable time (the active to passive edge is not delayed).

The Dead-Time Generation Block, illustrated in **Figure 135**, is built in a similar way for all three channels of T12. It is controlled by bits in register T12DTC. Any change of a CC6xST State Bit activates the corresponding Dead-Time Counter, that is clocked with the same input clock as T12 ( $f_{T12}$ ). The length of the dead-time can be programmed by bit field DTM. This value is identical for all three channels. Writing TCTR4.DTRES = 1 sets all dead-times to passive.

## Capture/Compare Unit 6 (CCU6)

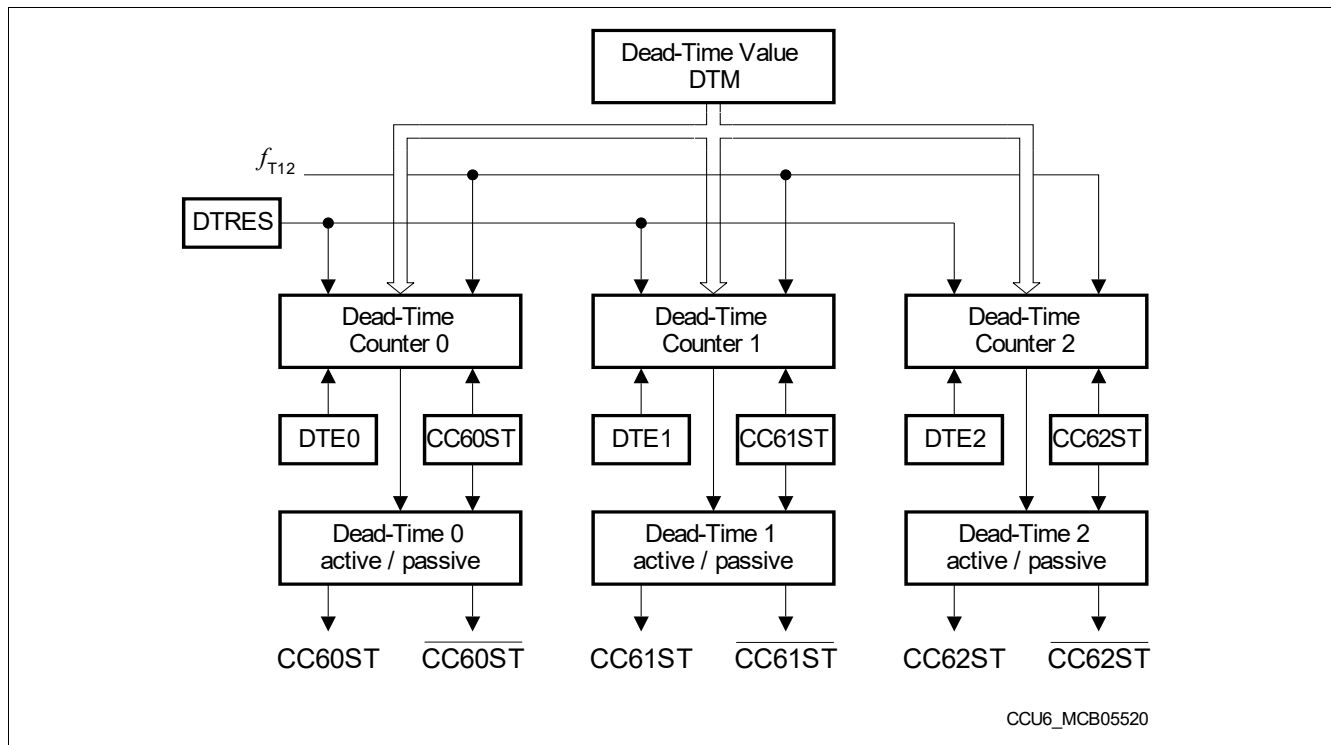


**Figure 135 Dead-Time Generation Block Diagram**

Each of the three dead-time counters has its individual dead-time enable bit, DTE<sub>x</sub>. An enabled dead-time counter generates a dead-time delaying the passive-to-active edge of the channel output signal. The change in a State Bit CC6<sub>x</sub>ST is not taken into account while the dead-time generation of this channel is currently in progress (active). This avoids an unintentional additional dead-time if a State Bit CC6<sub>x</sub>ST changes too early.

A disabled dead-time counter is always considered as passive and does not delay any edge of CC6<sub>x</sub>ST.

Based on the State Bits CC6<sub>x</sub>ST, the Dead-Time Generation Block outputs a direct signal CC6<sub>x</sub>ST and an inverted signal  $\overline{CC6xST}$  for each compare channel, each masked with the effect of the related Dead-Time Counters (waveforms illustrated in [Figure 136](#)).

## Capture/Compare Unit 6 (CCU6)

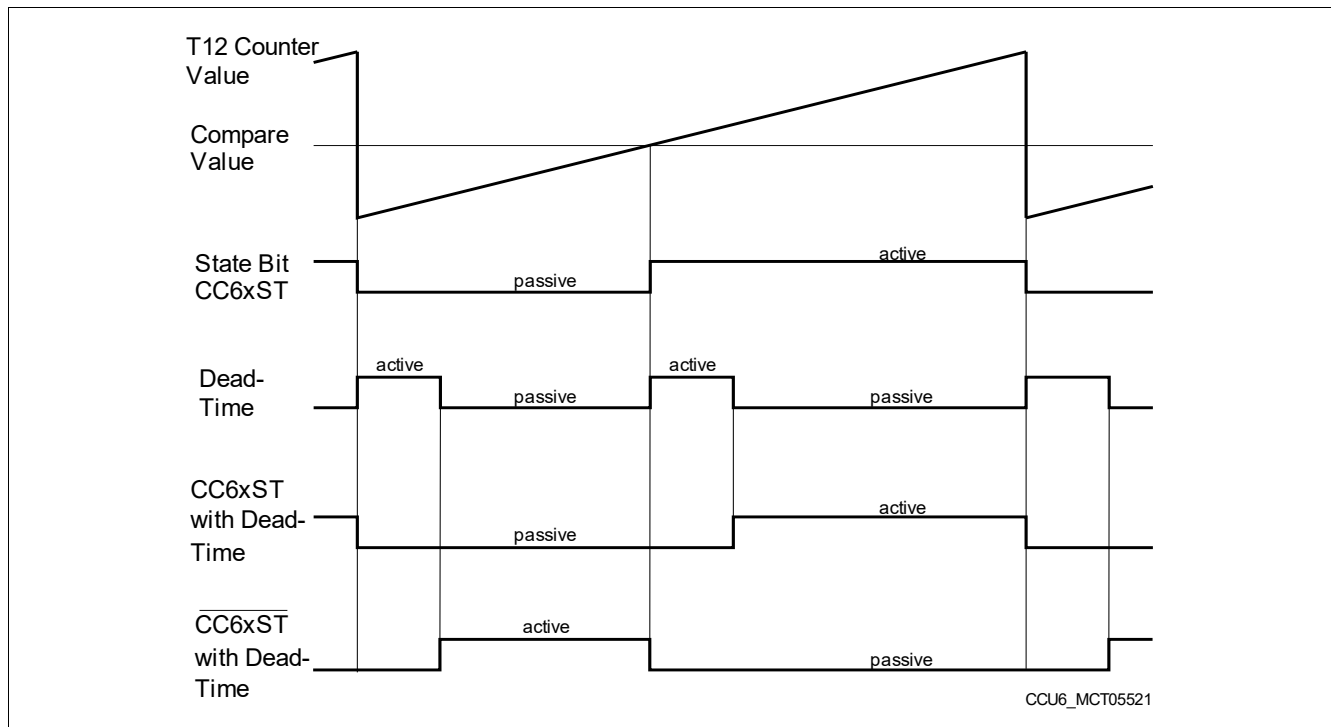

**Figure 136 Dead-Time Generation Waveforms**

### 18.3.4.2 State Selection

To support a wide range of power switches and drivers, the state selection offers the flexibility to define when an output can be active and can be modulated, especially useful for **complementary or multi-phase PWM** signals.

The state selection is based on the signals  $CC6xST$  and  $\overline{CC6xST}$  delivered by the dead-time generator (see [Figure 134](#)). Both signals are never active at the same time, but can be passive at the same time. This happens during the dead-time of each compare channel after a change of the corresponding State Bit  $CC6xST$ .

The user can select independently for each output signal  $CC6xO$  and  $COUT6xO$  if it should be active before or after the compare value has been reached (see register  $CMPSTAT$ ). With this selection, the active (conducting) phases of complementary power switches in a power inverter bridge leg can be positioned with respect to the compare value (e.g. signal  $CC6xO$  can be active before, whereas  $COUT6xO$  can be active after the compare value is reached). Like this, the output modulation, the trap logic and the output level selection can be programmed independently for each output signal, although two output signals are referring to the same compare channel.



## Capture/Compare Unit 6 (CCU6)

### 18.3.4.3 Output Modulation and Level Selection

The last block of the data path is the Output Modulation block. Here, all the modulation sources and the trap functionality are combined and control the actual level of the output pins (controlled by the modulation enable bits T1xMODENy and MCMEN in register MODCTR). The following signal sources can be combined here **for each T12 output signal** (see [Figure 137](#) for compare channel CC60):

- A **T12 related compare signal** CC6x\_O (for outputs CC6x) or COUT6x\_O (for outputs COUT6x) delivered by the T12 block (state selection with dead-time) with an individual enable bit T12MODENy per output signal (y = 0, 2, 4 for outputs CC6x and y = 1, 3, 5 for outputs COUT6x)
- The **T13 related compare signal** CC63\_O delivered by the T13 state selection with an individual enable bit T13MODENy per output signal (y = 0, 2, 4 for outputs CC6x and y = 1, 3, 5 for outputs COUT6x)
- A **multi-channel output signal** MCMPy (y = 0, 2, 4 for outputs CC6x and y = 1, 3, 5 for outputs COUT6x) with a common enable bit MCMEN
- The **trap state** TRPS with an individual enable bit TRPENy per output signal (y = 0, 2, 4 for outputs CC6x and y = 1, 3, 5 for outputs COUT6x)

If one of the modulation input signals CC6x\_O/COUT6x\_O, CC63\_O, or MCMPy of an output modulation block is enabled and is at passive state, the modulated is also in passive state, regardless of the state of the other signals that are enabled. Only if all enabled signals are in active state the modulated output shows an active state. If no modulation input is enabled, the output is in passive state.

If the Trap State is active (TRPS = 1), then the outputs that are enabled for the trap signal (by TRPENy = 1) are set to the passive state.

The output of each of the modulation control blocks is connected to a level select block that is configured by register PSLR. It offers the option to determine the actual output level of a pin, depending on the state of the output line (decoupling of active/passive state and output polarity) as specified by the Passive State Select bit PSLy. If the modulated output signal is in the passive state, the level specified directly by PSLy is output. If it is in the active state, the inverted level of PSLy is output. This allows the user to adapt the polarity of an active output signal to the connected circuitry.

The PSLy bits have shadow registers to allow for updates without undesired pulses on the output lines. The bits related to CC6x and COUT6x (x = 0, 1, 2) are updated with the T12 shadow transfer signal (T12\_ST). A read action returns the actually used values, whereas a write action targets the shadow bits. Providing a shadow register for the PSL value as well as for other values related to the generation of the PWM signal facilitates a concurrent update by software for all relevant parameters.

[Figure 137](#) shows the output modulation structure for compare channel CC60 (output signals CC60 and COUT60). A similar structure is implemented for the other two compare channels CC61 and CC62.

Capture/Compare Unit 6 (CCU6)

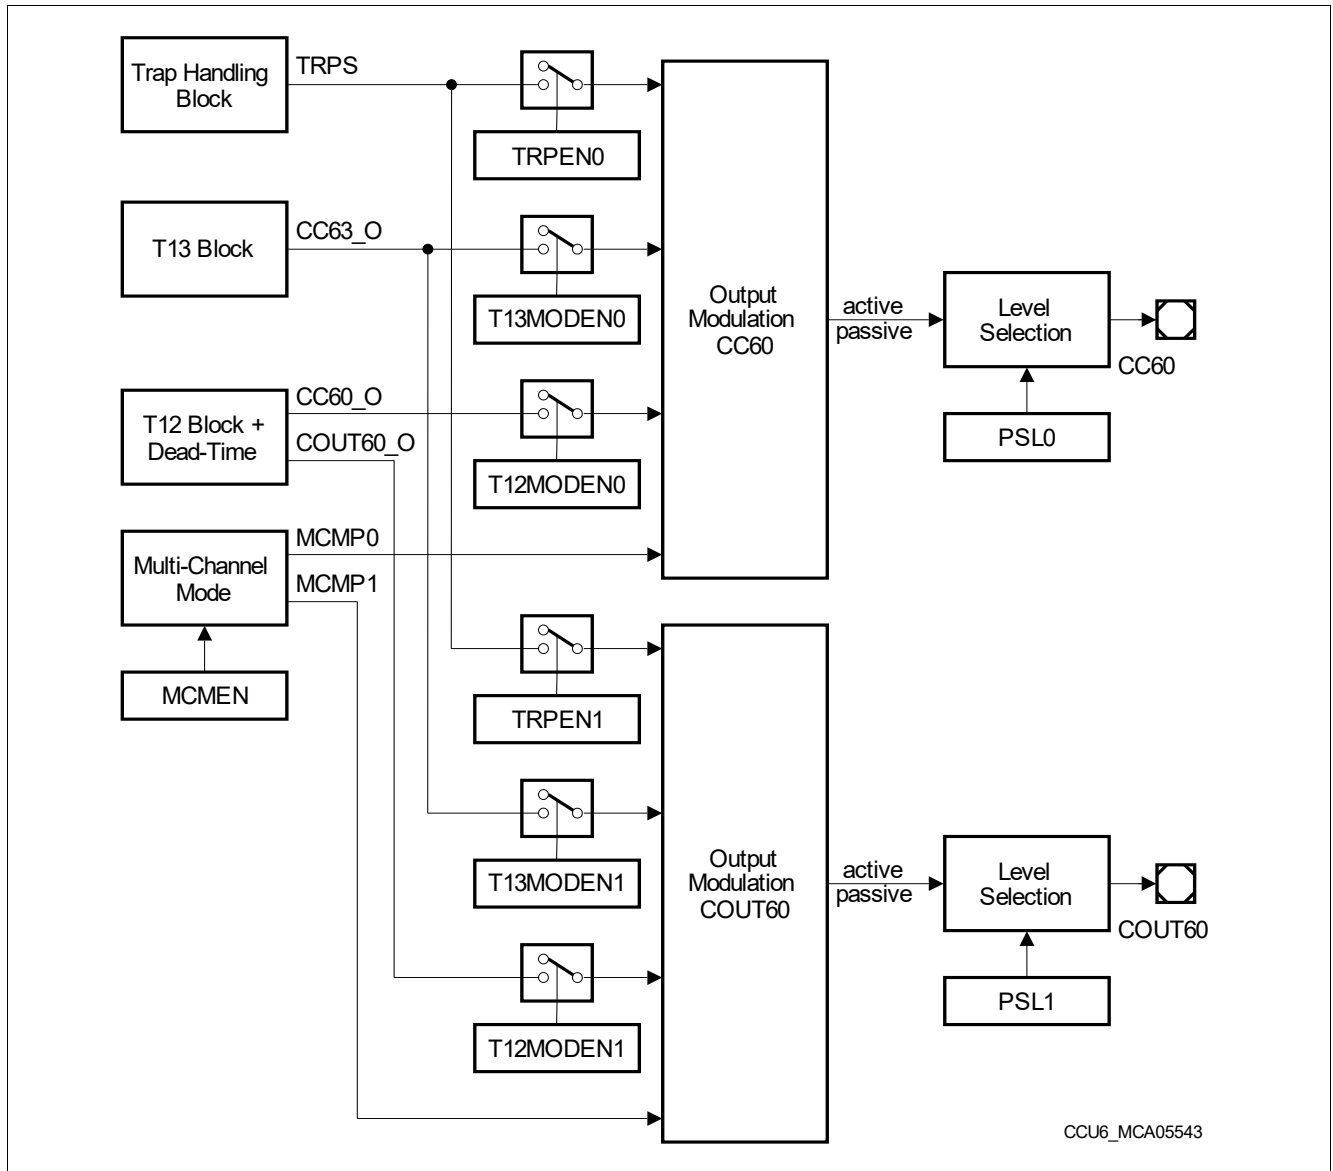


Figure 137 Output Modulation for Compare Channel CC60

Capture/Compare Unit 6 (CCU6)

18.3.5 T12 Capture Modes

Each of the three channels of the T12 Block can also be used to capture T12 time information in response to an external signal CC6xIN.

In capture mode, the interrupt event CC6x\_R is detected when a rising edge is detected at the input CC6xIN, whereas the interrupt event CC6x\_F is detected when a falling edge is detected.

There are a number of different modes for capture operation. In all modes, both of the registers of a channel are used. The selection of the capture modes is done via the T12MSEL.MSEL6x bit fields and can be selected individually for each of the channels.

Table 119 Capture Modes Overview

MSEL6x	Mode	Signal	Active Edge	CC6nSR Stored in	T12 Stored in
0100 <sub>B</sub>	1	CC6xIN	Rising	–	CC6xR
		CC6xIN	Falling	–	CC6xSR
0101 <sub>B</sub>	2	CC6xIN	Rising	CC6xR	CC6xSR
0110 <sub>B</sub>	3	CC6xIN	Falling	CC6xR	CC6xSR
0111 <sub>B</sub>	4	CC6xIN	Any	CC6xR	CC6xSR

Figure 138 illustrates **Capture Mode 1**. When a rising edge (0-to-1 transition) is detected at the corresponding input signal CC6xIN, the current contents of Timer T12 are captured into register CC6xR. When a falling edge (1-to-0 transition) is detected at the input signal CC6xIN, the contents of Timer T12 are captured into register CC6xSR.

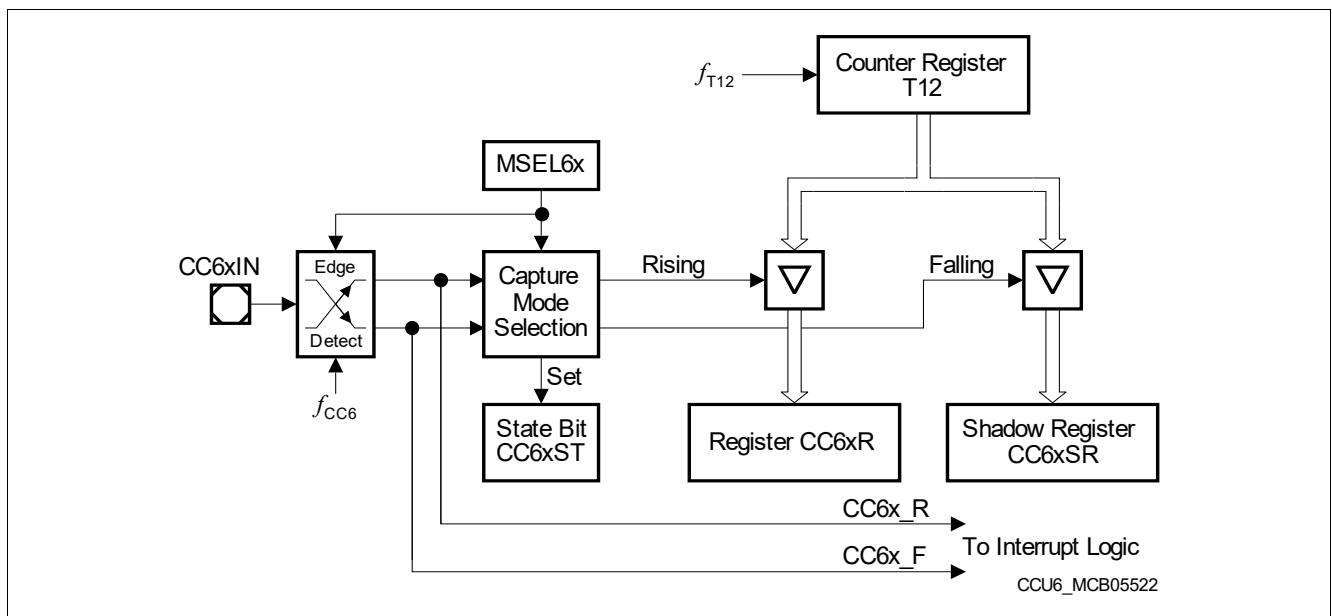


Figure 138 Capture Mode 1 Block Diagram

**Capture Modes 2, 3 and 4** are shown in Figure 139. They differ only in the active edge causing the capture operation. In each of the three modes, when the selected edge is detected at the corresponding input signal CC6xIN, the current contents of the shadow register CC6xSR are transferred into register CC6xR, and the current Timer T12 contents are captured in register CC6xSR (simultaneous transfer). The active edge is a rising edge of CC6xIN for Capture Mode 2, a falling edge for Mode 3, and both, a rising or a falling edge for Capture Mode 4, as shown in Table 119. These capture modes are very useful in cases where there is little time between two consecutive edges of the input signal.

Capture/Compare Unit 6 (CCU6)

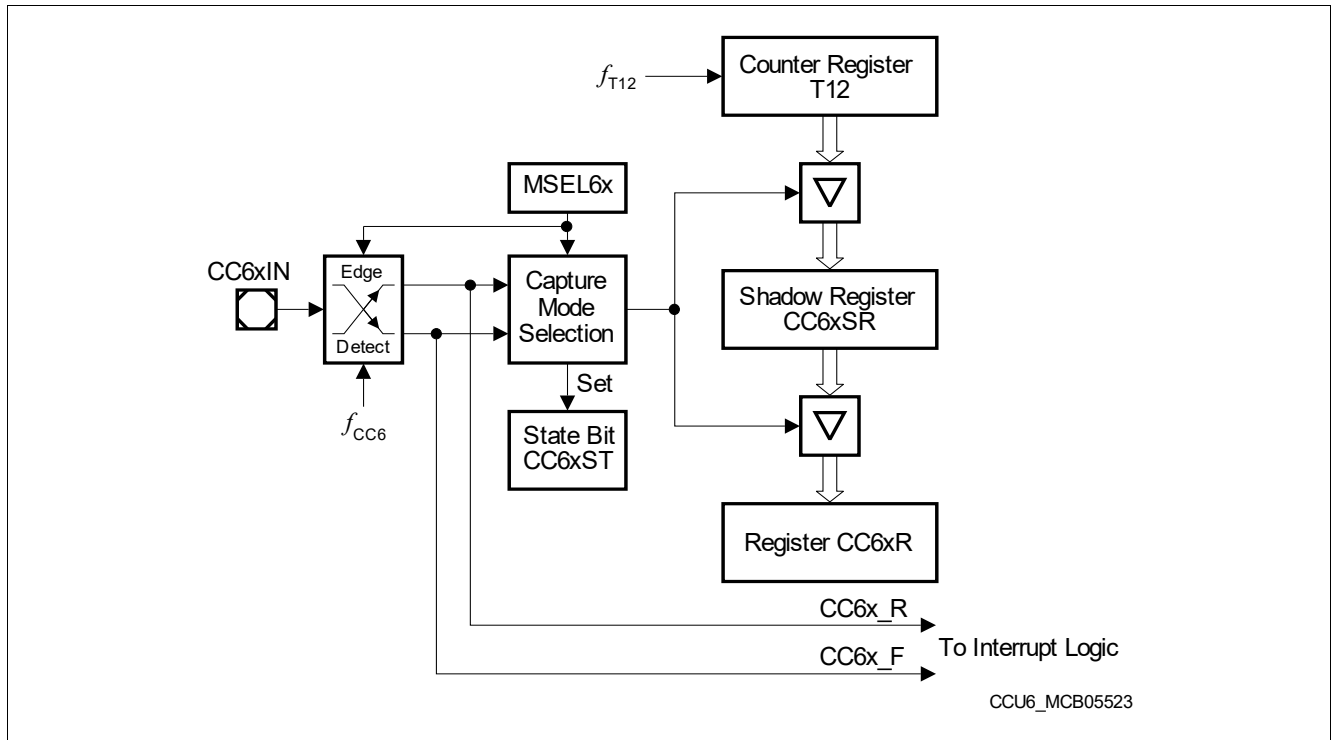


Figure 139 Capture Modes 2, 3 and 4 Block Diagram

Five further capture modes are called **Multi-Input Capture Modes**, as they use two different external inputs, signal CC6xIN and signal CCPOSx.

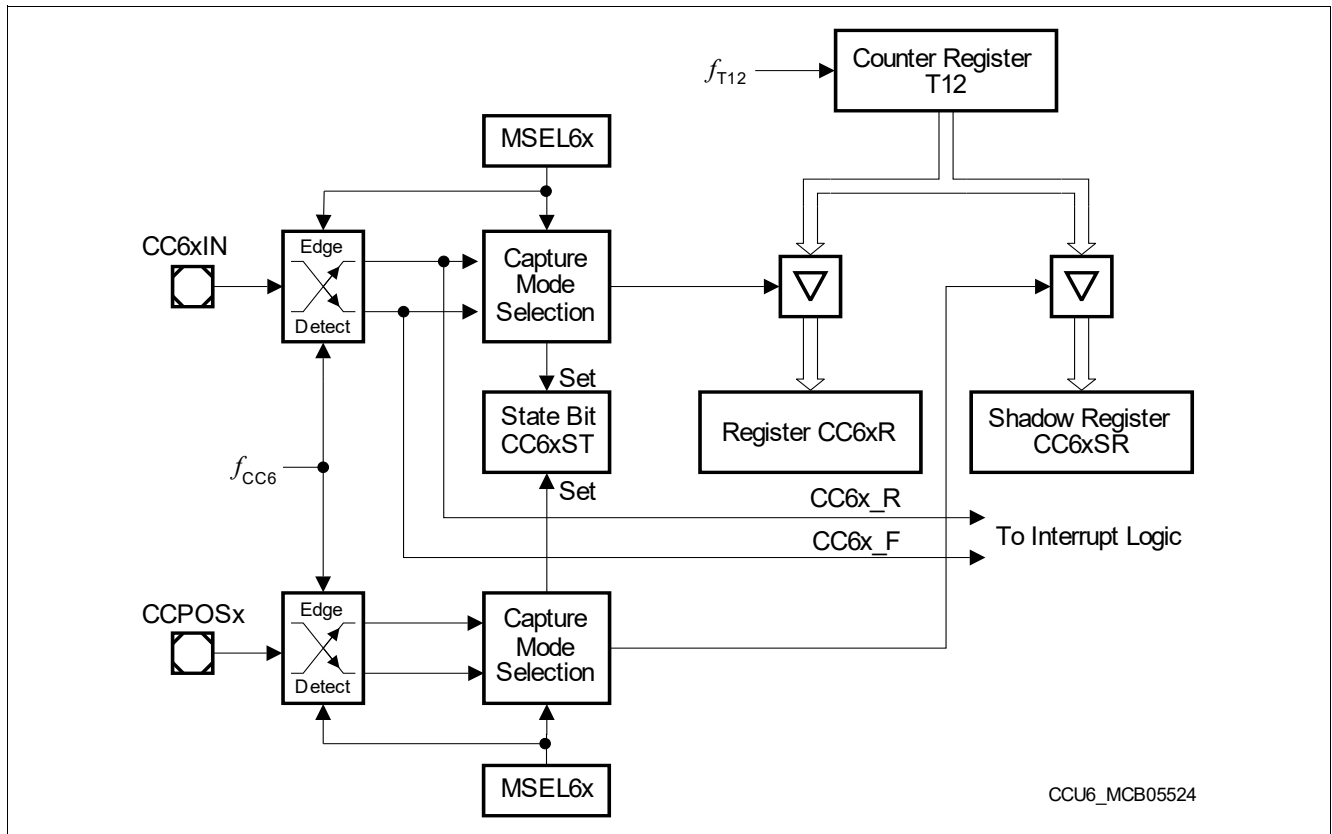


Figure 140 Multi-Input Capture Modes Block Diagram

## Capture/Compare Unit 6 (CCU6)

In each of these modes, the current T12 contents are captured in register CC6xR in response to a selected event at signal CC6xIN, and in register CC6xSR in response to a selected event at signal CCPOSx. The possible events can be opposite input transitions, or the same transitions, or any transition at the two inputs. The different options are detailed in [Table 120](#).

In each of the various capture modes, the Channel State Bit, CC6xST, is set to 1 when the selected capture trigger event at signal CC6xIN or CCPOSx has occurred. The State Bit is not cleared by hardware, but can be cleared by software.

In addition, appropriate signal lines to the interrupt logic are activated, that can generate an interrupt request to the CPU. Regardless of the selected active edge, all edges detected at signal CC6xIN can lead to the activation of the appropriate interrupt request line (see also [Section 18.10](#)).

**Table 120 Multi-Input Capture Modes Overview**

MSEL6x	Mode	Signal	Active Edge	T12 Stored in
1010 <sub>B</sub>	5	CC6xIN	Rising	CC6xR
		CCPOSx	Falling	CC6xSR
1011 <sub>B</sub>	6	CC6xIN	Falling	CC6xR
		CCPOSx	Rising	CC6xSR
1100 <sub>B</sub>	7	CC6xIN	Rising	CC6xR
		CCPOSx	Rising	CC6xSR
1101 <sub>B</sub>	8	CC6xIN	Falling	CC6xR
		CCPOSx	Falling	CC6xSR
1110 <sub>B</sub>	9	CC6xIN	Any	CC6xR
		CCPOSx	Any	CC6xSR
1111 <sub>B</sub>	–	reserved (no capture or compare action)		

Capture/Compare Unit 6 (CCU6)

18.3.6 T12 Shadow Register Transfer

A special shadow transfer signal (T12\_ST) can be generated to facilitate updating the period and compare values of the compare channels CC60, CC61, and CC62 synchronously to the operation of T12. Providing a shadow register for values defining one PWM period facilitates a concurrent update by software for all relevant parameters. The next PWM period can run with a new set of parameters. The generation of this signal is requested by software via bit TCTR0.STE12 (set by writing 1 to the write-only bit TCTR4.T12STR, cleared by writing 1 to the write-only bit TCTR4.T12STD).

Figure 141 shows the shadow register structure and the shadow transfer signals, as well as on the read/write accessibility of the various registers.

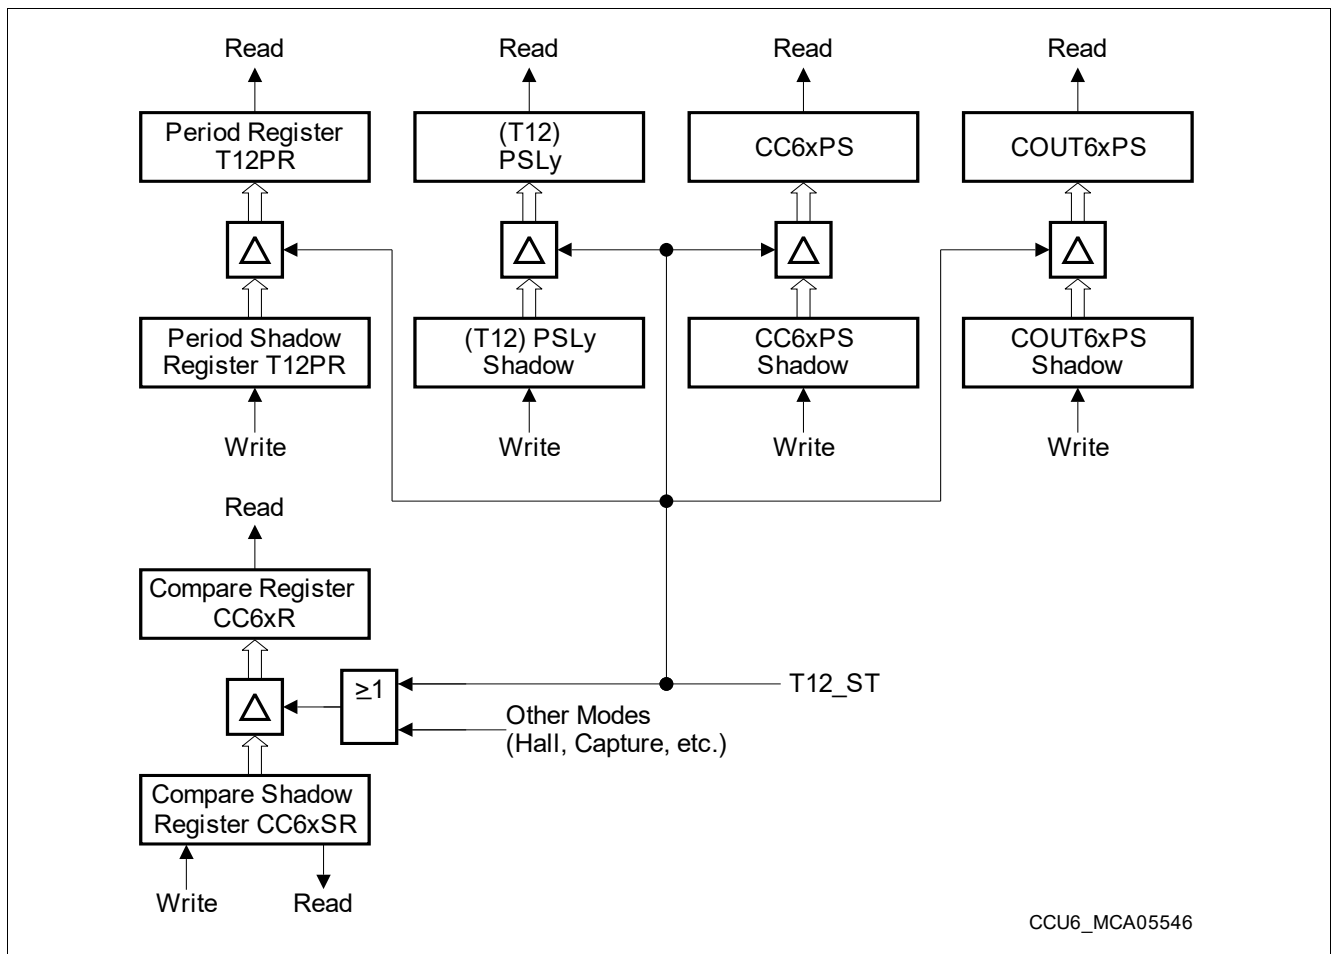


Figure 141 T12 Shadow Register Overview

## Capture/Compare Unit 6 (CCU6)

A T12 shadow register transfer takes place (T12\_ST active):

- STE12 = 1 and a Period-Match is detected while counting up, or
- STE12 = 1 and a One-Match is detected while counting down

When signal T12\_ST is active, a shadow register transfer is triggered with the next cycle of the T12 clock. Bit STE12 is automatically cleared with the shadow register transfer.

### 18.3.7 Timer T12 Operating Mode Selection

The operating mode for the T12 channels are defined by the bit fields T12MSEL.MSEL6x.

**Table 121** T12 Capture/Compare Modes Overview

MSEL6x	Selected Operating Mode
0000 <sub>B</sub> , 1111 <sub>B</sub>	Capture/Compare modes switched off
0001 <sub>B</sub> , 0010 <sub>B</sub> , 0011 <sub>B</sub>	Compare mode, see <a href="#">Section 18.3.3</a> same behavior for all three codings
01XX <sub>B</sub>	Double-Register Capture modes, see <a href="#">Section 18.3.5</a>
1000 <sub>B</sub>	Hall Sensor Mode, see <a href="#">Section 18.7</a> In order to properly enable this mode, all three MSEL6x fields have to be programmed to Hall Sensor mode.
1001 <sub>B</sub>	Hysteresis-like compare mode, see <a href="#">Section 18.3.3.3</a>
1010 <sub>B</sub> , 1011 <sub>B</sub> , 1100 <sub>B</sub> , 1101 <sub>B</sub> , 1110 <sub>B</sub>	Multi-Input Capture modes, see <a href="#">Section 18.3.5</a>

The clocking and counting scheme of the timers are controlled by the timer control registers TCTR0 and TCTR2. Specific actions are triggered by write operations to register TCTR4.


## Capture/Compare Unit 6 (CCU6)

### 18.4 Operating Timer T13

Timer T13 is implemented similarly to Timer T12, but only with one channel in compare mode. A 16-bit up-counter is connected to a channel register via a comparator, that generates a signal when the counter contents match the contents of the channel register. A variety of control functions facilitate the adaptation of the T13 structure to different application needs. In addition, T13 can be started synchronously to timer T12 events.

This section provides information about:

- T13 overview (see [Section 18.4.1](#))
- Counting scheme (see [Section 18.4.2](#))
- Compare mode (see [Section 18.4.3](#))
- Compare output path (see [Section 18.4.4](#))
- Shadow register transfer (see [Section 18.4.5](#))

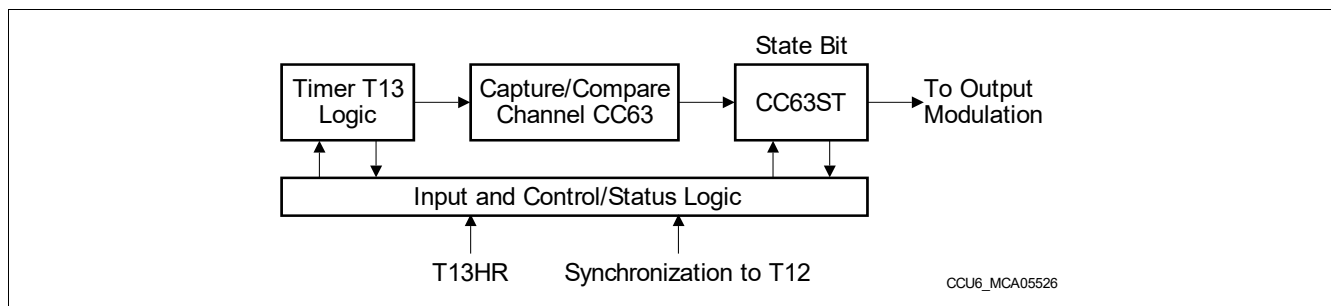

**Figure 142 Overview Diagram of the Timer T13 Block**

#### 18.4.1 T13 Overview

**Figure 143** shows a detailed block diagram of Timer T13. The functions of the timer T12 block are controlled by bits in registers TCTR0, TCTR2, and PISEL2.


Timer T13 receives its input clock,  $f_{T13}$ , from the module clock  $f_{CC6}$  via a programmable prescaler and an optional 1/256 divider or from an input signal T13HR. T13 can only count up (similar to the Edge-Aligned mode of T13).

Via a comparator, the timer T13 Counter Register T13 is connected to the Period Register T13PR. This register determines the maximum count value for T13. When T13 reaches the period value, signal T13\_PM (T13 Period Match) is generated and T13 is cleared to 0000<sub>H</sub> with the next T13 clock edge. The Period Register receives a new period value from its Shadow Period Register, T13PS, that is loaded via software. The transfer of a new period value from the shadow register into T13PR is controlled via the 'T13 Shadow Transfer' control signal, T13\_ST. The generation of this signal depends on the associated control bit STE13. Providing a shadow register for the period value as well as for other values related to the generation of the PWM signal facilitates a concurrent update by software for all relevant parameters (refer to [Table 18.4.5](#)). Another signal indicates whether the counter contents are equal to 0000<sub>H</sub> (T13\_ZM).

A Single-Shot control bit, T13SSC, enables an automatic stop of the timer when the current counting period is finished (see [Figure 145](#)).



## Capture/Compare Unit 6 (CCU6)

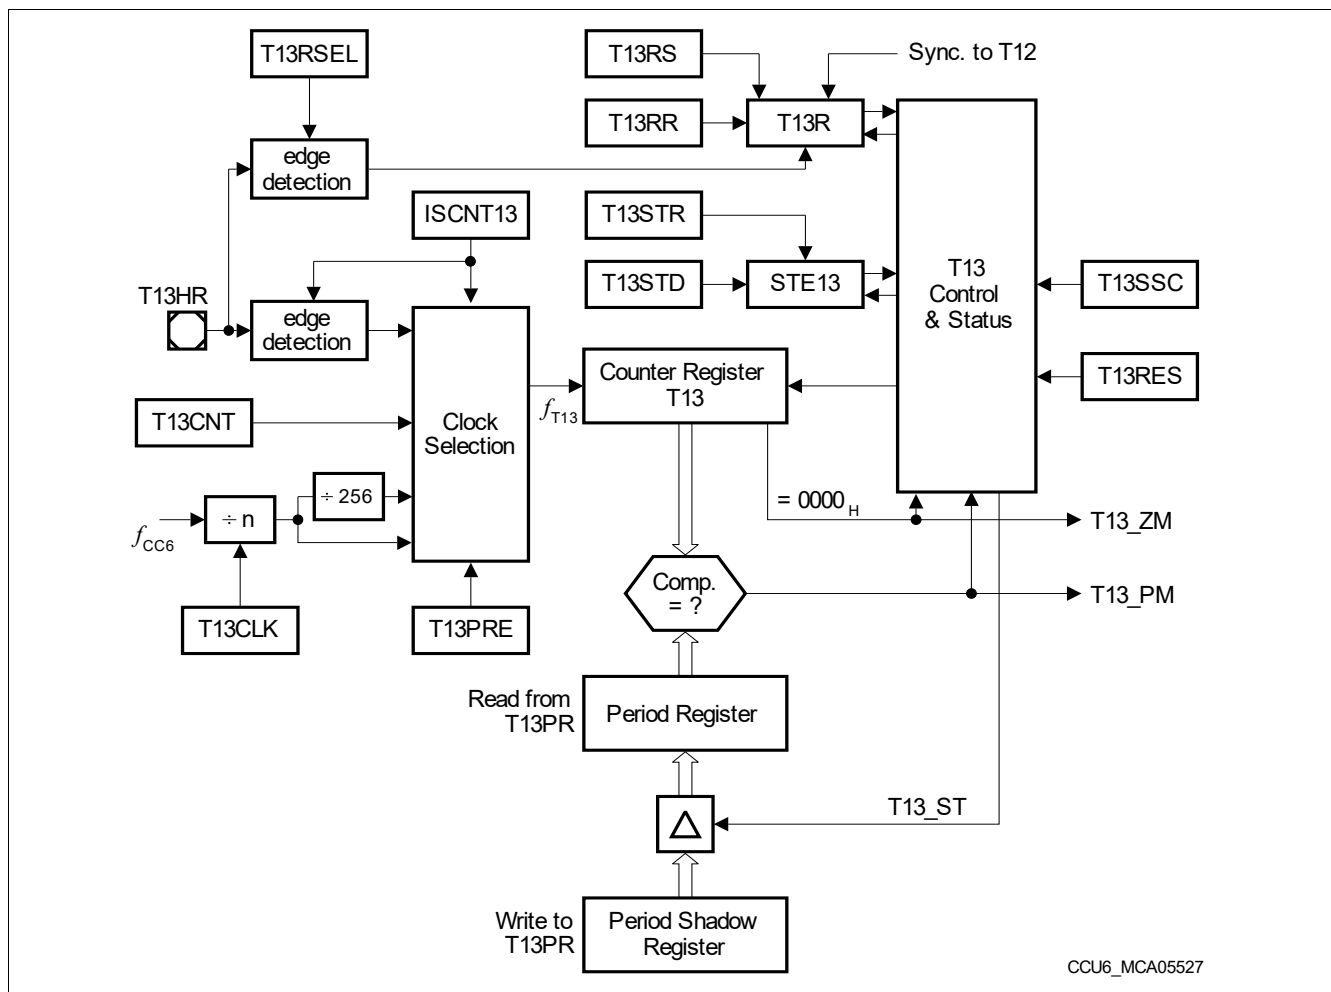

**Figure 143 T13 Counter Logic and Period Comparators**

The start or stop of T13 is controlled by the Run bit, T13R. This control bit can be set by software via the associated set/clear bits T13RS or T13RR in register TCTR4, or it is cleared by hardware according to preselected conditions (single-shot mode).

The timer T13 run bit T13R must not be set while the applied T13 period value is zero. Bit T13R can be set automatically if an event of T12 is detected to synchronize T13 timings to T12 events, e.g. to generate a programmable delay via T13 after an edge of a T12 compare channel before triggering an AD conversion (T13 can trigger ADC conversions).

Timer T13 can be cleared to 0000<sub>H</sub> via control bit T13RES. Setting this write-only bit only clears the timer contents, but has no further effects, e.g., it does not stop the timer.

The generation of the T13 shadow transfer control signal, T13\_ST, is enabled via bit STE13. This bit can be set or cleared by software indirectly through its associated set/reset control bits T13STR and T13STD.

Two bit fields, T13TEC and T13TED, control the synchronization of T13 to Timer T12 events. T13TEC selects the trigger event, while T13TED determines for which T12 count direction the trigger should be active.

While Timer T13 is running, write accesses to the count register T13 are not taken into account. If T13 is stopped, write actions to register T13 are immediately taken into account.

*Note:* The T13 Period Register and its associated shadow register are located at the same physical address. A write access to this address targets the Shadow Register, while a read access reads from the actual period register.

## Capture/Compare Unit 6 (CCU6)

### 18.4.2 T13 Counting Scheme

This section describes the clocking and the counting capabilities of T13.

#### 18.4.2.1 Clock Selection

In **Timer Mode** (PISEL2.ISCNT13 = 00<sub>B</sub>), the input clock  $f_{T13}$  of Timer T13 is derived from the internal module clock  $f_{CC6}$  through a programmable prescaler and an optional 1/256 divider. The resulting prescaler factors are listed in [Table 122](#). The prescaler of T13 is cleared while T13 is not running (TCTR0.T13R = 0) to ensure reproducible timings and delays.

**Table 122** Timer T13 Input Clock Options

T13CLK	Resulting Input Clock $f_{T13}$ Prescaler Off (T13PRE = 0)	Resulting Input Clock $f_{T13}$ Prescaler On (T13PRE = 1)
000 <sub>B</sub>	$f_{CC6}$	$f_{CC6} / 256$
001 <sub>B</sub>	$f_{CC6} / 2$	$f_{CC6} / 512$
010 <sub>B</sub>	$f_{CC6} / 4$	$f_{CC6} / 1024$
011 <sub>B</sub>	$f_{CC6} / 8$	$f_{CC6} / 2048$
100 <sub>B</sub>	$f_{CC6} / 16$	$f_{CC6} / 4096$
101 <sub>B</sub>	$f_{CC6} / 32$	$f_{CC6} / 8192$
110 <sub>B</sub>	$f_{CC6} / 64$	$f_{CC6} / 16384$
111 <sub>B</sub>	$f_{CC6} / 128$	$f_{CC6} / 32768$

In **Counter Mode**, timer T13 counts one step:

- If a 1 is written to TCTR4.T13CNT and PISEL2.ISCNT13 = 01<sub>B</sub>
- If a rising edge of input signal T13HR is detected and PISEL2.ISCNT13 = 10<sub>B</sub>
- If a falling edge of input signal T13HR is detected and PISEL2.ISCNT13 = 11<sub>B</sub>

Capture/Compare Unit 6 (CCU6)

18.4.2.2 T13 Counting

The period of the timer is determined by the value in the period Register T13PR according to the following formula:

$$T13_{PER} = \text{<Period-Value>} + 1; \text{ in } T13 \text{ clocks } (f_{T13}) \tag{18.3}$$

Timer T13 can only count up, comparable to the Edge-Aligned mode of T12. This leads to very simple ‘counting rule’ for the T13 counter:

- The counter is cleared with the next T13 clock edge if a Period-Match is detected. The counting direction is always upwards.

The behavior of T13 is illustrated in **Figure 144**.

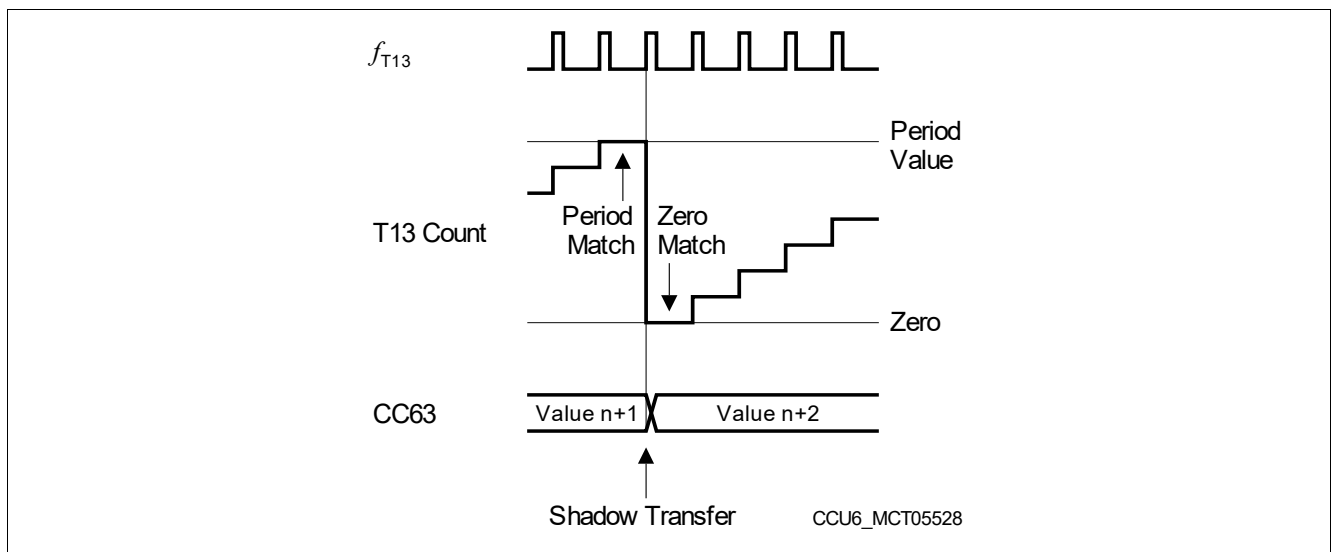


Figure 144 T13 Counting Sequence

18.4.2.3 Single-Shot Mode

In Single-Shot Mode, the timer run bit T13R is cleared by hardware. If bit T13SSC = 1, the timer T13 will stop when the current timer period is finished.

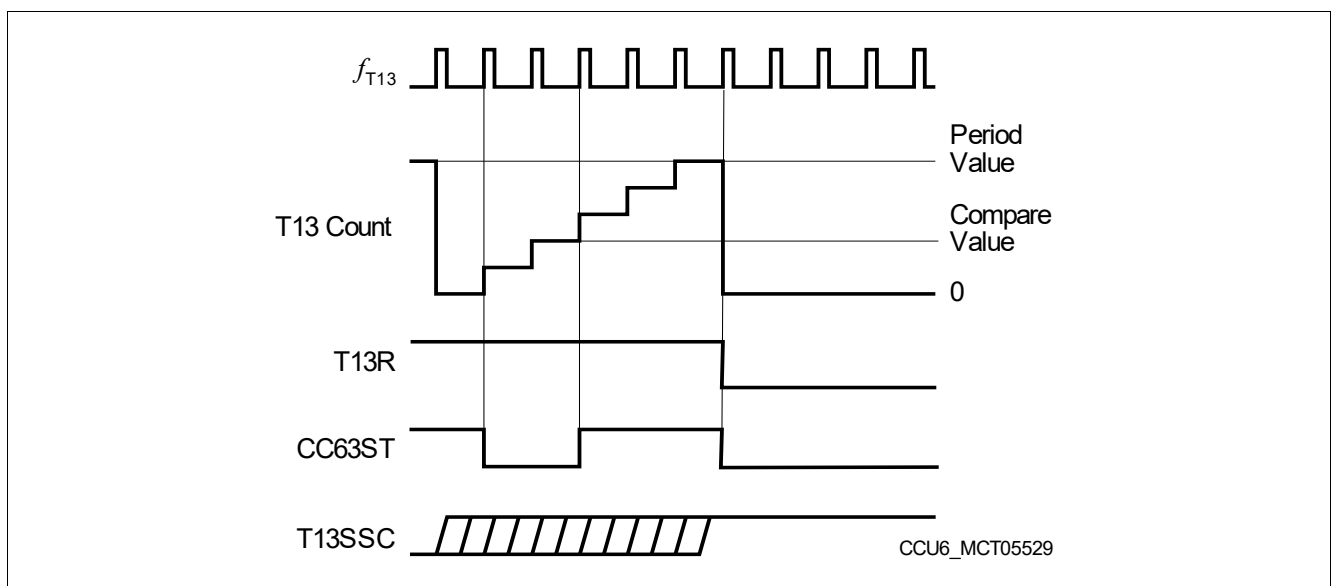



Figure 145 Single-Shot Operation of Timer T13

## Capture/Compare Unit 6 (CCU6)

### 18.4.2.4 Synchronization to T12

Timer T13 can be synchronized to a T12 event. Bit fields T13TEC and T13TED select the event that is used to start Timer T13. The selected event sets bit T13R via HW, and T13 starts counting. Combined with the Single-Shot mode, this feature can be used to generate a programmable delay after a T12 event.

**Figure 146** shows an example for the synchronization of T13 to a T12 event. Here, the selected event is a compare-match (compare value = 2) while counting up. The clocks of T12 and T13 can be different (other prescaler factor); the figure shows an example in which T13 is clocked with half the frequency of T12.

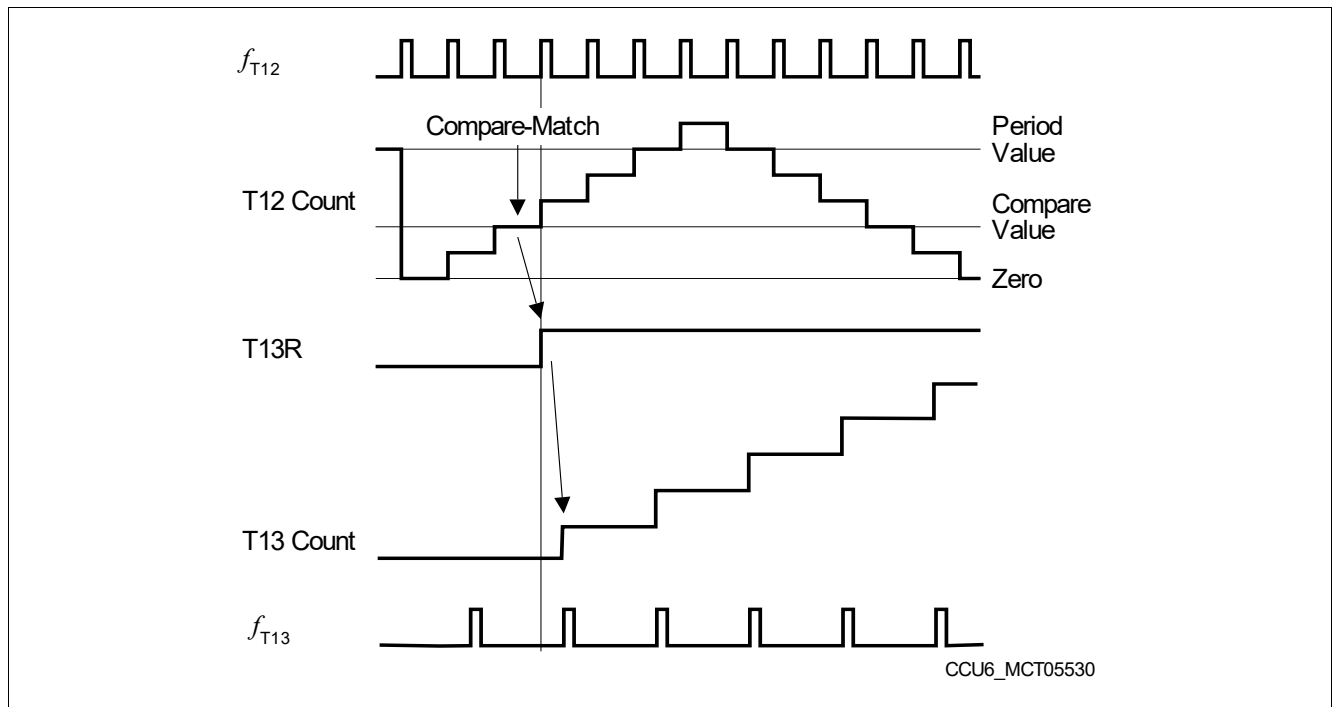

**Figure 146 Synchronization of T13 to T12 Compare Match**

Bit field T13TEC selects the trigger event to start T13 (automatic set of T13R for synchronization to T12 compare signals) according to the combinations shown in [Table 123](#). Bit field T13TED additionally specifies for which count direction of T12 the selected trigger event should be regarded (see [Table 124](#)).

---

**Capture/Compare Unit 6 (CCU6)**
**Table 123 T12 Trigger Event Selection**

<b>T13TEC</b>	<b>Selected Event</b>
000 <sub>B</sub>	None
001 <sub>B</sub>	T12 Compare Event on Channel 0 (CM_CC60)
010 <sub>B</sub>	T12 Compare Event on Channel 1 (CM_CC61)
011 <sub>B</sub>	T12 Compare Event on Channel 2 (CM_CC62)
100 <sub>B</sub>	T12 Compare Event on any Channel (0, 1, 2)
101 <sub>B</sub>	T12 Period-Match (T12_PM)
110 <sub>B</sub>	T12 Zero-Match while counting up (T12_ZM and CDIR = 0)
111 <sub>B</sub>	Any Hall State Change

**Table 124 T12 Trigger Event Additional Specifier**

<b>T13TED</b>	<b>Selected Event Specifier</b>
00 <sub>B</sub>	Reserved, no action
01 <sub>B</sub>	Selected event is active while T12 is counting up (CDIR = 0)
10 <sub>B</sub>	Selected event is active while T12 is counting down (CDIR = 1)
11 <sub>B</sub>	Selected event is active independently of the count direction of T12

## Capture/Compare Unit 6 (CCU6)

### 18.4.3 T13 Compare Mode


Associated with Timer T13 is one compare channel, that can perform compare operations with regard to the contents of the T13 counter.

**Figure 142** gives an overview on the T13 channel in Compare Mode. The channel is connected to the T13 counter register via an equal-to comparator, generating a compare match signal when the contents of the counter matches the contents of the compare register.

The channel consists of the comparator and a double register structure - the actual compare register, CC63R, feeding the comparator, and an associated shadow register, CC63SR, that is preloaded by software and transferred into the compare register when signal T13 shadow transfer, T13\_ST, gets active. Providing a shadow register for the compare value as well as for other values related to the generation of the PWM signal facilitates a concurrent update by software for all relevant parameters.

Associated with the channel is a State Bit, CMPSTAT.CC63ST, holding the status of the compare operation.

**Figure 147** gives an overview on the logic for the State Bit.

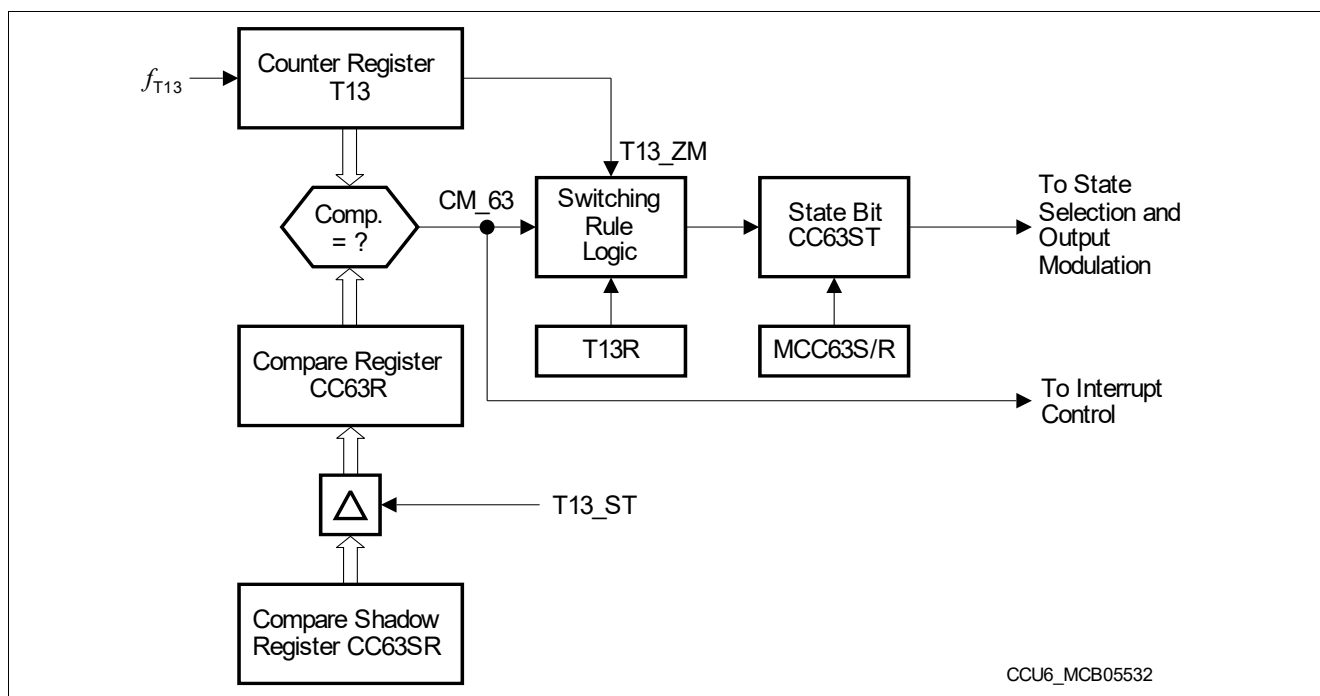

**Figure 147 T13 State Bit Block Diagram**

A compare interrupt event CM\_63 is signaled when a compare match is detected. The actual setting of a State Bit has no influence on the interrupt generation.

The inputs to the switching rule logic for the CC63ST bit are the timer run bit (T13R), the timer zero-match signal (T13\_ZM), and the actual individual compare-match signal CM\_63. In addition, the state bit can be set or cleared by software via bits MCC63S and MCC63R in register CMPMODIF.

A modification of the State Bit CC63ST by hardware is only possible while Timer T13 is running (T13R = 1). If this is the case, the following switching rules apply for setting and resetting the State Bit in Compare Mode:


State Bit **CC63ST** is set to 1

- with the next T13 clock ( $f_{T13}$ ) after a compare-match (T13 is always counting up) (i.e., when the counter is incremented above the compare value);
- with the next T13 clock ( $f_{T13}$ ) after a zero-match AND a parallel compare-match.

**Capture/Compare Unit 6 (CCU6)**

State Bit **CC63ST** is cleared to 0


- with the next T13 clock ( $f_{T13}$ ) after a zero-match AND NO parallel compare-match.

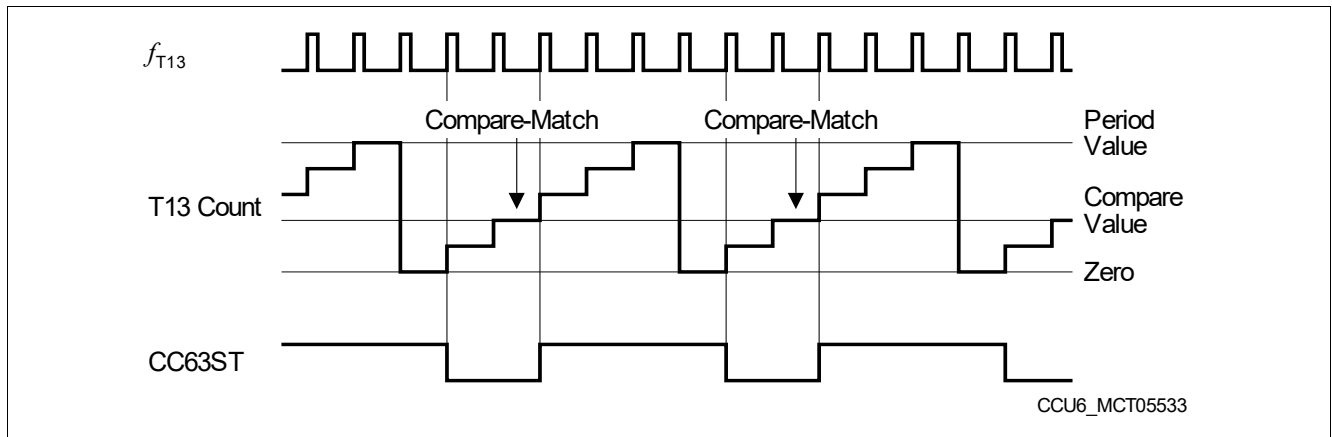

**Figure 148 T13 Compare Operation**

**18.4.4 Compare Mode Output Path**

**Figure 149** gives an overview on the signal path from the channel State Bit CC63ST to its output pin COUT63. As illustrated, a user can determine the desired output behavior in relation to the current state of CC63ST. Please refer to **Section 18.3.4.3** for detailed information on the output modulation for T12 signals.

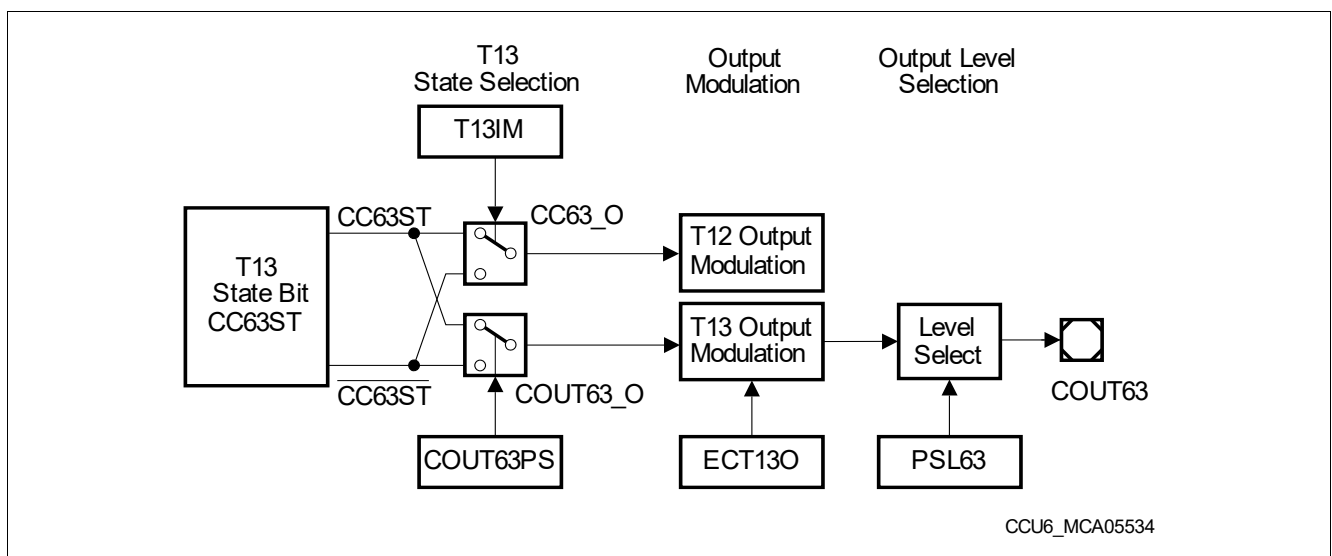

**Figure 149 Channel 63 Output Path**

The output line COUT63\_O can generate a T13 PWM at the output pin COUT63. The signal CC63\_O can be used to modulate the T12-related output signals with a T13 PWM. In order to decouple COUT63 from the internal modulation, the compare state leading to an active signal can be selected independently by bits T13IM and COUT63PS.

The last block of the data path is the Output Modulation block. Here, the modulation source T13 and the trap functionality are combined and control the actual level of the output pin COUT63 (see **Figure 150**):

- The **T13 related compare signal** COUT63\_O delivered by the T13 state selection with the enable bit MODCTR.ECT130
- The **trap state** TRPS with an individual enable bit TRPCTR.TRPEN13


## Capture/Compare Unit 6 (CCU6)

If the modulation input signal COUT63\_O is enabled (ECT130 = 1) and is at passive state, the modulated is also in passive state. If the modulation input is not enabled, the output is in passive state.

If the Trap State is active (TRPS = 1), then the output enabled for the trap signal (by TRPEN13 = 1) is set to the passive state.

The output of the modulation control block is connected to a level select block. It offers the option to determine the actual output level of a pin, depending on the state of the output line (decoupling of active/passive state and output polarity) as specified by the Passive State Select bit PSLR.PSL63. If the modulated output signal is in the passive state, the level specified directly by PSL63 is output. If it is in the active state, the inverted level of PSL63 is output. This allows the user to adapt the polarity of an active output signal to the connected circuitry.

The PSL63 bit has a shadow register to allow for updates with the T13 shadow transfer signal (T13\_ST) without undesired pulses on the output lines. A read action returns the actually used value, whereas a write action targets the shadow bit. Providing a shadow register for the PSL value as well as for other values related to the generation of the PWM signal facilitates a concurrent update by software for all relevant parameters.

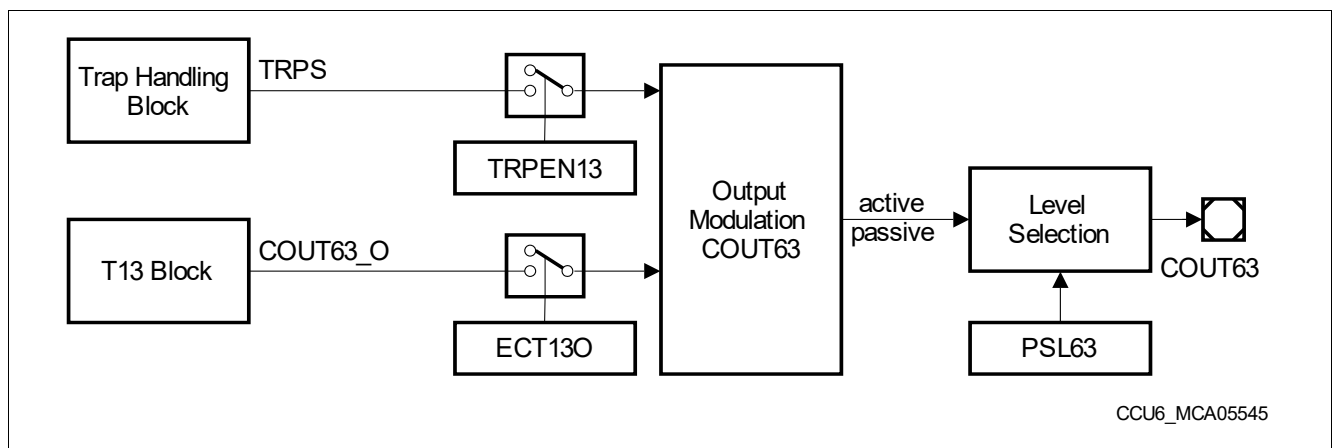

**Figure 150 T13 Output Modulation**



Capture/Compare Unit 6 (CCU6)

18.4.5 T13 Shadow Register Transfer

A special shadow transfer signal (T13\_ST) can be generated to facilitate updating the period and compare values of the compare channel CC63 synchronously to the operation of T13. Providing a shadow register for values defining one PWM period facilitates a concurrent update by software for all relevant parameters. The next PWM period can run with a new set of parameters. The generation of this signal is requested by software via bit TCTR0.STE13 (set by writing 1 to the write-only bit TCTR4.T13STR, cleared by writing 1 to the write-only bit TCTR4.T13STD).

When signal T13\_ST is active, a shadow register transfer is triggered with the next cycle of the T13 clock. Bit STE13 is automatically cleared with the shadow register transfer. A T13 shadow register transfer takes place (T13\_ST active):

- while timer T13 is not running (T13R = 0), or
- STE13 = 1 and a Period-Match is detected while T13R = 1

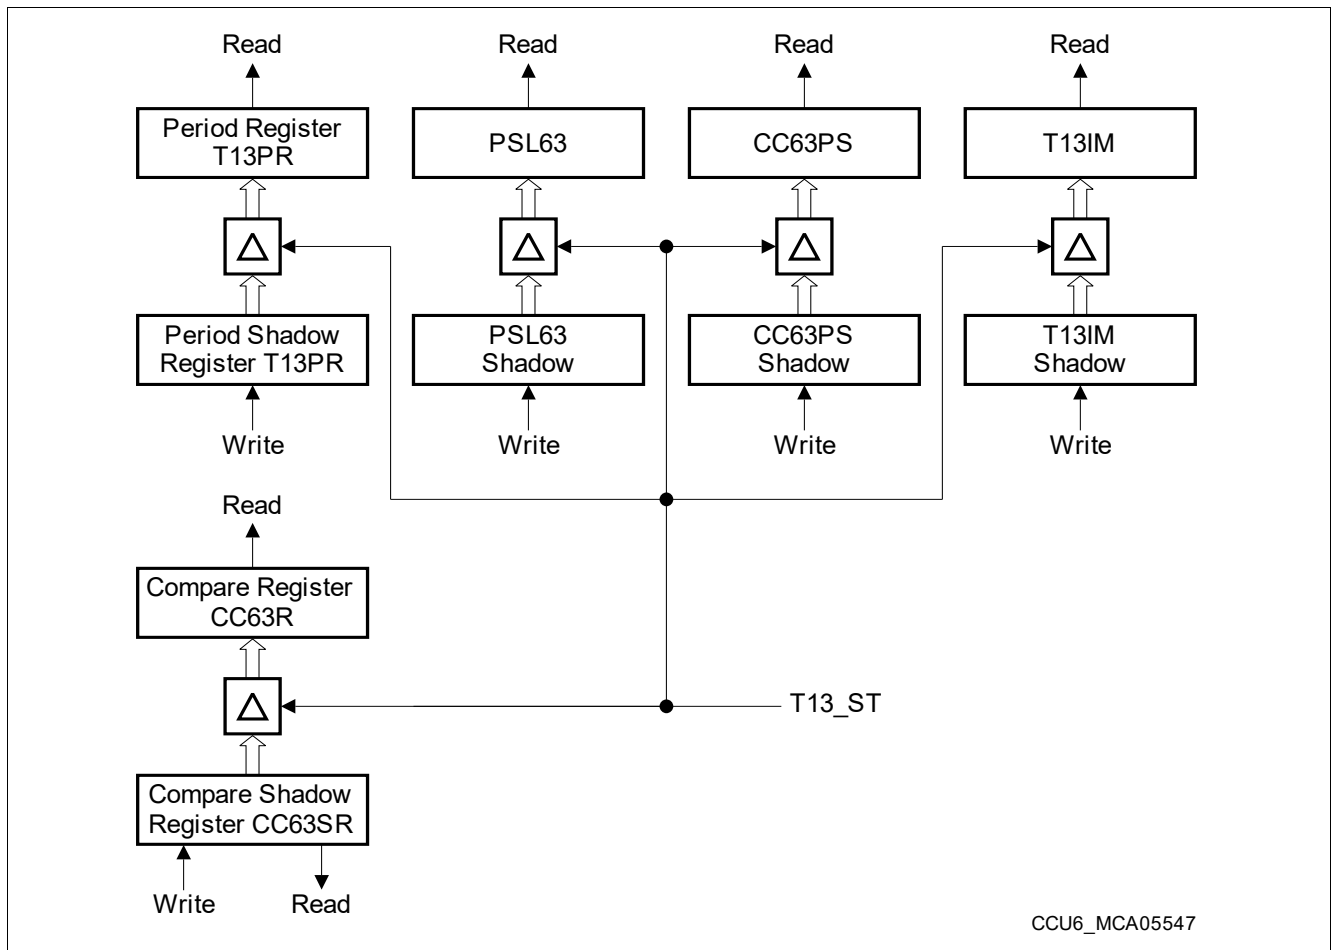


Figure 151 T13 Shadow Register Overview

## Capture/Compare Unit 6 (CCU6)

### 18.5 Trap Handling


The trap functionality permits the PWM outputs to react on the state of the input signal  $\overline{\text{CTRAP}}$ . This functionality can be used to switch off the power devices if the trap input becomes active (e.g. to perform an emergency stop). The trap handling and the effect on the output modulation are controlled by the bits in the trap control register TRPCTR. The trap flags TRPF and TRPS are located in register IS and can be set/cleared by SW by writing to registers ISS and ISR.

**Figure 152** gives an overview on the trap function.

The Trap Flag TRPF monitors the trap input and initiates the entry into the Trap State. The Trap State Bit TRPS determines the effect on the outputs and controls the exit of the Trap State.

When a trap condition is detected ( $\overline{\text{CTRAP}} = 0$ ) and the input is enabled (TRPPEN = 1), both, the Trap Flag TRPF and the Trap State Bit TRPS, are set to 1 (trap state active). The output of the Trap State Bit TRPS leads to the Output Modulation Blocks (for T12 and for T13) and can there deactivate the outputs (set them to the passive state). Individual enable control bits for each of the six T12-related outputs and the T13-related output facilitate a flexible adaptation to the application needs.

There are a number of different ways to exit the Trap State. This offers SW the option to select the best operation for the application. Exiting the Trap State can be done either immediately when the trap condition is removed ( $\overline{\text{CTRAP}} = 1$  or TRPPEN = 0), or under software control, or synchronously to the PWM generated by either Timer T12 or Timer T13.

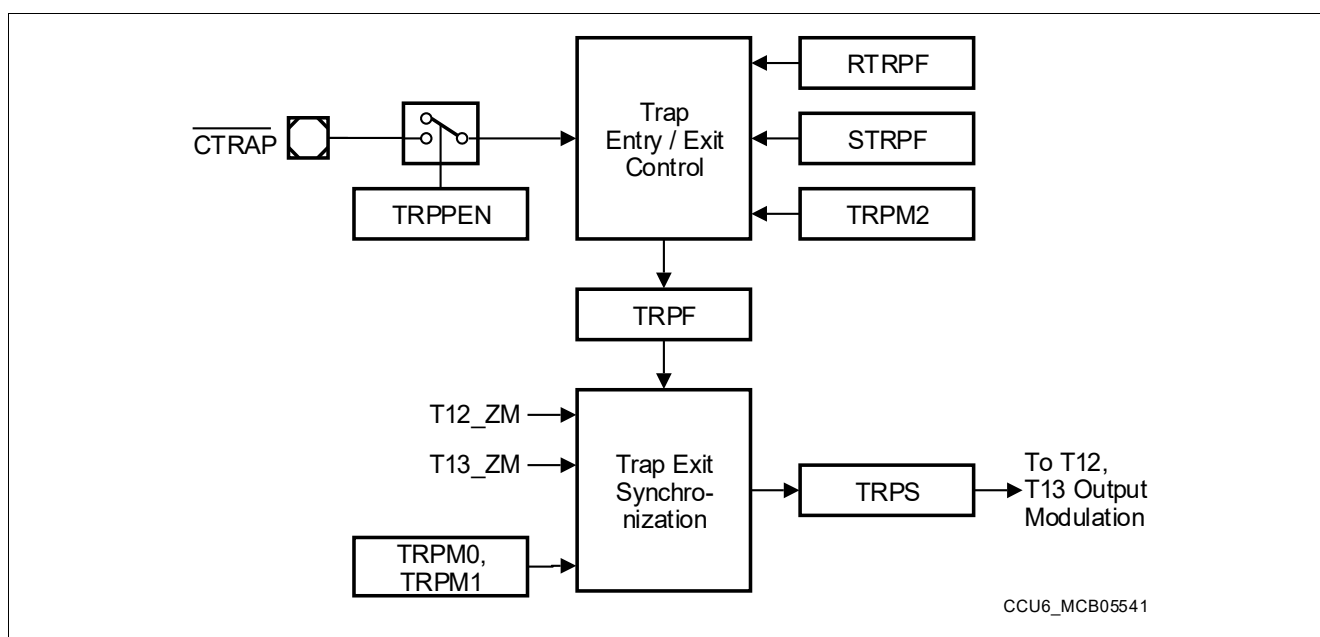

**Figure 152** Trap Logic Block Diagram

Clearing of TRPF is controlled by the mode control bit TRPM2. If TRPM2 = 0, TRPF is automatically cleared by HW when  $\overline{\text{CTRAP}}$  returns to the inactive level ( $\overline{\text{CTRAP}} = 1$ ) or if the trap input is disabled (TRPPEN = 0). When TRPM2 = 1, TRPF must be reset by SW after  $\overline{\text{CTRAP}}$  has become inactive.

Clearing of TRPS is controlled by the mode control bits TRPM1 and TRPM0 (located in the Trap Control Register TRPCTR). A reset of TRPS terminates the Trap State and returns to normal operation. There are three options selected by TRPM1 and TRPM0. One is that the Trap State is left immediately when the Trap Flag TRPF is cleared, without any synchronization to timers T12 or T13. The other two options facilitate the synchronization of the termination of the Trap State to the count periods of either Timer T12 or Timer T13.

**Figure 153** gives an overview on the associated operation.

Capture/Compare Unit 6 (CCU6)

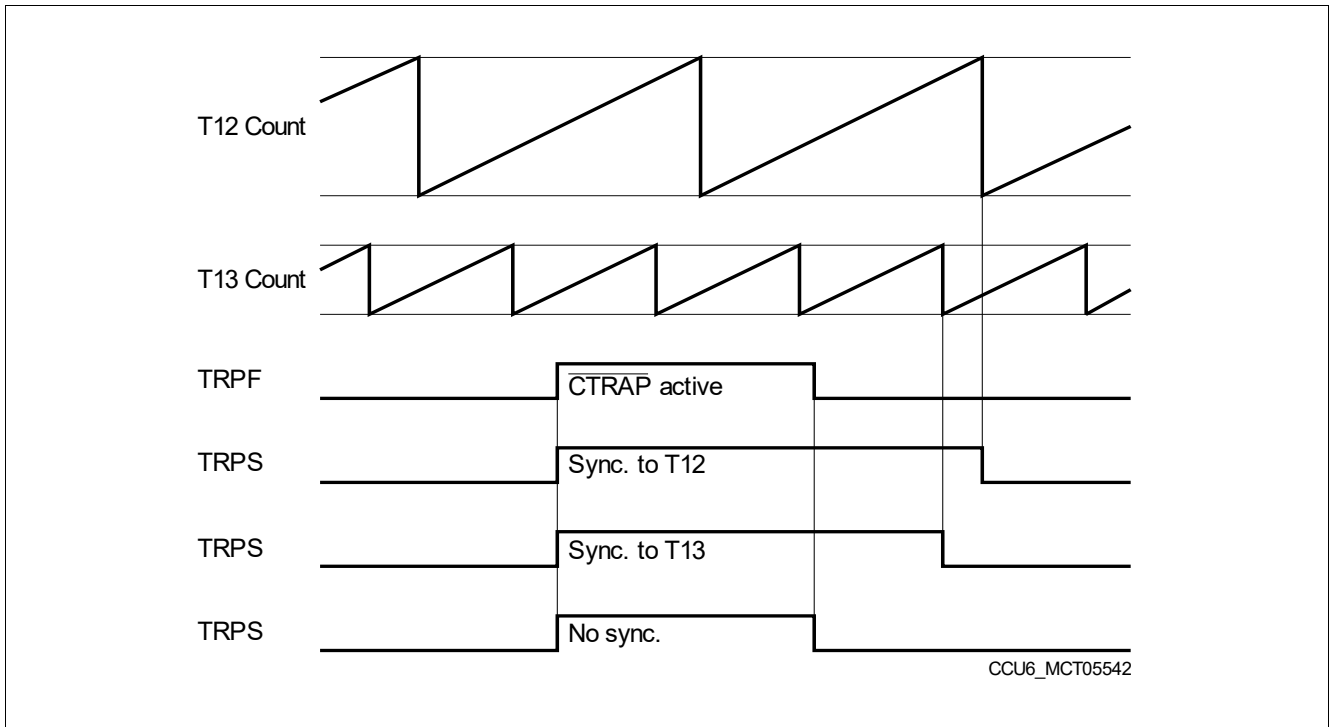


Figure 153 Trap State Synchronization (with TRPM2 = 0)

Capture/Compare Unit 6 (CCU6)

18.6 Multi-Channel Mode

The Multi-Channel mode offers the possibility to modulate all six T12-related output signals with one instruction. The bits in bit field MCMOUT.MCMP are used to specify the outputs that may become active. If Multi-Channel mode is enabled (bit MODCTR.MCMEN = 1), only those outputs may become active, that have a 1 at the corresponding bit position in bit field MCMP.

This bit field has its own shadow bit field MCMOUTS.MCMPS, that can be written by software. The transfer of the new value in MCMPS to the bit field MCMP can be triggered by, and synchronized to, T12 or T13 events. This structure permits the software to write the new value, that is then taken into account by the hardware at a well-defined moment and synchronized to a PWM signal. This avoids unintended pulses due to unsynchronized modulation sources.

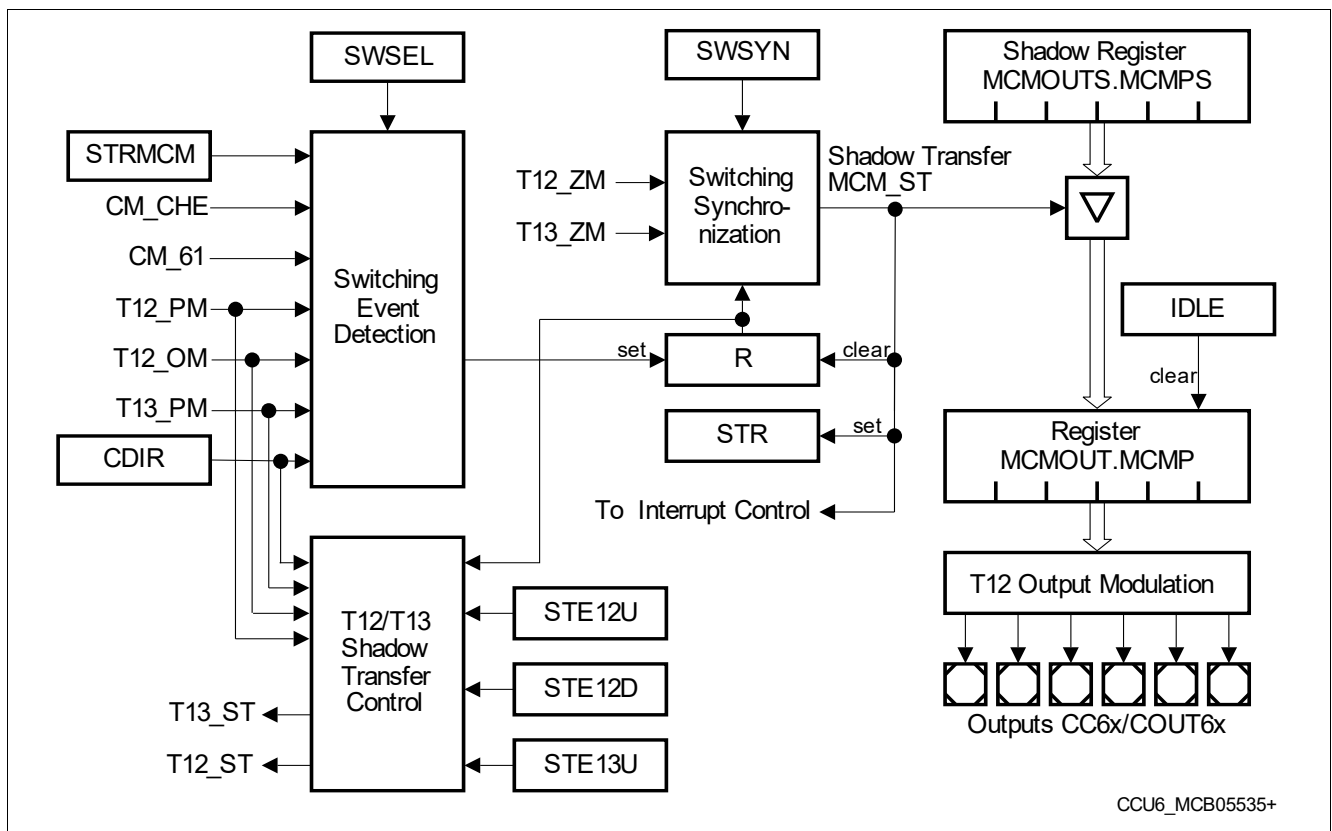


Figure 154 Multi-Channel Mode Block Diagram

Figure 154 shows the functional blocks for the Multi-Channel operation, controlled by bit fields in register MCMCTR. The event that triggers the update of bit field MCMP is chosen by SWSEL. In order to synchronize the update of MCMP to a PWM generated by T12 or T13, bit field SWSYN allows the selection of the synchronization event leading to the transfer from MCMPS to MCMP. Due to this structure, an update takes place with a new PWM period. A reminder flag R is set when the selected switching event occurs (the event is not necessarily synchronous to the modulating PWM), and is cleared when the transfer takes place. This flag can be monitored by software to check for the status of this logic block. If the shadow transfer from MCMPS to MCMP takes place, bit IS.STR becomes set and an interrupt can be generated.

In addition to the Multi-Channel shadow transfer event MCM\_ST, the shadow transfers for T12 (T12\_ST) and T13 (T13\_ST) can be generated to allow concurrent updates of applied duty cycles for T12 and/or T13 modulation and Multi-Channel patterns.

If it is explicitly desired, the update takes place immediately with the occurrence of the selected event when the direct synchronization mode is selected. The update can also be requested by software by writing to bit

## Capture/Compare Unit 6 (CCU6)

field MCMPS with the shadow transfer request bit STRMCM = 1. The option to trigger an update by SW is possible for all settings of SWSEL.

By using the direct mode and bit STRMCM = 1, the update takes place completely under software control.

**Table 125 Multi-Channel Mode Switching Event Selection**

SWSEL	Selected Event (see register MCMCTR)
000 <sub>B</sub>	No automatic event detection
001 <sub>B</sub>	Correct Hall Event (CM_CHE) detected at input signals CCPOSx without additional delay
010 <sub>B</sub>	T13 Period-Match (T13_PM)
011 <sub>B</sub>	T12 One-Match while counting down (T12_OM and CDIR = 1)
100 <sub>B</sub>	T12 Compare Channel 1 Event while counting up (CM_61 and CDIR = 0) to support the phase delay function by CC61 for block commutation mode.
101 <sub>B</sub>	T12 Period-Match while counting up (T12_PM and CDIR = 0)
110 <sub>B</sub> , 111 <sub>B</sub>	Reserved, no action

**Table 126 Multi-Channel Mode Switching Synchronization**

SWSYN	Synchronization Event (see register MCMCTR)
00 <sub>B</sub>	Direct Mode: the trigger event directly causes the shadow transfer
01 <sub>B</sub>	T13 Zero-Match (T13_ZM), the MCM shadow transfer is synchronized to a T13 PWM
10 <sub>B</sub>	T12 Zero-Match (T12_ZM), the MCM shadow transfer is synchronized to a T12 PWM
11 <sub>B</sub>	Reserved, no action

---

## Capture/Compare Unit 6 (CCU6)

### 18.7 Hall Sensor Mode

For Brushless DC-Motors in block commutation mode, the Multi-Channel Mode has been introduced to provide efficient means for switching pattern generation. These patterns need to be output in relation to the angular position of the motor. For this, usually Hall sensors or Back-EMF sensing are used to determine the angular rotor position. The CCU6 provides three inputs, CCPOS0, CCPOS1, and CCPOS2, that can be used as inputs for the Hall sensors or the Back-EMF detection signals.

There is a strong correlation between the motor position and the output modulation pattern. When a certain position of the motor has been reached, indicated by the sampled Hall sensor inputs (the Hall pattern), the next, pre-determined Multi-Channel Modulation pattern has to be output. Because of different machine types, the modulation pattern for driving the motor can vary. Therefore, it is wishful to have a wide flexibility in defining the correlation between the Hall pattern and the corresponding Modulation pattern. Furthermore, a hardware mechanism significantly reduces the CPU for block-commutation.

The CCU6 offers the flexibility by having a register containing the currently assumed Hall pattern (CURH), the next expected Hall pattern (EXPH) and the corresponding output pattern (MCMP). A new Modulation pattern is output when the sampled Hall inputs match the expected ones (EXPH). To detect the next rotation phase (segment for block commutation), the CCU6 monitors the Hall inputs for changes. When the next expected Hall pattern is detected, the next corresponding Modulation pattern is output.

To increase for noise immunity (to a certain extend), the CCU6 offers the possibility to introduce a sampling delay for the Hall inputs. Some changes of the Hall inputs are not leading to the expected Hall pattern, because they are only short spikes due to noise. The Hall pattern compare logic compares the Hall inputs to the next expected pattern and also to the currently assumed pattern to filter out spikes.

For the Hall and Modulation output patterns, a double-register structure is implemented. While register MCMOUT holds the actually used values, its shadow register MCMOUTS can be loaded by software from a pre-defined table, holding the appropriate Hall and Modulation patterns for the given motor control.

A transfer from the shadow register into register MCMOUT can take place when a correct Hall pattern change is detected. Software can then load the next values into register MCMOUTS. It is also possible by software to force a transfer from MCMOUTS into MCMOUT.

*Note: The Hall input signals CCPOSx and the CURH and EXPH bit fields are arranged in the following order:  
CCPOS0 corresponds to CURH.0 (LSB) and EXPH.0 (LSB)  
CCPOS1 corresponds to CURH.1 and EXPH.1  
CCPOS2 corresponds to CURH.2 (MSB) and EXPH.2 (MSB)*


## Capture/Compare Unit 6 (CCU6)

### 18.7.1 Hall Pattern Evaluation

The Hall sensor inputs CCPOSx can be permanently monitored via an edge detection block (with the module clock  $f_{CC6}$ ). In order to suppress spikes on the Hall inputs due to noise in rugged inverter environment, two optional noise filtering methods are supported by the Hall logic (both methods can be combined).

- Noise filtering with delay:  
For this function, the mode control bit fields MSEL6x for all T12 compare channels must be programmed to  $1000_b$  and DBYP = 0. The selected event triggers Dead-Time Counter 0 to generate a programmable delay (defined by bit field DTM). When the delay has elapsed, the evaluation signal HCRDY becomes activated. Output modulation with T12 PWM signals is not possible in this mode.
- Noise filtering by synchronization to PWM:  
The Hall inputs are not permanently monitored by the edge detection block, but samples are taken only at defined points in time during a PWM period. This can be used to sample the Hall inputs when the switching noise (due to PWM) does not disturb the Hall input signals.

If neither the delay function of Dead-Time Counter 0 is not used for the Hall pattern evaluation nor the Hall mode for Brushless DC-Drive control is enabled, the timer T12 block is available for PWM generation and output modulation.

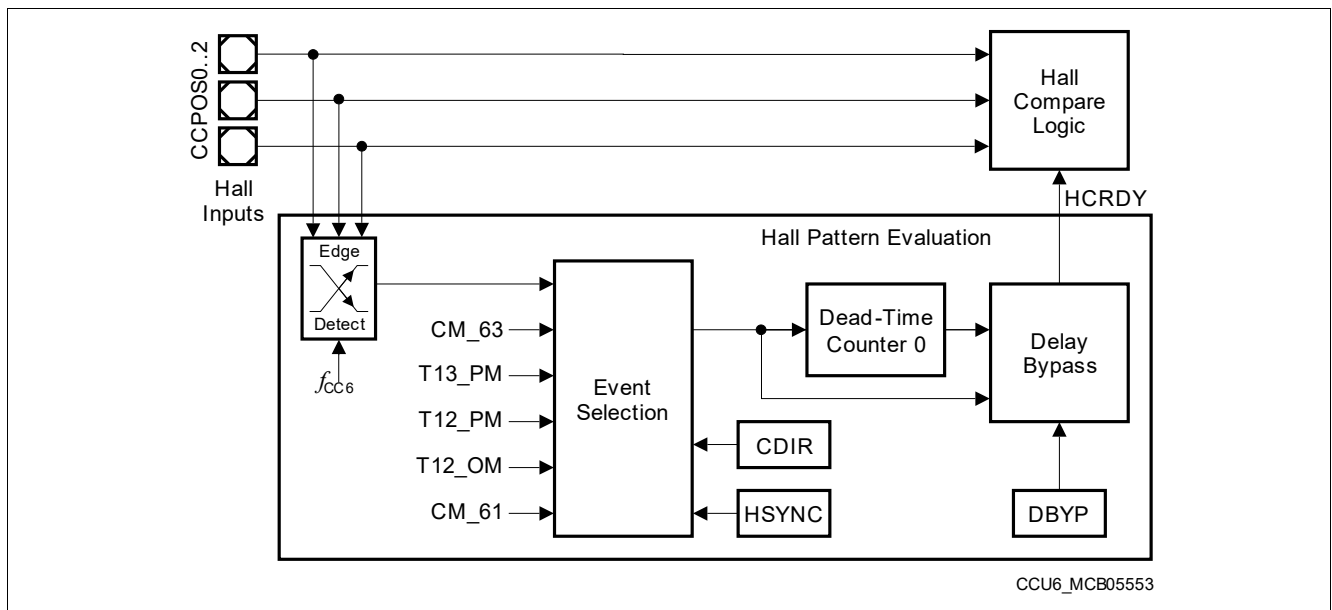

**Figure 155 Hall Pattern Evaluation**

If the evaluation signal HCRDY (Hall Compare Ready, see [Figure 156](#)) becomes activated, the Hall inputs are sampled and the Hall compare logic starts the evaluation of the Hall inputs.

[Figure 155](#) illustrates the events for Hall pattern evaluation and the noise filter logic, [Table 127](#) summarizes the selectable trigger input signals.

---

**Capture/Compare Unit 6 (CCU6)**
**Table 127 Hall Sensor Mode Trigger Event Selection**


<b>HSYNC</b>	<b>Selected Event (see register T12MSEL)</b>
000 <sub>B</sub>	Any edge at any of the inputs CCPOSx, independent from any PWM signal (permanent check).
001 <sub>B</sub>	A T13 Compare-Match (CM_63).
010 <sub>B</sub>	A T13 Period-Match (T13_PM).
011 <sub>B</sub>	Hall sampling triggered by HW sources is switched off.
100 <sub>B</sub>	A T12 Period-Match while counting up (T12_PM and CDIR = 0).
101 <sub>B</sub>	A T12 One-Match while counting down (T12_OM and CDIR = 1).
110 <sub>B</sub>	A T12 Compare-Match of compare channel CC61 while counting up (CM_61 and CDIR = 0).
111 <sub>B</sub>	A T12 Compare-Match of compare channel CC61 while counting down (CM_61 and CDIR = 1).



## Capture/Compare Unit 6 (CCU6)

### 18.7.2 Hall Pattern Compare Logic

**Figure 156** gives an overview on the double-register structure and the pattern compare logic. Software writes the next modulation pattern (MCMPS) and the corresponding current (CURHS) and expected (EXPHS) Hall patterns into the shadow register MCMOUTS. Register MCMOUT holds the actually used values CURH and EXPH. The modulation pattern MCM is provided to the T12 Output Modulation block. The current (CURH) and expected (EXPH) Hall patterns are compared to the sampled Hall sensor inputs (visible in register CMPSTAT). Sampling of the inputs and the evaluation of the comparator outputs is triggered by the evaluation signal HCRDY (Hall Compare Ready), that is detailed in the next section.

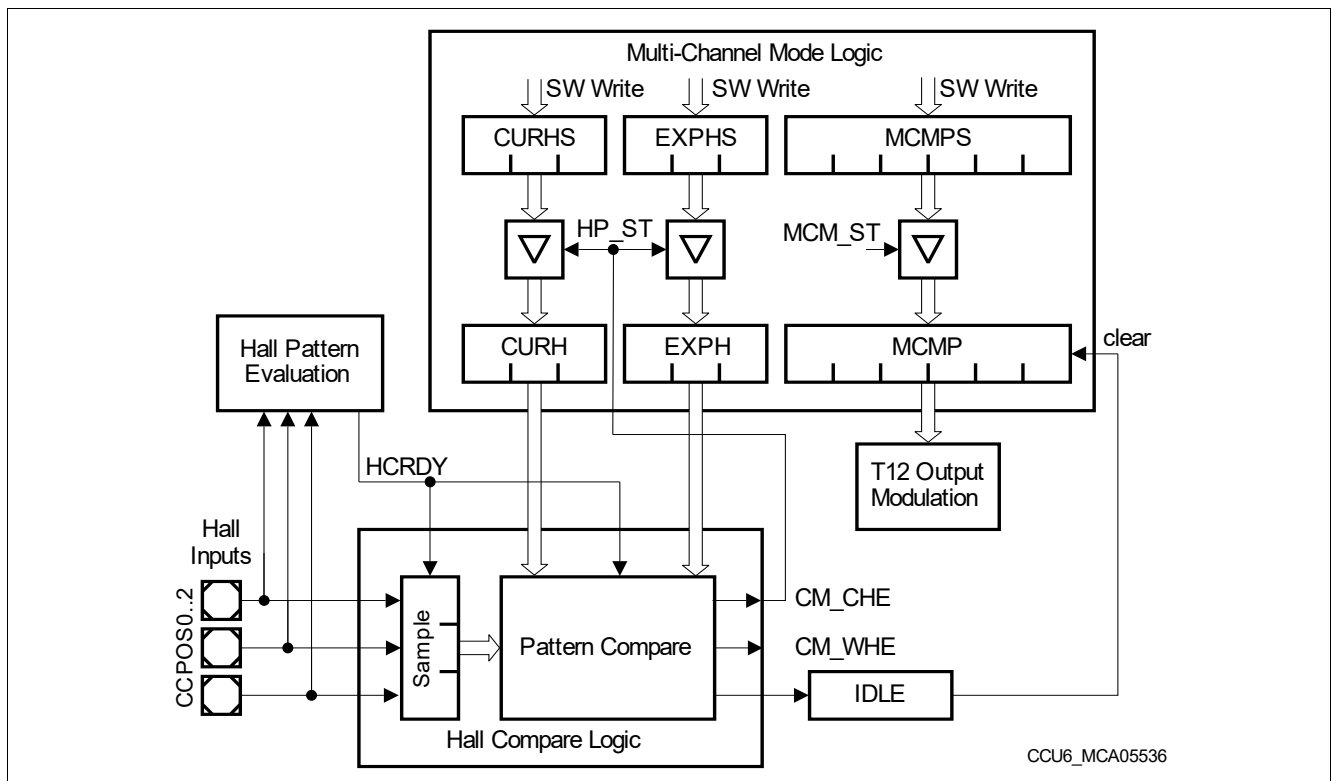

**Figure 156 Hall Pattern Compare Logic**

- If the sampled Hall pattern matches the value programmed in CURH, the detected transition was a spike (no Hall event) and no further actions are necessary.
- If the sampled Hall pattern matches the value programmed in EXPH, the detected transition was the expected event (correct Hall event CM\_CHE) and the MCMC value has to change.
- If the sampled Hall pattern matches neither CURH nor EXPH, the transition was due to a major error (wrong Hall event CM\_WHE) and can lead to an emergency shut down (IDLE).

At every correct Hall event (CM\_CHE), the next Hall patterns are transferred from the shadow register MCMOUTS into MCMOUT (Hall pattern shadow transfer HP\_ST), and a new Hall pattern with its corresponding output pattern can be loaded (e.g. from a predefined table in memory) by software into MCMOUTS. For the Modulation patterns, signal MCM\_ST is used to trigger the transfer.

Loading this shadow register can also be done by writing MCMOUTS.STRHP = 1 (for EXPH and CURH) or MCMOUTS.STRMCMC = 1 (for MCMC).

Capture/Compare Unit 6 (CCU6)

18.7.3 Hall Mode Flags

Depending on the Hall pattern compare operation, a number of flags are set in order to indicate the status of the module and to trigger further actions and interrupt requests.

Flag IS.CHE (Correct Hall Event) is set by signal CM\_CHE when the sampled Hall pattern matches the expected one (EXPH). This flag can also be set by SW by setting bit ISS.SCHE = 1. If enabled by bit IEN.ENCHE = 1, the set signal for CHE can also generate an interrupt request to the CPU. Bit field INP.INPCHE defines which service request output becomes activated in case of an interrupt request. To clear flag CHE, SW needs to write ISR.RCHE = 1.

Flag IS.WHE indicates a Wrong Hall Event. Its handling for flag setting and resetting as well as interrupt request generation are similar to the mechanism for flag CHE.

The implementation of flag STR is done in the same way as for CHE and WHE. This flag is set by HW by the shadow transfer signal MCM\_ST (see also Figure 154).

Please note that for flags CHE, WHE, and STR, the interrupt request generation is triggered by the set signal for the flag. That means, a request can be generated even if the flag is already set. There is no need to clear the flag in order to enable further interrupt requests.

The implementation for the IDLE flag is different. It is set by HW through signal CM\_WHE if enabled by bit ENIDLE. Software can also set the flag via bit SIDLE. As long as bit IDLE is set, the modulation pattern field MCM\_P is cleared to force the outputs to the passive state. Flag IDLE must be cleared by software by writing RIDLE = 1 in order to return to normal operation. To fully restart from IDLE mode, the transfer requests for the bit fields in register MCMOUTS to register MCMOUT have to be initiated by software via bits STRMCM and STRHP in register MCMOUTS. In this way, the release from IDLE mode is under software control, but can be performed synchronously to the PWM signal.

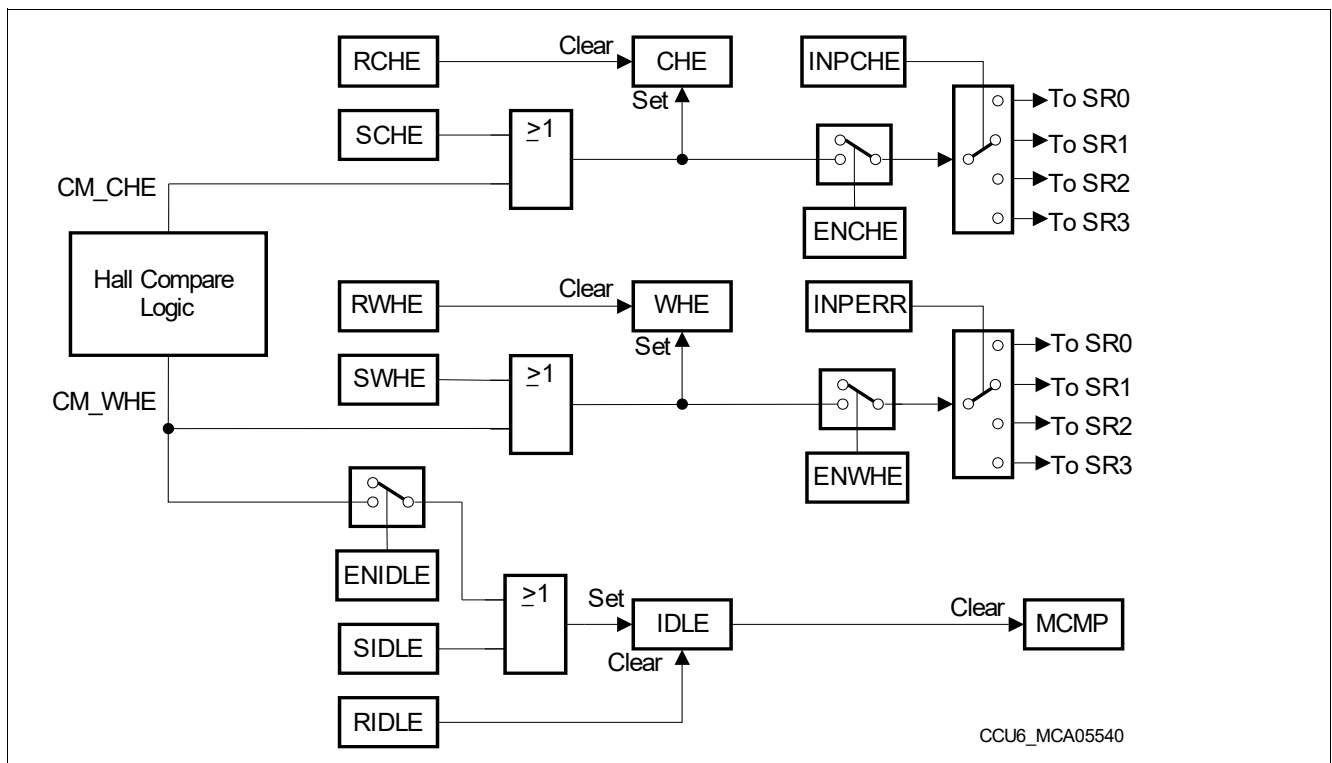



Figure 157 Hall Mode Flags

## Capture/Compare Unit 6 (CCU6)

### 18.7.4 Hall Mode for Brushless DC-Motor Control

The CCU6 provides a mode for the Timer T12 Block especially targeted for convenient control of block commutation patterns for Brushless DC-Motors. This mode is selected by setting all T12MSEL.MSEL6x bit fields of the three T12 Channels to 1000<sub>B</sub>.

In this mode, illustrated in **Figure 158**, channel CC60 is placed in capture mode to measure the time elapsed between the last two correct Hall events, channel CC61 in compare mode to provide a programmable phase delay between the Hall event and the application of a new PWM output pattern, and channel CC62 also in compare mode as first time-out criterion. A second time-out criterion can be built by the T12 period match event.

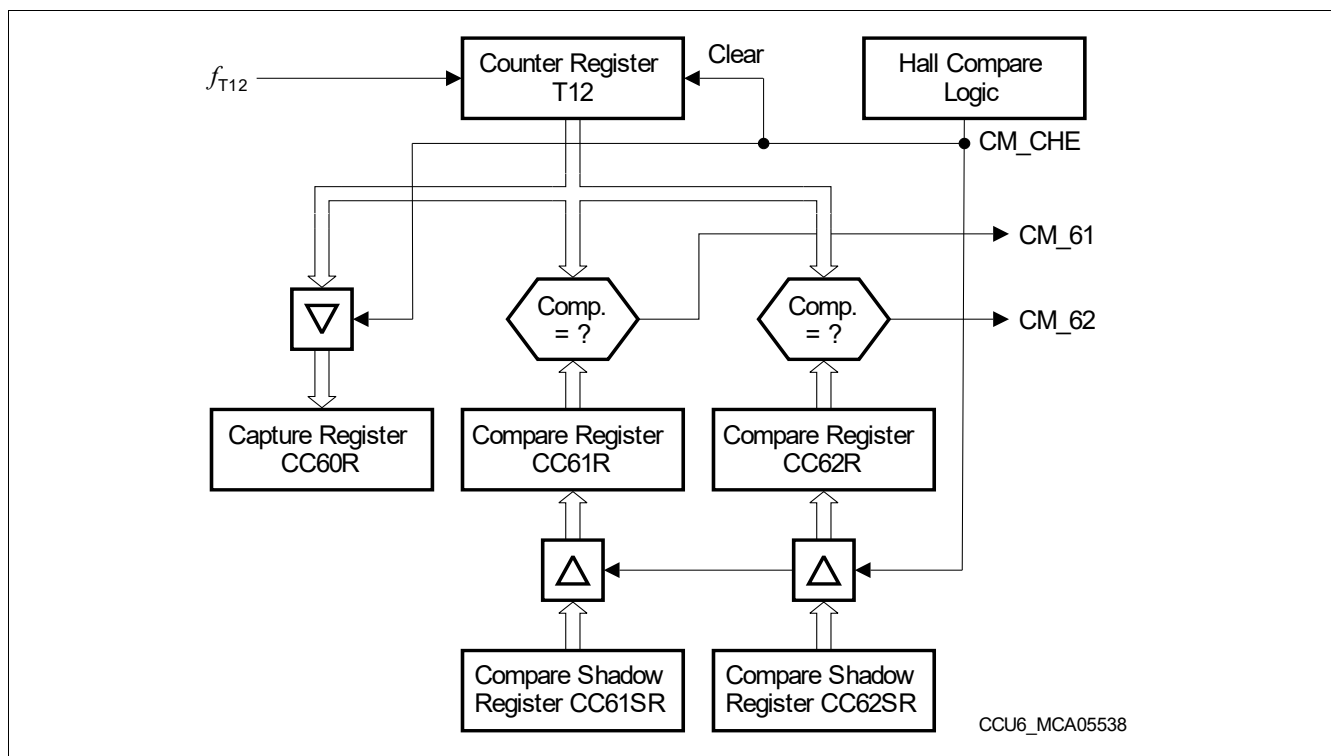

**Figure 158** T12 Block in Hall Sensor Mode

The signal CM\_CHE from the Hall compare logic is used to transfer the new compare values from the shadow registers CC6xSR into the actual compare registers CC6xR, performs the shadow transfer for the T12 period register, to capture the current T12 contents into register CC60R, and to clear T12.

*Note:* In this mode, the shadow transfer signal T12\_ST is not generated. Not all shadow bits, such as the PSLy bits, will be transferred to their main registers. To program the main registers, SW needs to write to these registers while Timer T12 is stopped. In this case, a SW write actualizes both registers.

Capture/Compare Unit 6 (CCU6)

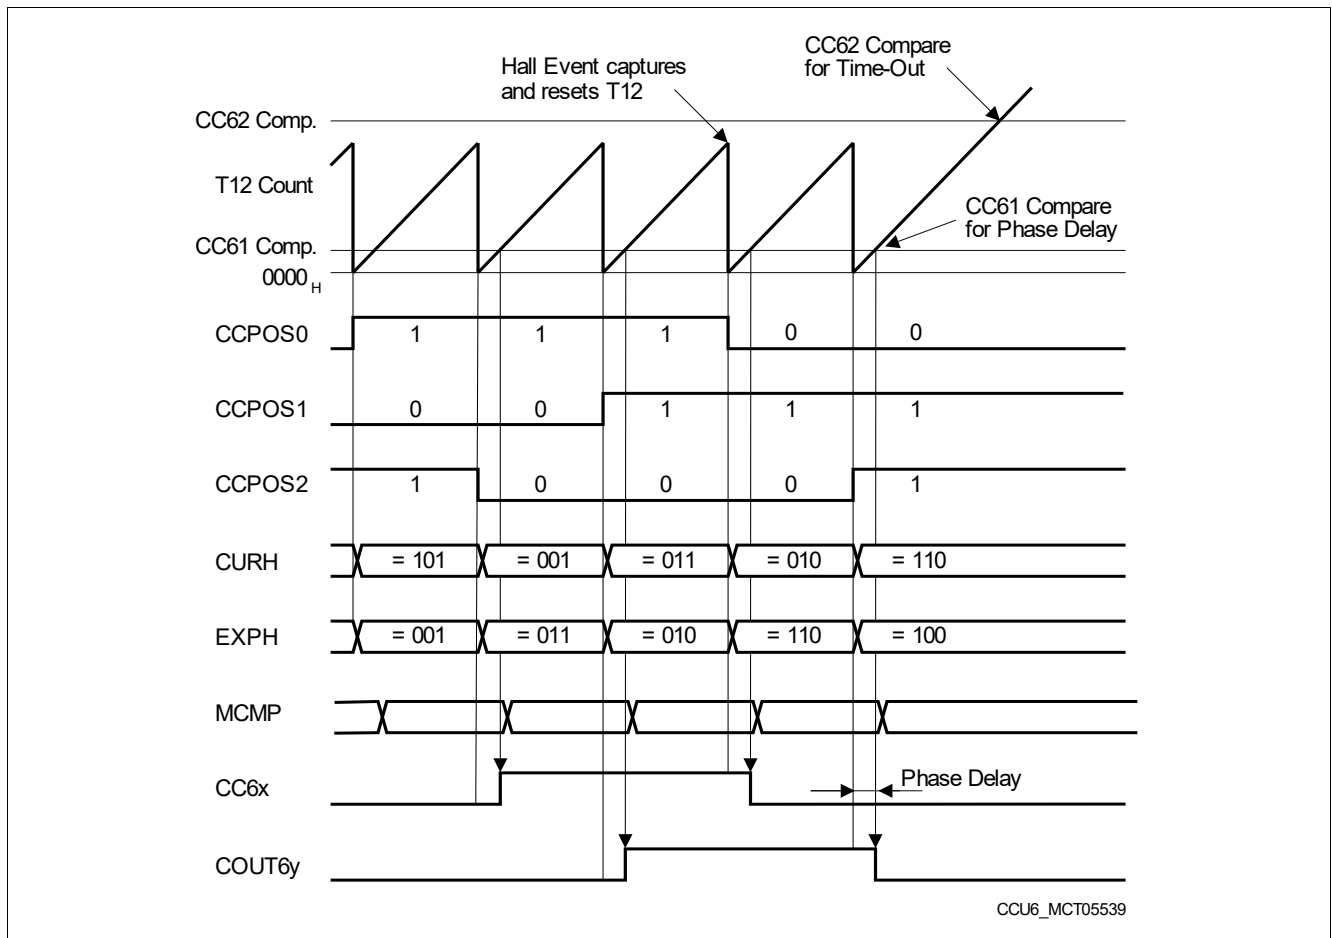


Figure 159 Brushless DC-Motor Control Example (all MSEL6x = 1000<sub>B</sub>)

After the detection of an expected Hall pattern (CM\_CHE active), the T12 count value is captured into channel CC60 (representing the actual rotor speed by measuring the elapsed time between the last two correct Hall events), and T12 is reset. When the timer reaches the compare value in channel CC61, the next multi-channel state is switched by triggering the shadow transfer of bit field MCMP (if enabled in bit field SWEN). This trigger event can be combined with the synchronization of the next multi-channel state to the PWM source (to avoid spikes on the output lines, see Section 18.6). This compare function of channel CC61 can be used as a phase delay from the position sensor input signals to the switching of the output signals, that is necessary if a sensorless back-EMF technique or Hall sensors are used. The compare value in channel CC62 can be used as a time-out trigger (interrupt), indicating that the actual motor speed is far below the desired destination value. An abnormal load change can be detected with this feature and PWM generation can be disabled.

## Capture/Compare Unit 6 (CCU6)

### 18.8 General Module Operation

This section provides information about the:

- Input selection (see [Section 18.8.1](#))

#### 18.8.1 Input Selection

Each CCU6 input signal can be selected from a vector of four or eight possible inputs by programming the port input select registers PISEL0 and PISEL2. This permits to adapt the pin functionality of the device to the application requirements.

The output pins for the module output signals are chosen in the ports.

*Note: All functional inputs of the CCU6 are synchronized to  $f_{CC6}$  before they affect the module internal logic. The resulting delay of  $2/f_{CC6}$  and for asynchronous signals an additional uncertainty of  $1/f_{CC6}$  have to be taken into account for precise timing calculation. An edge of an input signal can only be correctly detected if the high phase and the low phase of the input signal are both longer than  $1/f_{CC6}$ .*

### 18.9 Module Interfaces

This section describes the CCU6 module interfaces with the clock control, port connections, interrupt control, and address decoding.

#### 18.9.1 Interfaces of the CCU6 Module

An overview of the CCU6 kernel I/O interface is shown in [Figure 160](#).

The interrupt lines of the CCU6 are connected to the CPU interrupt controller via the SCU. An interrupt pulse can be generated at one of the four interrupt output lines SRCx (x=0 to 4) of the module. More than one CCU6 interrupt source can be connected to each CCU6 interrupt line.

The General Purpose IO (GPIO) Ports provide the interface from the CCU6 to the external world. Please refer to [Chapter 14](#) for Port implementation details.

The CCU6 kernel is clocked on PCLK frequency where  $f_{CCU} = f_{PCLK}$ .

#### Debug Suspend of Timers

The timers of CCU6, T12 and T13, can be suspended immediately when Debug Mode enters Monitor Mode and has the Debug-Suspend signal activated – provided the respective timer suspend bits, T12SUSP and T13SUSP (in SCU SFR MODSUSP), are set. When suspended, the respective timer stops and its PWM outputs enabled for the trap condition ([TRPCTR.TRPENx = 1](#)) are set to respective passive levels (similar to TRAP state). In addition, all CCU6 inputs are frozen. Refer to SCU [Chapter 6.9](#).

#### Flexible Peripheral Management (Kernel Clock Gating) of CCU6

When not in use, the CCU6 kernel may be disabled where the kernel clock input is gated. When the [PMCON1.CCU\\_DIS](#) request bit is set, both T12 and T13 are immediately stopped and PWM outputs enabled for the trap condition ([TRPCTR.TRPENx = 1](#)) are set to respective passive levels (similar to TRAP state). In addition, all CCU6 inputs are frozen. Finally, the kernel clock input is gated. Refer to SCU [Chapter 6.8](#).

The following figure shows all interrupt and interface signals and GPIO interface associated with the CCU6 module kernel.

Capture/Compare Unit 6 (CCU6)

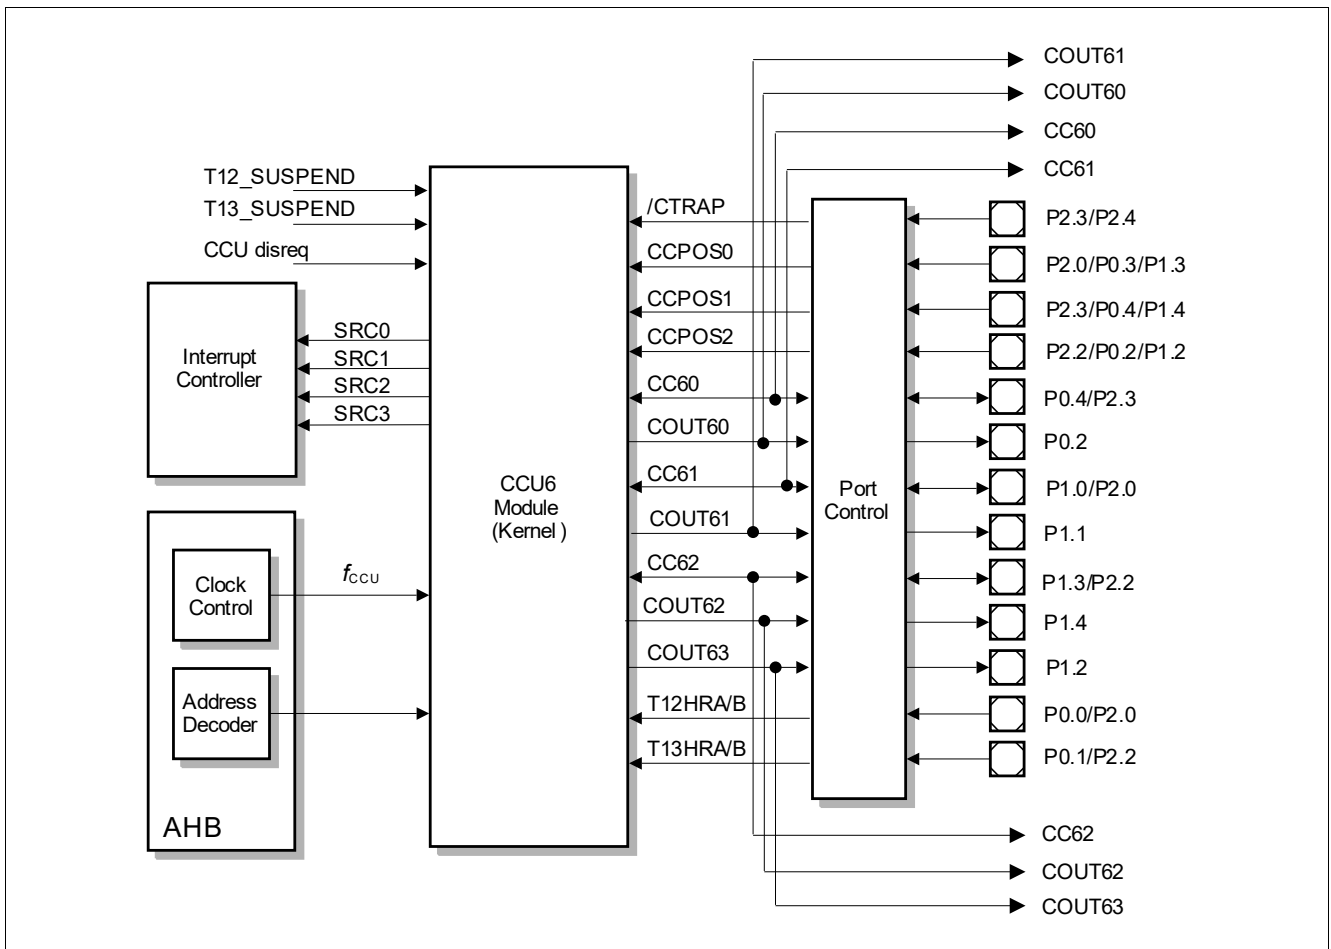


Figure 160 Interconnections of the CCU6 Module

## Capture/Compare Unit 6 (CCU6)


### 18.10 Interrupt Handling

This section describes the interrupt handling of the CCU6 module.

#### 18.10.1 Interrupt Structure

The HW interrupt event or the SW setting of the corresponding interrupt set bit (in register ISS) sets the event indication flags (in register IS) and can trigger the interrupt generation. The interrupt pulse is generated independently from the interrupt status flag in register IS (it is not necessary to clear the related status bit to be able to generate another interrupt). The interrupt flag can be cleared by SW by writing to the corresponding bit in register ISR.

If enabled by the related interrupt enable bit in register IEN, an interrupt pulse can be generated on one of the four service request outputs (SR0 to SR3) of the module. If more than one interrupt source is connected to the same interrupt node pointer (in register INP), the requests are logically OR-combined to one common service request output (see [Figure 161](#)).

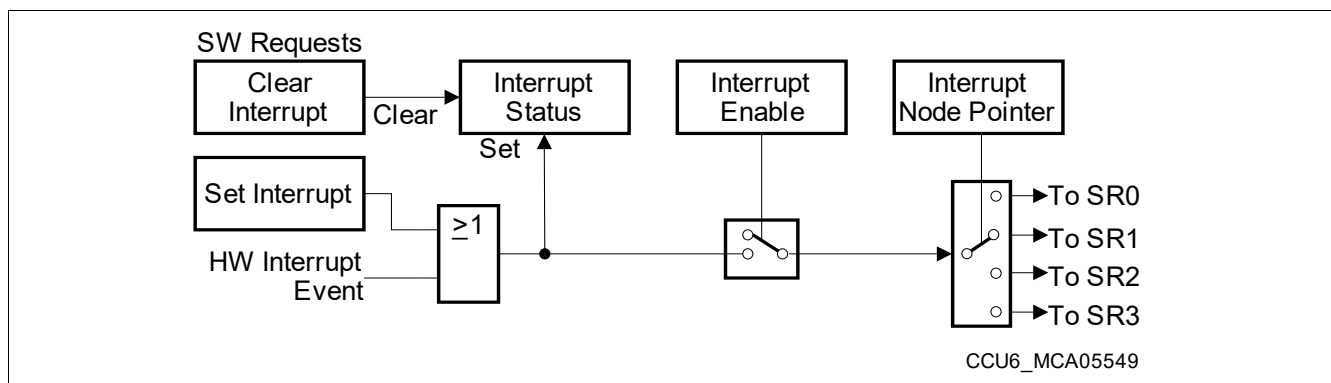

**Figure 161** General Interrupt Structure

The available interrupt events in the CCU6 are shown in [Figure 162](#).

Capture/Compare Unit 6 (CCU6)

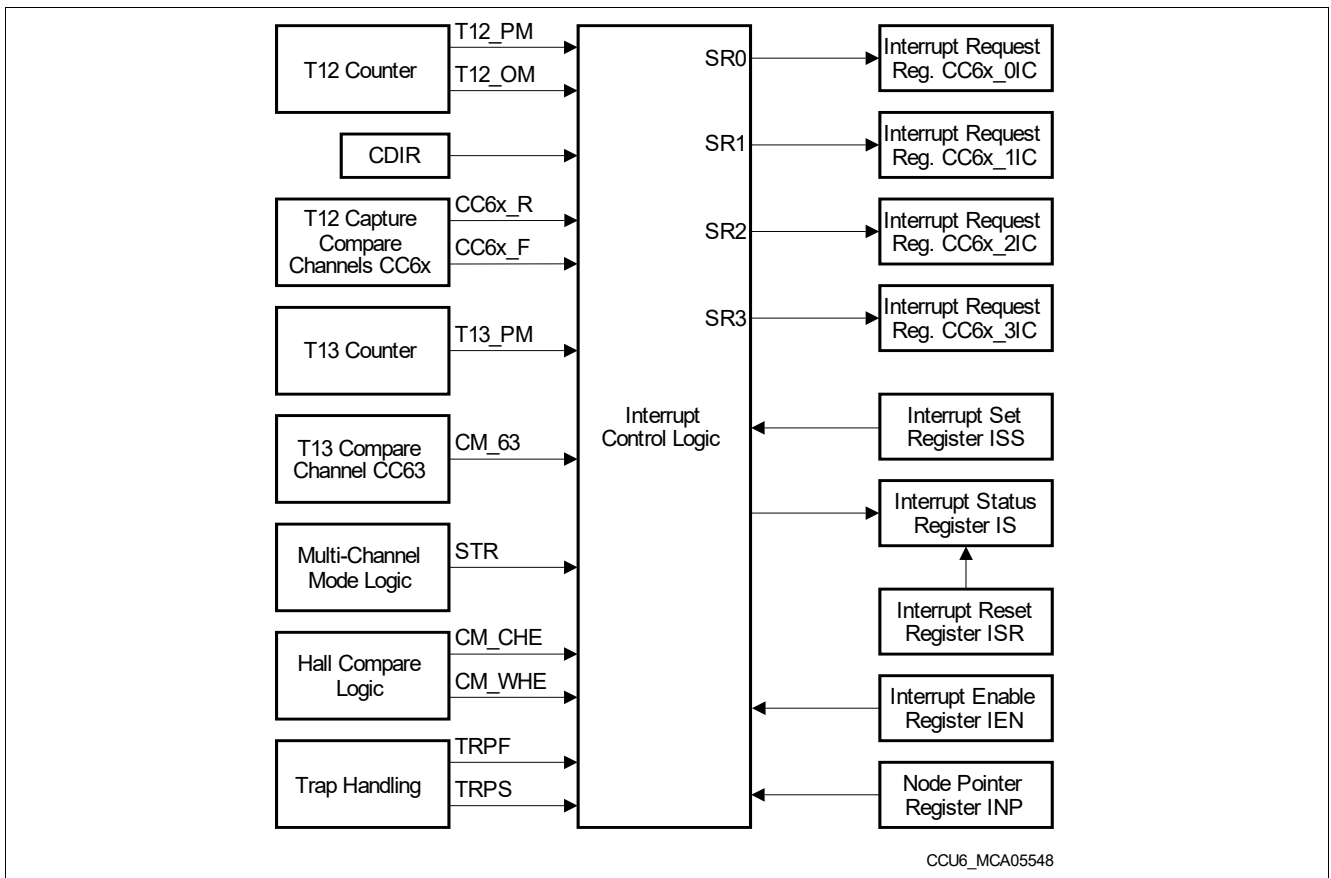


Figure 162 Interrupt Sources and Events



---

**Capture/Compare Unit 6 (CCU6)**
**18.11 Register Definition**
**18.11.1 CCU6 Register Description**

All CCU6 kernel register names described in this section will be referenced in other parts of this specification with the module name prefix “CCU6\_”.

*Note:* If a hardware and a software request to modify a bit occur simultaneously, the software wins.

**Table 128 Registers Overview**

Register Short Name	Register Long Name	Description see
<b>System Registers</b>		
PISEL0	Port Input Select Register 0	<a href="#">Page 571</a>
PISEL2	Port Input Select Register 2	<a href="#">Page 573</a>
<b>Timer T12 Registers</b>		
T12	Timer T12 Counter Register	<a href="#">Page 578</a>
T12PR	Timer T12 Period Register	<a href="#">Page 579</a>
CC6xR	Capture/Compare Register for Channel CC6x	<a href="#">Page 580</a>
CC6xSR	Compare Shadow Register for Channel CC6x	<a href="#">Page 581</a>
T12DTC	Timer T12 Dead-Time Control Register	<a href="#">Page 582</a>
<b>Timer T13 Registers</b>		
T13	Timer T13 Counter Register	<a href="#">Page 584</a>
T13PR	Timer T13 Period Register	<a href="#">Page 585</a>
CC63R	Capture/Compare Register for Channel CC63	<a href="#">Page 585</a>
CC63SR	Capture/Compare Shadow Register for Channel CC63	<a href="#">Page 586</a>
<b>CCU6 Control Registers</b>		
CMPSTAT	Compare State Register	<a href="#">Page 587</a>
CMPMODIF	Compare State Modification Register	<a href="#">Page 589</a>
T12MSEL	Capture/Compare T12 Mode Select Register	<a href="#">Page 576</a>
TCTR0	Timer Control Register 0	<a href="#">Page 591</a>
TCTR2	Timer Control Register 2	<a href="#">Page 594</a>
TCTR4	Timer Control Register 4	<a href="#">Page 596</a>
<b>Modulation Control Registers</b>		
MODCTR	Modulation Control Register	<a href="#">Page 598</a>
TRPCTR	Trap Control Register	<a href="#">Page 600</a>
PSLR	Passive State Level Register	<a href="#">Page 602</a>
MCMOUTS	Multi-Channel Mode Output Shadow Register	<a href="#">Page 603</a>
MCMOUT	Multi-Channel Mode Output Register	<a href="#">Page 605</a>
MCMCTR	Multi-Channel Mode Control Register	<a href="#">Page 607</a>
<b>Interrupt Control Registers</b>		

---

**Capture/Compare Unit 6 (CCU6)****Table 128 Registers Overview (cont'd)**

<b>Register Short Name</b>	<b>Register Long Name</b>	<b>Description see</b>
<b>IS</b>	Capture/Compare Interrupt Status Register	<a href="#">Page 609</a>
<b>ISS</b>	Capture/Compare Interrupt Status Set Register	<a href="#">Page 612</a>
<b>ISR</b>	Capture/Compare Interrupt Status Reset Register	<a href="#">Page 614</a>
<b>IEN</b>	Capture/Compare Interrupt Enable Register	<a href="#">Page 616</a>
<b>INP</b>	Capture/Compare Interrupt Node Pointer Register	<a href="#">Page 619</a>

## Capture/Compare Unit 6 (CCU6)

### 18.11.1.1 System Registers

Registers PISEL0 and PISEL2 contain bit fields that select the actual input port/signal for the module inputs. This permits the adaptation of the pin functionality of the device to the application's requirements. The output pins are chosen according to the registers in the ports.

#### PISEL0

##### Port Input Select Register 0

(6CH)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>IST12HR</b>		<b>ISPOS2</b>		<b>ISPOS1</b>		<b>ISPOS0</b>	
rw		rw		rw		rw	
7	6	5	4	3	2	1	0
<b>ISTRP</b>		<b>ISCC62</b>		<b>ISCC61</b>		<b>ISCC60</b>	
rw		rw		rw		rw	

Field	Bits	Type	Description
<b>ISCC60</b>	1:0	rw	<b>Input Select for CC60</b> This bit field defines the port pin that is used for the CC60 capture input signal. 00 <sub>B</sub> The input pin for CC60_0. 01 <sub>B</sub> The input pin for CC60_1. 10 <sub>B</sub> Reserved 11 <sub>B</sub> Reserved
<b>ISCC61</b>	3:2	rw	<b>Input Select for CC61</b> This bit field defines the port pin that is used for the CC61 capture input signal. 00 <sub>B</sub> The input pin for CC61_0. 01 <sub>B</sub> Reserved 10 <sub>B</sub> Reserved 11 <sub>B</sub> Reserved
<b>ISCC62</b>	5:4	rw	<b>Input Select for CC62</b> This bit field defines the port pin that is used for the CC62 capture input signal. 00 <sub>B</sub> The input pin for CC62_0. 01 <sub>B</sub> The input pin for CC62_1. 10 <sub>B</sub> The input pin for CC62_2. 11 <sub>B</sub> Reserved
<b>ISTRP</b>	7:6	rw	<b>Input Select for CTRAP</b> This bit field defines the port pin that is used for the <u>CTRAP</u> input signal. 00 <sub>B</sub> The input pin for <u>CTRAP_0</u> . 01 <sub>B</sub> The input pin for <u>CTRAP_1</u> . 10 <sub>B</sub> Reserved 11 <sub>B</sub> Reserved

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>ISPOS0</b>	9:8	rw	<p><b>Input Select for CCPOS0</b></p> <p>This bit field defines the port pin that is used for the CCPOS0 input signal.</p> <p>00<sub>B</sub> Reserved</p> <p>01<sub>B</sub> The input pin for CCPOS0_1.</p> <p>10<sub>B</sub> The input pin for CCPOS0_2.</p> <p>11<sub>B</sub> The input pin for CCPOS0_3 if <b>BEMFC_CTRL_STS</b>.CCPOS_INSEL = 0.</p> <p>11<sub>B</sub> BEMF Comparator if <b>BEMFC_CTRL_STS</b>.CCPOS_INSEL = 1.</p>
<b>ISPOS1</b>	11:10	rw	<p><b>Input Select for CCPOS1</b></p> <p>This bit field defines the port pin that is used for the CCPOS1 input signal.</p> <p>00<sub>B</sub> The input pin for CCPOS1_0.</p> <p>01<sub>B</sub> The input pin for CCPOS1_1.</p> <p>10<sub>B</sub> The input pin for CCPOS1_2.</p> <p>11<sub>B</sub> Reserved if <b>BEMFC_CTRL_STS</b>.CCPOS_INSEL = 0.</p> <p>11<sub>B</sub> BEMF Comparator if <b>BEMFC_CTRL_STS</b>.CCPOS_INSEL = 1.</p>
<b>ISPOS2</b>	13:12	rw	<p><b>Input Select for CCPOS2</b></p> <p>This bit field defines the port pin that is used for the CCPOS2 input signal.</p> <p>00<sub>B</sub> Reserved</p> <p>01<sub>B</sub> The input pin for CCPOS2_1.</p> <p>10<sub>B</sub> The input pin for CCPOS2_2.</p> <p>11<sub>B</sub> The input pin for CCPOS2_3 if <b>BEMFC_CTRL_STS</b>.CCPOS_INSEL = 0.</p> <p>11<sub>B</sub> BEMF Comparator if <b>BEMFC_CTRL_STS</b>.CCPOS_INSEL = 1.</p>
<b>IST12HR</b>	15:14	rw	<p><b>Input Select for T12HR</b></p> <p>This bit field defines the input signal used as T12HR input.</p> <p>00<sub>B</sub> Either signal T12HRA (if T12EXT = 0) or T12HRE (if T12EXT = 1) is selected.</p> <p>01<sub>B</sub> Either signal T12HRB (if T12EXT = 0) or T12HRF (if T12EXT = 1) is selected.</p> <p>10<sub>B</sub> Either signal T12HRC (if T12EXT = 0) or T12HRG (if T12EXT = 1) is selected.</p> <p>11<sub>B</sub> Either signal T12HRD (if T12EXT = 0) or T12HRH (if T12EXT = 1) is selected.</p>

---

**Capture/Compare Unit 6 (CCU6)**
**PISEL2****Port Input Select Register 2****(74H)****Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>T13EXT</b>	<b>T12EXT</b>	<b>ISCNT13</b>		<b>ISCNT12</b>		<b>IST13HR</b>	
rw	rw	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>IST13HR</b>	1:0	rw	<p><b>Input Select for T13HR</b></p> <p>This bit field defines the input signal used as T13HR input.</p> <p>00<sub>B</sub> Either signal T13HRA (if T13EXT = 0) or T13HRE (if T13EXT = 1) is selected.</p> <p>01<sub>B</sub> Either signal T13HRB (if T13EXT = 0) or T13HRF (if T13EXT = 1) is selected.</p> <p>10<sub>B</sub> Either signal T13HRC (if T13EXT = 0) or T13HRG (if T13EXT = 1) is selected.</p> <p>11<sub>B</sub> Either signal T13HRD (if T13EXT = 0) or T13HRH (if T13EXT = 1) is selected.</p>
<b>ISCNT12</b>	3:2	rw	<p><b>Input Select for T12 Counting Input</b></p> <p>This bit field defines the input event leading to a counting action of T12.</p> <p>00<sub>B</sub> The T12 prescaler generates the counting events. Bit TCTR4.T12CNT is not taken into account.</p> <p>01<sub>B</sub> Bit TCTR4.T12CNT written with 1 is a counting event. The T12 prescaler is not taken into account.</p> <p>10<sub>B</sub> The timer T12 is counting each rising edge detected in the selected T12HR signal.</p> <p>11<sub>B</sub> The timer T12 is counting each falling edge detected in the selected T12HR signal.</p>
<b>ISCNT13</b>	5:4	rw	<p><b>Input Select for T13 Counting Input</b></p> <p>This bit field defines the input event leading to a counting action of T13.</p> <p>00<sub>B</sub> The T13 prescaler generates the counting events. Bit TCTR4.T13CNT is not taken into account.</p> <p>01<sub>B</sub> Bit TCTR4.T13CNT written with 1 is a counting event. The T13 prescaler is not taken into account.</p> <p>10<sub>B</sub> The timer T13 is counting each rising edge detected in the selected T13HR signal.</p> <p>11<sub>B</sub> The timer T13 is counting each falling edge detected in the selected T13HR signal.</p>
<b>T12EXT</b>	6	rw	<p><b>Extension for T12HR Inputs</b></p> <p>This bit extends the 2-bit field IST12HR.</p> <p>0<sub>B</sub> One of the signals T12HR[D:A] is selected.</p> <p>1<sub>B</sub> One of the signals T12HR[H:E] is selected.</p>
<b>T13EXT</b>	7	rw	<p><b>Extension for T13HR Inputs</b></p> <p>This bit extends the 2-bit field IST13HR.</p> <p>0<sub>B</sub> One of the signals T13HR[D:A] is selected.</p> <p>1<sub>B</sub> One of the signals T13HR[H:E] is selected.</p>

## Capture/Compare Unit 6 (CCU6)

### 18.11.2 Timer 12 – Related Registers

The generation of the patterns for a 3-channel PWM is based on timer T12. The registers related to timer T12 can be concurrently updated (with well-defined conditions) in order to ensure consistency of the three PWM channels.

Timer T12 supports capture and compare modes, which can be independently selected for the three channels CC60, CC61, and CC62.

Register T12MSEL contains control bits to select the capture/compare functionality of the three channels of timer T12. [Table 129](#), [Table 130](#) and [Table 131](#) define and elaborate some of the capture/compare modes selectable. Refer to the following register description for the selection.

**Table 129 Double-Register Capture Modes**

Description	
0100	The contents of T12 are stored in CC6nR after a rising edge and in CC6nSR after a falling edge on the input pin CC6n.
0101	The value stored in CC6nSR is copied to CC6nR after a rising edge on the input pin CC6n. The actual timer value of T12 is simultaneously stored in the shadow register CC6nSR. This feature is useful for time measurements between consecutive rising edges on pins CC6n. COU6n is I/O.
0110	The value stored in CC6nSR is copied to CC6nR after a falling edge on the input pin CC6n. The actual timer value of T12 is simultaneously stored in the shadow register CC6nSR. This feature is useful for time measurements between consecutive falling edges on pins CC6n. COU6n is I/O.
0111	The value stored in CC6nSR is copied to CC6nR after any edge on the input pin CC6n. The actual timer value of T12 is simultaneously stored in the shadow register CC6nSR. This feature is useful for time measurements between consecutive edges on pins CC6n. COU6n is I/O.

**Table 130 Combined T12 Modes**


Description	
1000	Hall Sensor mode: Capture mode for channel 0, compare mode for channels 1 and 2. The contents of T12 are captured into CC60 at a valid hall event (which is a reference to the actual speed). CC61 can be used for a phase delay function between hall event and output switching. CC62 can act as a time-out trigger if the expected hall event comes too late. The value 1000 <sub>b</sub> must be programmed to MSEL0, MSEL1 and MSEL2 if the hall signals are used. In this mode, the contents of timer T12 are captured in CC60 and T12 is reset after the detection of a valid hall event. In order to avoid noise effects, the dead-time counter channel 0 is started after an edge has been detected at the hall inputs. On reaching the value of 000001 <sub>b</sub> , the hall inputs are sampled and the pattern comparison is done.
1001	Hysteresis-like control mode with dead-time generation: The negative edge of the CCPOSx input signal is used to reset bit CC6nST. As a result, the output signals can be switched to passive state immediately and switch back to active state (with dead-time) if the CCPOSx is high and the bit CC6nST is set by a compare event.

---

**Capture/Compare Unit 6 (CCU6)**
**Table 131 Multi-Input Capture Modes**

<b>Description</b>	
1010	The timer value of T12 is stored in CC6nR after a rising edge at the input pin CC6n. The timer value of T12 is stored in CC6nSR after a falling edge at the input pin CCPOSx.
1011	The timer value of T12 is stored in CC6nR after a falling edge at the input pin CC6n. The timer value of T12 is stored in CC6nSR after a rising edge at the input pin CCPOSx.
1100	The timer value of T12 is stored in CC6nR after a rising edge at the input pin CC6n. The timer value of T12 is stored in CC6nSR after a rising edge at the input pin CCPOSx.
1101	The timer value of T12 is stored in CC6nR after a falling edge at the input pin CC6n. The timer value of T12 is stored in CC6nSR after a falling edge at the input pin CCPOSx.
1110	The timer value of T12 is stored in CC6nR after any edge at the input pin CC6n. The timer value of T12 is stored in CC6nSR after any edge at the input pin CCPOSx.
1111	reserved (no capture or compare action)

---

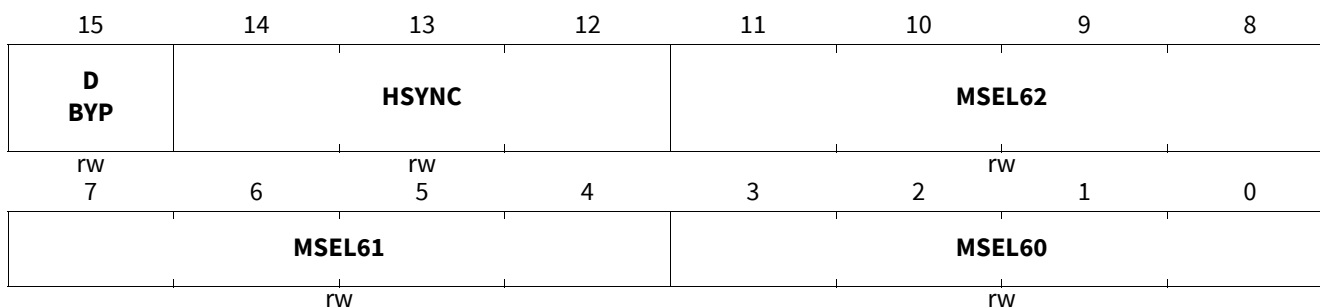**Capture/Compare Unit 6 (CCU6)**
**T12MSEL****Capture/Compare T12 Mode Select Register (40H)****Reset Value: 0000<sub>H</sub>**

Field	Bits	Type	Description
<b>MSEL60, MSEL61</b>	3:0, 7:4	rw	<p><b>Capture/Compare Mode Selection</b></p> <p>These bit fields select the operating mode of the three timer T12 capture/compare channels. Each channel (n = 0, 1, 2) can be programmed individually either for compare or capture operation according to:</p> <p>0000<sub>B</sub> Compare outputs disabled, pins CC6n and COUT6n can be used for I/O. No capture action.</p> <p>0001<sub>B</sub> Compare output on pin CC6n, pin COUT6n can be used for I/O. No capture action.</p> <p>0010<sub>B</sub> Compare output on pin COUT6n, pin CC6n can be used for I/O. No capture action.</p> <p>0011<sub>B</sub> Compare output on pins COUT6n and CC6n.</p> <p>01X<sub>B</sub> Double-Register Capture modes, see <a href="#">Table 129</a>.</p> <p>1000<sub>B</sub> Hall Sensor mode, see <a href="#">Table 130</a>. In order to enable the hall edge detection, all three MSEL6x must be programmed to Hall Sensor mode.</p> <p>1001<sub>B</sub> Hysteresis-like mode, see <a href="#">Table 130</a>.</p> <p>101X<sub>B</sub> Multi-Input Capture modes, see <a href="#">Table 131</a>.</p> <p>11X<sub>B</sub> Multi-Input Capture modes, see <a href="#">Table 131</a>.</p>



---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>MSEL62</b>	11:8	rw	<p><b>Capture/Compare Mode Selection</b></p> <p>These bit fields select the operating mode of the three timer T12 capture/compare channels. Each channel (n = 0, 1, 2) can be programmed individually either for compare or capture operation according to:</p> <p>0000<sub>B</sub> Compare outputs disabled, pins CC6n and COUT6n can be used for I/O. No capture action.</p> <p>0001<sub>B</sub> Compare output on pin CC6n, pin COUT6n can be used for I/O. No capture action.</p> <p>0010<sub>B</sub> Compare output on pin COUT6n, pin CC6n can be used for I/O. No capture action.</p> <p>0011<sub>B</sub> Compare output on pins COUT6n and CC6n.</p> <p>01XX<sub>B</sub> Double-Register Capture modes, see <a href="#">Table 129</a>.</p> <p>1000<sub>B</sub> Hall Sensor mode, see <a href="#">Table 130</a>. In order to enable the hall edge detection, all three MSEL6x must be programmed to Hall Sensor mode.</p> <p>1001<sub>B</sub> Hysteresis-like mode, see <a href="#">Table 130</a>.</p> <p>101X<sub>B</sub> Multi-Input Capture modes, see <a href="#">Table 131</a>.</p> <p>11XX<sub>B</sub> Multi-Input Capture modes, see <a href="#">Table 131</a>.</p>
<b>HSYNC</b>	14:12	rw	<p><b>Hall Synchronization</b></p> <p>Bit field HSYNC defines the source for the sampling of the Hall input pattern and the comparison to the current and the expected Hall pattern bit fields. In all modes, a trigger by software by writing a 1 to bit SWHC is possible.</p> <p>000<sub>B</sub> Any edge at one of the inputs CCPOSx (x = 0, 1, 2) triggers the sampling.</p> <p>001<sub>B</sub> A T13 compare-match triggers the sampling.</p> <p>010<sub>B</sub> A T13 period-match triggers the sampling.</p> <p>011<sub>B</sub> The Hall sampling triggered by hardware sources is switched off.</p> <p>100<sub>B</sub> A T12 period-match (while counting up) triggers the sampling.</p> <p>101<sub>B</sub> A T12 one-match (while counting down) triggers the sampling.</p> <p>110<sub>B</sub> A T12 compare-match of channel 1 (while counting up) triggers the sampling.</p> <p>111<sub>B</sub> A T12 compare-match of channel 1 (while counting down) triggers the sampling.</p>
<b>DBYP</b>	15	rw	<p><b>Delay Bypass</b></p> <p>Bit DBYP defines if the source signal for the sampling of the Hall input pattern (selected by HSYNC) uses the dead-time counter DTC0 of timer T12 as additional delay or if the delay is bypassed.</p> <p>0<sub>B</sub> The delay bypass is not active. The dead-time counter DTC0 is generating a delay after the source signal becomes active.</p> <p>1<sub>B</sub> The delay bypass is active. The dead-time counter DTC0 is not used by the sampling of the Hall pattern.</p>


## Capture/Compare Unit 6 (CCU6)

Register T12 represents the counting value of timer T12. It can only be written while the timer T12 is stopped. Write actions while T12 is running are not taken into account. Register T12 can always be read by software. In edge-aligned mode, T12 only counts up, whereas in center-aligned mode, T12 can count up and down.

### T12

#### Timer T12 Counter Register

(78H)

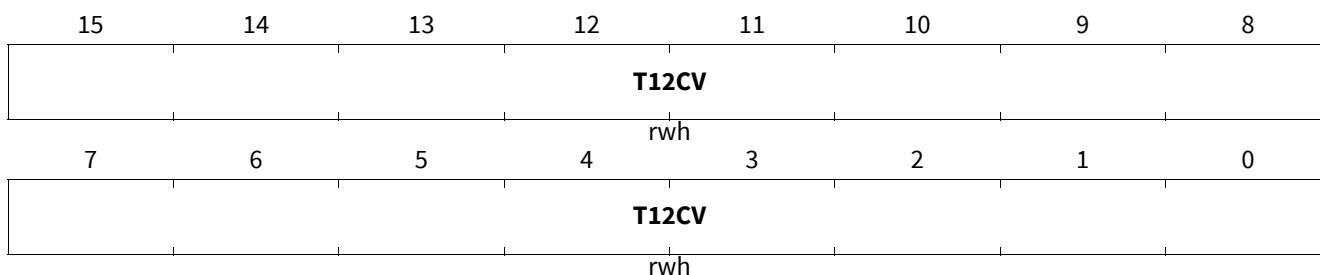Reset Value: 00<sub>H</sub>

Field	Bits	Type	Description
T12CV	15:0	rwh	<b>Timer T12 Counter Value</b> This register represents the 16-bit counter value of timer T12.

*Note:* While timer T12 is stopped, the internal clock divider is reset in order to ensure reproducible timings and delays.

*Note:* The timer period, compare values, passive state selects bits and passive levels bits for both timers are written to shadow registers and not directly to the actual registers. Thus, the values for a new output signal can be programmed without disturbing the currently generated signal(s). The transfer from the shadow registers to the actual registers is enabled by setting the respective shadow transfer enable bit STEx.

If the transfer is enabled, the shadow registers are copied to the respective registers as soon as the associated timer reaches the value zero the next time (being cleared in edge-aligned mode or counting down from 1 in center-aligned mode). When timer T12 is operating in center-aligned mode, it will also copy the registers (if enabled by STE12) if it reaches the currently programmed period value (counting up).

When a timer is stopped ( $TxR = 0$ ), the shadow transfer takes place immediately if the corresponding bit STEx is set.

After the transfer, the respective bit STEx is cleared automatically.

**Capture/Compare Unit 6 (CCU6)**


Register T12PR contains the period value for timer T12. The period value is compared to the actual counter value of T12 and the resulting counter actions depend on the defined counting rules. This register has a shadow register and the shadow transfer is controlled by bit STE12. A read action by software delivers the value which is currently used for the compare action, whereas the write action targets a shadow register. The shadow register structure allows a concurrent update of all T12-related values.

**T12PR**

**Timer T12 Period Register**

**(24H)**

**Reset Value: 0000<sub>H</sub>**

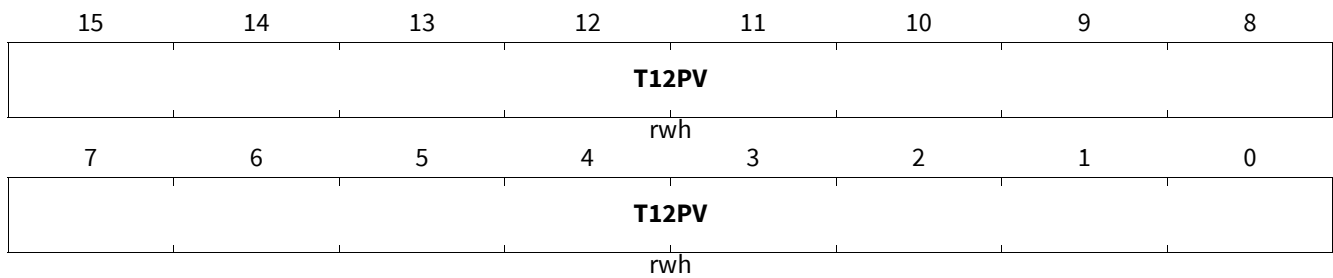

Field	Bits	Type	Description
<b>T12PV</b>	15:0	rwh	<p><b>T12 Period Value</b></p> <p>The value T12PV defines the counter value for T12, which leads to a period-match. On reaching this value, the timer T12 is set to zero (edge-aligned mode) or changes its count direction to down counting (center-aligned mode).</p> <p>Note: T12PV = 0xFFFF shall not be used to avoid overflow conditions when using the Zero Match and Period Match Trigger signals (PM and ZM)</p>


## Capture/Compare Unit 6 (CCU6)

In compare mode, the registers CC6xR (x = 0, 1, 2) are the actual compare registers for T12. The values stored in CC6xR are compared (all three channels in parallel) to the counter value of T12. In capture mode, the current value of the T12 counter register is captured by registers CC6xR if the corresponding capture event is detected.

### CC6xR (x = 0-2)

#### Capture/Compare Register for Channel CC6x ( $34_H + x \cdot 4_H$ )

Reset Value: 0000<sub>H</sub>

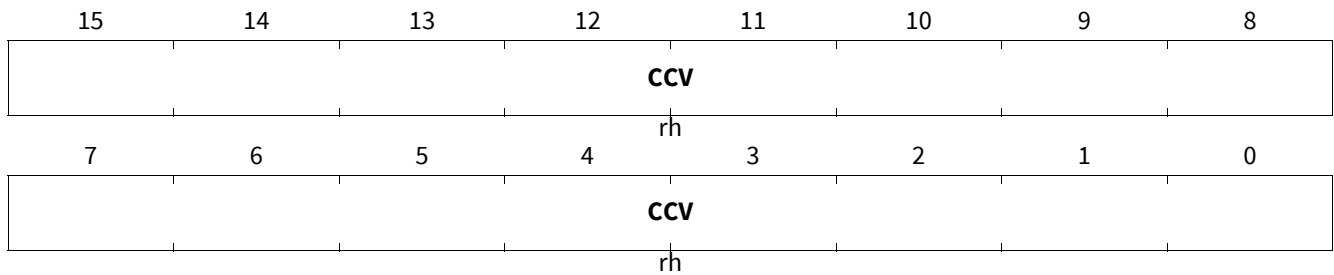

Field	Bits	Type	Description
CCV	15:0	rh	<b>Channel x Capture/Compare Value</b> In compare mode, the bit fields CCV contain the values that are compared to the T12 counter value. In capture mode, the captured value of T12 can be read from these registers.

**Capture/Compare Unit 6 (CCU6)**


The registers CC6xR can only be read by software, the modification of the value is done by a shadow register transfer from register CC6xSR. The corresponding shadow registers CC6xSR can be read and written by software. In capture mode, the value of the T12 counter register can also be captured by registers CC6xSR if the selected capture event is detected (depending on the selected mode).

**CC6xSR (x = 0-2)**

**Capture/Compare Shadow Register for Channel CC6x**

$$(14_H + x * 4_H)$$

**Reset Value: 0000<sub>H</sub>**

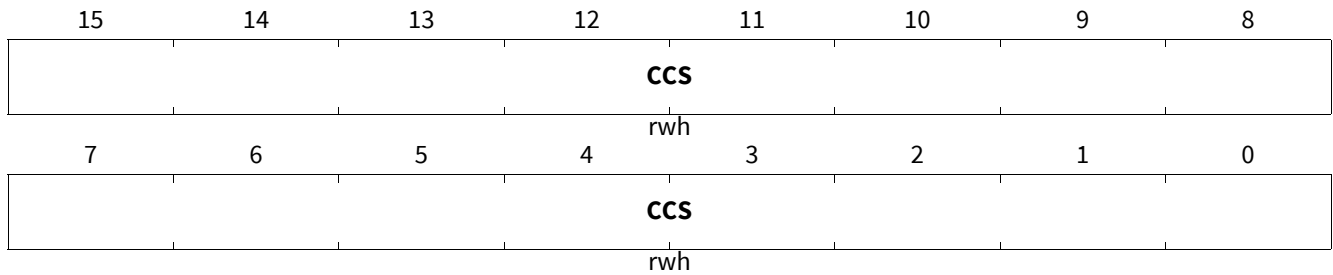

Field	Bits	Type	Description
CCS	15:0	rwh	<b>Shadow Register for Channel x Capture/Compare Value</b> In compare mode, the contents of bit field CCS are transferred to the bit field CCV for the corresponding channel during a shadow transfer. In capture mode, the captured value of T12 can be read from these registers.

*Note: The shadow registers can also be written by SW in capture mode. In this case, the HW capture event wins over the SW write if both happen in the same cycle (the SW write is discarded).*

## Capture/Compare Unit 6 (CCU6)

Register T12DTC controls the dead-time generation for the timer T12 compare channels. Each channel can be independently enabled/disabled for dead-time generation. If enabled, the transition from passive state to active state is delayed by the value defined by bit field DTM. The dead-time counter can only be reloaded while it is zero.

The dead time counters are clocked with the same frequency as T12. This structure allows symmetrical dead-time generation in center-aligned and in edge-aligned PWM mode. A duty cycle of 50% leads to CC6x, COU6x switched on for:  $0.5 \cdot \text{period} - \text{dead time}$ .

*Note:* The dead-time counters are not reset by bit T12RES, but by bit DTRES.

### T12DTC

**Timer T12 Dead-Time Control Register (2CH) Reset Value: 0000<sub>H</sub>**

15	14	13	12	11	10	9	8
<b>Res</b>	<b>DTR2</b>	<b>DTR1</b>	<b>DTR0</b>	<b>Res</b>	<b>DTE2</b>	<b>DTE1</b>	<b>DTE0</b>
r	rh	rh	rh	r	rw	rw	rw
7	6	5	4	3	2	1	0
<b>DTM</b>							
rw							

Field	Bits	Type	Description
<b>DTM</b>	7:0	rw	<b>Dead-Time</b> Bit field DTM determines the programmable delay between switching from the passive state to the active state of the selected outputs. The switching from the active state to the passive state is not delayed.
<b>DTE0, DTE1, DTE2</b>	8, 9, 10	rw	<b>Dead-Time Enable Bits</b> Bits DTE0..DTE2 enable and disable the dead-time generation for each compare channel (0, 1, 2) of timer T12. 0 <sub>B</sub> Dead-time generation is disabled. The corresponding outputs switch from the passive state to the active state (according to the actual compare status) without any delay. 1 <sub>B</sub> Dead-time generation is enabled. The corresponding outputs switch from the passive state to the active state (according to the compare status) with the delay programmed in bit field DTM.
<b>DTR0, DTR1, DTR2</b>	12, 13, 14	rh	<b>Dead-Time Run Indication Bits</b> Bits DTR0..DTR2 indicate the status of the dead-time generation for each compare channel (0, 1, 2) of timer T12. 0 <sub>B</sub> The value of the corresponding dead-time counter channel is 0. 1 <sub>B</sub> The value of the corresponding dead-time counter channel is not 0.
<b>Res</b>	11, 15	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

---

**Capture/Compare Unit 6 (CCU6)**

*Note: The dead-time counters are clocked with the same frequency as T12.  
This structure allows symmetrical dead-time generation in center-aligned and in edge-aligned PWM mode. A duty cycle of 50% leads to CC6x, COU6x switched on for:  $0.5 \cdot \text{period} - \text{dead-time}$ .*

*Note: The dead-time counters are not reset by bit T12RES, but by bit DTRES.*

---


**Capture/Compare Unit 6 (CCU6)**
**18.11.3 Timer 13 – Related Registers**

The generation of the patterns for a single channel pulse width modulation (PWM) is based on timer T13. The registers related to timer T13 can be concurrently updated (with well-defined conditions) in order to ensure consistency of the PWM signal. T13 can be synchronized to several timer T12 events.

Timer T13 supports only compare mode on its compare channel CC63.

Register T13 represents the counting value of timer T13. It can only be written while the timer T13 is stopped. Write actions while T13 is running are not taken into account. Register T13 can always be read by software.

Timer T13 supports only edge-aligned mode (counting up).

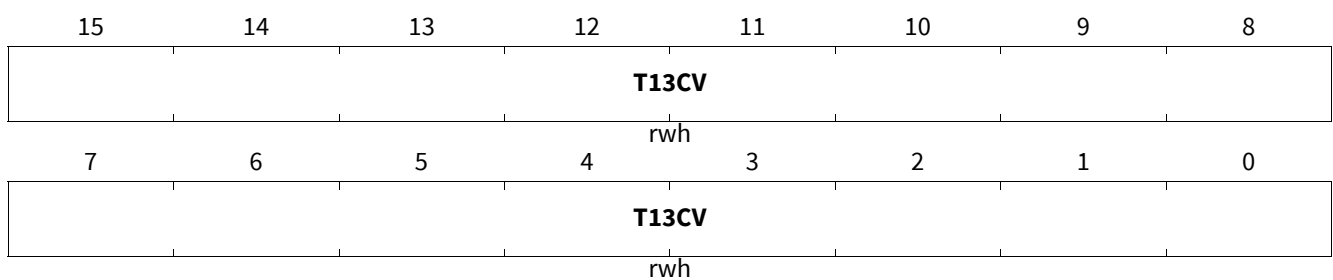**T13**
**Timer T13 Counter Register**
**(7CH)**
**Reset Value: 0000<sub>H</sub>**


Field	Bits	Type	Description
<b>T13CV</b>	15:0	rwh	<b>Timer T13 Counter Value</b> This register represents the 16-bit counter value of timer T13.

*Note:* While timer T13 is stopped, the internal clock divider is reset in order to ensure reproducible timings and delays.




## Capture/Compare Unit 6 (CCU6)

Register T13PR contains the period value for timer T13. The period value is compared to the actual counter value of T13 and the resulting counter actions depend on the defined counting rules. This register has a shadow register and the shadow transfer is controlled by bit STE13. A read action by software delivers the value which is currently used for the compare action, whereas the write action targets a shadow register. The shadow register structure allows a concurrent update of all T13-related values.

### T13PR

#### Timer T13 Period Register

(28H)

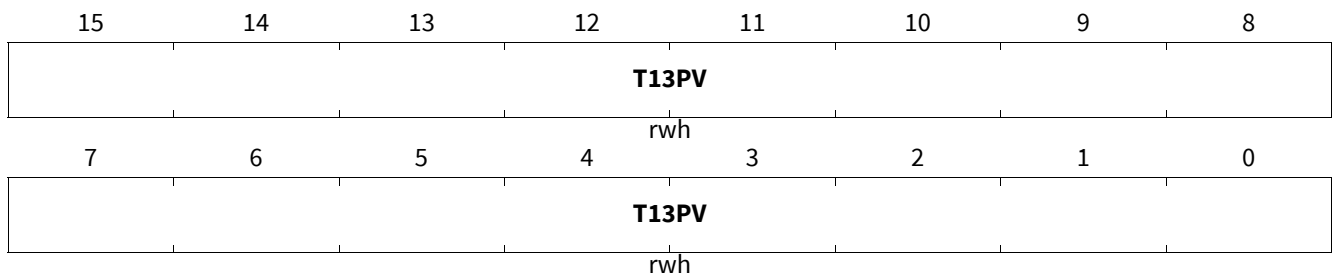Reset Value: 0000<sub>H</sub>


Field	Bits	Type	Description
T13PV	15:0	rwh	<b>T13 Period Value</b> The value T13PV defines the counter value for T13, which leads to a period-match. On reaching this value, the timer T13 is set to zero.

Register CC63R is the actual compare register for T13. The value stored in CC63R is compared to the counter value of T13. The State Bit CC63ST is located in register CMPSTAT.

### CC63R

#### Capture/Compare Register for Channel CC63

(00H)

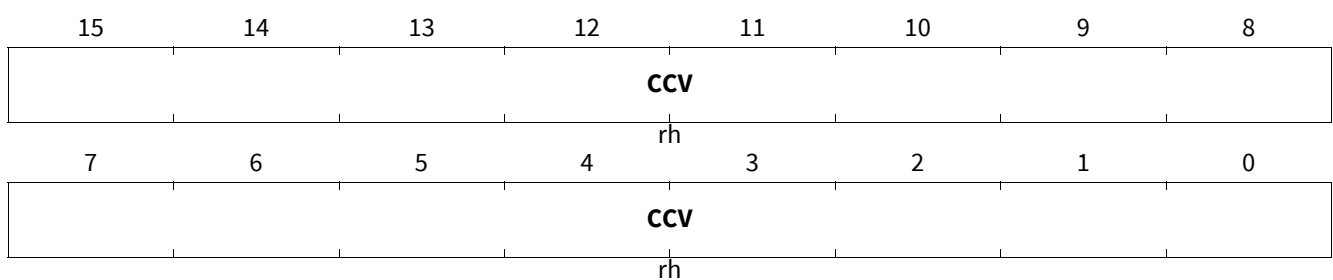Reset Value: 0000<sub>H</sub>

Field	Bits	Type	Description
CCV	15:0	rh	<b>Channel CC63 Compare Value</b> The bit field CCV contains the value that is compared to the T13 counter value.


**Capture/Compare Unit 6 (CCU6)**

The register CC63R can only be read by software and the modification of the value is done by a shadow register transfer from register CC63SR. The corresponding shadow register CC63SR can be read and written by software.

**CC63SR**

**Capture/Compare Shadow Register for Channel CC63 (20H)**

**Reset Value: 0000<sub>H</sub>**

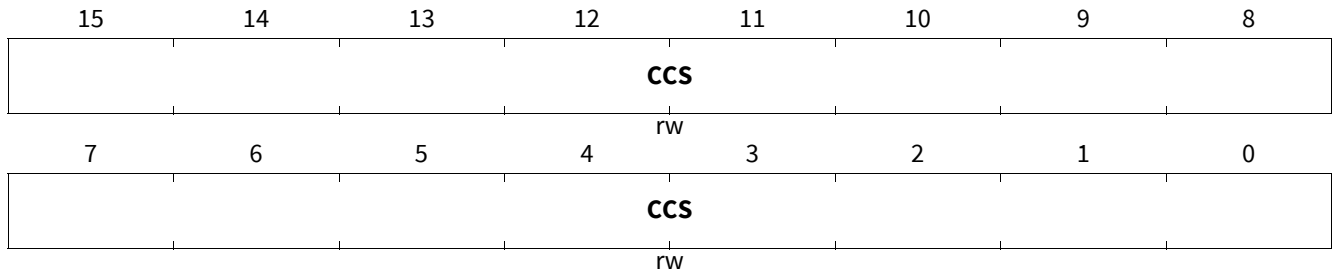

Field	Bits	Type	Description
CCS	15:0	rw	<b>Shadow Register for Channel CC63 Compare Value</b> The contents of bit field CCS are transferred to the bit field CCV during a shadow transfer.

## Capture/Compare Unit 6 (CCU6)

### 18.11.4 Capture/Compare Control Registers

The Compare State Register CMPSTAT contains status bits monitoring the current capture and compare state, and control bits defining the active/passive state of the compare channels.

#### CMPSTAT

#### Compare State Register

(80H)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>T13 IM</b>	<b>C OUT63PS</b>	<b>C OUT62PS</b>	<b>CC 62PS</b>	<b>C OUT61PS</b>	<b>CC 61PS</b>	<b>C OUT60PS</b>	<b>CC 60PS</b>
rwh 7	rwh 6	rwh 5	rwh 4	rwh 3	rwh 2	rwh 1	rwh 0
<b>Res</b>	<b>CC 63ST</b>	<b>CC POS 2</b>	<b>CC POS 1</b>	<b>CC POS 0</b>	<b>CC 62ST</b>	<b>CC 61ST</b>	<b>CC 60ST</b>
r	rh	rh	rh	rh	rh	rh	rh

Field	Bits	Type	Description
<b>CC60ST, CC61ST, CC62ST, CC63ST</b>	0, 1, 2, 6	rh	<p><b>Capture/Compare State Bits (x = 0, 1, 2, 3)</b>            Bits CC6xST monitor the state of the capture/compare channels. Bits CC6xST are related to T12; bit CC63ST is related to T13. These bits are set and reset according to the T12 and T13 switching rules.</p> <p>0<sub>B</sub> In compare mode, the timer count is less than the compare value. In capture mode, the selected edge has not yet been detected since the bit has been reset by software the last time.</p> <p>1<sub>B</sub> In compare mode, the counter value is greater than or equal to the compare value. In capture mode, the selected edge has been detected.</p>
<b>CCPOS0, CCPOS1, CCPOS2</b>	3, 4, 5	rh	<p><b>Sampled Hall Pattern Bits (x = 0, 1, 2)</b>            Bits CCPOSx indicate the value of the input Hall pattern that has been compared to the current and expected value. The value is sampled when the event hcrdy (Hall compare ready) occurs.</p> <p>0<sub>B</sub> The input CCPOSx has been sampled as 0.</p> <p>1<sub>B</sub> The input CCPOSx has been sampled as 1.</p>
<b>Res</b>	7	r	<p><b>Reserved</b>            Returns 0 if read; should be written with 0.</p>

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>CC60PS, CC61PS, CC62PS, COUT60PS, COUT61PS, COUT62PS, COUT63PS</b>	8, 10, 12, 9, 11, 13, 14	rwh	<p><b>Passive State Select for Compare Outputs</b></p> <p>Bits CC6xPS (<math>x = 0, 1, 2</math>), COUT6xPS (<math>x = 0, 1, 2, 3</math>) select the state of the corresponding compare channel, which is considered to be the passive state. During the passive state, the passive level (defined in register PSLR) is driven by the output pin. Bits CC6xPS, COUT6xPS (<math>x = 0, 1, 2</math>) are related to T12, bit COUT63PS is related to T13. These bits have shadow bits and are updated in parallel to the capture/compare registers of T12 and T13, respectively. A read action targets the actually used values, whereas a write action targets the shadow bits.</p> <p>In capture mode, these bits are not used.</p> <p>0<sub>B</sub> The corresponding compare output drives passive level while CC6xST is 0.</p> <p>1<sub>B</sub> The corresponding compare output drives passive level while CC6xST is 1.</p>
<b>T13IM</b>	15	rwh	<p><b>T13 Inverted Modulation</b></p> <p>Bit T13IM inverts the T13 signal for the modulation of the CC6x and COUT6x (<math>x = 0, 1, 2</math>) signals. This bit has a shadow bit and is updated in parallel to the compare and period registers of T13. A read action targets the actually used values, whereas a write action targets the shadow bit.</p> <p>0<sub>B</sub> T13 output is not inverted.</p> <p>1<sub>B</sub> T13 output is inverted for further modulation.</p>

## Capture/Compare Unit 6 (CCU6)

The Compare Status Modification Register CMPMODIF provides software-control (independent set and clear conditions) for the channel state bits CC6xST. This feature enables the user to individually change the status of the output lines by software, for example when the corresponding compare timer is stopped.

### CMPMODIF

#### Compare State Modification Register

(10H)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
Res	MCC 63R		Res		MCC 62R	MCC 61R	MCC 60R
r	w		r		w	w	w
7	6	5	4	3	2	1	0
Res	MCC 63S		Res		MCC 62S	MCC 61S	MCC 60S
r	w		r		w	w	w

Field	Bits	Type	Description
MCC60S, MCC61S, MCC62S, MCC63S	0, 1, 2, 6	w	<b>Capture/Compare Status Modification Bits (Set) (x = 0, 1, 2, 3)</b> These bits are used to set the corresponding CC6xST bits by software. This feature allows the user to individually change the status of the output lines by software, e.g. when the corresponding compare timer is stopped. This allows a bit manipulation of CC6xST-bits by a single data write action. Functionality see <a href="#">Table 132</a> .
Res	5:3, 7	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
MCC60R, MCC61R, MCC62R, MCC63R	8, 9, 10, 14	w	<b>Capture/Compare Status Modification Bits (Reset) (x = 0, 1, 2, 3)</b> These bits are used to reset the corresponding CC6xST bits by software. This feature allows the user to individually change the status of the output lines by software, e.g. when the corresponding compare timer is stopped. This allows a bit manipulation of CC6xST-bits by a single data write action. Functionality see <a href="#">Table 132</a> .
Res	13:11, 15	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

---

**Capture/Compare Unit 6 (CCU6)**
**Table 132 Capture/Compare Status Modification Bits (Set and Reset)**

Field	Bits	Description
MCC60S, MCC61S, MCC62S, MCC63S	0 1 2 6	The following functionality of a write access to bits concerning the same capture/compare state bit is provided (x = 0, 1, 2, 3): MCC6xR, MCC6xS = 00 <sub>B</sub> Bit CC6xST is not changed.
MCC60R, MCC61R, MCC62R, MCC63R	8 9 10 14	01 <sub>B</sub> Bit CC6xST is set. 10 <sub>B</sub> Bit CC6xST is reset. 11 <sub>B</sub> Reserved (toggle)

## Capture/Compare Unit 6 (CCU6)

Register TCTR0 controls the basic functionality of both timers T12 and T13.

*Note:* A write action to the bit fields T12CLK or T12PRE is only taken into account while the timer T12 is not running (T12R = 0). A write action to the bit fields T13CLK or T13PRE is only taken into account while the timer T13 is not running (T13R = 0).

### TCTR0

#### Timer Control Register 0

(30H)

Reset Value: 0000<sub>H</sub>

15		14		13		12		11		10		9		8	
Res				STE 13		T13R		T13 PRE		T13CLK					
r		rh		rh		rh		rw		rw					
7		6		5		4		3		2		1		0	
CTM		CDIR		STE12		T12R		T12 PRE		T12CLK					
rw		rh		rh		rh		rw		rw					

Field	Bits	Type	Description
<b>T12CLK</b>	2:0	rw	<b>Timer T12 Input Clock Select</b> Selects the input clock for timer T12 which is derived from the peripheral clock according to the equation $f_{T12} = f_{CCU} / 2^{<T12CLK>}$ . 000 <sub>B</sub> $f_{T12} = f_{CCU}$ 001 <sub>B</sub> $f_{T12} = f_{CCU} / 2$ 010 <sub>B</sub> $f_{T12} = f_{CCU} / 4$ 011 <sub>B</sub> $f_{T12} = f_{CCU} / 8$ 100 <sub>B</sub> $f_{T12} = f_{CCU} / 16$ 101 <sub>B</sub> $f_{T12} = f_{CCU} / 32$ 110 <sub>B</sub> $f_{T12} = f_{CCU} / 64$ 111 <sub>B</sub> $f_{T12} = f_{CCU} / 128$
<b>T12PRE</b>	3	rw	<b>Timer T12 Prescaler Bit</b> In order to support higher clock frequencies, an additional prescaler factor of 1/256 can be enabled for the prescaler for T12. 0 <sub>B</sub> The additional prescaler for T12 is disabled. 1 <sub>B</sub> The additional prescaler for T12 is enabled.
<b>T12R</b>	4	rh	<b>Timer T12 Run Bit</b> T12R starts and stops timer T12. It is set/reset by software by setting bits T12RS or T12RR, or it is reset by hardware according to the function defined by bit field T12SSC. A concurrent set/reset action on T12R (from T12SSC, T12RR or T12RS) will have no effect. The bit T12R will remain unchanged. 0 <sub>B</sub> Timer T12 is stopped. 1 <sub>B</sub> Timer T12 is running.

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>STE12</b>	5	rh	<p><b>Timer T12 Shadow Transfer Enable</b></p> <p>Bit STE12 enables or disables the shadow transfer of the T12 period value, the compare values and passive state select bits and levels from their shadow registers to the actual registers if a T12 shadow transfer event is detected. Bit STE12 is cleared by hardware after the shadow transfer.</p> <p>A T12 shadow transfer event is a period-match while counting up or a one-match while counting down.</p> <p>0<sub>B</sub> The shadow register transfer is disabled. 1<sub>B</sub> The shadow register transfer is enabled.</p>
<b>CDIR</b>	6	rh	<p><b>Count Direction of Timer T12</b></p> <p>This bit is set/reset according to the counting rules of T12.</p> <p>0<sub>B</sub> T12 counts up. 1<sub>B</sub> T12 counts down.</p>
<b>CTM</b>	7	rw	<p><b>T12 Operating Mode</b></p> <p>0<sub>B</sub> Edge-aligned Mode: T12 always counts up and continues counting from zero after reaching the period value. 1<sub>B</sub> Center-aligned Mode: T12 counts down after detecting a period-match and counts up after detecting a one-match.</p>
<b>T13CLK</b>	10:8	rw	<p><b>Timer T13 Input Clock Select</b></p> <p>Selects the input clock for timer T13 which is derived from the peripheral clock according to the equation</p> $f_{T13} = f_{CCU} / 2^{\langle T13CLK \rangle}$ <p>000<sub>B</sub> <math>f_{T13} = f_{CCU}</math>  001<sub>B</sub> <math>f_{T13} = f_{CCU} / 2</math>  010<sub>B</sub> <math>f_{T13} = f_{CCU} / 4</math>  011<sub>B</sub> <math>f_{T13} = f_{CCU} / 8</math>  100<sub>B</sub> <math>f_{T13} = f_{CCU} / 16</math>  101<sub>B</sub> <math>f_{T13} = f_{CCU} / 32</math>  110<sub>B</sub> <math>f_{T13} = f_{CCU} / 64</math>  111<sub>B</sub> <math>f_{T13} = f_{CCU} / 128</math></p>
<b>T13PRE</b>	11	rw	<p><b>Timer T13 Prescaler Bit</b></p> <p>In order to support higher clock frequencies, an additional prescaler factor of 1/256 can be enabled for the prescaler for T13.</p> <p>0<sub>B</sub> The additional prescaler for T13 is disabled. 1<sub>B</sub> The additional prescaler for T13 is enabled.</p>
<b>T13R</b>	12	rh	<p><b>Timer T13 Run Bit</b></p> <p>T13R starts and stops timer T13. It is set/reset by software by setting bits T13RS or T13RR or it is set/reset by hardware according to the function defined by bit fields T13SSC, T13TEC and T13TED.</p> <p>A concurrent set/reset action on T13R (from T13SSC, T13TEC, T13RR or T13RS) will have no effect. The bit T13R will remain unchanged.</p> <p>0<sub>B</sub> Timer T13 is stopped. 1<sub>B</sub> Timer T13 is running.</p>



---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>STE13</b>	13	rh	<p><b>Timer T13 Shadow Transfer Enable</b></p> <p>Bit STE13 enables or disables the shadow transfer of the T13 period value, the compare value and passive state select bit and level from their shadow registers to the actual registers if a T13 shadow transfer event is detected. Bit STE13 is cleared by hardware after the shadow transfer.</p> <p>A T13 shadow transfer event is a period-match.</p> <p>0<sub>B</sub> The shadow register transfer is disabled.</p> <p>1<sub>B</sub> The shadow register transfer is enabled.</p>
<b>Res</b>	15:14	r	<p><b>Reserved</b></p> <p>Returns 0 if read; should be written with 0.</p>

## Capture/Compare Unit 6 (CCU6)

Register TCTR2 controls the single-shot and the synchronization functionality of both timers T12 and T13. Both timers can run in single-shot mode. In this mode, they stop their counting sequence automatically after one counting period with a count value of zero. The single-shot mode and the synchronization feature of T13 to T12 allow the generation of events with a programmable delay after well-defined PWM actions of T12. For example, this feature can be used to trigger AD conversions, after a specified delay (to avoid problems due to switching noise), synchronously to a PWM event.

### TCTR2

#### Timer Control Register 2

(58H)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>Res</b>				<b>T13 RSEL</b>		<b>T12 RSEL</b>	
r				rw		rw	
7	6	5	4	3	2	1	0
<b>Res</b>		<b>T13 TED</b>		<b>T13 TEC</b>		<b>T13 SSC</b>	<b>T12 SSC</b>
r		rw		rw		rw	rw

Field	Bits	Type	Description
<b>T12SSC</b>	0	rw	<p><b>Timer T12 Single Shot Control</b></p> <p>This bit controls the single shot-mode of T12.</p> <p>0<sub>B</sub> The single-shot mode is disabled, no hardware action on T12R.</p> <p>1<sub>B</sub> The single shot mode is enabled, the bit T12R is reset by hardware if:</p> <ul style="list-style-type: none"> <li>- T12 reaches its period value in edge-aligned mode</li> <li>- T12 reaches the value 1 while down counting in center-aligned mode.</li> </ul> <p>In parallel to the reset action of bit T12R, the bits CC6xST (x = 0, 1, 2) are reset.</p>
<b>T13SSC</b>	1	rw	<p><b>Timer T13 Single Shot Control</b></p> <p>This bit controls the single shot-mode of T13.</p> <p>0<sub>B</sub> No hardware action on T13R</p> <p>1<sub>B</sub> The single-shot mode is enabled, the bit T13R is reset by hardware if T13 reaches its period value.</p> <p>In parallel to the reset action of bit T13R, the bit CC63ST is reset.</p>

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>T13TEC</b>	4:2	rw	<b>T13 Trigger Event Control</b> Bit field T13TEC selects the trigger event to start T13 (automatic set of T13R for synchronization to T12 compare signals) according to following combinations: 000 <sub>B</sub> no action 001 <sub>B</sub> set T13R on a T12 compare event on channel 0 010 <sub>B</sub> set T13R on a T12 compare event on channel 1 011 <sub>B</sub> set T13R on a T12 compare event on channel 2 100 <sub>B</sub> set T13R on any T12 compare event on the channels 0, 1, or 2 101 <sub>B</sub> set T13R upon a period-match of T12 110 <sub>B</sub> set T13R upon a zero-match of T12 (while counting up) 111 <sub>B</sub> set T13R on any edge of inputs CCPOSx
<b>T13TED</b>	6:5	rw	<b>Timer T13 Trigger Event Direction</b> Bit field T13TED delivers additional information to control the automatic set of bit T13R in the case that the trigger action defined by T13TEC is detected. 00 <sub>B</sub> no action 01 <sub>B</sub> while T12 is counting up 10 <sub>B</sub> while T12 is counting down 11 <sub>B</sub> independent on the count direction of T12
<b>Res</b>	7	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>T12RSEL</b>	9:8	rw	<b>Timer T12 External Run Selection</b> Bit field T12RSEL defines the event of signal T12HR that can set the run bit T12R by hardware. 00 <sub>B</sub> The external setting of T12R is disabled. 01 <sub>B</sub> Bit T12R is set if a rising edge of signal T12HR is detected. 10 <sub>B</sub> Bit T12R is set if a falling edge of signal T12HR is detected. 11 <sub>B</sub> Bit T12R is set if an edge of signal T12HR is detected.
<b>T13RSEL</b>	11:10	rw	<b>Timer T13 External Run Selection</b> Bit field T13RSEL defines the event of signal T13HR that can set the run bit T13R by hardware. 00 <sub>B</sub> The external setting of T13R is disabled. 01 <sub>B</sub> Bit T13R is set if a rising edge of signal T13HR is detected. 10 <sub>B</sub> Bit T13R is set if a falling edge of signal T13HR is detected. 11 <sub>B</sub> Bit T13R is set if an edge of signal T13HR is detected.
<b>Res</b>	15:12	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

**Example**

If the timer T13 is intended to start at any compare event on T12 (T13TEC = 100<sub>B</sub>), the trigger event direction can be programmed to:

- counting up >> a T12 channel 0, 1, 2 compare match triggers T13R only while T12 is counting up
- counting down >> a T12 channel 0, 1, 2 compare match triggers T13R only while T12 is counting down
- independent from bit CDIR >> each T12 channel 0, 1, 2 compare match triggers T13R

## Capture/Compare Unit 6 (CCU6)

The timer count direction is taken from the value of bit CDIR. As a result, if T12 is running in edge-aligned mode (counting up only), T13 can only be started automatically if bit field T13TED = 01<sub>B</sub> or 11<sub>B</sub>.

Register TCTR4 provides software-control (independent set and clear conditions) for the run bits T12R and T13R. Furthermore, the timers can be reset (while running) and bits STE12 and STE13 can be controlled by software. Reading these bits always returns 0.

### TCTR4

#### Timer Control Register 4

(04H)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>T13 STD</b>	<b>T13 STR</b>	<b>T13 CNT</b>	<b>Res</b>		<b>T13 RES</b>	<b>T13 RS</b>	<b>T13 RR</b>
w	w	w	r	r	w	w	w
7	6	5	4	3	2	1	0
<b>T12 STD</b>	<b>T12 STR</b>	<b>T12 CNT</b>	<b>Res</b>	<b>DT RES</b>	<b>T12 RES</b>	<b>T12 RS</b>	<b>T12 RR</b>
w	w	w	r	w	w	w	w

Field	Bits	Type	Description
<b>T12RR</b>	0	w	<b>Timer T12 Run Reset</b> Setting this bit resets the T12R bit. 0 <sub>B</sub> T12R is not influenced. 1 <sub>B</sub> T12R is cleared, T12 stops counting.
<b>T12RS</b>	1	w	<b>Timer T12 Run Set</b> Setting this bit sets the T12R bit. 0 <sub>B</sub> T12R is not influenced. 1 <sub>B</sub> T12R is set, T12 counts.
<b>T12RES</b>	2	w	<b>Timer T12 Reset</b> 0 <sub>B</sub> No effect on T12. 1 <sub>B</sub> The T12 counter register is reset to zero. The switching of the output signals is according to the switching rules. Setting of T12RES has no impact on bit T12R.
<b>DTRES</b>	3	w	<b>Dead-Time Counter Reset</b> 0 <sub>B</sub> No effect on the dead-time counters. 1 <sub>B</sub> The three dead-time counter channels are reset to zero.
<b>T12CNT</b>	5	w	<b>Timer T12 Count Event</b> 0 <sub>B</sub> No action 1 <sub>B</sub> If enabled (PISEL2), timer T12 counts one step.
<b>T12STR</b>	6	w	<b>Timer T12 Shadow Transfer Request</b> 0 <sub>B</sub> No action 1 <sub>B</sub> STE12 is set, enabling the shadow transfer.
<b>T12STD</b>	7	w	<b>Timer T12 Shadow Transfer Disable</b> 0 <sub>B</sub> No action 1 <sub>B</sub> STE12 is reset without triggering the shadow transfer.
<b>Res</b>	4	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>T13RR</b>	8	w	<b>Timer T13 Run Reset</b> Setting this bit resets the T13R bit. 0 <sub>B</sub> T13R is not influenced. 1 <sub>B</sub> T13R is cleared, T13 stops counting.
<b>T13RS</b>	9	w	<b>Timer T13 Run Set</b> Setting this bit sets the T13R bit. 0 <sub>B</sub> T13R is not influenced. 1 <sub>B</sub> T13R is set, T13 counts.
<b>T13RES</b>	10	w	<b>Timer T13 Reset</b> 0 <sub>B</sub> No effect on T13. 1 <sub>B</sub> The T13 counter register is reset to zero. The switching of the output signals is according to the switching rules. Setting of T13RES has no impact on bit T13R.
<b>T13CNT</b>	13	w	<b>Timer T13 Count Event</b> 0 <sub>B</sub> No action 1 <sub>B</sub> If enabled (PISEL2), timer T13 counts one step.
<b>T13STR</b>	14	w	<b>Timer T13 Shadow Transfer Request</b> 0 <sub>B</sub> No action 1 <sub>B</sub> STE13 is set, enabling the shadow transfer.
<b>T13STD</b>	15	w	<b>Timer T13 Shadow Transfer Disable</b> 0 <sub>B</sub> No action 1 <sub>B</sub> STE13 is reset without triggering the shadow transfer.
<b>Res</b>	12:11	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

*Note:* A simultaneous write of a 1 to bits which set and reset the same bit will trigger no action. The corresponding bit will remain unchanged.

## Capture/Compare Unit 6 (CCU6)

### 18.11.5 Global Modulation Control Registers

Register MODCTR contains control bits enabling the modulation of the corresponding output signal by PWM pattern generated by the timers T12 and T13. Furthermore, the multi-channel mode can be enabled as additional modulation source for the output signals.

#### MODCTR

#### Modulation Control Register

(5CH)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>ECT 130</b>	<b>Res</b>	<b>T13MODEN</b>					
rw 7	r 6	5	4	3	2	1	0
<b>MCMEN</b>		<b>T12MODEN</b>					
rw		rw					

Field	Bits	Type	Description
<b>T12MODEN</b>	5:0	rw	<p><b>T12 Modulation Enable</b></p> <p>Setting these bits enables the modulation of the corresponding compare channel by a PWM pattern generated by timer T12. The bit positions are corresponding to the following output signals:</p> <p>Bit 0: modulation of CC60            Bit 1: modulation of COUT60            Bit 2: modulation of CC61            Bit 3: modulation of COUT61            Bit 4: modulation of CC62            Bit 5: modulation of COUT62</p> <p>The enable feature of the modulation is defined as follows:</p> <p>0<sub>B</sub> The modulation of the corresponding output signal by a T12 PWM pattern is disabled.            1<sub>B</sub> The modulation of the corresponding output signal by a T12 PWM pattern is enabled.</p>
<b>MCMEN</b>	7	rw	<p><b>Multi-Channel Mode Enable</b></p> <p>0<sub>B</sub> The modulation of the corresponding output signal by a multi-channel pattern according to bit field MCMOUT is disabled.            1<sub>B</sub> The modulation of the corresponding output signal by a multi-channel pattern according to bit field MCMOUT is enabled.</p>
<b>Res</b>	6	r	<p><b>Reserved</b></p> <p>Returns 0 if read; should be written with 0.</p>

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>T13MODEN</b>	13:8	rw	<p><b>T13 Modulation Enable</b></p> <p>Setting these bits enables the modulation of the corresponding compare channel by a PWM pattern generated by timer T13. The bit positions are corresponding to the following output signals:</p> <p>Bit 0: modulation of CC60            Bit 1: modulation of COUT60            Bit 2: modulation of CC61            Bit 3: modulation of COUT61            Bit 4: modulation of CC62            Bit 5: modulation of COUT62</p> <p>The enable feature of the modulation is defined as follows:</p> <p>0<sub>B</sub> The modulation of the corresponding output signal by a T13 PWM pattern is disabled.            1<sub>B</sub> The modulation of the corresponding output signal by a T13 PWM pattern is enabled.</p>
<b>ECT130</b>	15	rw	<p><b>Enable Compare Timer T13 Output</b></p> <p>0<sub>B</sub> The alternate output function COUT63 is disabled.            1<sub>B</sub> The alternate output function COUT63 is enabled for the PWM signal generated by T13.</p>
<b>Res</b>	14	r	<p><b>Reserved</b></p> <p>Returns 0 if read; should be written with 0.</p>

## Capture/Compare Unit 6 (CCU6)

The register TRPCTR controls the trap functionality. It contains independent enable bits for each output signal and control bits to select the behavior in case of a trap condition. The trap condition is a low-level on the  $\overline{\text{CTRAP}}$  input pin, which is monitored (inverted level) by bit IS.TRPF. While TRPF = 1 (trap input active), the trap state bit IS.TRPS is set to 1.

### TRPCTR

#### Trap Control Register

(60H)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>TRP PEN</b>	<b>TRP EN 13</b>	<b>TRPEN</b>					
rw	rw	rw					
7	6	5	4	3	2	1	0
<b>Res</b>					<b>TRP M2</b>	<b>TRP M1</b>	<b>TRP M0</b>
r					rw	rw	rw

Field	Bits	Type	Description
<b>TRPM0, TRPM1</b>	0, 1	rw	<p><b>Trap Mode Control Bits 1, 0</b></p> <p>These two bits define the behavior of the selected outputs when leaving the trap state after the trap condition has become inactive again.</p> <p>A synchronization to the timer driving the PWM pattern permits to avoid unintended short pulses when leaving the trap state. See <a href="#">Table 133</a>.</p>
<b>TRPM2</b>	2	rw	<p><b>Trap Mode Control Bit 2</b></p> <p>0<sub>B</sub> The trap state can be left (return to normal operation = bit TRPS = 0) as soon as the input <math>\overline{\text{CTRAP}}</math> becomes inactive. Bit TRPF is automatically cleared by hardware if the input pin <math>\overline{\text{CTRAP}}</math> becomes 1. Bit TRPS is automatically cleared by hardware if bit TRPF is 0 and if the synchronization condition (according to TRPM0,1) is detected.</p> <p>1<sub>B</sub> The trap state can be left (return to normal operation = bit TRPS = 0) as soon as bit TRPF is reset by software after the input <math>\overline{\text{CTRAP}}</math> becomes inactive (TRPF is not cleared by hardware). Bit TRPS is automatically cleared by hardware if bit TRPF = 0 and if the synchronization condition (according to TRPM0,1) is detected.</p>
<b>Res</b>	7:3	r	<p><b>Reserved</b></p> <p>Returns 0 if read; should be written with 0.</p>



---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>TRPEN</b>	13:8	rw	<p><b>Trap Enable Control</b></p> <p>Setting these bits enables the trap functionality for the following corresponding output signals:</p> <p>Bit 0: trap functionality of CC60</p> <p>Bit 1: trap functionality of COUT60</p> <p>Bit 2: trap functionality of CC61</p> <p>Bit 3: trap functionality of COUT61</p> <p>Bit 4: trap functionality of CC62</p> <p>Bit 5: trap functionality of COUT62</p> <p>The enable feature of the trap functionality is defined as follows:</p> <p>0<sub>B</sub> The trap functionality of the corresponding output signal is disabled. The output state is independent from bit TRPS.</p> <p>1<sub>B</sub> The trap functionality of the corresponding output signal is enabled. The output is set to the passive state while TRPS = 1.</p>
<b>TRPEN13</b>	14	rw	<p><b>Trap Enable Control for Timer T13</b></p> <p>0<sub>B</sub> The trap functionality for T13 is disabled. Timer T13 (if selected and enabled) provides PWM functionality even while TRPS = 1.</p> <p>1<sub>B</sub> The trap functionality for T13 is enabled. The timer T13 PWM output signal is set to the passive state while TRPS = 1.</p>
<b>TRPPEN</b>	15	rw	<p><b>Trap Pin Enable</b></p> <p>0<sub>B</sub> The trap functionality based on the input pin <math>\overline{\text{CTRAP}}</math> is disabled. A trap can only be generated by software by setting bit TRPF.</p> <p>1<sub>B</sub> The trap functionality based on the input pin <math>\overline{\text{CTRAP}}</math> is enabled. A trap can be generated by software by setting bit TRPF or by <math>\overline{\text{CTRAP}} = 0</math>.</p>

**Table 133 Trap Mode Control Bits 1, 0**

Field	Bits	Description
TRPM0,	0	<p>A synchronization to the timer driving the PWM pattern permits to avoid unintended short pulses when leaving the trap state. The combination (TRPM1, TRPM0) leads to:</p> <p>00<sub>B</sub> The trap state is left (return to normal operation according to TRPM2) when a zero-match of T12 (while counting up) is detected (synchronization to T12).</p> <p>01<sub>B</sub> The trap state is left (return to normal operation according to TRPM2) when a zero-match of T13 is detected (synchronization to T13).</p> <p>10<sub>B</sub> reserved</p> <p>11<sub>B</sub> The trap state is left (return to normal operation according to TRPM2) immediately without any synchronization to T12 or T13.</p>
TRPM1	1	

## Capture/Compare Unit 6 (CCU6)

Register PSLR defines the passive state level driven by the output pins of the module. The passive state level is the value that is driven by the port pin during the passive state of the output. During the active state, the corresponding output pin drives the active state level, which is the inverted passive state level. The passive state level permits the adaptation of the driven output levels to the driver polarity (inverted, not inverted) of the connected power stage. The bits in this register have shadow bit fields to permit a concurrent update of all PWM-related parameters (bit field PSL is updated with T12\_ST, whereas PSL63 is updated with T13\_ST). The actually used values can be read (attribute “rh”), whereas the shadow bits can only be written (attribute “w”).

### PSLR

#### Passive State Level Register

(50H)

Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>PSL63</b>	<b>Res</b>	<b>PSL</b>					
rwh	r	rwh					

Field	Bits	Type	Description
<b>PSL</b>	5:0	rwh	<b>Compare Outputs Passive State Level</b> The bits of this bit field define the passive level driven by the module outputs during the passive state. The bit positions are: Bit 0: passive level for output CC60 Bit 1: passive level for output COUT60 Bit 2: passive level for output CC61 Bit 3: passive level for output COUT61 Bit 4: passive level for output CC62 Bit 5: passive level for output COUT62 The value of each bit position is defined as: 0 <sub>B</sub> The passive level is 0. 1 <sub>B</sub> The passive level is 1.
<b>PSL63</b>	7	rwh	<b>Passive State Level of Output COUT63</b> This bit field defines the passive level of the output pin COUT63. 0 <sub>B</sub> The passive level is 0. 1 <sub>B</sub> The passive level is 1.
<b>Res</b>	6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

### Notes

1. Bit field PSL has a shadow register to allow for updates without undesired pulses on the output lines. The bits are updated with the T12 shadow transfer. A read action targets the actually used values, whereas a write action targets the shadow bits.
2. Bit field PSL63 has a shadow register to allow for updates without undesired pulses on the output line. The bit is updated with the T13 shadow transfer. A read action targets the actually used values, whereas a write action targets the shadow bits.

## Capture/Compare Unit 6 (CCU6)

### 18.11.6 Multi-Channel Modulation Control Registers

Register MCMOUTS contains bits used as pattern input for the multi-channel mode and the Hall mode. This register is a shadow register (that can be read and written) for register MCMOUT, which indicates the currently active signals.

#### MCMOUTS

#### Multi-Channel Mode Output Shadow Register (08H)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>STR HP</b>	<b>Res</b>	<b>CURHS</b>			<b>EXPHS</b>		
w 7	r 6	5	rw 4	3	2	rw 1	0
<b>STR MCM</b>	<b>Res</b>	<b>MCMPS</b>					
w	r	rw					

Field	Bits	Type	Description
<b>MCMPS</b>	5:0	rw	<b>Multi-Channel PWM Pattern Shadow</b> Bit field MCMPS is the shadow bit field for bit field MCMP. The multi-channel shadow transfer is triggered according to the transfer conditions defined by register MCMCTR.
<b>STRMCM</b>	7	w	<b>Shadow Transfer Request for MCMPS</b> Setting this bit during a write action leads to an immediate update of bit field MCMP by the value written to bit field MCMPS. This functionality permits an update triggered by software. When read, this bit always delivers 0.  0 <sub>B</sub> Bit field MCMP is updated according to the defined hardware action. The write access to bit field MCMPS does not modify bit field MCMP.  1 <sub>B</sub> Bit field MCMP is updated by the value written to bit field MCMPS.
<b>Res</b>	6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>EXPHS</b>	10:8	rw	<b>Expected Hall Pattern Shadow</b> Bit field EXPHS is the shadow bit field for bit field EXPH. The bit field is transferred to bit field EXPH if an edge on the hall input pins CCPOS <sub>x</sub> (x = 0, 1, 2) is detected.
<b>CURHS</b>	13:11	rw	<b>Current Hall Pattern Shadow</b> Bit field CURHS is the shadow bit field for bit field CURH. The bit field is transferred to bit field CURH if an edge on the hall input pins CCPOS <sub>x</sub> (x = 0, 1, 2) is detected.

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>STRHP</b>	15	w	<p><b>Shadow Transfer Request for the Hall Pattern</b></p> <p>Setting these bits during a write action leads to an immediate update of bit fields CURH and EXPH by the value written to bit fields CURHS and EXPH. This functionality permits an update triggered by software. When read, this bit always delivers 0.</p> <p>0<sub>B</sub> The bit fields CURH and EXPH are updated according to the defined hardware action. The write access to bit fields CURHS and EXPHS does not modify the bit fields CURH and EXPH.</p> <p>1<sub>B</sub> The bit fields CURH and EXPH are updated by the value written to the bit fields CURHS and EXPHS.</p>
<b>Res</b>	14	r	<p><b>Reserved</b></p> <p>Returns 0 if read; should be written with 0.</p>

## Capture/Compare Unit 6 (CCU6)

Register MCMOUT shows the multi-channel control bits that are currently used. Register MCMOUT is defined as follows:

### MCMOUT

#### Multi-Channel Mode Output Register

(64H)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>Res</b>		<b>CURH</b>				<b>EXPH</b>	
7	6	5	4	3	2	1	0
<b>Res</b>	<b>R</b>	<b>MCMP</b>					
r	rh	rh					

Field	Bits	Type	Description
<b>MCMP</b>	5:0	rh	<p><b>Multi-Channel PWM Pattern</b></p> <p>Bit field MCMP is written by a shadow transfer from bit field MCMPS. It contains the output pattern for the multi-channel mode. If this mode is enabled by bit MCMEN in register MODCTR, the output state of the following output signal can be modified:</p> <p>Bit 0: multi-channel state for output CC60            Bit 1: multi-channel state for output COUT60            Bit 2: multi-channel state for output CC61            Bit 3: multi-channel state for output COUT61            Bit 4: multi-channel state for output CC62            Bit 5: multi-channel state for output COUT62</p> <p>The multi-channel patterns can set the related output to the passive state.</p> <p>While IDLE = 1, bit field MCMP is cleared.</p> <p>0<sub>B</sub> The output is set to the passive state. The PWM generated by T12 or T13 is not taken into account.</p> <p>1<sub>B</sub> The output can deliver the PWM generated by T12 or T13 (according to register MODCTR).</p>
<b>R</b>	6	rh	<p><b>Reminder Flag</b></p> <p>This reminder flag indicates that the shadow transfer from bit field MCMPS to MCMP has been requested by the selected trigger source. This bit is cleared when the shadow transfer takes place and while MCMEN = 0.</p> <p>0<sub>B</sub> Currently, no shadow transfer from MCMPS to MCMP is requested.</p> <p>1<sub>B</sub> A shadow transfer from MCMPS to MCMP has been requested by the selected trigger source, but it has not yet been executed, because the selected synchronization condition has not yet occurred.</p>
<b>Res</b>	7	r	<p><b>Reserved</b></p> <p>Returns 0 if read; should be written with 0.</p>

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>EXPH</b>	10:8	rh	<p><b>Expected Hall Pattern</b></p> <p>Bit field EXPH is written by a shadow transfer from bit field EXPHS. The contents are compared after every detected edge at the hall input pins with the pattern at the hall input pins in order to detect the occurrence of the next desired (= expected) hall pattern or a wrong pattern.</p> <p>If the current hall pattern at the hall input pins is equal to the bit field EXPH, bit CHE (correct hall event) is set and an interrupt request is generated (if enabled by bit ENCHE).</p> <p>If the current hall pattern at the hall input pins is not equal to the bit fields CURH or EXPH, bit WHE (wrong hall event) is set and an interrupt request is generated (if enabled by bit ENWHE).</p>
<b>CURH</b>	13:11	rh	<p><b>Current Hall Pattern</b></p> <p>Bit field CURH is written by a shadow transfer from bit field CURHS. The contents are compared after every detected edge at the hall input pins with the pattern at the hall input pins in order to detect the occurrence of the next desired (= expected) hall pattern or a wrong pattern.</p> <p>If the current hall input pattern is equal to bit field CURH, the detected edge at the hall input pins has been an invalid transition (e.g. a spike).</p>
<b>Res</b>	15:14	r	<p><b>Reserved</b></p> <p>Returns 0 if read; should be written with 0.</p>

*Note:* The bits in the bit fields EXPH and CURH correspond to the hall patterns at the input pins CCPOS<sub>x</sub> (x = 0, 1, 2) in the following order (EXPH.2, EXPH.1, EXPH.0), (CURH.2, CURH.1, CURH.0), (CCPOS2, CCPOS.1, CCPOS0).

## Capture/Compare Unit 6 (CCU6)

Register MCMCTR contains control bits for the multi-channel functionality.

### MCMCTR

#### Multi-Channel Mode Control Register

(54H)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
Res					STE 13U	STE 12D	STE 12U
7	6	r 5	4	3	rw 2	rw 1	rw 0
Res		SWSYN		Res	SWSEL		
r		rw		r	rw		

Field	Bits	Type	Description
<b>SWSEL</b>	2:0	rw	<p><b>Switching Selection</b></p> <p>Bit field SWSEL selects one of the following trigger request sources (next multi-channel event) for the shadow transfer from MCMPS to MCMP. The trigger request is stored in the reminder flag R until the shadow transfer is done and flag R is cleared automatically with the shadow transfer. The shadow transfer takes place synchronously with an event selected in bit field SWSYN.</p> <p>000<sub>B</sub> no trigger request will be generated            001<sub>B</sub> correct hall pattern on CCPOSx detected            010<sub>B</sub> T13 period-match detected (while counting up)            011<sub>B</sub> T12 one-match (while counting down)            100<sub>B</sub> T12 channel 1 compare-match detected (phase delay function)            101<sub>B</sub> T12 period match detected (while counting up) else reserved, no trigger request will be generated</p>
<b>SWSYN</b>	5:4	rw	<p><b>Switching Synchronization</b></p> <p>Bit field SWSYN triggers the shadow transfer between MCMPS and MCMP if it has been requested before (flag R set by an event selected by SWSEL). This feature permits the synchronization of the outputs to the PWM source, that is used for modulation (T12 or T13).</p> <p>00<sub>B</sub> direct; the trigger event directly causes the shadow transfer            01<sub>B</sub> T13 zero-match triggers the shadow transfer            10<sub>B</sub> a T12 zero-match (while counting up) triggers the shadow transfer            11<sub>B</sub> reserved; no action</p>
<b>Res</b>	3, 6, 7	r	<p><b>Reserved</b></p> <p>Returns 0 if read; should be written with 0.</p>
<b>STE12U</b>	8	rw	<p><b>Shadow Transfer Enable for T12 Upcounting</b></p> <p>This bit enables the shadow transfer T12_ST if flag MCMOUT.R is set or becomes set while a T12 period match is detected while counting up.</p> <p>0<sub>B</sub> No action            1<sub>B</sub> The T12_ST shadow transfer mechanism is enabled if MCMEN = 1.</p>

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>STE12D</b>	9	rw	<p><b>Shadow Transfer Enable for T12 Downcounting</b></p> <p>This bit enables the shadow transfer T12_ST if flag MCMOUT.R is set or becomes set while a T12 one match is detected while counting down.</p> <p>0<sub>B</sub> No action  1<sub>B</sub> The T12_ST shadow transfer mechanism is enabled if MCMEN = 1.</p>
<b>STE13U</b>	10	rw	<p><b>Shadow Transfer Enable for T13 Upcounting</b></p> <p>This bit enables the shadow transfer T13_ST if flag MCMOUT.R is set or becomes set while a T13 period match is detected.</p> <p>0<sub>B</sub> No action  1<sub>B</sub> The T13_ST shadow transfer mechanism is enabled if MCMEN = 1.</p>
<b>Res</b>	15:11	r	<p><b>Reserved</b></p> <p>Returns 0 if read; should be written with 0.</p>



## Capture/Compare Unit 6 (CCU6)

### 18.11.7 Interrupt Control Registers

Register IS contains the individual interrupt request bits. This register can only be read; write actions have no impact on the contents of this register. The software can set or reset the bits individually by writing to the registers ISS (to set the bits) or to register ISR (to reset the bits).

The interrupt generation is independent from the value of the bits in register IS, e.g. the interrupt will be generated (if enabled) even if the corresponding bit is already set. The trigger for an interrupt generation is the detection of a set condition (by HW or SW) for the corresponding bit in register IS.

In compare mode (and hall mode), the timer-related interrupts are only generated while the timer is running (T1xR = 1). In capture mode, the capture interrupts are also generated while the timer T12 is stopped.

*Note:* Not all bits in register IS can generate an interrupt. Other status bits have been added, that have a similar structure for their set and clear actions. It is recommended that SW checks the interrupt bits bit-wisely (instead of common OR over the bits).

#### IS

#### Capture/Compare Interrupt Status Register (68H)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>STR</b>	<b>IDLE</b>	<b>WHE</b>	<b>CHE</b>	<b>TRP S</b>	<b>TRP F</b>	<b>T13 PM</b>	<b>T13 CM</b>
rh	rh	rh	rh	rh	rh	rh	rh
7	6	5	4	3	2	1	0
<b>T12 PM</b>	<b>T12 OM</b>	<b>ICC 62F</b>	<b>ICC 62R</b>	<b>ICC 61F</b>	<b>ICC 61R</b>	<b>ICC 60F</b>	<b>ICC 60R</b>
rh	rh	rh	rh	rh	rh	rh	rh

Field	Bits	Type	Description
<b>ICC60R, ICC61R, ICC62R</b>	0, 2, 4	rh	<b>Capture, Compare-Match Rising Edge Flag (x = 0, 1, 2)</b> In compare mode, a compare-match has been detected while T12 was counting up. In capture mode, a rising edge has been detected at the input CC6x. 0 <sub>B</sub> The event has not yet occurred since this bit has been reset for the last time. 1 <sub>B</sub> The event described above has been detected.
<b>ICC60F, ICC61F, ICC62F</b>	1, 3, 5	rh	<b>Capture, Compare-Match Falling Edge Flag (x = 0, 1, 2)</b> In compare mode, a compare-match has been detected while T12 was counting down. In capture mode, a falling edge has been detected at the input CC6x. 0 <sub>B</sub> The event has not yet occurred since this bit has been reset for the last time. 1 <sub>B</sub> The event described above has been detected.
<b>T12OM</b>	6	rh	<b>Timer T12 One-Match Flag</b> 0 <sub>B</sub> A timer T12 one-match (while counting down) has not yet been detected since this bit has been reset for the last time. 1 <sub>B</sub> A timer T12 one-match (while counting down) has been detected.

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>T12PM</b>	7	rh	<p><b>Timer T12 Period-Match Flag</b></p> <p>0<sub>B</sub> A timer T12 period-match (while counting up) has not yet been detected since this bit has been reset for the last time.</p> <p>1<sub>B</sub> A timer T12 period-match (while counting up) has been detected.</p>
<b>T13CM</b>	8	rh	<p><b>Timer T13 Compare-Match Flag</b></p> <p>0<sub>B</sub> A timer T13 compare-match has not yet been detected since this bit has been reset for the last time.</p> <p>1<sub>B</sub> A timer T13 compare-match has been detected.</p>
<b>T13PM</b>	9	rh	<p><b>Timer T13 Period-Match Flag</b></p> <p>0<sub>B</sub> A timer T13 period-match has not yet been detected since this bit has been reset for the last time.</p> <p>1<sub>B</sub> A timer T13 period-match has been detected.</p>
<b>TRPF</b>	10	rh	<p><b>Trap Flag</b></p> <p>The trap flag TRPF will be set by hardware if TRPPEN = 1 and <math>\overline{\text{CTRAP}} = 0</math> or by software. If TRPM2 = 0, bit TRPF is reset by hardware if the input <math>\overline{\text{CTRAP}}</math> becomes inactive (TRPPEN = 1). If TRPM2 = 1, bit TRPF must be reset by software in order to leave the trap state.</p> <p>0<sub>B</sub> The trap condition has not been detected.</p> <p>1<sub>B</sub> The trap condition has been detected (input <math>\overline{\text{CTRAP}}</math> has been 0 or by software).</p>
<b>TRPS</b>	11	rh	<p><b>Trap State</b></p> <p>During the trap state, the selected outputs are set to the passive state. The logic level driven during the passive state is defined by the corresponding bit in register PSLR. Bit TRPS = 1 and TRPF = 0 can occur if the trap condition is no longer active but the selected synchronization has not yet taken place.</p> <p>0<sub>B</sub> The trap state is not active.</p> <p>1<sub>B</sub> The trap state is active. Bit TRPS is set while bit TRPF = 1. It is reset according to the mode selected in register TRPCTR.</p>
<b>CHE</b>	12	rh	<p><b>Correct Hall Event</b></p> <p>On every valid hall edge, the contents of EXPH are compared with the pattern on pin CCPOSx and if equal bit CHE is set.</p> <p>0<sub>B</sub> A transition to a correct (= expected) hall event has not yet been detected since this bit has been reset for the last time.</p> <p>1<sub>B</sub> A transition to a correct (= expected) hall event has been detected.</p>
<b>WHE</b>	13	rh	<p><b>Wrong Hall Event</b></p> <p>On every valid hall edge, the contents of EXPH are compared with the pattern on pin CCPOSx. If both comparisons (CURH and EXPH with CCPOSx) are not true, bit WHE (wrong hall event) is set.</p> <p>0<sub>B</sub> A transition to a wrong hall event (not the expected one) has not yet been detected since this bit has been reset for the last time.</p> <p>1<sub>B</sub> A transition to a wrong hall event (not the expected one) has been detected.</p>

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>IDLE</b>	14	rh	<p><b>IDLE State</b> This bit is set together with bit WHE (wrong hall event) and it must be reset by software.</p> <p>0<sub>B</sub> No action. 1<sub>B</sub> Bit field MCMP is cleared and held to 0, the selected outputs are set to passive state.</p>
<b>STR</b>	15	rh	<p><b>Multi-Channel Mode Shadow Transfer Request</b> This bit is set when a shadow transfer from MCMOUTS to MCMOUT takes places in multi-channel mode.</p> <p>0<sub>B</sub> The shadow transfer has not yet taken place. 1<sub>B</sub> The shadow transfer has taken place.</p>

## Capture/Compare Unit 6 (CCU6)

Register ISS contains individual interrupt request set bits to generate a CCU6 interrupt request by software. Writing a 1 sets the bit(s) in register IS at the corresponding bit position(s) and can generate an interrupt event (if available and enabled). All bit positions read as 0.

### ISS

#### Capture/Compare Interrupt Status Set Register (4CH)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>S STR</b>	<b>S IDLE</b>	<b>S WHE</b>	<b>S CHE</b>	<b>S WHC</b>	<b>S TRPF</b>	<b>S T13 PM</b>	<b>S T13 CM</b>
W 7	W 6	W 5	W 4	W 3	W 2	W 1	W 0
<b>S T12 PM</b>	<b>S T12 OM</b>	<b>S CC 62F</b>	<b>S CC 62R</b>	<b>S CC 61F</b>	<b>S CC 61R</b>	<b>S CC 60F</b>	<b>S CC 60R</b>
W	W	W	W	W	W	W	W

Field	Bits	Type	Description
<b>SCC60R</b>	0	w	<b>Set Capture, Compare-Match Rising Edge Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit CC60R in register IS will be set.
<b>SCC60F</b>	1	w	<b>Set Capture, Compare-Match Falling Edge Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit CC60F in register IS will be set.
<b>SCC61R</b>	2	w	<b>Set Capture, Compare-Match Rising Edge Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit CC61R in register IS will be set.
<b>SCC61F</b>	3	w	<b>Set Capture, Compare-Match Falling Edge Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit CC61F in register IS will be set.
<b>SCC62R</b>	4	w	<b>Set Capture, Compare-Match Rising Edge Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit CC62R in register IS will be set.
<b>SCC62F</b>	5	w	<b>Set Capture, Compare-Match Falling Edge Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit CC62F in register IS will be set.
<b>ST12OM</b>	6	w	<b>Set Timer T12 One-Match Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit T12OM in register IS will be set.
<b>ST12PM</b>	7	w	<b>Set Timer T12 Period-Match Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit T12PM in register IS will be set.
<b>ST13CM</b>	8	w	<b>Set Timer T13 Compare-Match Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit T13CM in register IS will be set.

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>ST13PM</b>	9	w	<b>Set Timer T13 Period-Match Flag</b> $0_B$ No action $1_B$ Bit T13PM in register IS will be set.
<b>STRPF</b>	10	w	<b>Set Trap Flag</b> $0_B$ No action $1_B$ Bits TRPF and TRPS in register IS will be set.
<b>SWHC</b>	11	w	<b>Software Hall Compare</b> $0_B$ No action $1_B$ The Hall compare action is triggered.
<b>SCHE</b>	12	w	<b>Set Correct Hall Event Flag</b> $0_B$ No action $1_B$ Bit CHE in register IS will be set.
<b>SWHE</b>	13	w	<b>Set Wrong Hall Event Flag</b> $0_B$ No action $1_B$ Bit WHE in register IS will be set.
<b>SIDLE</b>	14	w	<b>Set IDLE Flag</b> $0_B$ No action $1_B$ Bit IDLE in register IS will be set.
<b>SSTR</b>	15	w	<b>Set STR Flag</b> $0_B$ No action $1_B$ Bit STR in register IS will be set.

*Note: If the setting by hardware of the corresponding flags can lead to an interrupt, the setting by software has the same effect.*

## Capture/Compare Unit 6 (CCU6)

Register ISR contains bits to individually clear the interrupt event flags by software. Writing a 1 clears the bit(s) in register IS at the corresponding bit position(s). All bit positions read as 0.

### ISR

#### Capture/Compare Interrupt Status Reset Register(0CH)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>R STR</b>	<b>R IDLE</b>	<b>R WHE</b>	<b>R CHE</b>	<b>Res</b>	<b>R TRPF</b>	<b>R T13 PM</b>	<b>R T13 CM</b>
w	w	w	w	r	w	w	w
7	6	5	4	3	2	1	0
<b>R T12 PM</b>	<b>R T12 OM</b>	<b>R CC 62F</b>	<b>R CC 62R</b>	<b>R CC 61F</b>	<b>R CC 61R</b>	<b>R CC 60F</b>	<b>R CC 60R</b>
w	w	w	w	w	w	w	w

Field	Bits	Type	Description
<b>RCC60R</b>	0	w	<b>Reset Capture, Compare-Match Rising Edge Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit CC60R in register IS will be reset.
<b>RCC60F</b>	1	w	<b>Reset Capture, Compare-Match Falling Edge Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit CC60F in register IS will be reset.
<b>RCC61R</b>	2	w	<b>Reset Capture, Compare-Match Rising Edge Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit CC61R in register IS will be reset.
<b>RCC61F</b>	3	w	<b>Reset Capture, Compare-Match Falling Edge Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit CC61F in register IS will be reset.
<b>RCC62R</b>	4	w	<b>Reset Capture, Compare-Match Rising Edge Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit CC62R in register IS will be reset.
<b>RCC62F</b>	5	w	<b>Reset Capture, Compare-Match Falling Edge Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit CC62F in register IS will be reset.
<b>RT12OM</b>	6	w	<b>Reset Timer T12 One-Match Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit T12OM in register IS will be reset.
<b>RT12PM</b>	7	w	<b>Reset Timer T12 Period-Match Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit T12PM in register IS will be reset.
<b>RT13CM</b>	8	w	<b>Reset Timer T13 Compare-Match Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit T13CM in register IS will be reset.

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>RT13PM</b>	9	w	<b>Reset Timer T13 Period-Match Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit T13PM in register IS will be reset.
<b>RTRPF</b>	10	w	<b>Reset Trap Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit TRPF in register IS will be reset (not taken into account while input $\overline{\text{CTRAP}} = 0$ and TRPPEN = 1.
<b>Res</b>	11	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>RCHE</b>	12	w	<b>Reset Correct Hall Event Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit CHE in register IS will be reset.
<b>RWHE</b>	13	w	<b>Reset Wrong Hall Event Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit WHE in register IS will be reset.
<b>RIDLE</b>	14	w	<b>Reset IDLE Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit IDLE in register IS will be reset.
<b>RSTR</b>	15	w	<b>Reset STR Flag</b> 0 <sub>B</sub> No action 1 <sub>B</sub> Bit STR in register IS will be reset.

## Capture/Compare Unit 6 (CCU6)

Register IEN contains the interrupt enable bits and a control bit to enable the automatic idle function in the case of a wrong hall pattern.

### IEN

#### Capture/Compare Interrupt Enable Register (44H)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>EN STR</b>	<b>EN IDLE</b>	<b>EN WHE</b>	<b>EN CHE</b>	<b>Res</b>	<b>EN TRPF</b>	<b>EN T13 PM</b>	<b>EN T13 CM</b>
rw	rw	rw	rw	r	rw	rw	rw
7	6	5	4	3	2	1	0
<b>EN T12 PM</b>	<b>EN T12 OM</b>	<b>EN CC 62F</b>	<b>EN CC 62R</b>	<b>EN CC 61F</b>	<b>EN CC 61R</b>	<b>EN CC 60F</b>	<b>EN CC 60R</b>
rw	rw	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
<b>ENCC60R</b>	0	rw	<p><b>Capture, Compare-Match Rising Edge Interrupt Enable for Channel 0</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit CC60R in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit CC60R in register IS occurs. The interrupt line that will be activated is selected by bit field INPCC60.</p>
<b>ENCC60F</b>	1	rw	<p><b>Capture, Compare-Match Falling Edge Interrupt Enable for Channel 0</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit CC60F in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit CC60F in register IS occurs. The interrupt line that will be activated is selected by bit field INPCC60.</p>
<b>ENCC61R</b>	2	rw	<p><b>Capture, Compare-Match Rising Edge Interrupt Enable for Channel 1</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit CC61R in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit CC61R in register IS occurs. The interrupt line that will be activated is selected by bit field INPCC61.</p>
<b>ENCC61F</b>	3	rw	<p><b>Capture, Compare-Match Falling Edge Interrupt Enable for Channel 1</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit CC61F in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit CC61F in register IS occurs. The interrupt line that will be activated is selected by bit field INPCC61.</p>



---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>ENCC62R</b>	4	rw	<p><b>Capture, Compare-Match Rising Edge Interrupt Enable for Channel 2</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit CC62R in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit CC62R in register IS occurs. The interrupt line that will be activated is selected by bit field INPCC62.</p>
<b>ENCC62F</b>	5	rw	<p><b>Capture, Compare-Match Falling Edge Interrupt Enable for Channel 2</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit CC62F in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit CC62F in register IS occurs. The interrupt line that will be activated is selected by bit field INPCC62.</p>
<b>ENT12OM</b>	6	rw	<p><b>Enable Interrupt for T12 One-Match</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit T12OM in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit T12OM in register IS occurs. The interrupt line that will be activated is selected by bit field INPT12.</p>
<b>ENT12PM</b>	7	rw	<p><b>Enable Interrupt for T12 Period-Match</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit T12PM in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit T12PM in register IS occurs. The interrupt line that will be activated is selected by bit field INPT12.</p>
<b>ENT13CM</b>	8	rw	<p><b>Enable Interrupt for T13 Compare-Match</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit T13CM in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit T13CM in register IS occurs. The interrupt line that will be activated is selected by bit field INPT13.</p>
<b>ENT13PM</b>	9	rw	<p><b>Enable Interrupt for T13 Period-Match</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit T13PM in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit T13PM in register IS occurs. The interrupt line that will be activated is selected by bit field INPT13.</p>
<b>ENTRPF</b>	10	rw	<p><b>Enable Interrupt for Trap Flag</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit TRPF in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit TRPF in register IS occurs. The interrupt line that will be activated is selected by bit field INPERR.</p>
<b>Res</b>	11	r	<p><b>Reserved</b></p> <p>Returns 0 if read; should be written with 0.</p>

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>ENCHE</b>	12	rw	<p><b>Enable Interrupt for Correct Hall Event</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit CHE in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit CHE in register IS occurs. The interrupt line that will be activated is selected by bit field INPCHE.</p>
<b>ENWHE</b>	13	rw	<p><b>Enable Interrupt for Wrong Hall Event</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit WHE in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit WHE in register IS occurs. The interrupt line that will be activated is selected by bit field INPERR.</p>
<b>ENIDLE</b>	14	rw	<p><b>Enable Idle</b></p> <p>This bit enables the automatic entering of the idle state (bit IDLE will be set) after a wrong hall event has been detected (bit WHE is set). During the idle state, the bit field MCMP is automatically cleared.</p> <p>0<sub>B</sub> The bit IDLE is not automatically set when a wrong hall event is detected.</p> <p>1<sub>B</sub> The bit IDLE is automatically set when a wrong hall event is detected.</p>
<b>ENSTR</b>	15	rw	<p><b>Enable Multi-Channel Mode Shadow Transfer Interrupt</b></p> <p>0<sub>B</sub> No interrupt will be generated if the set condition for bit STR in register IS occurs.</p> <p>1<sub>B</sub> An interrupt will be generated if the set condition for bit STR in register IS occurs. The interrupt line that will be activated is selected by bit field INPCHE.</p>


## Capture/Compare Unit 6 (CCU6)

Register INP contains the interrupt node pointers allowing a flexible interrupt handling. These bit fields define which service request output will be activated if the corresponding interrupt event occurs and the interrupt generation for this event is enabled.

### INP

#### Capture/Compare Interrupt Node Pointer Register (48H)

Reset Value: 3940<sub>H</sub>

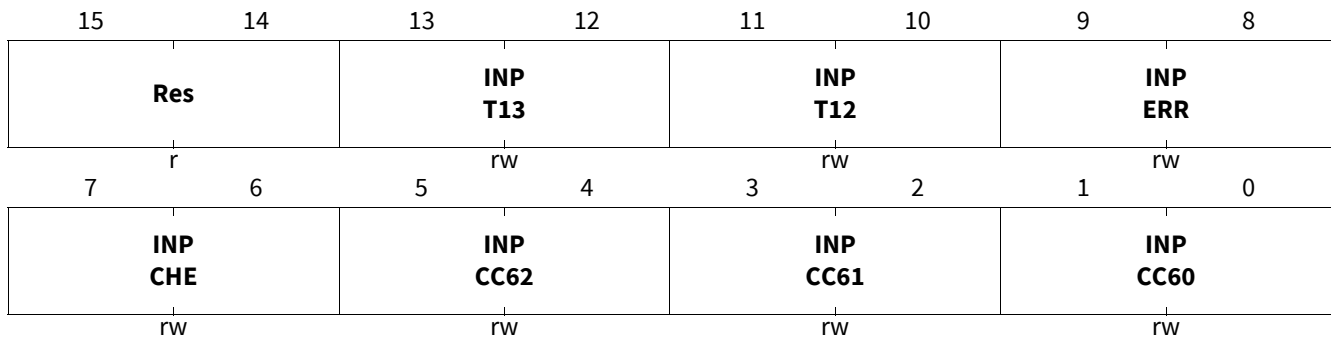

Field	Bits	Type	Description
<b>INPCC60</b>	1:0	rw	<b>Interrupt Node Pointer for Channel 0 Interrupts</b> This bit field defines the interrupt output line, which is activated due to a set condition for bit CC60R (if enabled by bit ENCC60R) or for bit CC60F (if enabled by bit ENCC60F). 00 <sub>B</sub> Interrupt output line SR0 is selected. 01 <sub>B</sub> Interrupt output line SR1 is selected. 10 <sub>B</sub> Interrupt output line SR2 is selected. 11 <sub>B</sub> Interrupt output line SR3 is selected.
<b>INPCC61</b>	3:2	rw	<b>Interrupt Node Pointer for Channel 1 Interrupts</b> This bit field defines the interrupt output line, which is activated due to a set condition for bit CC61R (if enabled by bit ENCC61R) or for bit CC61F (if enabled by bit ENCC61F). 00 <sub>B</sub> Interrupt output line SR0 is selected. 01 <sub>B</sub> Interrupt output line SR1 is selected. 10 <sub>B</sub> Interrupt output line SR2 is selected. 11 <sub>B</sub> Interrupt output line SR3 is selected.
<b>INPCC62</b>	5:4	rw	<b>Interrupt Node Pointer for Channel 2 Interrupts</b> This bit field defines the interrupt output line, which is activated due to a set condition for bit CC62R (if enabled by bit ENCC62R) or for bit CC62F (if enabled by bit ENCC62F). 00 <sub>B</sub> Interrupt output line SR0 is selected. 01 <sub>B</sub> Interrupt output line SR1 is selected. 10 <sub>B</sub> Interrupt output line SR2 is selected. 11 <sub>B</sub> Interrupt output line SR3 is selected.

---

**Capture/Compare Unit 6 (CCU6)**

Field	Bits	Type	Description
<b>INPCHE</b>	7:6	rw	<p><b>Interrupt Node Pointer for the CHE Interrupt</b></p> <p>This bit field defines the interrupt output line, which is activated due to a set condition for bit CHE (if enabled by bit ENCHE) or for bit STR (if enabled by bit ENSTR).</p> <p>00<sub>B</sub> Interrupt output line SR0 is selected.            01<sub>B</sub> Interrupt output line SR1 is selected.            10<sub>B</sub> Interrupt output line SR2 is selected.            11<sub>B</sub> Interrupt output line SR3 is selected.</p>
<b>INPERR</b>	9:8	rw	<p><b>Interrupt Node Pointer for Error Interrupts</b></p> <p>This bit field defines the interrupt output line, which is activated due to a set condition for bit TRPF (if enabled by bit ENTRPF) or for bit WHE (if enabled by bit ENWHE).</p> <p>00<sub>B</sub> Interrupt output line SR0 is selected.            01<sub>B</sub> Interrupt output line SR1 is selected.            10<sub>B</sub> Interrupt output line SR2 is selected.            11<sub>B</sub> Interrupt output line SR3 is selected.</p>
<b>INPT12</b>	11:10	rw	<p><b>Interrupt Node Pointer for Timer T12 Interrupts</b></p> <p>This bit field defines the interrupt output line, which is activated due to a set condition for bit T12OM (if enabled by bit ENT12OM) or for bit T12PM (if enabled by bit ENT12PM).</p> <p>00<sub>B</sub> Interrupt output line SR0 is selected.            01<sub>B</sub> Interrupt output line SR1 is selected.            10<sub>B</sub> Interrupt output line SR2 is selected.            11<sub>B</sub> Interrupt output line SR3 is selected.</p>
<b>INPT13</b>	13:12	rw	<p><b>Interrupt Node Pointer for Timer T13 Interrupts</b></p> <p>This bit field defines the interrupt output line, which is activated due to a set condition for bit T13CM (if enabled by bit ENT13CM) or for bit T13PM (if enabled by bit ENT13PM).</p> <p>00<sub>B</sub> Interrupt output line SR0 is selected.            01<sub>B</sub> Interrupt output line SR1 is selected.            10<sub>B</sub> Interrupt output line SR2 is selected.            11<sub>B</sub> Interrupt output line SR3 is selected.</p>
<b>Res</b>	15:14	r	<p><b>Reserved</b></p> <p>Returns 0 if read; should be written with 0.</p>

## Capture/Compare Unit 6 (CCU6)

### 18.11.8 Register Map

**Table 134** shows the CCU6 module base addresses.

**Table 135** lists the addresses of the CCU6 SFRs.

**Table 134 Register Address Space**

Module	Base Address	End Address	Note
CCU6	4000C000 <sub>H</sub>	4000FFFF <sub>H</sub>	

**Table 135 Register Overview SSC**

Register Short Name	Register Long Name	Offset Address	Reset Value
CC63R	Capture/Compare Register for Channel CC63	00 <sub>H</sub>	<b>585</b>
TCTR4	Timer Control Register 4	04 <sub>H</sub>	<b>596</b>
MCMOUTS	Multi-Channel Mode Output Shadow Register	08 <sub>H</sub>	<b>603</b>
ISR	Capture/Compare Interrupt Status Reset Register	0C <sub>H</sub>	<b>614</b>
CMPMODIF	Compare State Modification Register	10 <sub>H</sub>	<b>589</b>
CC60SR	Capture/Compare Shadow Register for Channel CC60SR	14 <sub>H</sub>	<b>581</b>
CC61SR	Capture/Compare Shadow Register for Channel CC61SR	18 <sub>H</sub>	<b>581</b>
CC62SR	Capture/Compare Shadow Register for Channel CC62SR	1C <sub>H</sub>	<b>581</b>
CC63SR	Capture/Compare Shadow Register for Channel CC63	20 <sub>H</sub>	<b>586</b>
T12PR	Timer T12 Period Register	24 <sub>H</sub>	<b>579</b>
T13PR	Timer T13 Period Register	28 <sub>H</sub>	<b>585</b>
T12DTC	Timer T12 Dead-Time Control Register	2C <sub>H</sub>	<b>582</b>
TCTR0	Timer Control Register 0	30 <sub>H</sub>	<b>591</b>
CC60R	Capture/Compare Register for Channel CC60R	34 <sub>H</sub>	<b>580</b>
CC61R	Capture/Compare Register for Channel CC61R	38 <sub>H</sub>	<b>580</b>
CC62R	Capture/Compare Register for Channel CC62R	3C <sub>H</sub>	<b>580</b>
T12MSEL	Capture/Compare T12 Mode Select Register	40 <sub>H</sub>	<b>576</b>
IEN	Capture/Compare Interrupt Enable Register	44 <sub>H</sub>	<b>616</b>
INP	Capture/Compare Interrupt Node Pointer Register	48 <sub>H</sub>	<b>619</b>
ISS	Capture/Compare Interrupt Status Set Register	4C <sub>H</sub>	<b>612</b>
PSLR	Passive State Level Register	50 <sub>H</sub>	<b>602</b>
MCMCTR	Multi-Channel Mode Control Register	54 <sub>H</sub>	<b>607</b>
TCTR2	Timer Control Register 2	58 <sub>H</sub>	<b>594</b>
MODCTR	Modulation Control Register	5C <sub>H</sub>	<b>598</b>
TRPCTR	Trap Control Register	60 <sub>H</sub>	<b>600</b>
MCMOUT	Multi-Channel Mode Output Register	64 <sub>H</sub>	<b>605</b>
IS	Capture/Compare Interrupt Status Register	68 <sub>H</sub>	<b>609</b>
PISEL0	Port Input Select Register 0	6C <sub>H</sub>	<b>571</b>
PISEL2	Port Input Select Register 2	74 <sub>H</sub>	<b>573</b>

---

**Capture/Compare Unit 6 (CCU6)****Table 135 Register Overview SSC**

<b>Register Short Name</b>	<b>Register Long Name</b>	<b>Offset Address</b>	<b>Reset Value</b>
T12	Timer T12 Counter Register	78 <sub>H</sub>	<b>578</b>
T13	Timer T13 Counter Register	7C <sub>H</sub>	<b>584</b>
CMPSTAT	Compare State Register	80 <sub>H</sub>	<b>587</b>

## UART1/UART2

# 19 UART1/UART2


## 19.1 Features

- Full-duplex asynchronous modes
  - 8-bit or 9-bit data frames, LSB first
  - fixed or variable baud rate
- Receive buffered
- Multiprocessor communication
- Interrupt generation on the completion of a data transmission or reception
- Baud-rate generator with fractional divider for generating a wide range of baud rates
- Hardware logic for break and synch byte detection

## 19.2 Introduction

The UART provides a full-duplex asynchronous receiver/transmitter, i.e., it can transmit and receive simultaneously. It is also receive-buffered, i.e., it can commence reception of a second byte before a previously received byte has been read from the receive register. However, if the first byte still has not been read by the time reception of the second byte is complete, one of the bytes will be lost. The serial port receive and transmit registers are both accessed at Special Function Register (SFR) SBUF. Writing to SBUF loads the transmit register, and reading SBUF accesses a physically separate receive register.

### 19.2.1 Block Diagram

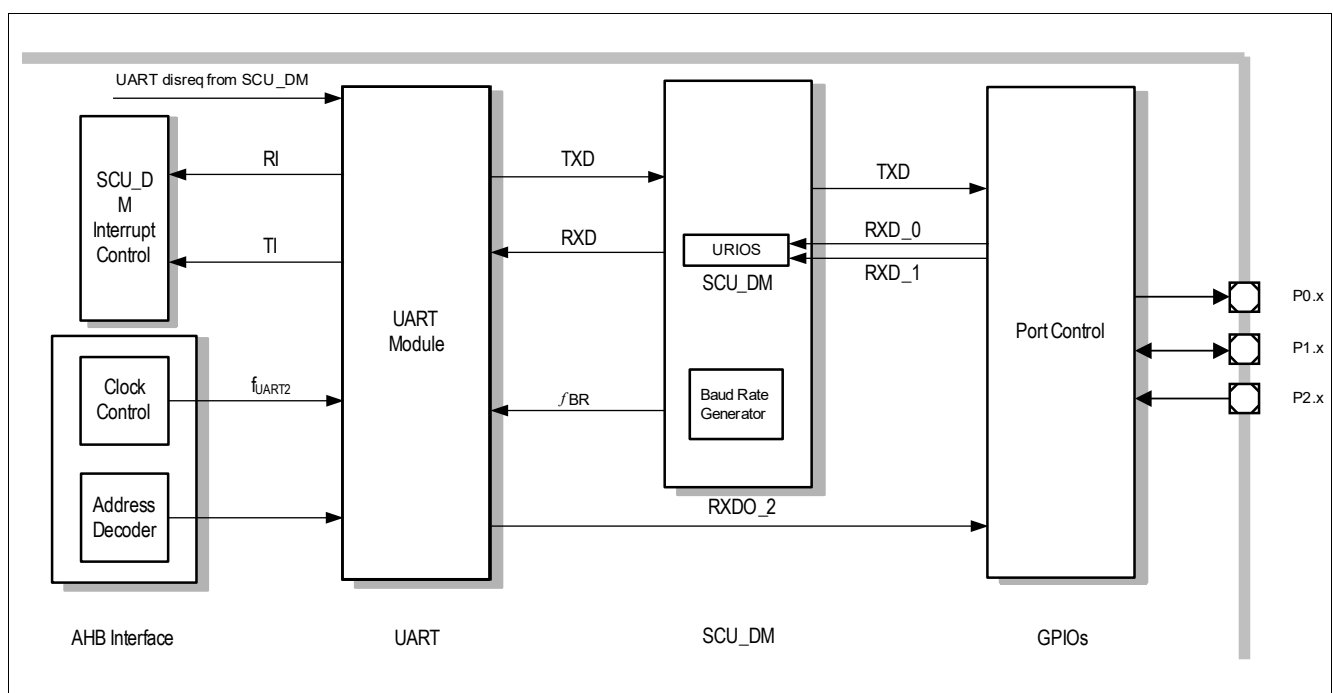

**Figure 163** UART Block Diagram

## UART1/UART2

### 19.3 UART Modes

The UART can be used in four different modes. In mode 0, it operates as an 8-bit shift register. In mode 1, it operates as an 8-bit serial port. In modes 2 and 3, it operates as a 9-bit serial port. The only difference between mode 2 and mode 3 is the baud rate, which is fixed in mode 2 but variable in mode 3. The variable baud rate is set by the underflow rate on the dedicated baud-rate generator.

The different modes are selected by setting bits SM0 and SM1 to their corresponding values, as shown in [Table 136](#).

**Table 136** UART Modes

SM0	SM1	Operating Mode	Baud Rate
0	0	Mode 0: 8-bit shift register	$f_{PCLK}/2$
0	1	Mode 1: 8-bit shift UART	Variable
1	0	Mode 2: 9-bit shift UART	$f_{PCLK}/64$
1	1	Mode 3: 9-bit shift UART	Variable

The UART1 is connected to the integrated LIN transceiver, and to GPIO for test purpose. The UART2 is connected to GPIO only.

#### 19.3.1 Mode 0, 8-Bit Shift Register, Fixed Baud Rate

In mode 0, the serial port behaves as an 8-bit shift register. Data is shifted in through RXD, and out through RXDO, while the TXD line is used to provide a shift clock which can be used by external devices to clock data in and out.

The transmission cycle is activated by a write to SBUF. For the next seven machine cycles, the contents of the transmit shift register are shifted right one position and a zero shifted in from the left so that when the MSB of the data byte is at the output position, it has a 1 and a sequence of zeros to its left. The control block then executes one last shift before setting the TI bit.

Reception is started by the condition  $REN = 1$  and  $RI = 0$ . At the start of the reception cycle,  $11111110_B$  is written to the receive shift register. In each machine cycle that follows, the contents of the shift register are shifted left one position and the value sampled on the RXD line in the same machine cycle is shifted in from the right. When the 0 of the initial byte reaches the leftmost position, the control block executes one last shift, loads SBUF and sets the RI bit.

The baud rate for the transfer is fixed at  $f_{PCLK}/2$  where  $f_{PCLK}$  is the input clock frequency, i.e. one bit per machine cycle.

#### 19.3.2 Mode 1, 8-Bit UART, Variable Baud Rate

In mode 1, the UART behaves as an 8-bit serial port. A start bit (0), 8 data bits, and a stop bit (1) are transmitted on TXD or received on RXD at a variable baud rate.

The transmission cycle is activated by a write to SBUF. The data is transferred to the transmit shift register and a 1 is loaded to the 9th bit position (as in mode 0). At phase 1 of the machine cycle after the next rollover in the divide-by-16 counter, the start bit is copied to TXD, and data is activated one bit time later. One bit time after the data is activated, the data starts getting shifted right with zeros shifted in from the left. When the MSB gets to the output position, the control block executes one last shift and sets the TI bit.

Reception is started by a high to low transition on RXD (sampled at 16 times the baud rate). The divide-by-16 counter is then reset and  $1111\ 1111_B$  is written to the receive register. If a valid start bit (0) is then detected (based on two out of three samples), it is shifted into the register followed by 8 data bits. If the transition is not followed by a valid start bit, the controller goes back to looking for a high to low transition on RXD. When the



UART1/UART2

start bit reaches the leftmost position, the control block executes one last shift, then loads SBUF with the 8 data bits, loads RB8 (SCON.2) with the stop bit, and sets the RI bit, provided RI = 0, and either SM2 = 0 (see [Section 19.4](#)) or the received stop bit = 1. If none of these conditions is met, the received byte is lost.

The associated timings for transmit/receive in mode 1 are illustrated in [Figure 164](#).

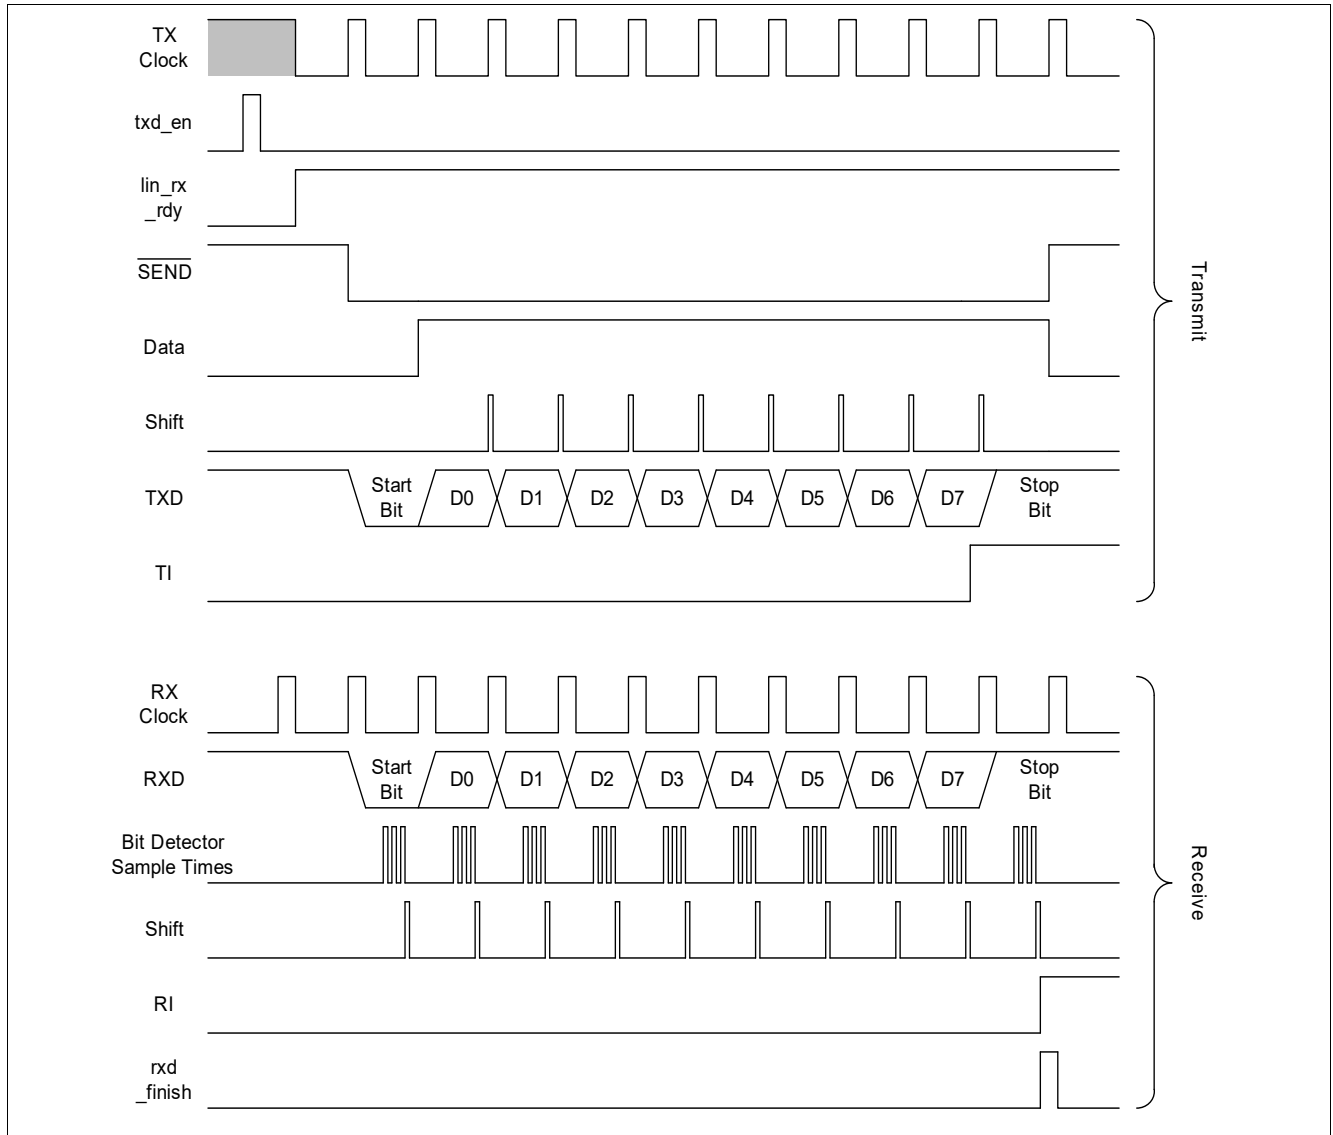


Figure 164 Serial Interface, Mode 1, Timing Diagram

---

**UART1/UART2****19.3.3 Mode 2, 9-Bit UART, Fixed Baud Rate**

In mode 2, the UART behaves as a 9-bit serial port. A start bit (0), 8 data bits plus a programmable 9th bit and a stop bit (1) are transmitted on TXD or received on RXD. The 9th bit for transmission is taken from TB8 (SCON.3) while for reception, the 9th bit received is placed in RB8 (SCON.2).

The transmission cycle is activated by a write to SBUF. The data is transferred to the transmit shift register and TB8 is copied into the 9th bit position. At phase 1 of the machine cycle following the next rollover in the divide-by-16 counter, the start bit is copied to TXD and data is activated one bit time later. One bit time after the data is activated, the data starts shifting right. For the first shift, a stop bit (1) is shifted in from the left and for subsequent shifts, zeros are shifted in. When the TB8 bit gets to the output position, the control block executes one last shift and sets the TI bit.

Reception is started by a high to low transition on RXD (sampled at 16 times the baud rate). The divide-by-16 counter is then reset and  $1111\ 1111_b$  is written to the receive register. If a valid start bit (0) is then detected (based on two out of three samples), it is shifted into the register followed by 8 data bits. If the transition is not followed by a valid start bit, the controller goes back to looking for a high to low transition on RXD. When the start bit reaches the leftmost position, the control block executes one last shift, then loads SBUF with the 8 data bits, loads RB8 (SCON.2) with the 9th data bit, and sets the RI bit, provided RI = 0, and either SM2 = 0 (see [Section 19.4](#)) or the 9th bit = 1. If none of these conditions is met, the received byte is lost.

The baud rate for the transfer is fixed at  $f_{PCLK}/64$ .

**19.3.4 Mode 3, 9-Bit UART, Variable Baud Rate**

Mode 3 is the same as mode 2 in all respects except that the baud rate is variable.

In all modes, transmission is initiated by any instruction that uses SBUF as a destination register. Reception is initiated in the modes by the incoming start bit if REN = 1.

The serial interface also provides interrupt requests when transmission or reception of the frames has been completed. The corresponding interrupt request flags are TI or RI, respectively. If the serial interrupt is not used (i.e., serial interrupt not enabled), TI and RI can also be used for polling the serial interface.

The associated timings for transmit/receive in modes 2 and 3 are illustrated in [Figure 165](#).

UART1/UART2

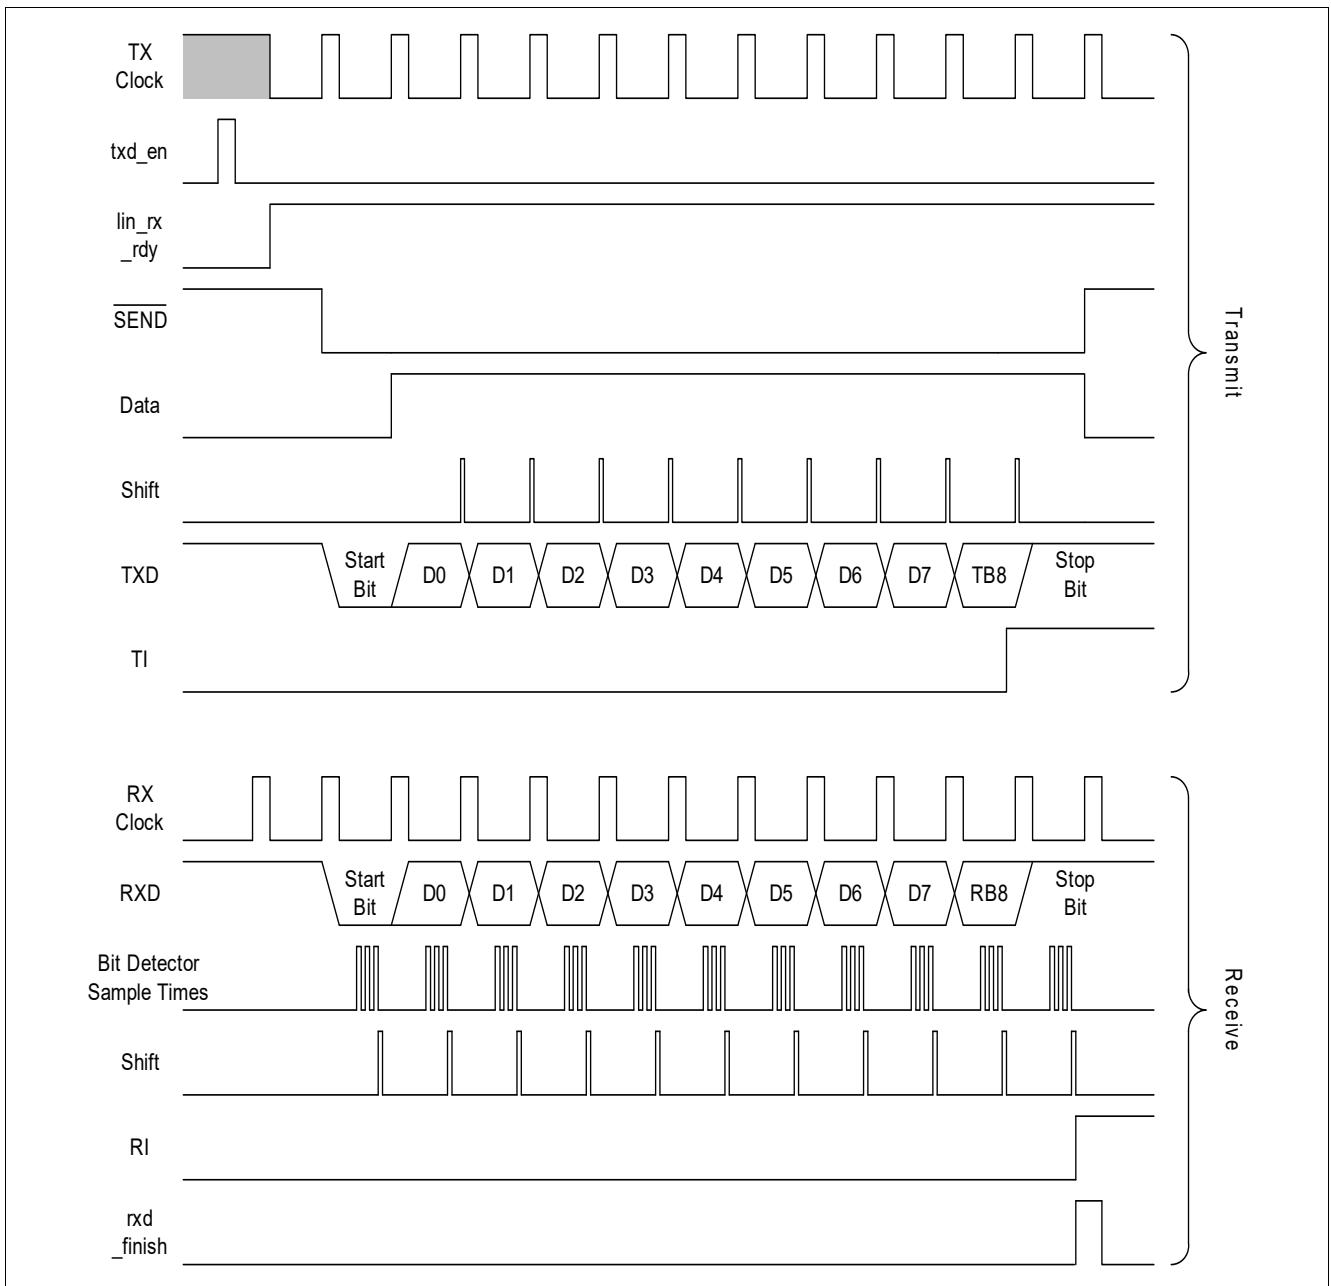


Figure 165 Serial Interface, Modes 2 and 3, Timing Diagram

---

**UART1/UART2****19.4 Multiprocessor Communication**

Modes 2 and 3 have a special provision for multiprocessor communication using a system of address bytes with bit 9 = 1 and data bytes with bit 9 = 0. In these modes, 9 data bits are received. The 9th data bit goes into RB8. The communication always ends with one stop bit. The port can be programmed such that when the stop bit is received, the serial port interrupt will be activated only if RB8 = 1.

This feature is enabled by setting bit SM2 in SCON. One of the ways to use this feature in multiprocessor systems is described in the following paragraph.

When the master processor wants to transmit a block of data to one of several slaves, it first sends out an address byte that identifies the target slave. An address byte differs from a data byte in that the 9th bit is 1 in an address byte and 0 in a data byte. With SM2 = 1, no slave will be interrupted by a data byte. An address byte, however, will interrupt all slaves, so that each slave can examine the received byte and see if it is being addressed. The addressed slave will clear its SM2 bit and prepare to receive the data bytes that will be coming. The slaves that were not being addressed retain their SM2s as set and ignore the incoming data bytes.

Bit SM2 has no effect in mode 0. SM2 can be used in mode 1 to check the validity of the stop bit. In a mode 1 reception, if SM2 = 1, the receive interrupt will not be activated unless a valid stop bit is received.

## UART1/UART2

### 19.5 Baud Rate Generation

There are several ways to generate the baud rate clock for the serial port, depending on the mode in which they are operating.

The baud rates in modes 0 and 2 are fixed to  $f_{PCLK}/2$  and  $f_{PCLK}/64$  respectively, while the variable baud rate in modes 1 and 3 is generated based on the setting of the Baud-rate generator in SCU (see [Section 19.5.1](#)).

“Baud rate clock” and “baud rate” must be distinguished from each other. The serial interface requires a clock rate that is 16 times the baud rate for internal synchronization. Therefore, the UART baud-rate generator must provide a “baud rate clock” to the serial interface where it is divided by 16 to obtain the actual “baud rate”. The abbreviation  $f_{PCLK}$  refers to the input clock frequency.

#### 19.5.1 Baud-rate Generator

The baud-rate generator in SCU is used to generate the variable baud rate for the UART in modes 1 and 3. It has programmable 11-bit reload value, 3-bit prescaler and 5-bit fractional divider.

The baud-rate generator is clocked derived via a prescaler ( $f_{DIV}$ ) from the input clock  $f_{PCLK}$ . The baud rate timer counts downwards and can be started or stopped through the baud rate control run bit BCON.R. Each underflow of the timer provides one clock pulse to the serial channel. The timer is reloaded with the 11-bit BR\_VALUE stored in its reload register BG each time it underflows. The duration between underflows depends on the ‘n’ value in the fractional divider, which can be selected by the bits BG.FD\_SEL. ‘n’ times out of 32, the timer counts one cycle more than specified by BR\_VALUE. The prescaler is selected by the bits BCON.BRPRE.


Register BG is the dual-function Baud-rate Generator/Reload register. Reading BG returns the contents of the timer, while writing to BG (low byte) always updates the reload register.

The BG should be written only when BCON.R is 0. An auto-reload of the timer with the contents of the reload register is performed one instruction cycle after the next time BCON.R is set. Any write to BG, while BCON.R is set, will be ignored.

The baud rate of the baud-rate generator depends on the following bits and register values:

- Input clock  $f_{PCLK}$
- Value of bit field BCON.BRPRE.
- Value of bit field BG.FD\_SEL
- Value of the 11-bit reload value BG.BR\_VALUE

**Figure 166** shows a simplified block diagram of the baud rate generator.

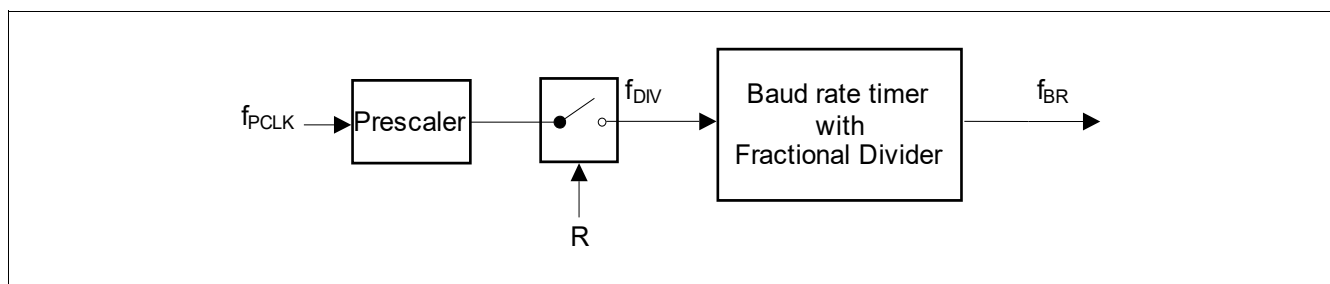

**Figure 166 Simplified Baud Rate Generator Block Diagram**

## UART1/UART2

The following formula calculate the final baud rate.

(19.1)

$$\text{Baud rate} = \frac{f_{\text{PCLK}}}{16 \times \text{PRE} \times \left( \text{BR\_VALUE} + \frac{n}{32} \right)}$$

The value of PRE (prescaler) is chosen by the bit field BCON.BRPRE. BR\_VALUE represents the contents of the reload value, taken as unsigned 11-bit integer from the bit field BG.BR\_VALUE. n/32 is defined by the fractional divider selection in bit field BG.FDSEL.

The maximum baud rate that can be generated is limited to  $f_{\text{PCLK}}/32$ . Hence, for module clocks of 40 MHz and 24 MHz, the maximum achievable baud rate is 1.25 MBaud and 0.75 MBaud respectively.

**Table 137** and **Table 138** list various commonly used baud rates together with their corresponding parameter settings and the deviation errors compared to the intended baud rate.

**Table 137 Typical Baud Rates of UART ( $f_{\text{PCLK}} = 40 \text{ MHz}$ )**

Baud rate ( $f_{\text{PCLK}} = 40 \text{ MHz}$ )	PRE	Reload Value (BR_VALUE)	Fractional Divider Selection (FD_NUM)	BG Register <sup>1)</sup>	Deviation Error
115.2 kBaud	1 (BRPRE = 000)	21 (15 <sub>H</sub> )	22 (16 <sub>H</sub> )	02B6 <sub>H</sub>	+0.06%
20 kBaud	1 (BRPRE = 000)	125 (7D <sub>H</sub> )	0 (0 <sub>H</sub> )	0FA0 <sub>H</sub>	0.00%
19.2 kBaud	1 (BRPRE = 000)	130 (82 <sub>H</sub> )	7 (7 <sub>H</sub> )	1047 <sub>H</sub>	-0.01%
9600 Baud	2 (BRPRE = 001)	130 (82 <sub>H</sub> )	7 (7 <sub>H</sub> )	1047 <sub>H</sub>	-0.01%
4800 Baud	4 (BRPRE = 010)	130 (82 <sub>H</sub> )	7 (7 <sub>H</sub> )	1047 <sub>H</sub>	-0.01%
2400 Baud	8 (BRPRE = 011)	130 (82 <sub>H</sub> )	7 (7 <sub>H</sub> )	1047 <sub>H</sub>	-0.01%

1) The value of the 16-bit BG register is obtained by concatenation the 11-bit BRVALUE and 5-bit FD\_NUM into a 16-bit value.

**Table 138 Typical Baud Rates of UART ( $f_{\text{PCLK}} = 24 \text{ MHz}$ )**

Baud rate ( $f_{\text{PCLK}} = 24 \text{ MHz}$ )	PRE	Reload Value (BR_VALUE)	Fractional Divider Selection (FD_NUM)	BG Register <sup>1)</sup>	Deviation Error
115.2 kBaud	1 (BRPRE = 000)	13 (0D <sub>H</sub> )	1 (01 <sub>H</sub> )	01A1 <sub>H</sub>	-0.08%
20 kBaud	1 (BRPRE = 000)	75 (4B <sub>H</sub> )	0 (00 <sub>H</sub> )	0960 <sub>H</sub>	+0.00%
19.2 kBaud	1 (BRPRE = 000)	78 (4E <sub>H</sub> )	4 (04 <sub>H</sub> )	09C4 <sub>H</sub>	+0.00%
9600 Baud	2 (BRPRE = 001)	78 (4E <sub>H</sub> )	4 (04 <sub>H</sub> )	09C4 <sub>H</sub>	+0.00%
4800 Baud	4 (BRPRE = 010)	78 (4E <sub>H</sub> )	4 (04 <sub>H</sub> )	09C4 <sub>H</sub>	+0.00%
2400 Baud	8 (BRPRE = 011)	78 (4E <sub>H</sub> )	4 (04 <sub>H</sub> )	09C4 <sub>H</sub>	+0.00%

1) The value of the 16-bit BG register is obtained by concatenation the 11-bit BRVALUE and 5-bit FD\_NUM into a 16-bit value.

## UART1/UART2

### 19.6 LIN Support in UART


The UART module can be used to support the Local Interconnect Network (LIN) protocol for both master and slave operations. The LIN baud rate detection feature, which consists of the hardware logic for Break and Synch Byte detection, provides the capability to detect the baud rate within LIN protocol using Timer 2. This allows the UART module to be synchronized to the LIN baud rate for data transmission and reception.

#### 19.6.1 LIN Protocol

LIN is a holistic communication concept for local interconnected networks in vehicles. The communication is based on the SCI (UART) data format, a single-master/multiple-slave concept, a clock synchronization for nodes without stabilized time base. An attractive feature of LIN is self-synchronization of the slave nodes without a crystal or ceramic resonator, which significantly reduces the cost of hardware platform. Hence, the baud rate must be calculated and returned with every message frame.


The structure of a LIN frame is shown in [Figure 167](#). The frame consists of the:

- header, which comprises a Break (13-bit time low), Synch Byte ( $55_{\mu}$ ), and ID field
- response time
- data bytes (according to UART protocol)
- checksum

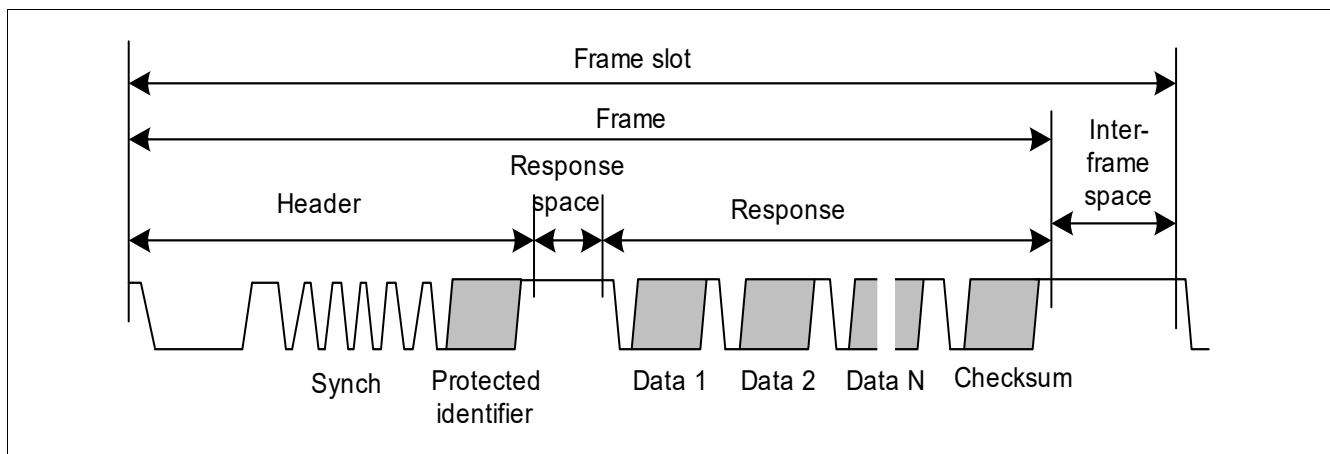

**Figure 167** The Structure of LIN Frame

Each byte field is transmitted as a serial byte, as shown in [Figure 168](#). The LSB of the data is sent first and the MSB is sent last. The start bit is encoded as a bit with value zero (dominant) and the stop bit is encoded as a bit with value one (recessive).

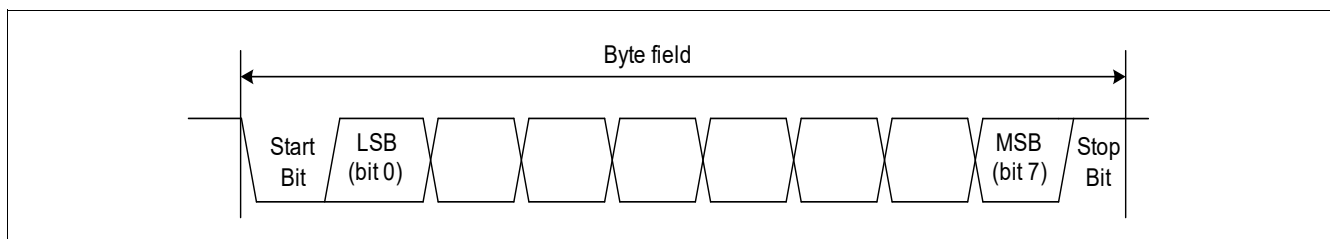


**Figure 168** The Structure of Byte Field

The break is used to signal the beginning of a new frame. It is the only field that does not comply with [Figure 168](#). A break is always generated by the master task (in the master mode) and it must be at least 13 bits

## UART1/UART2

of dominant value, including the start bit, followed by a break delimiter, as shown in [Figure 169](#). The break delimiter will be at least one nominal bit time long.


A slave node will use a break detection threshold of 11 nominal bit times.

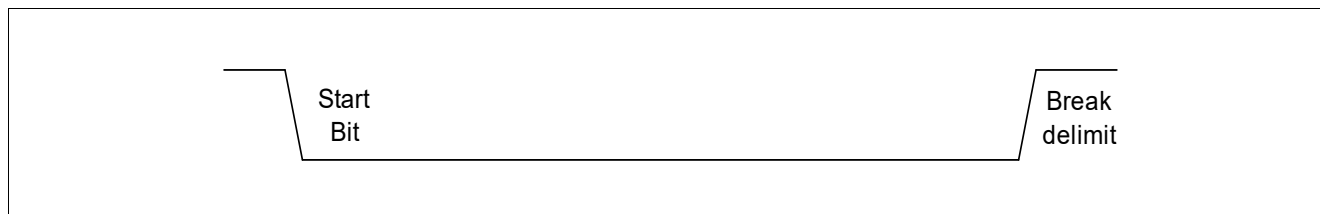

**Figure 169 The Break Field**

Synch Byte is a specific pattern for determination of time base. The byte field is with the data value 55<sub>H</sub>, as shown in [Figure 170](#).

A slave task is always able to detect the Break/Synch sequence, even if it expects a byte field (assuming the byte fields are separated from each other). If this happens, detection of the Break/Synch sequence will abort the transfer in progress and processing of the new frame will commence.

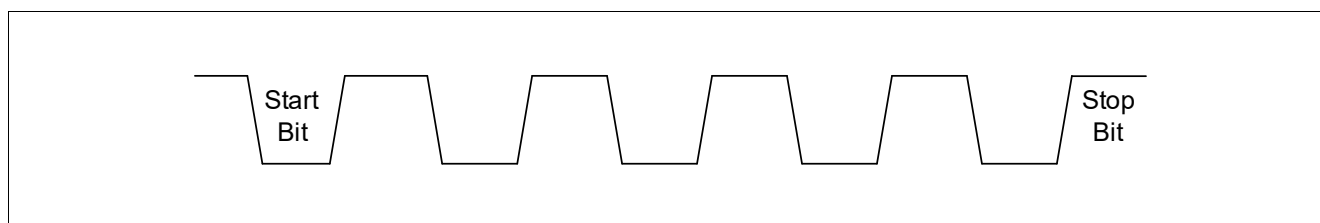

**Figure 170 The Synch Byte Field**

The slave task will receive and transmit data when an appropriate ID is sent by the master:

1. Slave waits for Synch Break
2. Slave synchronizes on Synch Byte
3. Slave snoops for ID
4. According to ID, slave determines whether to receive or transmit data, or do nothing
5. When transmitting, the slave sends 2, 4 or 8 data bytes, followed by check byte

### 19.6.2 LIN Header Transmission

LIN header transmission is only applicable in master mode. In the LIN communication, a master task decides when and which frame is to be transferred on the bus. It also identifies a slave task to provide the data transported by each frame. The information needed for the handshaking between the master and slave tasks is provided by the master task through the header portion of the frame.

The header consists of a break and synch pattern followed by an identifier. Among these three fields, only the break pattern cannot be transmitted as a normal 8-bit UART data. The break must contain a dominant value of 13 bits or more to ensure proper synchronization of slave nodes.

In the LIN communication, a slave task is required to be synchronized at the beginning of the protected identifier field of frame. For this purpose, every frame starts with a sequence consisting of a break field followed by a synch byte field. This sequence is unique and provides enough information for any slave task to detect the beginning of a new frame and be synchronized at the start of the identifier field.



---

**UART1/UART2****19.6.2.1 Automatic Synchronization to the Host**

Upon entering LIN communication, a connection is established and the transfer speed (baud rate) of the serial communication partner (host) is automatically synchronized in the following steps that are to be included in user software:

STEP 1: Initialize interface for reception and timer for baud rate measurement

STEP 2: Wait for an incoming LIN frame from host

STEP 3: Synchronize the baud rate to the host

STEP 4: Enter for Master Request Frame or for Slave Response Frame

The next sections, [Section 19.6.2.2](#), [Section 19.6.2.3](#) and [Section 19.6.2.4](#) provide some hints on setting up the microcontroller for baud rate detection of LIN.

*Note:*        *Re-synchronization and setup of baud rate are always done for **every** Master Request Header or Slave Response Header LIN frame.*

---

**UART1/UART2**
**19.6.2.2 Initialization of Break/Synch Field Detection Logic**

The LIN baud rate detection feature provides the capability to detect the baud rate within the LIN protocol using Timer 2. Initialization consists of:

- Serial port of the microcontroller set to Mode 1 (8-bit UART, variable baud rate) for communication.
- Provide the baud rate range via bit field BCON.BGSEL.
- Toggle BCON.BRDIS bit (set the bit to 1 before clearing it back to 0) to initialize the Break/Synch detection logic.
- Clear all status flags LINST.BRK, LINST.EOFSYN and LINST.ERRSYN to 0.
- Timer 2 is set to capture mode with falling edge trigger at pin T2EX. Bit T2MOD.EDGESEL is set to 0 by default and bit T2CON.CP/RL2 is set to 1.
- Timer 2 external events are enabled. T2CON.EXEN2 is set to 1. (EXF2 flag is set when a negative transition occurs at pin T2EX)
- $f_{T2}$  can be configured by bit field T2MOD.T2PRE.

**19.6.2.3 Baud Rate Range Selection**

The Synch Break and Synch Byte detection logic supports a maximum number of bits in the Break field as defined by [Equation \(19.2\)](#).

$$\text{Maximum number of bits} = \text{Baud Rate} \times \frac{4095}{\text{Sample Frequency}} \quad (19.2)$$

The sample frequency is given by [Equation \(19.3\)](#).

$$\text{Sample Frequency} = \frac{f_{\text{PCLK}}}{8 \times 2^{\text{BGSEL}}} \quad (19.3)$$

If the maximum number of bits in the Break field is exceeded, the internal counter will overflow, which results in a baudrate detection error. Therefore, an appropriate BGSEL value has to be selected for the required baudrate detection range.

## UART1/UART2

The baud rate range defined by different BGSEL settings is shown in the following table. The BGSEL settings and baudrate ranges are valid for a synch break field of 13 bits.

**Table 139 BGSEL Bit Field Definition for Different Input Frequencies**

$f_{PCLK}$	BGSEL	Baud Rate Select for Detection $f_{pclk}/(2184*2^{BGSEL})$ to $f_{pclk}/(72*2^{BGSEL})$
40 MHz	00 <sub>B</sub>	18.3 kHz to 555.6 kHz
	01 <sub>B</sub>	9.2 kHz to 277.8 kHz
	10 <sub>B</sub>	4.6 kHz to 138.9 kHz
	11 <sub>B</sub>	2.3 kHz to 69.4 kHz
24 MHz	00 <sub>B</sub>	11 kHz to 333.3 kHz
	01 <sub>B</sub>	5.5 kHz to 166.7 kHz
	10 <sub>B</sub>	2.8 kHz to 83.3 kHz
	11 <sub>B</sub>	1.4 kHz to 41.7 kHz

Each BGSEL setting supports a range of baud rate for Synch Break and Synch Byte detection. If the baud rate used is outside the defined range, the Synch Break and Synch Byte may not be detected correctly. In order to determine the right BGSEL range the following equation helps selecting the right range:

$$n = f_{SYS} / \text{Master\_BaudRate}$$

if  $n > 576$  then BGSEL = 3

if  $n > 288$  then BGSEL = 2

if  $n > 144$  then BGSEL = 1

if  $n > 72$  then BGSEL = 0

For any value  $n$  smaller than 72 a proper Synch Break and Synch Byte detection may not be given.

Since a given BGSEL value defines a certain master baudrate range, alternatively the recognized synch break length can be considered for given master baudrates. The [Table 140](#) lists the recognized synch break length in master baudrate bit times depending on the system frequency, the BGSEL setting and the master baudrate. The table lists nominal values, clock tolerances are not taken into account. Furthermore these values are only for user guidance, proper evaluation in the user application should still be considered.

**Table 140 Recognized Synch Break Length in bit times for a given system frequency, BGSEL selection and master baudrate**

$f_{PCLK}$	BGSEL	9600 baud [bits]	10400 baud [bits]	19200 baud [bits]
40 MHz	00 <sub>B</sub>	-	-	11..15
	01 <sub>B</sub>	11..15	11..16	11..30
	10 <sub>B</sub>	11..30	11..32	11..60
	11 <sub>B</sub>	11..60	11..65	11..120
24 MHz	00 <sub>B</sub>	11..12	11..13	11..25
	01 <sub>B</sub>	11..25	11..27	11..50
	10 <sub>B</sub>	11..50	11..54	11..100
	11 <sub>B</sub>	11..100	11..108	11..200

## UART1/UART2

### 19.6.2.4 LIN Baud Rate Detection


This chapter gives an example on how the hardware features can be used to detect a Synch Break and how to measure the LIN master baud rate.

The baud rate detection for LIN is shown in **Figure 171**.

The Header LIN frame consists of the:

- Synch Break (13 bit times low or higher)
- Synch Byte (55<sub>H</sub>)
- Protected ID field

where only the Synch Break and Synch Byte is of interest for the baud rate detection. The LIN header is not even displayed in **Figure 171**.

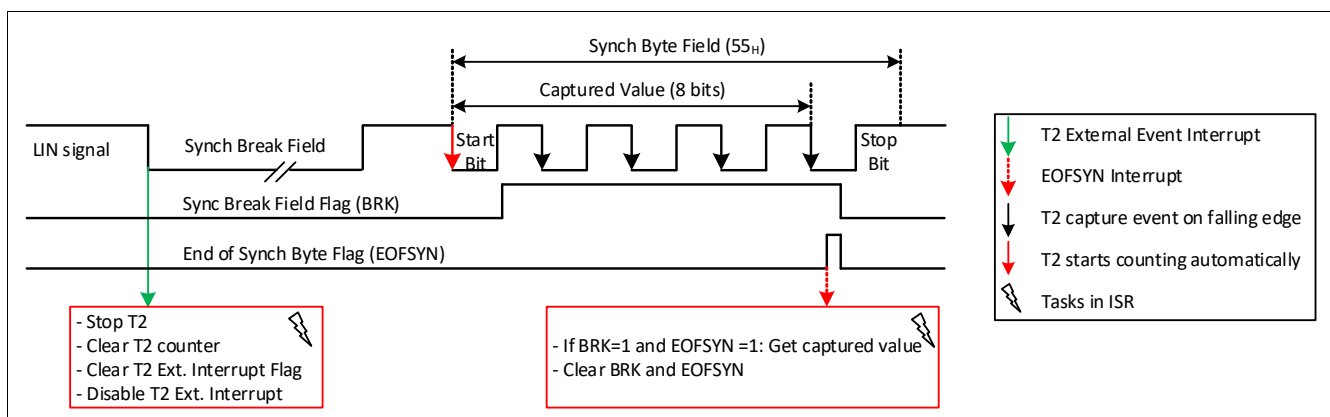

**Figure 171** LIN Auto Baud Rate Detection

The Timer2 (**Chapter 16**) is used to measure the baud rate of the LIN master. For this purpose the Timer2 should be configured to operate in capture mode. Timer2 should start on a falling edge on the T2EX signal, which is by default connected to the internal LIN transceiver. Furthermore the Timer2 should be configured to capture T2EX on the falling edge as well. The **LINST.BGSEL** should be set to a value which covers the expected baud rate of the LIN master to be able to recognize the Synch Break. **Table 139** gives possible values for  $f_{\text{SYS}} = 24\text{MHz}$  and  $40\text{MHz}$ . For any other system frequencies the correct **LINST.BGSEL** values has to be calculated according to the formula given along with the table. E.g. for  $f_{\text{SYS}} = 40\text{MHz}$  a value of **LINST.BGSEL** = 3 would be a good choice.

Timer2 starts with the falling edge on LIN line at the beginning of the Synch Break and triggers an interrupt. Inside this ISR the Timer2 should be stopped by the user and the Timer2 counter values has to be reset, because at this time the Timer2 value is not of interest, the main purpose of this ISR is to reset and arm the Timer2 again. To avoid any undesired interrupts during the following Synch Byte the Timer2 external interrupt should be disabled. The Timer2 is now ready to start again on the next falling edge of the LIN line, with the start bit of the Synch Byte Field. The Timer2 now captures the current count value in its capture register on every falling edge of the LIN signal (Synch Byte). On every falling edge the previous captured timer value will be overwritten.

The **LINST.BRK** signals a valid Synch Break Field, means the Synch Break Field was at least 11 times longer than the first bit of the Synch Byte. The signal **LINST.EOFSYN** gets set once a valid Synch Byte was received. The **LINST.EOFSYN** can be used to trigger an interrupt in which the **LINST.BRK** should be checked and along with **LINST.EOFSYN** these flags should be cleared (**LINSCLR**). Inside this EOFSYS interrupt service routine the user reads the Timer2 capture value which reflects the Timer2 count value at the 8th bit of the Synch Byte. The Timer2 capture value can now be used to calculate the master baud rate and program the UART1 accordingly.

---

**UART1/UART2**

If the Synch Byte was not received properly then the signal **LINST.ERRSYN** gets set instead of LINST.EOFSYN. Also the signal LINST.ERRSYN can issue an interrupt which could be used to clear the flags and implement an error handling.

Latest at the end of the LIN frame or with the reception of the LINST.ERRSYN signal, the Timer2 external interrupt should be enabled again to be able to trigger on the next falling edge of the Synch Break.

UART1/UART2

19.7 Module Interfaces

An overview of the UART I/O interface is shown in **Figure 172** (UART1) and **Figure 173** (UART2).

In mode 0 (the serial port behaves as shift register), data is shifted in through RXD and out through RXDO, while the TXD line is used to provide a shift clock which can be used by external devices to clock data in and out. In modes 1, 2 and 3, the port behaves as an UART. Data is transmitted on TXD and received on RXD.

UART1:

As RXDO is not connected to I/O for UART1, mode 0 is not supported on UART1.

Data that is shifted into and out of the UART through RXD and TXD respectively.

RXD from UART1 can be selected from different sources (LIN or RXD1). This selection is performed within the SCU via SFR bit MODPISEL.URIOS1.

RXD and TXD from UART1 are connected to LIN can be monitored via RXD1 and TXD1 outputs on GPIO (by enabling the alternate outputs), UART1 in LIN mode or LIN monitoring mode.

In addition, UART1 transmission can be disconnected from LIN and provided via input port TXD1 (selected via . MODPISEL.U\_TX\_CONDIS), UART1 not used.

If UART1 is used as UART, RXD1 is input and TXD1 is output.

UART2:

RXD and TXD from UART2 can be selected from different sources. This selection is performed by the SCU via SFR bit MODPISEL3.URIOS2.

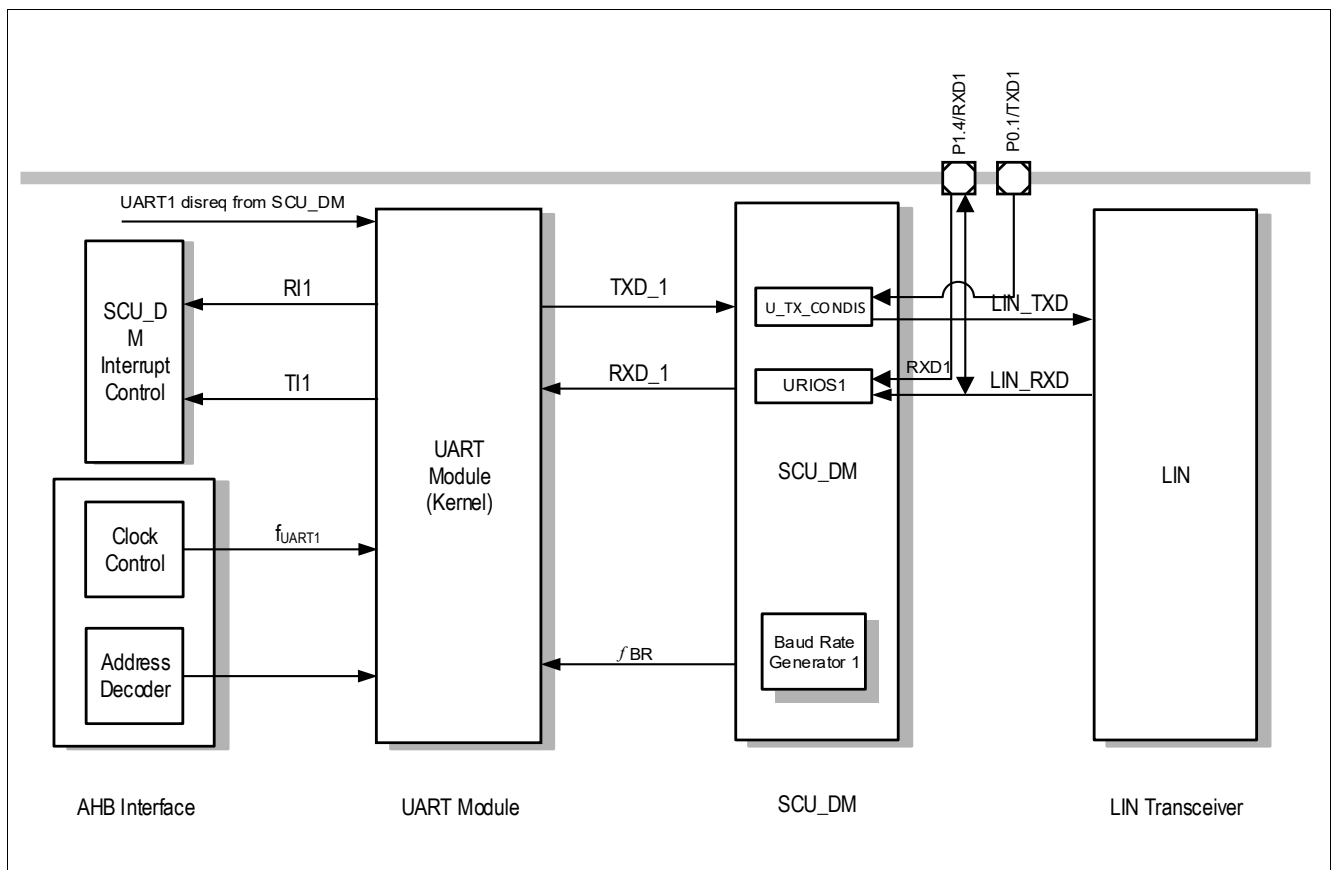


Figure 172 UART1 Module I/O Interface

UART1/UART2

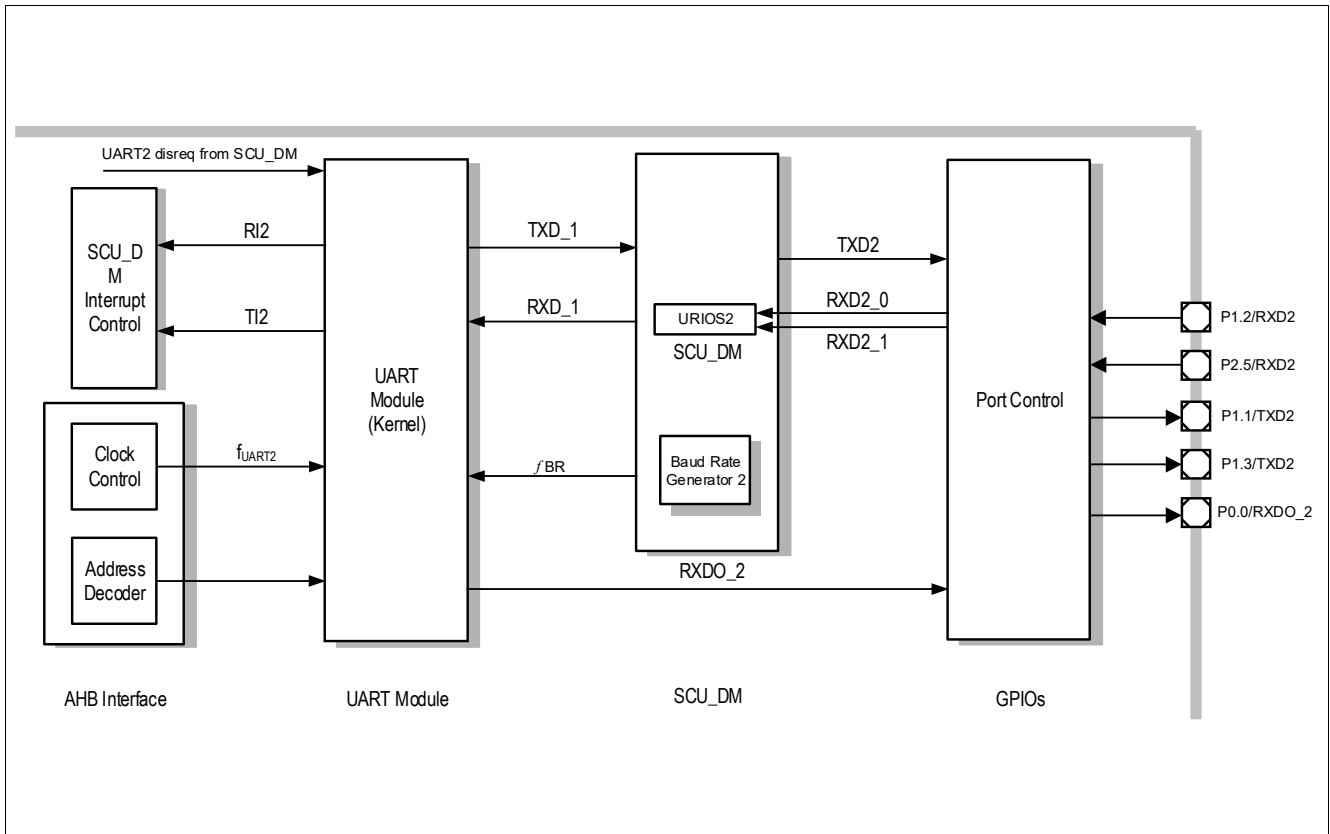


Figure 173 UART2 Module I/O Interface

19.8 Interrupts

The two UART interrupts can be separately enabled or disabled by setting or clearing their corresponding enable bits in SCU SFR MODIEN. An overview of the UART interrupt sources is shown in [Table 141](#) and [Table 142](#).

Table 141 UART1 Interrupt Sources

Interrupt	Flag	Interrupt Enable Bit
Reception completed	SCON.RI	SCU_MODIEN1.RIEN
Transmission completed	SCON.TI	SCU_MODIEN1.TIEN

Table 142 UART2 Interrupt Sources

Interrupt	Flag	Interrupt Enable Bit
Reception completed	SCON.RI	SCU_MODIEN2.RIEN
Transmission completed	SCON.TI	SCU_MODIEN2.TIEN

---

**UART1/UART2**
**19.9 Register Definition**
**19.9.1 UART Registers**
**19.9.1.1 UART Control Registers**

UART contains the two Special Function Registers (SFRs), SCON and SBUF. SCON is the control register and SBUF is the data register. On reset, both SCON and SBUF return 00<sub>H</sub>. The serial port control and status register is the SFR SCON. This register contains not only the mode selection bits, but also the 9th data bit for transmit and receive (TB8 and RB8) and the serial port interrupt bits (TI and RI).

SBUF is the receive and transmit buffer of the serial interface. Writing to SBUF loads the transmit register and initiates transmission. This register is used for both transmit and receive data. Transmit data is written to this location and receive data is read from this location, but the two paths are independent.

Reading out SBUF accesses a physically separate receive register.

**SBUF**
**Serial Data Buffer**
**(04<sub>H</sub>)**
**Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>VAL</b>							
rwh							

Field	Bits	Type	Description
VAL	[7:0]	rwh	<b>Serial Interface Buffer Register</b>

**SCON**
**Serial Channel Control Register**
**(00<sub>H</sub>)**
**Reset Value: 00<sub>H</sub>**

7	6	5	4	3	2	1	0
<b>SM0</b>	<b>SM1</b>	<b>SM2</b>	<b>REN</b>	<b>TB8</b>	<b>RB8</b>	<b>TI</b>	<b>RI</b>
rw	rw	rw	rw	rw	rwh	rwh	rwh

Field	Bits	Type	Description
RI	0	rwh	<b>Receive Interrupt Flag</b> This is set by hardware at the end of the 8th bit on mode 0, or at the half point of the stop bit in modes 1, 2, and 3. Flag can be set by software by writing 1 to RI Flag must be cleared by software in SCONCLR.RICLR.
TI	1	rwh	<b>Transmit Interrupt Flag</b> This is set by hardware at the end of the 8th bit in mode 0, or at the beginning of the stop bit in modes 1, 2, and 3. Flag can be set by software by writing 1 to TI Flag must be cleared by software in SCONCLR.TICLR.



---

**UART1/UART2**

Field	Bits	Type	Description
RB8	2	rwh	<b>Serial Port Receiver Bit 9</b> In modes 2 and 3, this is the 9th data bit received. In mode 1, this is the stop bit received. In mode 0, this bit is not used.
TB8	3	rw	<b>Serial Port Transmitter Bit 9</b> In modes 2 and 3, this is the 9th data bit sent.
REN	4	rw	<b>Enable Receiver of Serial Port</b> 0 <sub>B</sub> Serial reception is disabled. 1 <sub>B</sub> Serial reception is enabled.
SM2	5	rw	<b>Enable Serial Port Multiprocessor Communication in Modes 2 and 3</b> In mode 2 or 3, if SM2 is set to 1, RI will not be activated if the received 9th data bit (RB8) is 0. In mode 1, if SM2 is set to 1, RI will not be activated if a valid stop bit (RB8) was not received. In mode 0, SM2 should be 0.
SM1, SM0	6, 7	rw	<b>Serial Port Operating Mode Selection</b> 00 <sub>B</sub> Mode 0: 8-bit shift register, fixed baud rate ( $f_{PCLK}/2$ ). 01 <sub>B</sub> Mode 1: 8-bit UART, variable baud rate. 10 <sub>B</sub> Mode 2: 9-bit UART, fixed baud rate ( $f_{PCLK}/64$ or $f_{PCLK}/32$ ). 11 <sub>B</sub> Mode 3: 9-bit UART, variable baud rate.

## UART1/UART2

## 19.9.1.2 Baud-Rate Generator Control and Status Registers


## BCON1

Baud Rate Control Register 1

(88<sub>H</sub>)Reset Value: 00<sub>H</sub>

## BCON2

Baud Rate Control Register 2

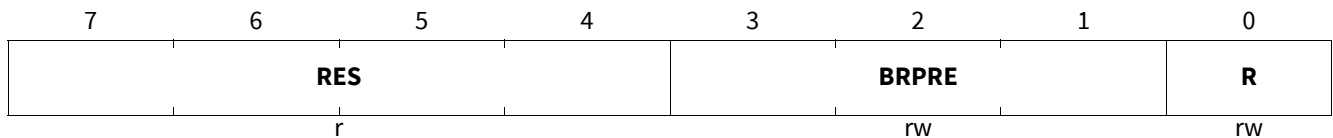(98<sub>H</sub>)Reset Value: 00<sub>H</sub>

Field	Bits	Type	Description
<b>R</b>	0	rw	<p><b>Baud Rate Generator Run Control Bit</b></p> <p>0<sub>B</sub> Baud-rate generator disabled. 1<sub>B</sub> Baud-rate generator enabled.</p> <p><i>Note: BR_VALUE should only be written if R = 0.</i></p>
<b>BRPRE</b>	[3:1]	rw	<p><b>Prescaler Bit</b></p> <p>Selects the input clock for <math>f_{DIV}</math> which is derived from the peripheral clock.</p> <p>000<sub>B</sub> <math>f_{DIV} = f_{PCLK}</math>            001<sub>B</sub> <math>f_{DIV} = f_{PCLK}/2</math>            010<sub>B</sub> <math>f_{DIV} = f_{PCLK}/4</math>            011<sub>B</sub> <math>f_{DIV} = f_{PCLK}/8</math>            100<sub>B</sub> <math>f_{DIV} = f_{PCLK}/16</math>            101<sub>B</sub> <math>f_{DIV} = f_{PCLK}/32</math>            Others: reserved</p>
<b>RES</b>	[7:4]	r	<p><b>Reserved</b></p> <p>Returns 0 if read; should be written with 0.</p>

## UART1/UART2

## LINST

## LIN Status Register

(94<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
<b>RES</b>	<b>SYNEN</b>	<b>ERRSYN</b>	<b>EOFSYN</b>	<b>BRK</b>	<b>BGSEL</b>		<b>BRDIS</b>
r	rw	r	r	r	rw		rw

Field	Bits	Type	Description
<b>BRDIS</b>	0	rw	<b>Baud Rate Detection Disable</b> 0 <sub>B</sub> Break/Synch detection is enabled. 1 <sub>B</sub> Break/Synch detection is disabled.
<b>BGSEL</b>	[2:1]	rw	<b>Baud Rate Select for Detection</b> For different values of BGSEL, the baud rate range for detection is defined by the following formula: $f_{pclk}/(2184 \cdot 2^{BGSEL}) < \text{baud rate range} < f_{pclk}/(72 \cdot 2^{BGSEL})$ where BGSEL = 00 <sub>B</sub> , 01 <sub>B</sub> , 10 <sub>B</sub> , 11 <sub>B</sub> . See <a href="#">Table 137</a> for bit field BGSEL definition for different input frequencies.
<b>BRK</b>	3	r	<b>Break Field Flag</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Break Field is not detected. 1 <sub>B</sub> Break Field is detected.
<b>EOFSYN</b>	4	r	<b>End of SYN Byte Interrupt Flag</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> End of SYN Byte is not detected. 1 <sub>B</sub> End of SYN Byte is detected.
<b>ERRSYN</b>	5	r	<b>SYN Byte Error Interrupt Flag</b> This bit is set by hardware and can only be cleared by software. 0 <sub>B</sub> Error is not detected in SYN Byte. 1 <sub>B</sub> Error is detected in SYN Byte.
<b>SYNEN</b>	6	rw	<b>End of SYN Byte and SYN Byte Error Interrupts Enable</b> 0 <sub>B</sub> End of SYN Byte and SYN Byte Error Interrupts are not enabled. 1 <sub>B</sub> End of SYN Byte and SYN Byte Error Interrupts are enabled.
<b>RES</b>	7	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

## UART1/UART2

## LINSCLR

## LIN Status Clear Register

(0A4<sub>H</sub>)Reset Value: 00<sub>H</sub>

7	6	5	4	3	2	1	0
Res		ERRSYNC	EOFSYNC	BRKC		Res	
r		w	w	w		r	

Field	Bits	Type	Description
<b>Res</b>	2:0	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>BRKC</b>	3	w	<b>Break Field Flag Clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Break Field flag is not cleared. 1 <sub>B</sub> Break Field is cleared.
<b>EOFSYNC</b>	4	w	<b>End of SYN Byte Interrupt Flag Clear</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> End of SYN Byte Interrupt Flag is not cleared. 1 <sub>B</sub> End of SYN Byte is cleared.
<b>ERRSYNC</b>	5	w	<b>SYN Byte Error Interrupt Flag</b> This bit is set by software and can only be cleared by hardware. 0 <sub>B</sub> Error in SYN Byte Error Interrupt Flag is not cleared. 1 <sub>B</sub> Error in SYN Byte cleared.
<b>Res</b>	7:6	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

---

**UART1/UART2**
**19.9.1.3 Baud-Rate Generator Timer/Reload Registers**

The low and high bytes of the baud rate timer/reload register BG contains the 11-bit reload value for the baud rate timer and the 5-bit fractional divider selection.

Reading the low byte of register BG returns the content of the lower three bits of the baud rate timer and the FD\_SEL setting, while reading the high byte returns the content of the upper 8 bits of the baud rate timer.

Writing to register BG loads the baud rate timer with the reload and fractional divider values from the BG register, the first instruction cycle after BCON.R is set.

BG should only be written if R = 0.

*Note: The Baud-rate Generator Timer/Reload registers are located inside the SCU\_DM module. For accessing them, the base address of the SCU\_DM module has to be used.*

**BGL1**

**Baud Rate Timer/Reload Register 1, Low Byte (8C<sub>H</sub>)** **Reset Value: 00<sub>H</sub>**

**BGL2**

**Baud Rate Timer/Reload Register 2, Low Byte (9C<sub>H</sub>)** **Reset Value: 00<sub>H</sub>**




Field	Bits	Type	Description
<b>FD_SEL</b>	[4:0]	rw	<p><b>Fractional Divider Selection</b></p> <p>Selects the fractional divider to be n/32, where n is the value of FD_SEL and is in the range of 0 to 31.</p> <p>For example, writing 0001<sub>B</sub> to FD_SEL selects the fractional divider to be 1/32.</p> <p><i>Note: Fractional divider has no effect if BR_VALUE = 000<sub>H</sub>.</i></p>
<b>BR_VALUE</b>	[7:5]	rwh	<p><b>Baud Rate Timer/Reload Value</b></p> <p>The lower three bits of the 11-bit Baud Rate Timer/Reload value. See description in BGH register.</p>

## UART1/UART2

## BGH1

Baud Rate Timer/Reload Register 1, High Byte (90<sub>H</sub>)Reset Value: 00<sub>H</sub>


## BGH2

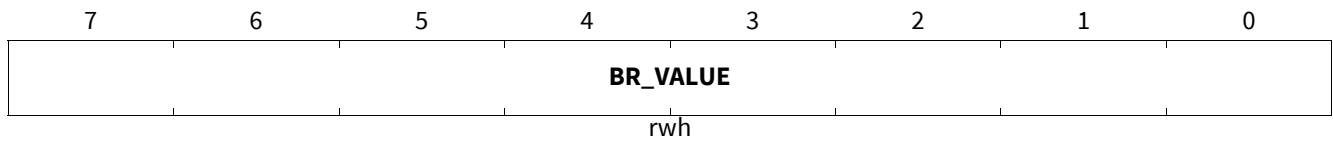Baud Rate Timer/Reload Register 2, High Byte (A0<sub>H</sub>)Reset Value: 00<sub>H</sub>

Field	Bits	Type	Description
<b>BR_VALUE</b>	[7:0]	rwh	<p><b>Baud Rate Timer/Reload Value</b> The upper 8 bits of the 11-bit Baud Rate Timer/Reload value.</p> <p>The definition of the 11-bit reload value is as follows:            000<sub>H</sub> Baud-rate timer is bypassed.            001<sub>H</sub> 1            002<sub>H</sub> 2            : :            : :            : :            7FE<sub>H</sub> 2046            7FF<sub>H</sub> 2047</p>

## SCONCLR

SCON Clear Register

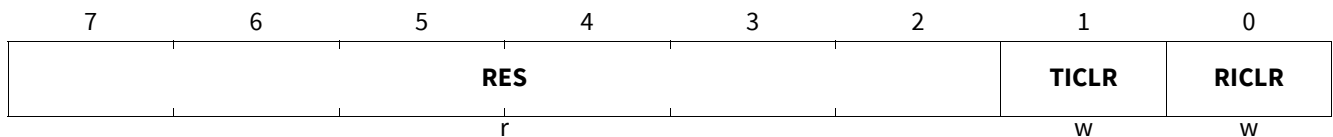(08<sub>H</sub>)Reset Value: 00<sub>H</sub>

Field	Bits	Type	Description
<b>RES</b>	[7:2]	r	<p><b>Reserved</b> Returns 0 if read; should be written with 0.</p>
<b>TICLR</b>	1	w	<p><b>SCON.TI Clear Flag</b> The definition of the clear flag is as follows:            0<sub>H</sub> TI Flag is not cleared.            1<sub>B</sub> TI Flag is cleared</p> <p><i>Note:</i> read to TICLR always return 0.</p>
<b>RICLR</b>	0	w	<p><b>SCON.RI Clear Flag</b> The definition of the clear flag is as follows:            0<sub>H</sub> RI Flag is not cleared.            1<sub>B</sub> RI Flag is cleared</p> <p><i>Note:</i> read to RICLR always return 0.</p>

## UART1/UART2

### 19.9.2 Register Map

There are two UART kernels in the TLE987x, namely UART1 and UART2. UART1 is dedicated for LIN transmission. UART2 is dedicated for external UART communication.

**Table 144** lists the addresses of the UART SFRs. **Table 145** lists the addresses of the SCU SFRs dedicated for UART1/2 functionality.

**Table 143** shows the UART module base addresses.

**Table 143 Register Address Space**

Module	Base Address	End Address	Note
UART1	4802 0000 <sub>H</sub>	4802 1FFF <sub>H</sub>	
UART2	4802 2000 <sub>H</sub>	4802 3FFF <sub>H</sub>	
SCU	5000 5000 <sub>H</sub>	5000 5FFF <sub>H</sub>	

**Table 144 Register Overview UART**

Register Short Name	Register Long Name	Offset Address	Reset Value
SCON	Serial Channel Control Register	00 <sub>H</sub>	<b>640</b>
SBUF	Serial Data Buffer	04 <sub>H</sub>	<b>640</b>
SCONCLR	SCON Clear Register	08 <sub>H</sub>	<b>646</b>

**Table 145 Register Overview SCU Module**

Register Short Name	Register Long Name	Offset Address	Reset Value
BCON1, dedicated for UART1	Baud Rate Control Register 1	88 <sub>H</sub>	<b>642</b>
BGL1, dedicated for UART1	Baud Rate Timer/Reload Register 1, Low Byte	8C <sub>H</sub>	<b>645</b>
BGH1 dedicated for UART1	Baud Rate Timer/Reload Register 1, High Byte	90 <sub>H</sub>	<b>646</b>
LINST dedicated for UART1	LIN Status Register	94 <sub>H</sub>	<b>643</b>
BCON2, dedicated for UART2	Baud Rate Control Register 2	98 <sub>H</sub>	<b>642</b>
BGL2, dedicated for UART2	Baud Rate Timer/Reload Register 2, Low Byte	9C <sub>H</sub>	<b>645</b>
BGH2, dedicated for UART2	Baud Rate Timer/Reload Register 2, High Byte	A0 <sub>H</sub>	<b>646</b>

## 20 LIN Transceiver

### 20.1 Features

#### General Functional Features

- Compliant to LIN2.2 standard, backward compatible to LIN1.3, LIN2.0 and LIN 2.1
- Compliant to SAE J2602 (slew rate, receiver hysteresis)

#### Special Features

- Measurement of LIN master baudrate via Timer 2
- LIN can be used as input/output with SFR bits.
- TxD timeout feature (optional, on by default)

#### Operation Mode Features

- LIN Sleep Mode (LSLM)
- LIN Receive-Only Mode (LROM)
- LIN Normal Mode (LNM)
- High Voltage Input / Output Mode (LHVIO)

#### Supported Baud Rates

- Mode for a transmission up to 10.4 kBaud
- Mode for a transmission up to 20 kBaud
- Mode for a transmission up to 40 kBaud
- Mode for a transmission up to 115.2 kBaud

#### Slope Mode Features

- Normal Slope Mode (20 kbit/s)
- Low Slope Mode (10.4 kbit/s)
- Flash Mode (115.2 kbit/s)

#### Wake-Up Features

- LIN bus wake-up



LIN Transceiver

20.2 Introduction

The LIN Module is a transceiver for the Local Interconnect Network (LIN) compliant to the LIN2.2 standard, backward compatible to LIN1.3, LIN2.0 and LIN2.1. It operates as a bus driver between the protocol controller and the physical network. The LIN bus is a single wire, bi-directional bus typically used for in-vehicle networks, using baud rates between 2.4 kBaud and 20 kBaud. Additionally baud rates up to 115.2 kBaud are implemented.

The LIN Module offers several different operation modes, including a LIN Sleep Mode and the LIN Normal Mode. The integrated slope control allows to use several data transmission rates with optimized EMC performance. For data transfer at the end of line, a Flash Mode up to 115.2 kBaud is implemented. This Flash Mode can be used for data transfer under special conditions for up to 250 kbit/s (in production environment, point-to-point communication with reduced wire length and limited supply voltage).

20.2.1 Block Diagram

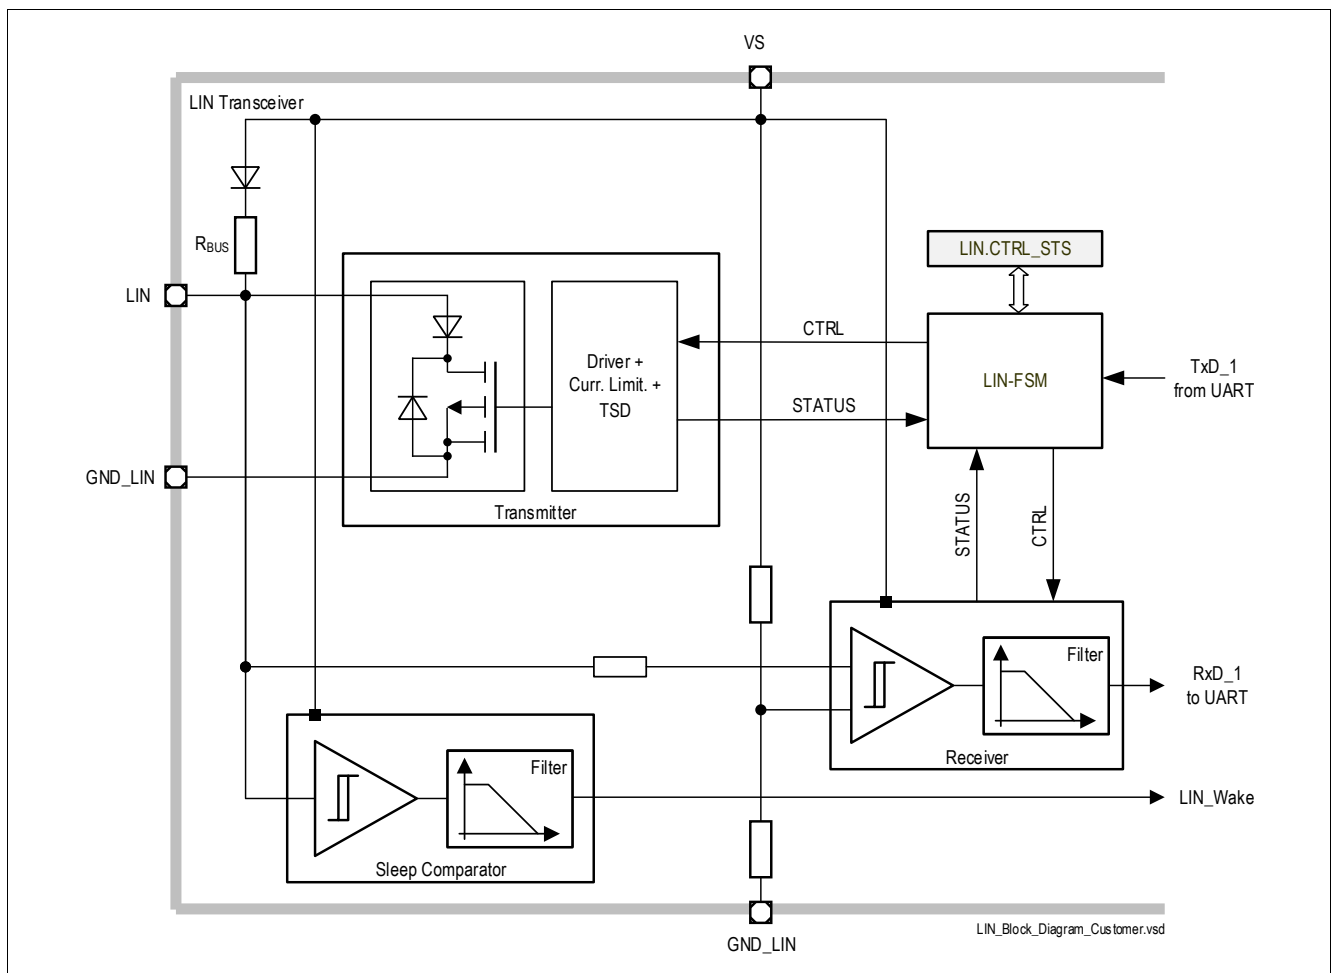



Figure 174 LIN Transceiver Block Diagram

## LIN Transceiver

### 20.3 Functional Description

#### 20.3.1 LIN Transceiver Modes

The LIN Module is controlled by an internal state machine which determines the actual state of the transceiver. This state machine is controllable by the SFR interface.

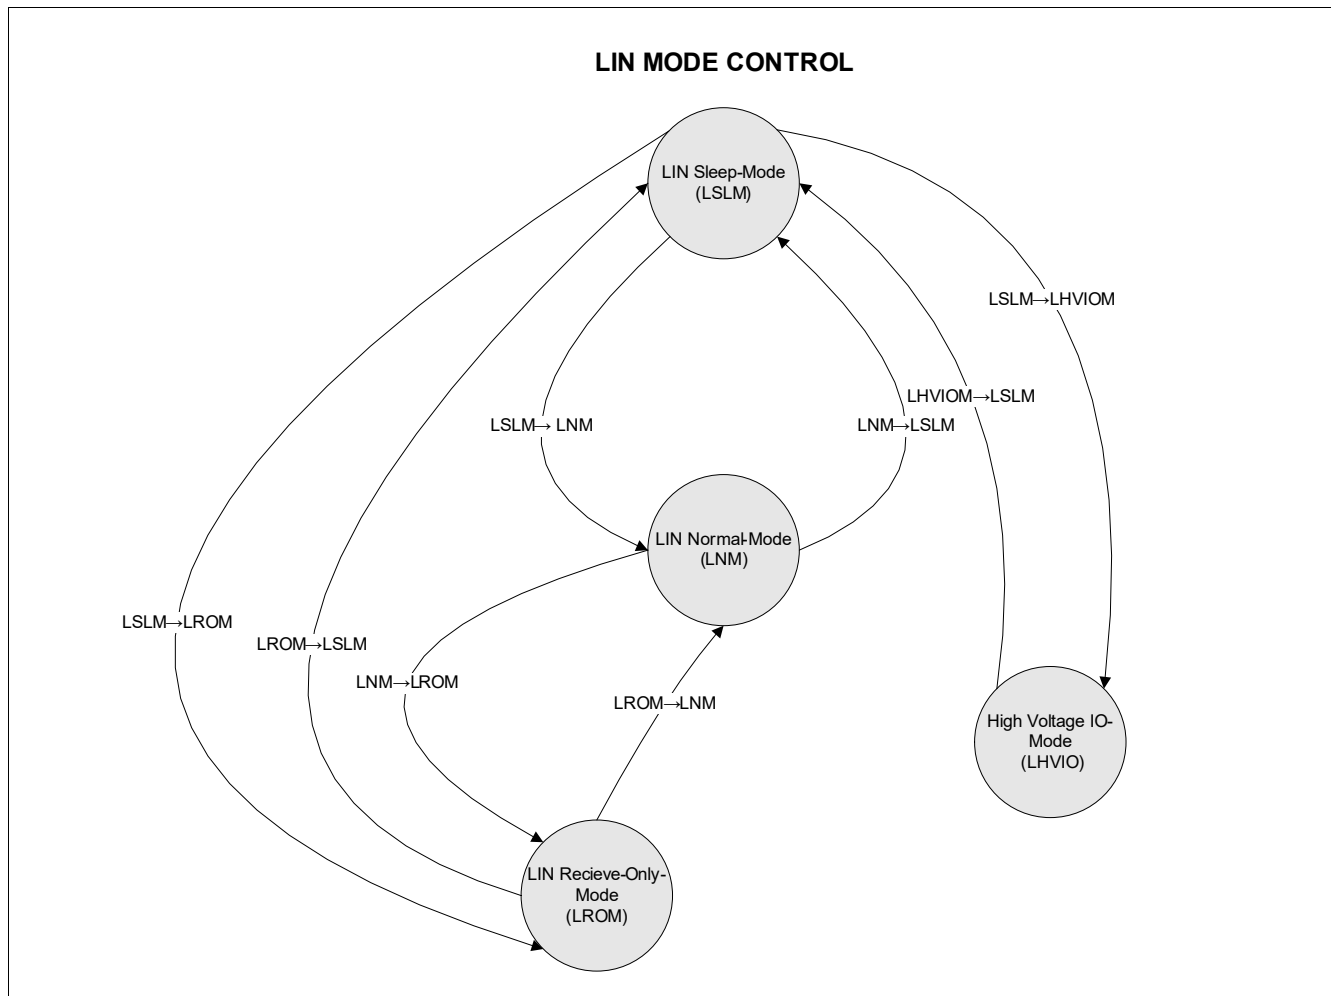

**Figure 175 SFR controlled LIN Transceiver State machine**

#### LIN Normal Mode (LNM)

In this mode it is possible to receive and transmit data with low slope, normal slope, fast slope or flash mode. Slope setting is locked during LIN Normal Mode to avoid destruction of communication process. This is blocked by hardware.

#### LIN Receive-Only Mode (LROM)

In LIN Receive-Only Mode the transmitter is disabled. The receiver is active. This mode can be directly selected by application software or is automatically set upon error detection.

## LIN Transceiver

### LIN Sleep Mode (LSLM)

In this mode, the transmit and receive functions are disabled, the wake receiver is active. Minimum current consumption is achieved. Wake up via LIN is possible. To disable the wake capability via LIN, the LIN wake can be disabled within the PMU.

### LIN High Voltage Input / Output (LHVIO)

This mode is dedicated for using the LIN transceiver as high voltage input/output. In LHVIO Mode the transceiver is controlled by **CTRL\_STS.TXD**.

The Input status is controlled by **CTRL\_STS.TXD** and can be read by **CTRL\_STS.RXD**.

The transitions between the described states can only be executed when corresponding conditions are fulfilled. The detailed description of the transitions can be found below.

### LIN Sleep Mode (LSLM) - LIN Receive-Only Mode (LROM) Transition Description

- LSLM - LROM transition is executed when:
  - MODE is configured to LIN Receive-Only Mode and
  - Feedback signals of Mode and Slope Mode are ok and
  - HV\_Mode bit is not set
- LROM - LSLM transition is executed when:
  - MODE is configured to LIN Sleep Mode

### LIN Sleep Mode (LSLM) - LIN Normal Mode (LNM) Transition Description

- LSLM - LNM transition is executed when:
  - MODE is configured to LIN Normal Mode and
  - Feedback signals of Mode and Slope Mode are ok and
  - HV\_Mode bit is not set and
  - VS undervoltage flag (VS\_UV\_STS) is not set
  - LIN transceiver OT\_STS and OC\_STS are not set and
  - no TXD\_TMOUT is set
- LNM - LSLM transition is executed when:
  - MODE is configured LIN Sleep Mode

### LIN Normal Mode (LNM) - LIN Receive-Only Mode (LROM) Transition Description

- LNM - LROM transition is executed when
  - MODE is configured to LIN Receive-Only Mode or
  - Feedback signals of Mode and Slope Mode are not ok or
  - VS undervoltage flag (VS\_UV\_STS) is set or
  - LIN transceiver OT\_STS or OC\_STS are set or
  - TXD\_TMOUT is set

---

## LIN Transceiver

- LROM - LNM transition is executed when:
  - MODE is configured to LIN Normal Mode and
  - Feedback signals of Mode and Slope Mode are ok (see [Chapter 20.3.2](#)) and
  - VS undervoltage flag (VS\_UV\_STS) is not set and
  - LIN transceiver OT\_STS and OC\_STS are not set and
  - no TXD\_TMOU is set

### LIN Sleep Mode (LSLM) - LIN High Voltage Input / Output Mode (LHVIO) Transition Description

- LSLM - LHVIO transition is executed when
  - HV\_MODE flag is set and
  - MODE is configured to LIN Normal Mode after HV\_MODE flag was set and
  - Feedback signals of Mode and Slope Mode are ok and
  - LIN transceiver OT\_STS and OC\_STS are not set
- LHVIO - LSLM transition is executed when:
  - MODE is configured to LIN Sleep Mode and
  - HV\_MODE flag is set or
  - Feedback signals of Mode and Slope Mode are not ok or
  - LIN transceiver OT\_STS or OC\_STS are set

### LIN Specifications 1.3 and 2.0, 2.1

The LIN specification 2.0 is a superset of the 1.3 version offering some additional features. However, it is possible to use the LIN 1.3 slave node in a 2.0 node cluster, as long as the new features are not used. Vice versa it is possible to use a LIN 2.0 node in the 1.3 cluster without using the new features.

The latest version of the LIN specification 2.1 has no changes regarding the physical layer specification of LIN 2.0.

## LIN Transceiver

### 20.3.2 LIN Transceiver Status for Mode Selection

The LIN transceiver provides the possibility to monitor the on chip status through internally generated feedback signals. This provides additional protection functionality for the application to avoid wrong configuration of the transceiver, which may lead to a blocking of communication on the LIN Bus. The table below shows the decoding of feedback signals to check the current status of the transceiver.

**Table 146 Decoding of Feedback Signals for LIN Transmitter Mode Settings**

MODE_FB[2]	MODE_FB[1]	MODE_FB[0]	Remarks
0	0	0	Mode Error
0	0	1	LIN Sleep Mode
0	1	0	Mode Error
0	1	1	Mode Error
1	0	0	Mode Error
1	0	1	LIN Receive-Only Mode
1	1	0	Mode Error
1	1	1	LIN Normal Mode

A Mode Error indicates a problem in the LIN configuration. If that applies, check the LIN software configuration, and whenever this does not improve the mode feedback it is recommended to enter Sleep Mode.

### 20.3.3 LIN Transceiver Error Handling

The LIN Module provides error handling for three different cases:

#### LIN Transceiver TxD Timeout

If the internal UART TxD signal is dominant for the time  $t > t_{\text{timeout}}$ , the TxD timeout function deactivates the LIN transmitter output stage temporarily by entering the LIN Receive-Only Mode. The transceiver remains in recessive state. The TxD timeout function prevents the LIN bus from being blocked by a permanent low signal on the TxD pin, caused by a failure. The failure is stored in the TXD\_TMOU flag. The transmitter stage is activated again after the dominant timeout condition is removed and after the TXD\_TMOU flag is cleared by software.

*Note: the TxD Timeout feature is automatically deactivated when the transceiver is set to LHVIO Mode.*

#### LIN Transceiver Overcurrent

If the LIN transmitter detects an overcurrent condition  $I > I_{\text{BUS,sc}}$ , the LIN transceiver stays in LIN Normal Mode and the overcurrent status will be stored in the OC\_STS flag. The short circuit current is limited to  $I_{\text{BUS,sc}}$ . The OC\_STS flag can be cleared by software and will be set again as long as the above condition remains.

To generate an interrupt in case of LIN overcurrent detection, the corresponding interrupt can be enabled by setting the OC\_IE in the SYS\_IRQ\_CTRL\_1 register. This interrupt is routed to INTISR[10].

---

## LIN Transceiver

### LIN Transceiver Overtemperature

If the LIN transmitter detects an overtemperature condition the transmitter will be deactivated temporarily by entering the LIN Receive-Only Mode. The transceiver remains in recessive state. The failure is stored in the LIN\_OT\_STS flag. The transmitter stage is activated again after the overtemperature condition is gone and after the LIN\_OT\_STS flag is cleared by software.

To generate an interrupt in case of LIN overtemperature detection, the corresponding interrupt can be enabled by setting the LIN\_OT\_IE in the SYS\_IRQ\_CTRL\_1 register. This interrupt is routed to INTISR[10].

### 20.3.4 Slope Modes

The LIN Module provides some additional slope mode features which can be used for EoL (End of Line) programming or to reduce emission in case of usage of lower baudrates. The configurable slope modes are:

#### Normal Slope Mode

This mode is usually used to transmit and receive messages on the bus. The selected slew rate setting allows a transmission rate of up to 20 kBaud.

#### Low Slope Mode

The usage of this mode is linked to a communication with lower baudrate. With this setting the emission of the transmitter can be reduced. The selected slew rate setting allows a transmission rate of up to 10.4 kBaud.

#### Fast Slope Mode

In this mode it is also possible to transmit and receive messages on the bus. The selected slew rate setting allows a transmission rate of up to 40 kBaud.

#### Flash Mode

In this mode it is possible to transmit and receive messages on the bus. Transmission rates of up to 115.2 kBaud are allowed due the internal slew rate control. This mode can be used for EoL programming.

#### Changing Slope Modes

It is not possible to change slope modes when the module is operating in LIN Normal Mode because this would cause transmission errors. For example, to change from Normal Slope Mode to Flash Mode, proceed as follows:

- change to LIN Receive-Only Mode or LIN Sleep Mode;
- configure the desired slope mode; and
- go back to LIN Normal Mode.

---

**LIN Transceiver**
**20.3.5 LIN Transceiver Slope Mode Status**

The LIN transceiver provides the possibility to monitor the on chip status of the slope control through internally generated feedback signals. The table shows the decoding of the feedback signals.

**Table 147 Slope Mode Status**

<b>FB_SM3</b>	<b>FB_SM2</b>	<b>FB_SM1</b>	<b>Remarks</b>
0	0	0	LIN module not enabled
0	0	1	Low Slope Mode
0	1	0	Normal Slope Mode
0	1	1	Fast Slope mode
1	0	0	Flash Mode
1	0	1	Slope Mode Error
1	1	0	Slope Mode Error
1	1	1	Slope Mode Error

---

**LIN Transceiver**

## 20.4 Register Definition

**Table 148** shows the module base and end addresses.

**Table 148 Register Address Space**

Module	Base Address	End Address	Note
LIN	4801E000 <sub>H</sub>	4801FFFF <sub>H</sub>	

**Table 149 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Register Definition,</b>			
<b>CTRL_STS</b>	LIN Transceiver Control and Status	00 <sub>H</sub>	0000 0000 0001 1xxx xxx0 0x10 0000 0111 <sub>B</sub>

The registers are addressed wordwise.

The LIN transceiver and the controlling finite state machine can be fully controlled by the following SFR Register.



## LIN Transceiver

### LIN Transceiver Control and Status

The register is reset by RESET\_TYPE\_3.

This register is being initialized by the BootROM during the bootup process to a value of 0058\_9E07<sub>H</sub>

CTRL_STS	Offset	Reset Value
LIN Transceiver Control and Status	00 <sub>H</sub>	0000 0000 0001 1xxx xxx0 0x10 0000 0111 <sub>B</sub>

31												25		24	23	22	21	20	19	18	16	
Res												M_SM_ERR_CLR		Res	Res	HV_MODE	Res		MODE_FB			
r												w		r	r	rw	r		r			
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
FB_SM3	FB_SM2	FB_SM1	SM		RXD	TXD	Res	Res	TXD_TMOU_T_S*	OC_TS	OT_TS	M_SM_ERR	MODE		Res							
r	r	r	rw		r	rw	r	r	r	r	r	r	rw		r							

Field	Bits	Type	Description
Res	31:25	r	<b>Reserved</b> Always read as 0
M_SM_ERR_CLR	24	w	<b>LIN Transceiver Mode or Slope Mode Error Clear</b> 0 <sub>B</sub> <b>Mode or Slope Mode Error</b> , Status not clear 1 <sub>B</sub> <b>Mode or Slope Mode Error</b> , Status clear
Res	23	r	<b>Reserved</b> Always read as 0
Res	22	r	<b>Reserved</b> Always read as 0
HV_MODE	21	rw	<b>LIN Transceiver High Voltage Input - Output Mode</b> 0 <sub>B</sub> <b>DISABLE</b> , High Voltage Mode Entry is disabled 1 <sub>B</sub> <b>ENABLE</b> , High Voltage Mode Entry is enabled
Res	20:19	r	<b>Reserved</b> Always read as "11"
MODE_FB	18:16	r	<b>Feedback Signals for LIN Transmitter Mode Settings</b> Coding see <a href="#">Table 146</a>
FB_SM3	15	r	<b>Feedback Signal 3 for Slope Mode Setting</b> Coding see <a href="#">Table 147</a>
FB_SM2	14	r	<b>Feedback Signal 2 for Slope Mode Setting</b> Coding see <a href="#">Table 147</a>
FB_SM1	13	r	<b>Feedback Signal 1 for Slope Mode Setting</b> Coding see <a href="#">Table 147</a>

## LIN Transceiver

Field	Bits	Type	Description
<b>SM</b>	12:11	rw	<b>LIN Transmitter Slope mode control</b> 00 <sub>B</sub> <b>Normal Slope Mode</b> , for max. 20 kBaud 01 <sub>B</sub> <b>Fast Slope Mode</b> , for max. 40 kBaud 10 <sub>B</sub> <b>Low Slope Mode</b> , for max. 10.4 kBaud 11 <sub>B</sub> <b>Flash Mode</b> , for max. 150 kBaud <sub>B</sub> <i>Note: Slope Mode can not be changed in Normal Mode</i>
<b>RXD</b>	10	r	<b>Output Signal of Receiver</b> Can be used to monitor the Receiver Output
<b>TXD</b>	9	rw	<b>LIN Transmitter switch on (only used when HV_MODE is set)</b> 0 <sub>B</sub> <b>Pull Down LIN Line</b> , Transmitter is switched on 1 <sub>B</sub> <b>Pull Up Resistor is active</b> , Transmitter is switched off
<b>Res</b>	8	r	<b>Reserved</b> Always read as 0
<b>Res</b>	7	r	<b>Reserved</b> Always read as 0
<b>TXD_TMOUT_STS</b>	6	r	<b>LIN TXD time-out status</b> 0 <sub>B</sub> <b>NO_TIMEOUT</b> , no time-out occurred 1 <sub>B</sub> <b>TIMEOUT</b> , time-out occurred
<b>OC_STS</b>	5	r	<b>LIN Receiver Overcurrent Status</b> 0 <sub>B</sub> <b>no Overcurrent</b> , overcurrent status occurred 1 <sub>B</sub> <b>Overcurrent</b> , overcurrent status occurred
<b>OT_STS</b>	4	r	<b>LIN Receiver Overtemperature Status</b> 0 <sub>B</sub> <b>no Overtemperature</b> , overtemperature occurred 1 <sub>B</sub> <b>Overtemperature</b> , overtemperature occurred
<b>M_SM_ERR</b>	3	r	<b>LIN Transceiver Mode or Slope Mode Error</b> 0 <sub>B</sub> <b>no Mode or Slope Mode Error</b> , Status (see corresponding feedback bits) 1 <sub>B</sub> <b>Mode or Slope Mode Error</b> , Status (see corresponding feedback bits)
<b>MODE</b>	2:1	rw	<b>LIN transceiver power mode control</b> 00 <sub>B</sub> <b>LIN Sleep Mode</b> , LIN module switched to LIN Sleep Mode 01 <sub>B</sub> <b>LIN Receive-Only Mode</b> , LIN module switched to LIN Receive Only Mode 10 <sub>B</sub> <b>n.u.</b> , not used 11 <sub>B</sub> <b>LIN Normal Mode</b> , LIN module switched to LIN Normal Mode
<b>Res</b>	0	r	<b>Reserved</b> Always read as 1

## LIN Transceiver

### 20.5 Register Access Hints

The register **CTRL\_STS**, in the LIN module is clocked with the MI\_CLK. Write operations will be delayed by one MI\_CLK cycle.

For handling the clearing of interrupt status flags special care might be necessary. Under certain coding constellations an extra write access to the interrupt clear flag will be necessary to add the extra MI\_CLK cycle.

In case of interrupt status clear, two use cases in the software can be considered:

1. the writing to the interrupt clear flag and the reading of the corresponding interrupt status flag are having some other code in between
2. the writing to the interrupt clear flag and the reading of the corresponding interrupt status flag are placed in code right behind each other, with no code in between

#### Use Case 1 - Example, no extra write attempt to the interrupt clear register required

```
/* clearing of LIN Trx. Mode/Slope Mode Error status flag */
LIN->CTRL_STS.bit.M_SM_ERR_CLR = 1;
/* some other code is placed here */
...
/* reading of LIN Trx. Mode/Slope Mode Error status flag */
if ( LIN->CTRL_STS.bit.M_SM_ERR == 1 )
{
    /* some user code here */
}
```

In this example, between the interrupt clear register write and the corresponding status register read, sufficient time is ensured, as some C code (at least one C instruction) is placed in between.

#### Use Case 2- Example, one extra write attempt to the interrupt clear register required

```
/* clearing of LIN Trx. Mode/Slope Mode Error status flag */
LIN->CTRL_STS.bit.M_SM_ERR_CLR = 1;
/* place another interrupt status flag clear attempt to add an extra MI_CLK cycle*/
LIN->CTRL_STS.bit.M_SM_ERR_CLR = 0;
/* reading of LIN Trx. Mode/Slope Mode Error status flag */
if ( LIN->CTRL_STS.bit.M_SM_ERR == 1 )
{
    /* some user code here */
}
```

In this example, between the interrupt clear register write and the corresponding status register read, another interrupt clear register write is placed. In order to add another MI\_CLK cycle and ensure that the first interrupt status flag write attempt has reach the interrupt status register before it will be read again in the if clause right after it. Without this extra clear attempt the following interrupt status flag read might still reflect the interrupt status set.

An extra instruction gives the first clear attempt at least one MI\_CLK cycle of time. Any other C instruction might be sufficient as well. Using the same interrupt clear write again is proposed. This access cannot be eliminated by the compiler by optimization.

Executing the second interrupt clear write with a '0' is recommended, as so, no functional effect to the register takes place.

## **21 High-Speed Synchronous Serial Interface (SSC1/SSC2)**

### **21.1 Features**

- Master and Slave Mode operation
  - Full-duplex or half-duplex operation
- Transmit and receive buffered
- Flexible data format
  - Programmable number of data bits: 2 to 16 bits
  - Programmable shift direction: Least Significant Bit (LSB) or Most Significant Bit (MSB) shift first
  - Programmable clock polarity: idle low or high state for the shift clock
  - Programmable clock/data phase: data shift with leading or trailing edge of the shift clock
- Variable baud rate
- Compatible with Serial Peripheral Interface (SPI)
- Interrupt generation
  - On a transmitter empty condition
  - On a “receiver full” condition
  - On an error condition (receive, phase, baud rate, transmission error)

High-Speed Synchronous Serial Interface (SSC1/SSC2)

21.2 Introduction

The High-Speed Synchronous Serial Interface (SSC) supports both full-duplex and half-duplex serial synchronous communication. The serial clock signal can be generated by the SSC internally (master mode), using its own 16-bit baud rate generator, or can be received from an external master (slave mode). Data width, shift direction, clock polarity, and phase are programmable. This allows communication with SPI-compatible devices or devices using other synchronous serial interfaces.

Data is transmitted or received on TXD and RXD lines, which are normally connected to the MTSR (Master Transmit/Slave Receive) and MRST (Master Receive/Slave Transmit) pins. The clock signal is output via line MS\_CLK (Master Serial Shift Clock) or input via line SS\_CLK (Slave Serial Shift Clock). Both lines are normally connected to the pin SCLK. Transmission and reception of data are double-buffered.

21.2.1 Block Diagram

Figure 176 shows all functional relevant interfaces associated with the SSC Kernel.

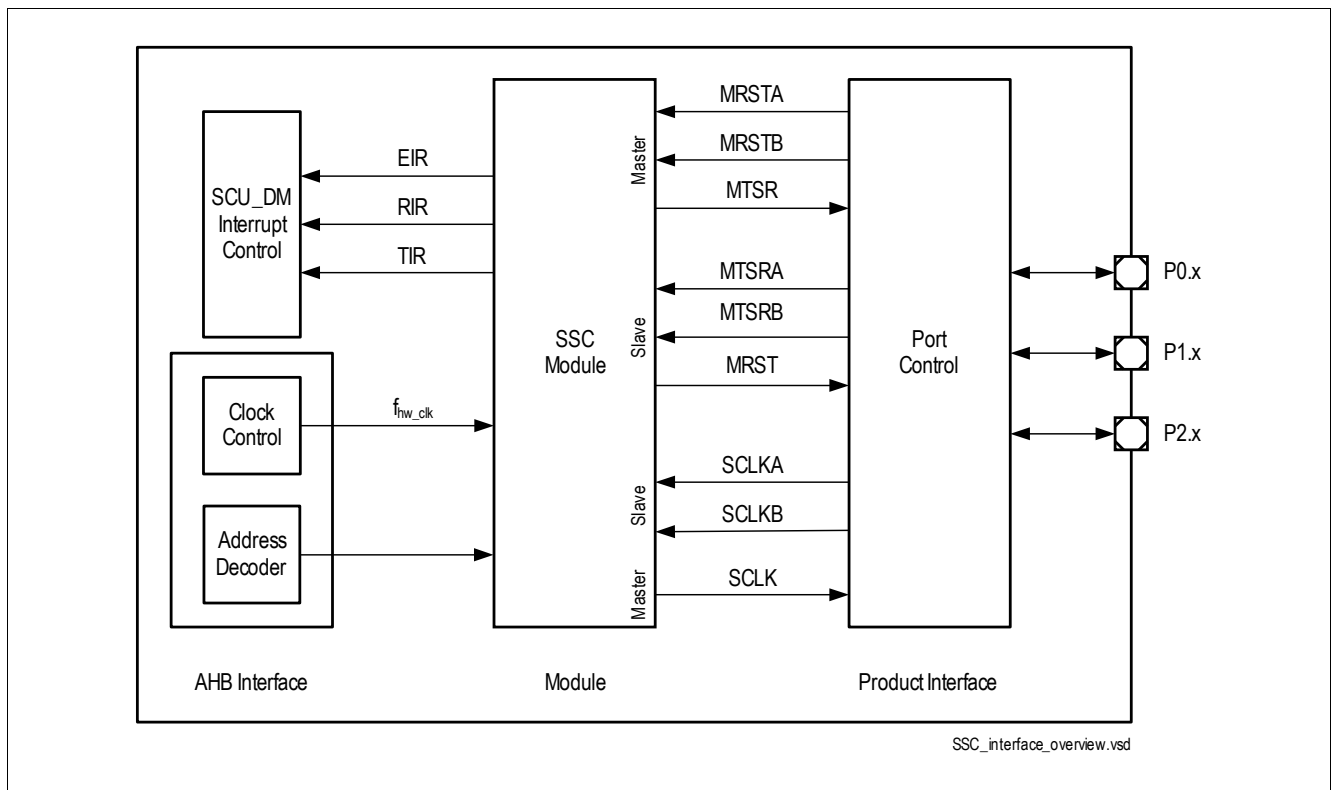


Figure 176 SSC Interface Diagram

High-Speed Synchronous Serial Interface (SSC1/SSC2)

21.3 Functional Description

21.3.1 SSC1 and SSC2 Modes Overview

The SSC supports full-duplex and half-duplex synchronous communication up to 20 MBaud (@ 40 MHz module clock). The serial clock signal can be generated by the SSC itself (Master Mode) or can be received from an external master (Slave Mode). Data width, shift direction, clock polarity, and phase are programmable. This allows communication with SPI-compatible devices. Transmission and reception of data is double-buffered. A 16-bit baud-rate generator provides the SSC with a separate serial clock signal.

The SSC can be configured in a very flexible way, so it can be used with other synchronous serial interfaces, can serve for master/slave or multimaster interconnections or can operate compatible with the popular SPI interface. Thus, the SSC can be used to communicate with shift registers (I/O expansion), peripherals (e.g. EEPROMs, etc.) or other controllers (networking). The SSC supports half-duplex and full-duplex communication. Data is transmitted or received on lines TXD and RXD, normally connected with pins MTSR (Master Transmit/Slave Receive) and MRST (Master Receive/Slave Transmit). The clock signal is output via line MS\_CLK (Master Serial Shift Clock) or input via line SS\_CLK (Slave Serial Shift Clock). Both lines are normally connected to pin SCLK.

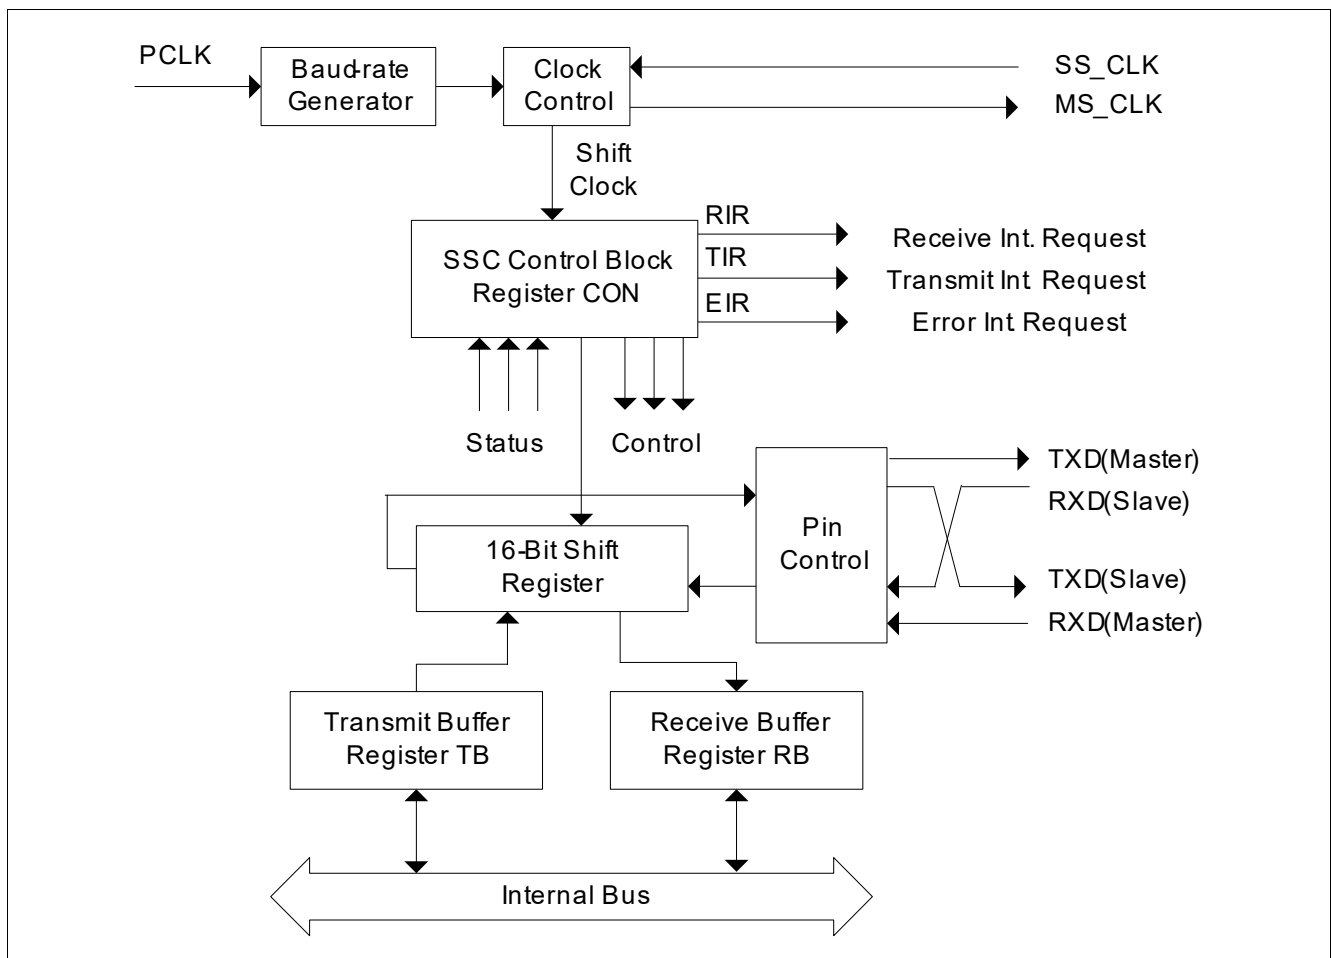


Figure 177 Synchronous Serial Channel SSC Block Diagram

## High-Speed Synchronous Serial Interface (SSC1/SSC2)

### 21.3.2 Operating Mode Selection

The operating mode of the serial channel SSC is controlled by its control register CON. This register serves two purposes:

- During programming (SSC disabled by CON.EN = 0), it provides access to a set of control bits
- During operation (SSC enabled by CON.EN = 1), it provides access to a set of status flags.

The shift register of the SSC is connected to both the transmit lines and the receive lines via the pin control logic (see block diagram in [Figure 177](#)). Transmission and reception of serial data are synchronized and take place at the same time, i.e. the same number of transmitted bits is also received. Transmit data is written into the Transmit Buffer (TB) and is moved to the shift register as soon as this is empty. An SSC master (CON.MS = 1) immediately begins transmitting, while an SSC slave (CON.MS = 0) will wait for an active shift clock. When the transfer starts, the busy flag CON.BSY is set and the Transmit Interrupt Request line TIR will be activated to indicate that register TB may be reloaded again. When the programmed number of bits (2 ... 16) has been transferred, the contents of the shift register are moved to the Receive Buffer RB and the Receive Interrupt Request line RIR will be activated. If no further transfer is to take place (TB is empty), CON.BSY will be cleared at the same time. Software should not modify CON.BSY, as this flag is hardware controlled.

*Note: The SSC starts transmission and sets CON.BSY minimum two clock cycles after transmit data is written into TB. Therefore, it is not recommended to poll CON.BSY to indicate the start and end of a single transmission. Instead, interrupt service routine should be used if interrupts are enabled, or the interrupt flags IRCON1.TIR and IRCON1.RIR should be polled if interrupts are disabled.*

*Note: Only one SSC (etc.) can be master at a given time.*

The transfer of serial data bits can be programmed in many respects:

- The data width can be specified from 2 bits to 16 bits
- A transfer may start with either the LSB or the MSB
- The shift clock may be idle low or idle high
- The data bits may be shifted with the leading edge or the trailing edge of the shift clock signal
- The baud rate may be set from 305.18 Baud up to 20 Mbaud (@ 40 MHz module clock)
- The shift clock can be generated (MS\_CLK) or can be received (SS\_CLK)

These features allow the adaptation of the SSC to a wide range of applications requiring serial data transfer.

The Data Width Selection supports the transfer of frames of any data length, from 2-bit “characters” up to 16-bit “characters”. Starting with the LSB (CON.HB = 0) allows communication with SSC devices in Synchronous Mode or with 8051 like serial interfaces for example. Starting with the MSB (CON.HB = 1) allows operation compatible with the SPI interface.

Regardless of the data width selected and whether the MSB or the LSB is transmitted first, the transfer data is always right-aligned in registers TB and RB, with the LSB of the transfer data in bit 0 of these registers. The data bits are rearranged for transfer by the internal shift register logic. The unselected bits of TB are ignored; the unselected bits of RB will not be valid and should be ignored by the receiver service routine.

The Clock Control allows the adaptation of transmit and receive behavior of the SSC to a variety of serial interfaces. A specific shift clock edge (rising or falling) is used to shift out transmit data, while the other shift clock edge is used to latch in receive data. Bit CON.PH selects the leading edge or the trailing edge for each function. Bit CON.PO selects the level of the shift clock line in the idle state. Thus, for an idle-high clock, the leading edge is a falling one, a 1-to-0 transition (see [Figure 178](#)).

High-Speed Synchronous Serial Interface (SSC1/SSC2)

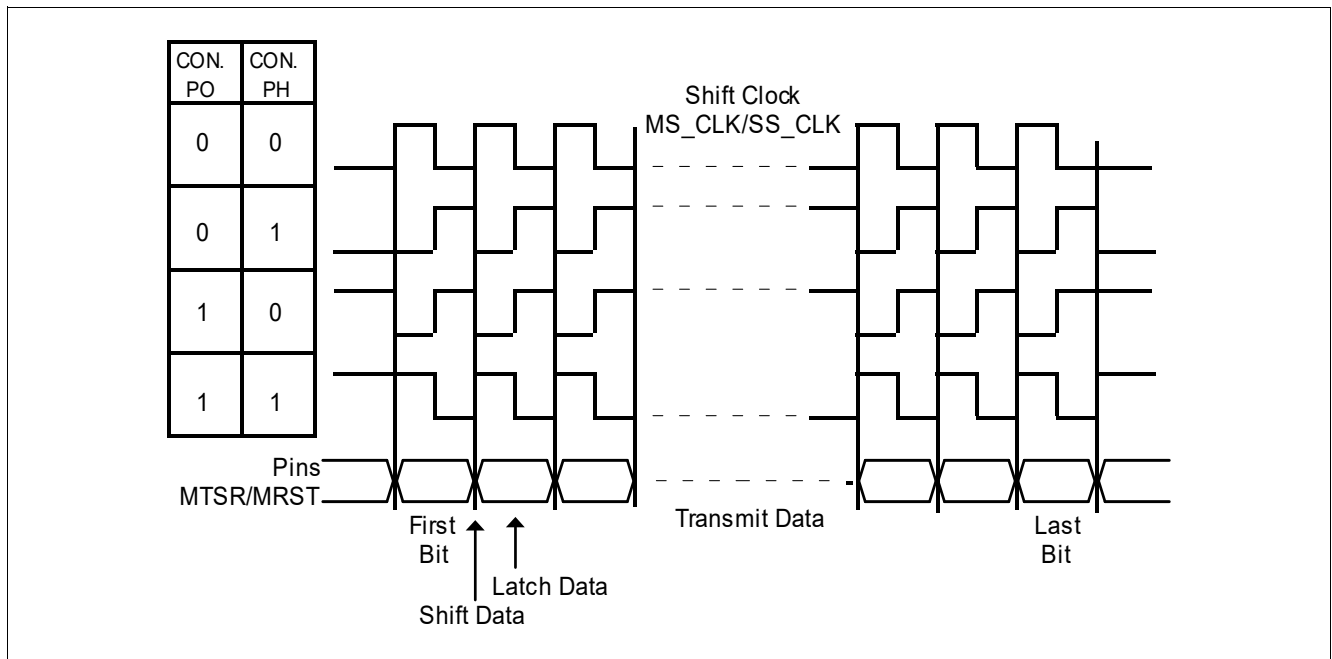


Figure 178 Serial Clock Phase and Polarity Options

21.3.3 Full-Duplex Operation


The various devices are connected through three lines. The definition of these lines is always determined by the master: the line connected to the master’s data output line TXD is the transmit line; the receive line is connected to its data input line RXD; the shift clock line is either MS\_CLK or SS\_CLK. Only the device selected for master operation generates and outputs the shift clock on line MS\_CLK. Since all slaves receive this clock, their pin SCLK must be switched to input mode. The output of the master’s shift register is connected to the external transmit line, which in turn is connected to the slaves’ shift register input. The output of the slaves’ shift register is connected to the external receive line in order to enable the master to receive the data shifted out of the slave. The external connections are hard-wired, the function and direction of these pins is determined by the master or slave operation of the individual device.

*Note: The shift direction shown in the figure applies for MSB-first operation as well as for LSB-first operation.*

When initializing the devices in this configuration, one device must be selected for master operation while all other devices must be programmed for slave operation. Initialization includes the operating mode of the device’s SSC and also the function of the respective port lines.



## High-Speed Synchronous Serial Interface (SSC1/SSC2)

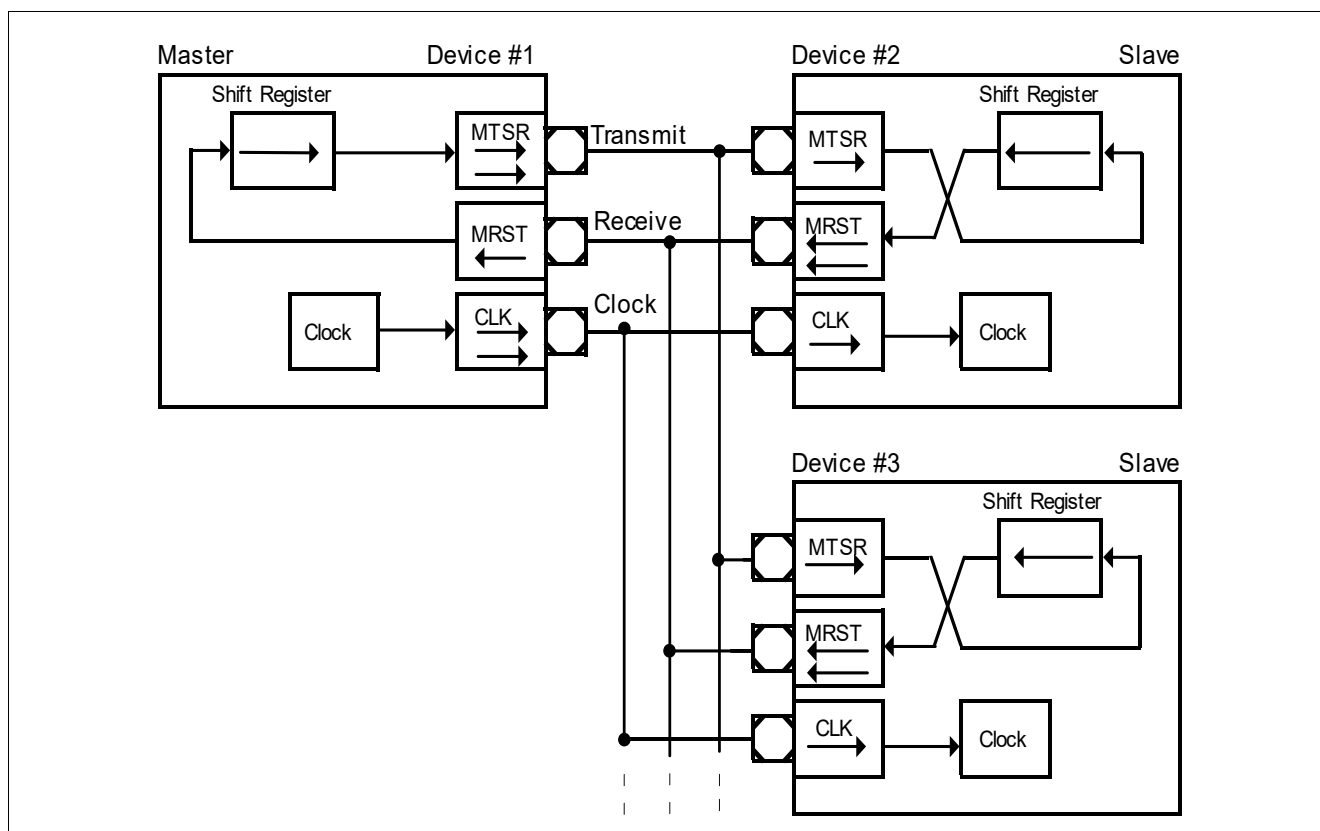

**Figure 179 SSC Full-Duplex Configuration**

The data output pins MRST of all slave devices are connected together onto the one receive line in the configuration shown in [Figure 179](#). During a transfer, each slave shifts out data from its shift register. There are two ways to avoid collisions on the receive line due to different slave data:

- Only one slave drives the line, i.e. enables the driver of its MRST pin. All the other slaves must have their MRST pins programmed as input so only one slave can put its data onto the master's receive line. Only receiving data from the master is possible. The master selects the slave device from which it expects data either by separate select lines, or by sending a special command to this slave. The selected slave then switches its MRST line to output until it gets a de-selection signal or command.
- The slaves use open drain output on MRST. This forms a wired-AND connection. The receive line needs an external pull-up in this case. Corruption of the data on the receive line sent by the selected slave is avoided when all slaves not selected for transmission to the master only send ones (1s). Because this high level is not actively driven onto the line, but only held through the pull-up device, the selected slave can pull this line actively to a low-level when transmitting a zero bit. The master selects the slave device from which it expects data either by separate select lines or by sending a special command to this slave.

After performing the necessary initialization of the SSC, the serial interfaces can be enabled. For a master device, the alternate clock line will now go to its programmed polarity. The alternate data line will go to either 0 or 1 until the first transfer starts. After a transfer, the alternate data line will always remain at the logic level of the last transmitted data bit.

When the serial interfaces are enabled, the master device can initiate the first data transfer by writing the transmit data into register TB. This value is copied into the shift register (assumed to be empty at this time), and the selected first bit of the transmit data will be placed onto the TXD line on the next clock from the baud-rate generator (transmission starts only if CON.EN = 1). Depending on the selected clock phase, a clock pulse will also be generated on the MS\_CLK line. At the same time, with the opposite clock edge, the master latches and shifts in the data detected at its input line RXD. This “exchanges” the transmit data with the receive data.

---

## High-Speed Synchronous Serial Interface (SSC1/SSC2)

Because the clock line is connected to all slaves, their shift registers will be shifted synchronously with the master's shift register — shifting out the data contained in the registers, and shifting in the data detected at the input line. After the preprogrammed number of clock pulses (via the data width selection), the data transmitted by the master is contained in all the slaves' shift registers, while the master's shift register holds the data of the selected slave. In the master and all slaves, the contents of the shift register are copied into the receive buffer RB and the receive interrupt line RIR is activated.

A slave device will immediately output the selected first bit (MSB or LSB of the transfer data) at line RXD when the contents of the transmit buffer are copied into the slave's shift register. Bit CON.BSY is not set until the first clock edge at SS\_CLK appears. The slave device will not wait for the next clock from the baud-rate generator, as the master does. The reason for this is that, depending on the selected clock phase, the first clock edge generated by the master may already be used to clock in the first data bit. Thus, the slave's first data bit must already be valid at this time.

*Note: On the SSC, a transmission **and** a reception takes place at the same time, regardless of whether valid data has been transmitted or received.*

*Note: The initialization of the CLK pin on the master requires some attention in order to avoid undesired clock transitions, which may disturb the other devices. Before the clock pin is switched to output via the related direction control register, the clock output level will be selected in the control register CON and the alternate output be prepared via the related ALTSEL register, or the output latch must be loaded with the clock idle level.*

High-Speed Synchronous Serial Interface (SSC1/SSC2)

21.3.4 Half-Duplex Operation

In a Half-Duplex Mode, only one data line is necessary for both receiving **and** transmitting of data. The data exchange line is connected to both the MTSR and MRST pins of each device, the shift clock line is connected to the SCLK pin.

The master device controls the data transfer by generating the shift clock, while the slave devices receive it. Due to the fact that all transmit and receive pins are connected to the one data exchange line, serial data may be moved between arbitrary stations.

Similar to Full-Duplex Mode, there are two ways to avoid collisions on the data exchange line:

- Only the transmitting device may enable its transmit pin driver
- The non-transmitting devices use open drain output and send only ones.

Because the data inputs and outputs are connected together, a transmitting device will clock in its own data at the input pin (MRST for a master device, MTSR for a slave). By this method, any corruptions on the common data exchange line are detected if the received data is not equal to the transmitted data.

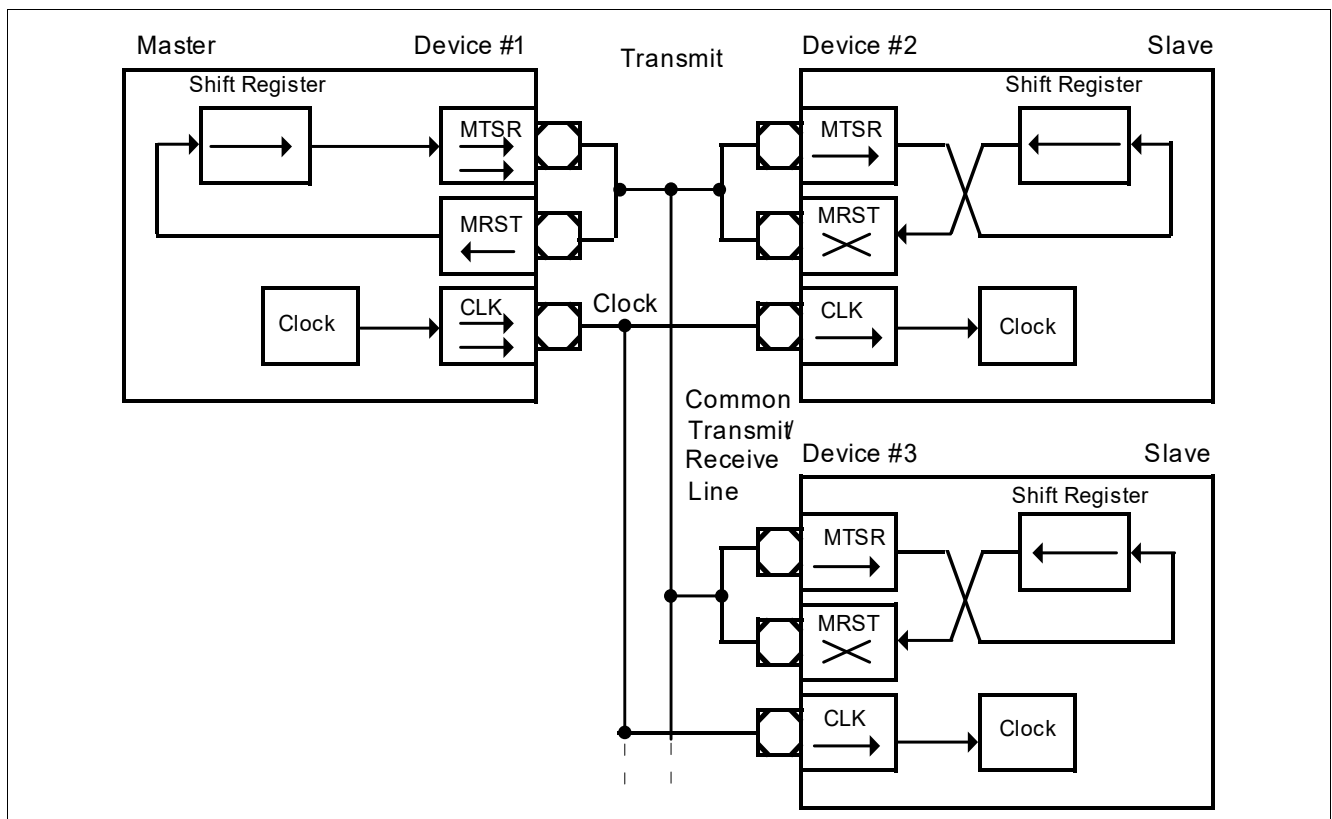


Figure 180 SSC Half-Duplex Configuration

---

## High-Speed Synchronous Serial Interface (SSC1/SSC2)

### 21.3.5 Continuous Transfers


When the transmit interrupt request flag is set, it indicates that the transmit buffer TB is empty and ready to be loaded with the next transmit data. If TB has been reloaded by the time the current transmission is finished, the data is immediately transferred to the shift register and the next transmission will start without any additional delay. On the data line, there is no gap between the two successive frames. For example, two byte transfers would look the same as one word transfer. This feature can be used to interface with devices that can operate with or require more than 8 data bits per transfer. It is just a matter of software, how long a total data frame length can be. This option can also be used to interface to byte-wide and word-wide devices on the same serial bus, for instance.

*Note: Of course, this can happen only in multiples of the selected basic data width, because it would require disabling/enabling of the SSC to reprogram the basic data width on-the-fly.*

## High-Speed Synchronous Serial Interface (SSC1/SSC2)

### 21.3.6 Baud Rate Generation

The serial channel SSC has its own dedicated 16-bit baud-rate generator with 16-bit reload capability, allowing baud rate generation independent of the timers. In addition to [Figure 177](#), [Figure 181](#) shows the baud-rate generator of the SSC in more detail.

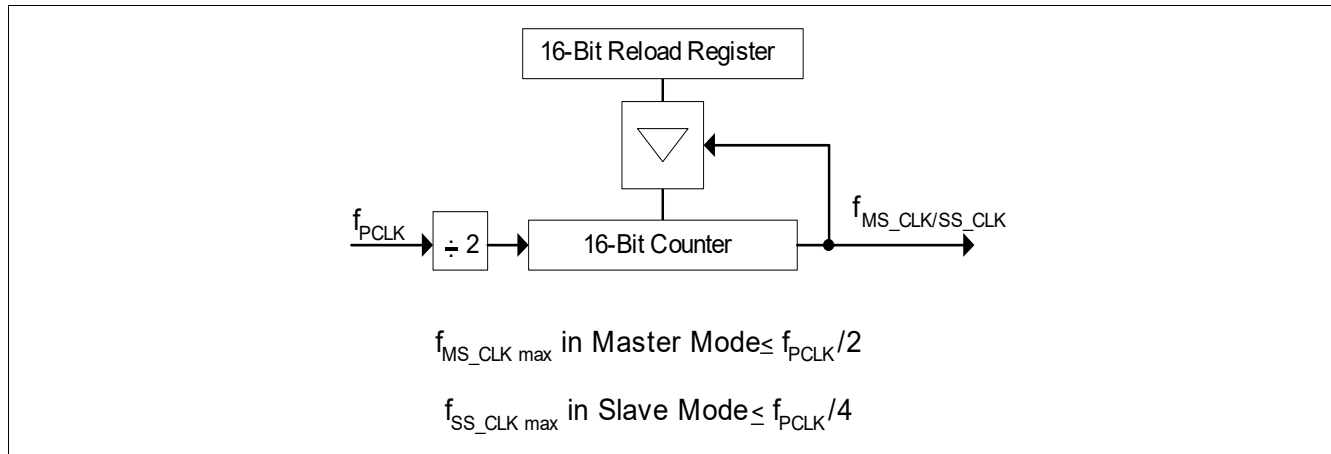

**Figure 181 SSC Baud-rate Generator**

The baud-rate generator is clocked with the module clock  $f_{hw\_clk}$ . The timer counts downwards. Register BR is the dual-function Baud-rate Generator/Reload register. Reading BR, while the SSC is enabled, returns the contents of the timer. Reading BR, while the SSC is disabled, returns the programmed reload value. In this mode, the desired reload value can be written to BR.

*Note: Never write to BR while the SSC is enabled.*

The formulas below calculate either the resulting baud rate for a given reload value, or the required reload value for a given baud rate:

$$\text{Baud rate} = \frac{f_{hw\_clk}}{2 \cdot (\langle BR \rangle + 1)} \qquad \text{BR} = \frac{f_{hw\_clk}}{2 \cdot \text{Baud rate}} - 1 \qquad (21.1)$$

$\langle BR \rangle$  represents the contents of the reload register, taken as an unsigned 16-bit integer, while baud rate is equal to  $f_{MS\_CLK/SS\_CLK}$  as shown in [Figure 181](#).

The maximum baud rate that can be achieved when using a module clock of 40 MHz is 20 MBaud in Master Mode (with  $\langle BR \rangle = 0000_H$ ) or 10 MBaud in Slave Mode (with  $\langle BR \rangle = 0001_H$ ).

---

**High-Speed Synchronous Serial Interface (SSC1/SSC2)**

**Table 150** lists some possible baud rates together with the required reload values and the resulting bit times, assuming a module clock of 40 MHz.

**Table 150 Typical Baud Rates of the SSC ( $f_{hw\_clk} = 40\text{ MHz}$ )**


Reload Value	Baud Rate ( $= f_{MS\_CLK/SS\_CLK}$ )	Deviation
0000 <sub>H</sub>	20 MBaud (only in Master Mode)	0.0%
0001 <sub>H</sub>	10 MBaud	0.0%
0013 <sub>H</sub>	1 MBaud	0.0%
0027 <sub>H</sub>	500 kBaud	0.0%
00C7 <sub>H</sub>	100 kBaud	0.0%
07CF <sub>H</sub>	10 kBaud	0.0%
4E1F <sub>H</sub>	1 kBaud	0.0%
FFFF <sub>H</sub>	305.18 Baud	0.0%

## High-Speed Synchronous Serial Interface (SSC1/SSC2)

### 21.3.7 Error Detection Mechanisms

The SSC is able to detect four different error conditions. Receive Error and Phase Error are detected in all modes; Transmit Error and Baud Rate Error apply only to Slave Mode. When an error is detected, the respective error flag is/can be set and an error interrupt request will be generated by activating the EIR line (see [Figure 182](#)) if enabled. The error interrupt handler may then check the error flags to determine the cause of the error interrupt. The error flags are not reset automatically but must be cleared by software after servicing. This allows servicing of some error conditions via interrupt, while the others may be polled by software.

*Note: The error interrupt handler must clear the associated (enabled) error flag(s) to prevent repeated interrupt requests.*

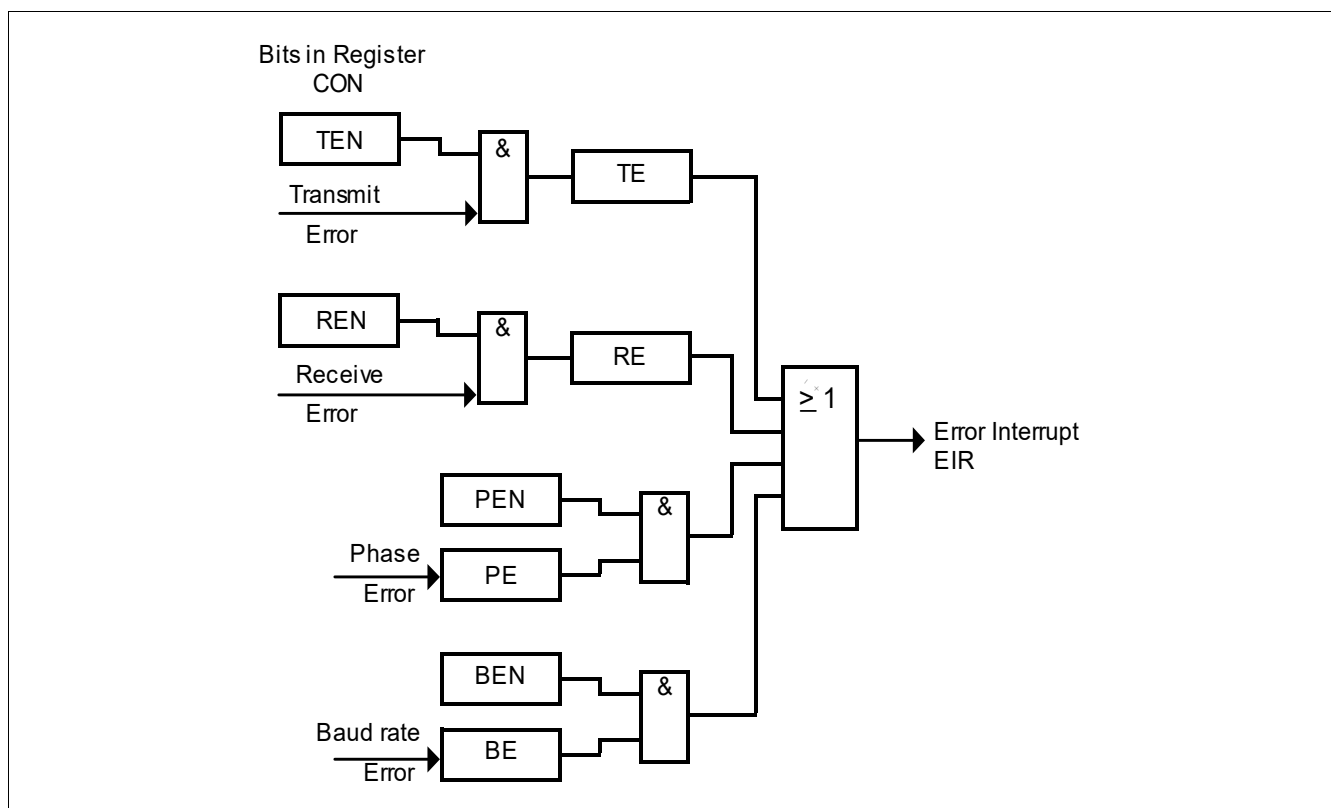

**Figure 182 SSC Error Interrupt Control**

A **Receive Error** (Master or Slave Mode) is detected when a new data frame is completely received but the previous data was not read out of the receive buffer register RB. This condition sets the error flag CON.RE and the error interrupt request line EIR, when enabled via CON.REN. The old data in the receive buffer RB will be overwritten with the new value and is irretrievably lost.

A **Phase Error** (Master or Slave Mode) is detected when the incoming data at pin MRST (Master Mode) or MTSR (Slave Mode), sampled with the same frequency as the module clock, changes between one cycle before and two cycles after the latching edge of the shift clock signal SCLK. This condition sets the error flag CON.PE and, when enabled via CON.PEN, the error interrupt request line EIR.

*Note: When receiving and transmitting data in parallel, phase errors occur if the baud rate is configured to  $f_{hw\_clk}/2$ .*

---

## High-Speed Synchronous Serial Interface (SSC1/SSC2)

A **Baud Rate Error** (Slave Mode) is detected when the incoming clock signal deviates from the programmed baud rate by more than 100%, i.e. it is either more than double or less than half the expected baud rate. This condition sets the error flag CON.BE and, when enabled via CON.BEN, the error interrupt request line EIR. Using this error detection capability requires that the slave's baud-rate generator is programmed to the same baud rate as the master device. This feature detects false additional, or missing pulses on the clock line (within a certain frame).

*Note: If this error condition occurs and bit CON.REN = 1, an automatic reset of the SSC will be performed in case of this error. This is done to re-initialize the SSC if too few or too many clock pulses have been detected.*

*Note: This error can occur after any transfer if the communication is stopped. This is the case due to the fact that the SSC module supports back-to-back transfers for multiple transfers. In order to handle this, the baud rate detector expects after a finished transfer immediately a next clock cycle for a new transfer.*

A **Transmit Error** (Slave Mode) is detected when a transfer was initiated by the master (SS\_CLK gets active) but the transmit buffer TB of the slave was not updated since the last transfer. This condition sets the error flag CON.TE and the error interrupt request line EIR, when enabled via CON.TEN. If a transfer starts while the transmit buffer is not updated, the slave will shift out the 'old' contents of the shift register, which normally is the data received during the last transfer. This may lead to corruption of the data on the transmit/receive line in half-duplex mode (open drain configuration) if this slave is not selected for transmission. This mode requires that slaves not selected for transmission only shift out ones; that is, their transmit buffers must be loaded with 'FFFF<sub>H</sub>' prior to any transfer.

*Note: A slave with push/pull output drivers not selected for transmission, will normally have its output drivers switched. However, in order to avoid possible conflicts or misinterpretations, it is recommended to always load the slave's transmit buffer prior to any transfer.*

The cause of an error interrupt request (receive, phase, baud rate, transmit error) can be identified by the error status flags in control register CON.

*Note: In contrast to the error interrupt request line EIR, the error status flags CON.TE, CON.RE, CON.PE, and CON.BE, are not reset automatically upon entry into the error interrupt service routine, but must be cleared by software.*



## High-Speed Synchronous Serial Interface (SSC1/SSC2)

### 21.3.7.1 Port Control

The SSC uses three lines to communicate with the external world. Pin SCLK serves as the clock line, while pins MRST (Master Receive/Slave Transmit) and MTSR (Master Transmit/Slave Receive) serve as the serial data input/output lines. As shown in [Figure 176](#) these three lines (SCLK as input, Master Receive, Slave Receive) have all two inputs at the SSC Module kernel. Three bits in register PISEL define which of the two kernel inputs (A or B) are connected. This feature allows for each of the three SSC communication lines to be connected to two inputs coming from different port pins.

Operation of the SSC I/O lines depends on the selected operating mode (master or slave). The direction of the port lines depends on the operating mode. The SSC will automatically use the correct kernel output or kernel input line of the ports when switching modes. Port pins assigned as SSC I/O lines can be controlled in two ways:

- By hardware
- By software

When the SSC I/O lines are connected with dedicated pins typically hardware I/O control should be used. In this case, the two output signals reflect directly the state of the CON.EN and CON.MS bits (the M/S select line is inverted to the CON.MS bit definition).

When the SSC I/O lines are connected with bidirectional lines of general purpose I/O ports, typically software I/O control should be used. In this case port registers must be programmed for alternate output and input selection. When switching between master and slave mode, port registers must be reprogrammed.

## 21.4 Module Interfaces

This section describes:

- The SSC module related interfaces such as port connections and interrupt control
- All SSC module related registers with its addresses

### 21.4.1 Interfaces of the SSC Module

An overview of the SSC kernel I/O interface is shown in [Figure 183](#) (SSC1) and [Figure 184](#) (SSC2).

The interrupt requests of the SSC are not connected directly to the Interrupt Controller, but via the System Control Unit (SCU). The interrupt request signals of the SSC are mapped to the Interrupt Controller by the SCU.

*Note:* Please refer to [Chapter 6](#) for the SCU description.

The General Purpose IO (GPIO) Port provides the interface from the SSC to the external world. There are two SSC kernels in the TLE987x, namely SSC1 and SSC2.

*Note:* Please refer to [Chapter 14](#) for the Ports description.

High-Speed Synchronous Serial Interface (SSC1/SSC2)

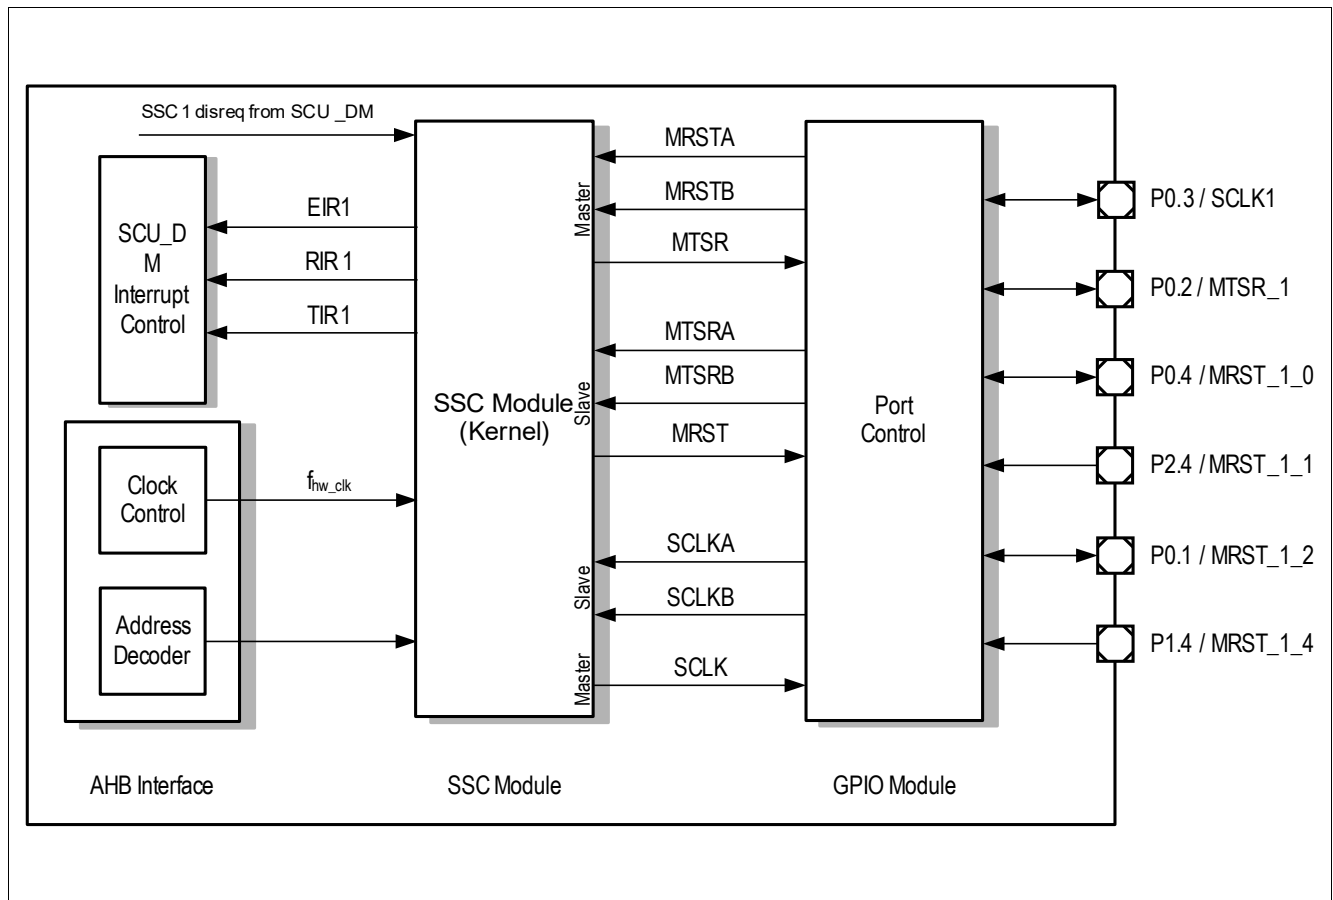


Figure 183 SSC1 Module I/O Interface

Table 151 SSC1 Interface

MIS_1	MIS_0	Description
0	0	P0.4 (MRST_1_0)
0	1	P2.4 (MRST_1_1)
1	0	P0.1 (MRST_1_2)
1	1	P1.4 (MRST_1_3)

High-Speed Synchronous Serial Interface (SSC1/SSC2)

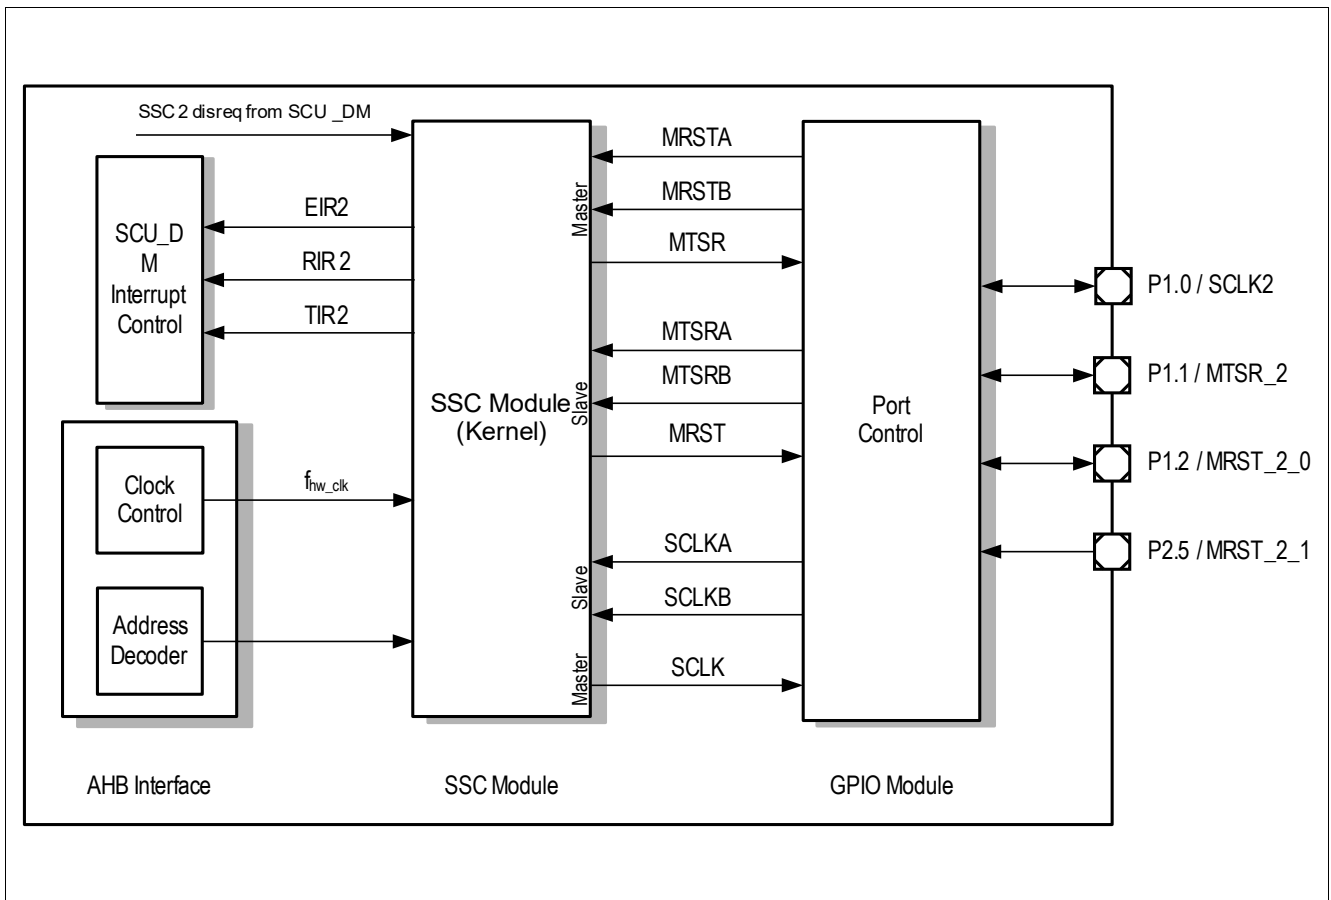


Figure 184 SSC2 Module I/O Interface

## High-Speed Synchronous Serial Interface (SSC1/SSC2)

### 21.5 Interrupts

The three SSC interrupts can be separately enabled or disabled by setting or clearing their corresponding enable bits in SFR SCU\_MODIEN.

For a detailed description of the various interrupts see [Section 21.4](#). An overview is given in [Table 152](#).

**Table 152 SSC Interrupt Sources**

Interrupt	Signal	Description
Transmission starts	TIR	Indicates that the transmit buffer can be reloaded with new data.
Transmission ends	RIR	The configured number of bits have been transmitted and shifted to the receive buffer.
Receive Error	EIR	This interrupt occurs if a new data frame is completely received and the last data in the receive buffer was not read.
Phase Error	EIR	This interrupt is generated if the incoming data changes between one cycle before and two cycles after the latching edge of the shift clock signal SCLK.
Baud Rate Error (Slave Mode only)	EIR	This interrupt is generated when the incoming clock signal deviates from the programmed baud rate by more than 100%.
Transmit Error (Slave Mode only)	EIR	This interrupt is generated when TB was not updated since the last transfer if a transfer is initiated by a master.

## High-Speed Synchronous Serial Interface (SSC1/SSC2)

### 21.6 Register Definition

#### 21.6.1 SSC1 and SSC2 Register Definition

##### 21.6.1.1 Port Input Select Register

The PISEL register controls the receiver input selection of the SSC module.

###### PISEL

**Port Input Select Register, RESET\_TYPE\_3 (00<sub>H</sub>)** **Reset Value: 00<sub>H</sub>**

	7	6	5	4	3	2	1	0
	RES				MIS_1	CIS	SIS	MIS_0
	r				rw	rw	rw	rw

Field	Bits	Type	Description
<b>MIS_0</b>	0	rw	<b>Master Mode Receiver Input Select</b> 0 <sub>B</sub> see <a href="#">Table 151 “SSC1 Interface” on Page 674</a> (SSC1). 1 <sub>B</sub> see <a href="#">Table 151 “SSC1 Interface” on Page 674</a> (SSC1). 0 <sub>B</sub> Receiver input (Port A: P1.2) is selected (SSC2). 1 <sub>B</sub> Receiver input (Port B: P2.5) is selected (SSC2).
<b>SIS</b>	1	rw	<b>Slave Mode Receiver Input Select</b> 0 <sub>B</sub> Receiver input (Port A: P0.2) is selected (SSC1). 1 <sub>B</sub> Receiver input (Port B: P0.2) is selected (SSC1). 0 <sub>B</sub> Receiver input (Port A: P1.1) is selected (SSC2). 1 <sub>B</sub> Receiver input (Port B: P1.1) is selected (SSC2).
<b>CIS</b>	2	rw	<b>Slave Mode Clock Input Select</b> 0 <sub>B</sub> Clock input (Port A: P0.3) is selected (SSC1). 1 <sub>B</sub> Clock input (Port B: P0.3) is selected (SSC1). 0 <sub>B</sub> Clock input (Port A: P1.0) is selected (SSC2). 1 <sub>B</sub> Clock input (Port B: P1.0) is selected (SSC2).
<b>MIS_1</b>	3	rw	<b>Master Mode Receiver Input Select</b> 0 <sub>B</sub> see <a href="#">Table 151 “SSC1 Interface” on Page 674</a> (SSC1). 1 <sub>B</sub> see <a href="#">Table 151 “SSC1 Interface” on Page 674</a> (SSC1). 0 <sub>B</sub> n/a (SSC2). 1 <sub>B</sub> n/a (SSC2).
<b>RES</b>	7:4	r	<b>Reserved</b> Returns 0 if read; should be written with 0.

*Note:* Port A and Port B inputs of the SSC kernel are connected to the external pins of Port 0 and Port 1 respectively.

##### 21.6.1.2 Configuration Register

The operating mode of the serial channel SSC is controlled by the control register CON. This register contains control bits for mode and error check selection, and status flags for error identification. Depending on bit EN, either control functions or status flags and master/slave control are enabled.

## High-Speed Synchronous Serial Interface (SSC1/SSC2)

### CON.EN = 0: Programming Mode

#### CON

#### Control Register

(04<sub>H</sub>)

Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>EN</b>	<b>MS</b>	<b>Res</b>	<b>AREN</b>	<b>BEN</b>	<b>PEN</b>	<b>REN</b>	<b>TEN</b>
rw 7	rw 6	r 5	rw 4	rw 3	rw 2	rw 1	rw 0
<b>LB</b>	<b>PO</b>	<b>PH</b>	<b>HB</b>	<b>BM</b>			
rw	rw	rw	rw	rw			

Field	Bits	Type	Description
<b>BM</b>	3:0	rw	<b>Data Width Selection</b> 0000 <sub>B</sub> Reserved. Do not use this combination. 0001 <sub>B</sub> - 1111 <sub>B</sub> Transfer Data Width is 2 ... 16 bits (BM+1).
<b>HB</b>	4	rw	<b>Heading Control</b> 0 <sub>B</sub> Transmit/Receive LSB First. 1 <sub>B</sub> Transmit/Receive MSB First.
<b>PH</b>	5	rw	<b>Clock Phase Control</b> 0 <sub>B</sub> Shift transmit data on the leading clock edge, latch on trailing edge. 1 <sub>B</sub> Latch receive data on leading clock edge, shift on trailing edge.
<b>PO</b>	6	rw	<b>Clock Polarity Control</b> 0 <sub>B</sub> Idle clock line is low, leading clock edge is low-to-high transition. 1 <sub>B</sub> Idle clock line is high, leading clock edge is high-to-low transition.
<b>LB</b>	7	rw	<b>Loop Back Control</b> 0 <sub>B</sub> Normal output. 1 <sub>B</sub> Receive input is connected with transmit output (half-duplex mode).
<b>TEN</b>	8	rw	<b>Transmit Error Enable</b> 0 <sub>B</sub> Ignore transmit errors. 1 <sub>B</sub> Check transmit errors.
<b>REN</b>	9	rw	<b>Receive Error Enable</b> 0 <sub>B</sub> Ignore receive errors. 1 <sub>B</sub> Check receive errors.
<b>PEN</b>	10	rw	<b>Phase Error Enable</b> 0 <sub>B</sub> Ignore phase errors. 1 <sub>B</sub> Check phase errors.
<b>BEN</b>	11	rw	<b>Baud Rate Error Enable</b> 0 <sub>B</sub> Ignore baud rate errors. 1 <sub>B</sub> Check baud rate errors.

---

**High-Speed Synchronous Serial Interface (SSC1/SSC2)**

Field	Bits	Type	Description
<b>AREN</b>	12	rw	<b>Automatic Reset Enable</b> 0 <sub>B</sub> No additional action upon a baud rate error. 1 <sub>B</sub> The SSC is automatically reset upon a baud rate error.
<b>Res</b>	13	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>MS</b>	14	rw	<b>Master Select</b> 0 <sub>B</sub> Slave Mode. Operate on shift clock received via SCLK. 1 <sub>B</sub> Master Mode. Generate shift clock and output it via SCLK.
<b>EN</b>	15	rw	<b>Enable Bit = 0</b> Transmission and reception disabled. Access to control bits.  <i>Note: The effect of EN bit becomes visible on the next write to the CON register.</i>

## High-Speed Synchronous Serial Interface (SSC1/SSC2)

### CON.EN = 1: Operating Mode

#### CON

#### Control Register

(04<sub>H</sub>)Reset Value: 0000<sub>H</sub>

15	14	13	12	11	10	9	8
<b>EN</b>	<b>MS</b>	<b>Res</b>	<b>BSY</b>	<b>BE</b>	<b>PE</b>	<b>RE</b>	<b>TE</b>
rw 7	rw 6	r 5	rh 4	r 3	r 2	r 1	r 0
<b>Res</b>				<b>BC</b>			
r				rh			

Field	Bits	Type	Description
<b>BC</b>	3:0	rh	<b>Bit Count Field</b> Shift counter is updated with every shift bit.  <i>Note: This bit field is not to be written to.</i>
<b>Res</b>	7:4	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>TE</b>	8	r	<b>Transmit Error Flag</b> 0 <sub>B</sub> No error. 1 <sub>B</sub> Transfer starts with the slave's transmit buffer not being updated.
<b>RE</b>	9	r	<b>Receive Error Flag</b> 0 <sub>B</sub> No error. 1 <sub>B</sub> Reception completed before the receive buffer was read.
<b>PE</b>	10	r	<b>Phase Error Flag</b> 0 <sub>B</sub> No error. 1 <sub>B</sub> Received data changes around sampling clock edge.
<b>BE</b>	11	r	<b>Baud Rate Error Flag</b> 0 <sub>B</sub> No error. 1 <sub>B</sub> More than factor 2 or 0.5 between slave's actual and expected baud rate.
<b>BSY</b>	12	rh	<b>Busy Flag</b> Set while a transfer is in progress.  <i>Note: This bit is not to be written to.</i>
<b>Res</b>	13	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>MS</b>	14	rw	<b>Master Select Bit</b> 0 <sub>B</sub> Slave Mode. Operate on shift clock received via SCLK. 1 <sub>B</sub> Master Mode. Generate shift clock and output it via SCLK.



**High-Speed Synchronous Serial Interface (SSC1/SSC2)**

Field	Bits	Type	Description
<b>EN</b>	15	rw	<b>Enable Bit = 1</b> Transmission and reception enabled. Access to status flags and M/S control.  <i>Note: The effect of EN bit becomes visible on the next write to the CON register.</i>

**ISRCLR**
**Interrupt Status Register Clear**
**(14<sub>H</sub>)**
**Reset Value: 0000<sub>H</sub>**

15	14	13	12	11	10	9	8
Res				<b>BECLR</b>	<b>PECLR</b>	<b>RECLR</b>	<b>TECLR</b>
	r			w	w	w	w
7	6	5	4	3	2	1	0
Res							
			r				

Field	Bits	Type	Description
<b>Res</b>	7:0	r	<b>Reserved</b> Returns 0 if read; should be written with 0.
<b>TECLR</b>	8	w	<b>Transmit Error Flag Clear</b> 0 <sub>B</sub> No error clear. 1 <sub>B</sub> Error clear.
<b>RECLR</b>	9	w	<b>Receive Error Flag Clear</b> 0 <sub>B</sub> No error clear. 1 <sub>B</sub> Error clear.
<b>PECLR</b>	10	w	<b>Phase Error Flag Clear</b> 0 <sub>B</sub> No error clear. 1 <sub>B</sub> Error clear.
<b>BECLR</b>	11	w	<b>Baud Rate Error Flag Clear</b> 0 <sub>B</sub> No error clear. 1 <sub>B</sub> Error clear.
<b>Res</b>	15:12	r	<b>Reserved</b> Returns 0 if read; should be written with 0.


## High-Speed Synchronous Serial Interface (SSC1/SSC2)

### 21.6.1.3 Baud Rate Timer Reload Register

The SSC baud rate timer reload register BR contains the 16-bit reload value for the baud rate timer.

#### BR

**Baud Rate Timer Reload Register** (10<sub>H</sub>) **Reset Value: 0000<sub>H</sub>**

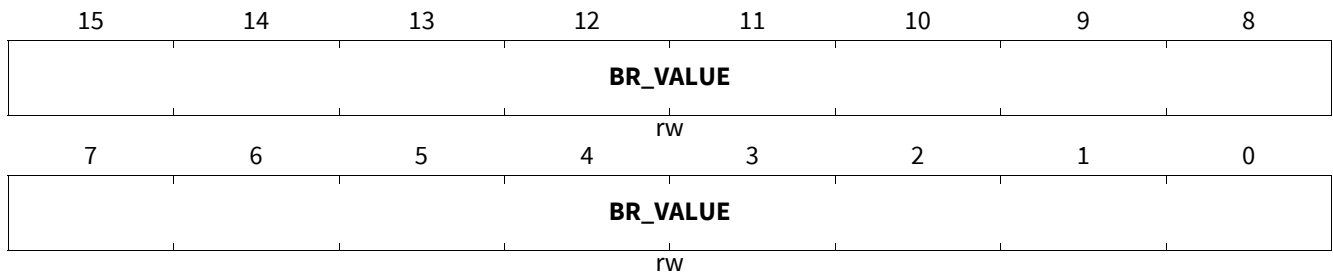


Field	Bits	Type	Description
<b>BR_VALUE</b>	15:0	rw	<b>Baud Rate Timer/Reload Register Value</b> Reading BR returns the 16-bit contents of the baud rate timer. Writing BR loads the baud rate timer reload register with BR_VALUE. Never write to BR while the SSC is enabled via CON.EN = 1.

### 21.6.1.4 Transmitter Buffer Register

The SSC transmitter buffer register TB contains the transmit data value.

#### TB

**Transmitter Buffer Register** (08<sub>H</sub>) **Reset Value: 0000<sub>H</sub>**

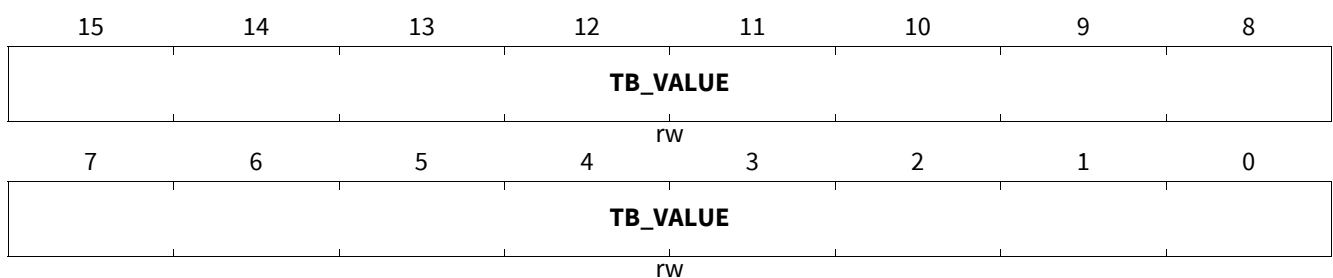

Field	Bits	Type	Description
<b>TB_VALUE</b>	15:0	rw	<b>Transmit Data Register Value</b> TB_VALUE is the data value to be transmitted. Unselected bits of TB are ignored during transmission.

## High-Speed Synchronous Serial Interface (SSC1/SSC2)

### 21.6.1.5 Receiver Buffer Register


The SSC receiver buffer register RB contains the receive data value.

**RB**

**Receiver Buffer Register**

(0C<sub>H</sub>)

Reset Value: 0000<sub>H</sub>

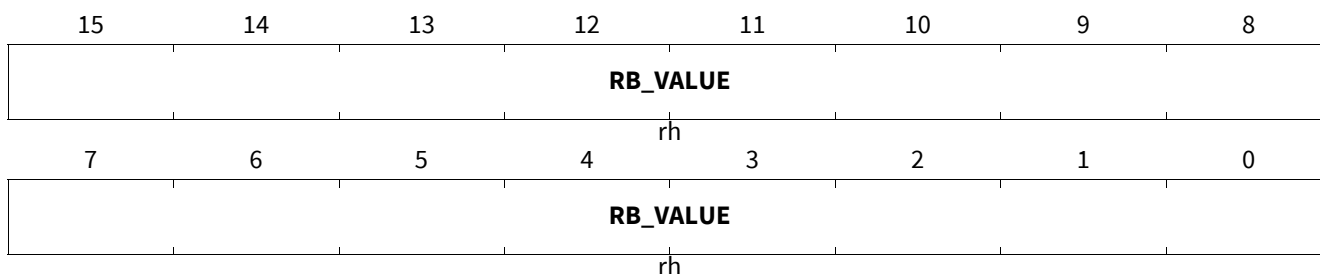

Field	Bits	Type	Description
<b>RB_VALUE</b>	15:0	rh	<b>Receive Data Register Value</b> RB contains the received data value RB_VALUE. Unselected bits of RB will be not valid and should be ignored.

### 21.6.2 Register Map

There are two SSC kernels in the TLE987x, namely SSC1 and SSC2. [Table 153](#) shows the SSC module base addresses.

[Table 154](#) lists the addresses of the SSC SFRs.

**Table 153 Register Address Space**

Module	Base Address	End Address	Note
SSC1	48024000 <sub>H</sub>	48025FFF <sub>H</sub>	
SSC2	48026000 <sub>H</sub>	48027FFF <sub>H</sub>	

**Table 154 Register Overview SSC**

Register Short Name	Register Long Name	Offset Address	Reset Value
PISEL	Port Input Select Register	00 <sub>H</sub>	<a href="#">677</a>
CON	Control Register	04 <sub>H</sub>	<a href="#">678</a>
TB	Transmitter Buffer Register	08 <sub>H</sub>	<a href="#">682</a>
RB	Receiver Buffer Register	0C <sub>H</sub>	<a href="#">683</a>
BR	Baud Rate Timer Reload Register	10 <sub>H</sub>	<a href="#">682</a>
ISRCLR	Interrupt Status Clear Register	14 <sub>H</sub>	<a href="#">681</a>

---

**Measurement Unit**

## 22 Measurement Unit

### 22.1 Features

- 1 x 8-bit ADC with 10 Inputs including attenuator allowing measurement of high voltage input signals
- Supply Voltage Attenuators with attenuation of **VS**, **VDDP** and **VDDC**.
- VBG monitoring of 8-bit ADC to guarantee functional safety requirements.
- Bridge Driver Diagnosis Measurement (VDH, VCP).
- Temperature Sensor for monitoring the chip temperature and PMU Regulator temperature.
- BEMF Comparators for commutation triggering inside BLDC Applications.
- Supplement Block with Reference Voltage Generation, Bias Current Generation, Voltage Buffer for NVM Reference Voltage, Voltage Buffer for Analog Module Reference Voltage and Test Interface.

### 22.2 Introduction

The measurement unit is a functional unit that comprises the following associated sub-modules:

**Table 155 Measurement Functions and Associated Modules**

Module Name	Modules	Functions
Central Functions Unit	Bandgap reference circuit	The bandgap-reference sub-module provides two reference voltages 1. a trimmable reference voltage for the 8-bit ADCs. A local dedicated bandgap circuit is implemented to avoid deterioration of the reference voltage arising e.g. from crosstalk or ground voltage shift. 2. the reference voltage for the NVM module
8-bit ADC (ADC2)	8-bit ADC module with 10 multiplexed inputs, including HV input attenuator	5 high voltage full supply range capable inputs (2.5V...30,7V(FS)) 2 medium voltage inputs (0..5V/7V FS). 3 low voltage inputs (0..1.2V/1.6V FS) (allocation see following overview figure)
10-bit ADC (ADC1)	10-bit ADC module with 8 multiplexed inputs	Five (5V) analog inputs from Port 2.x
14 Bit ADCs <sup>1)</sup> (ADC3, ADC4)	14 Bit Sigma Delta ADC module	Two differential analog inputs from Port 2.x
VDH Input Voltage Attenuator	VDH input voltage attenuator	Scales down V(VDH) to the input voltage range of ADC1.CH6
Temperature Sensor	Temperature sensor with two multiplexed sensing elements: <ul style="list-style-type: none"> <li>• PMU located sensor</li> <li>• Central chip located sensor</li> </ul>	Generates output voltage which is a linear function of the local chip (junction) temperature.


Measurement Unit

**Table 155 Measurement Functions and Associated Modules (cont'd)**

Module Name	Modules	Functions
BEMF - Comparators	Back Electromotive Force Comparators	Comparators are used to detect the Back Electromotive Force (Zero Crossing Event), which can be used as a commutation trigger for BLDC applications.
Measurement Core Module	Digital signal processing and ADC2 control unit	<ol style="list-style-type: none"> <li>Generates the control signal for the 8-bit ADC2 and the synchronous clock for the switched capacitor circuits,</li> <li>Performs digital signal processing functions and provides status outputs for interrupt generation.</li> </ol>

1) for TLE9879-2QXA40 variant only

**22.2.1 Block Diagram**

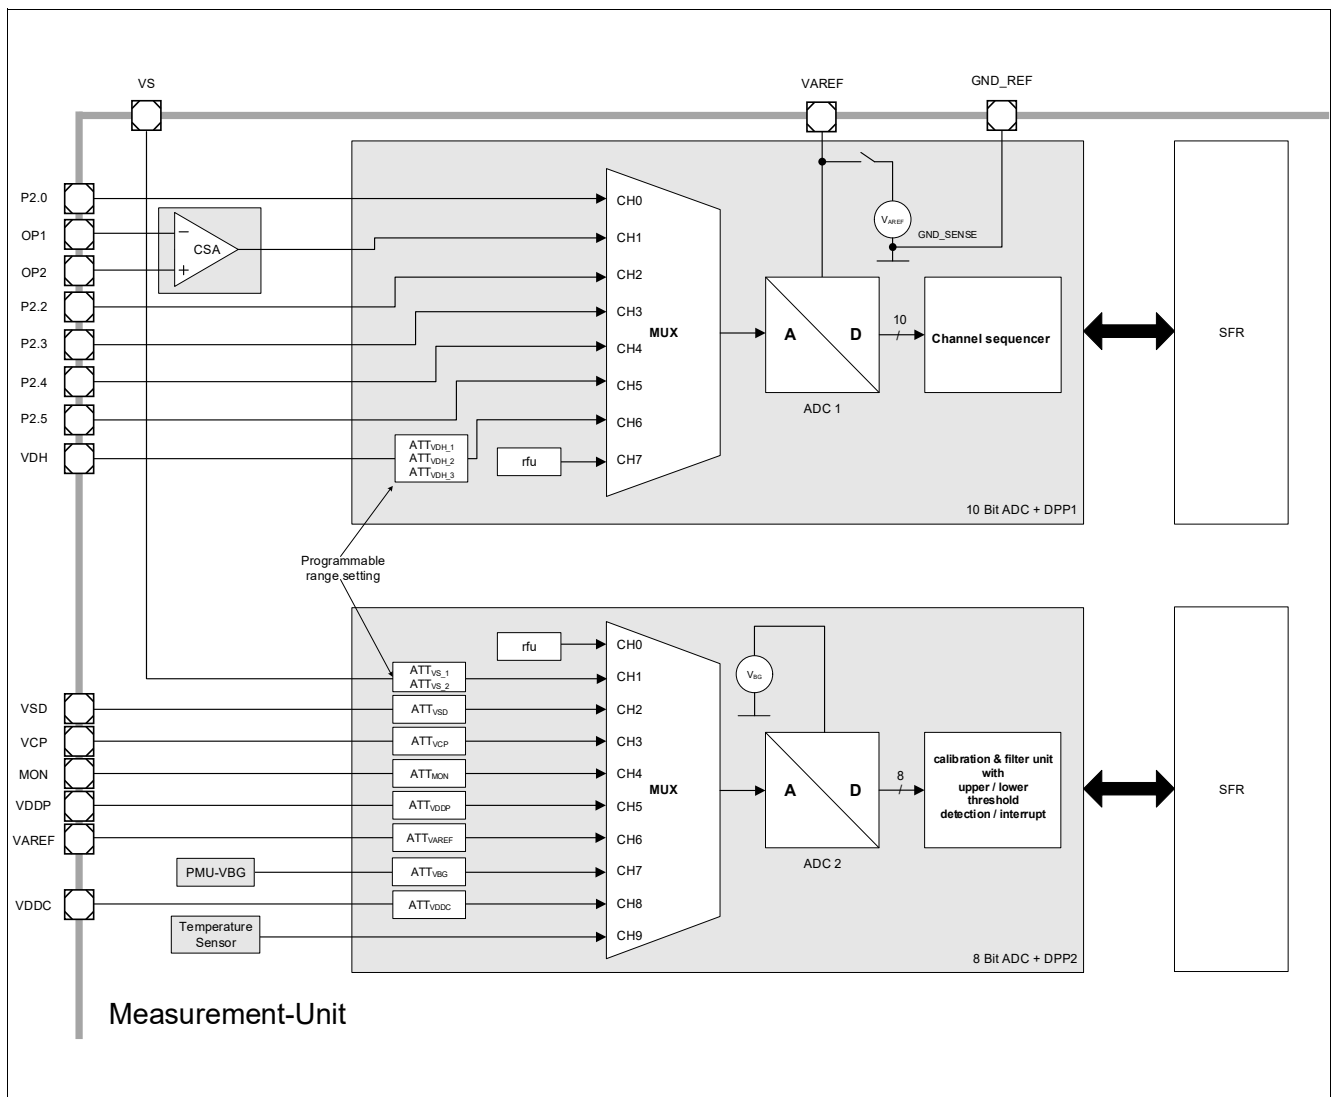

**Figure 185 Measurement Unit-Overview (with opamp), except TLE9879-2QXA40 variant**

Measurement Unit

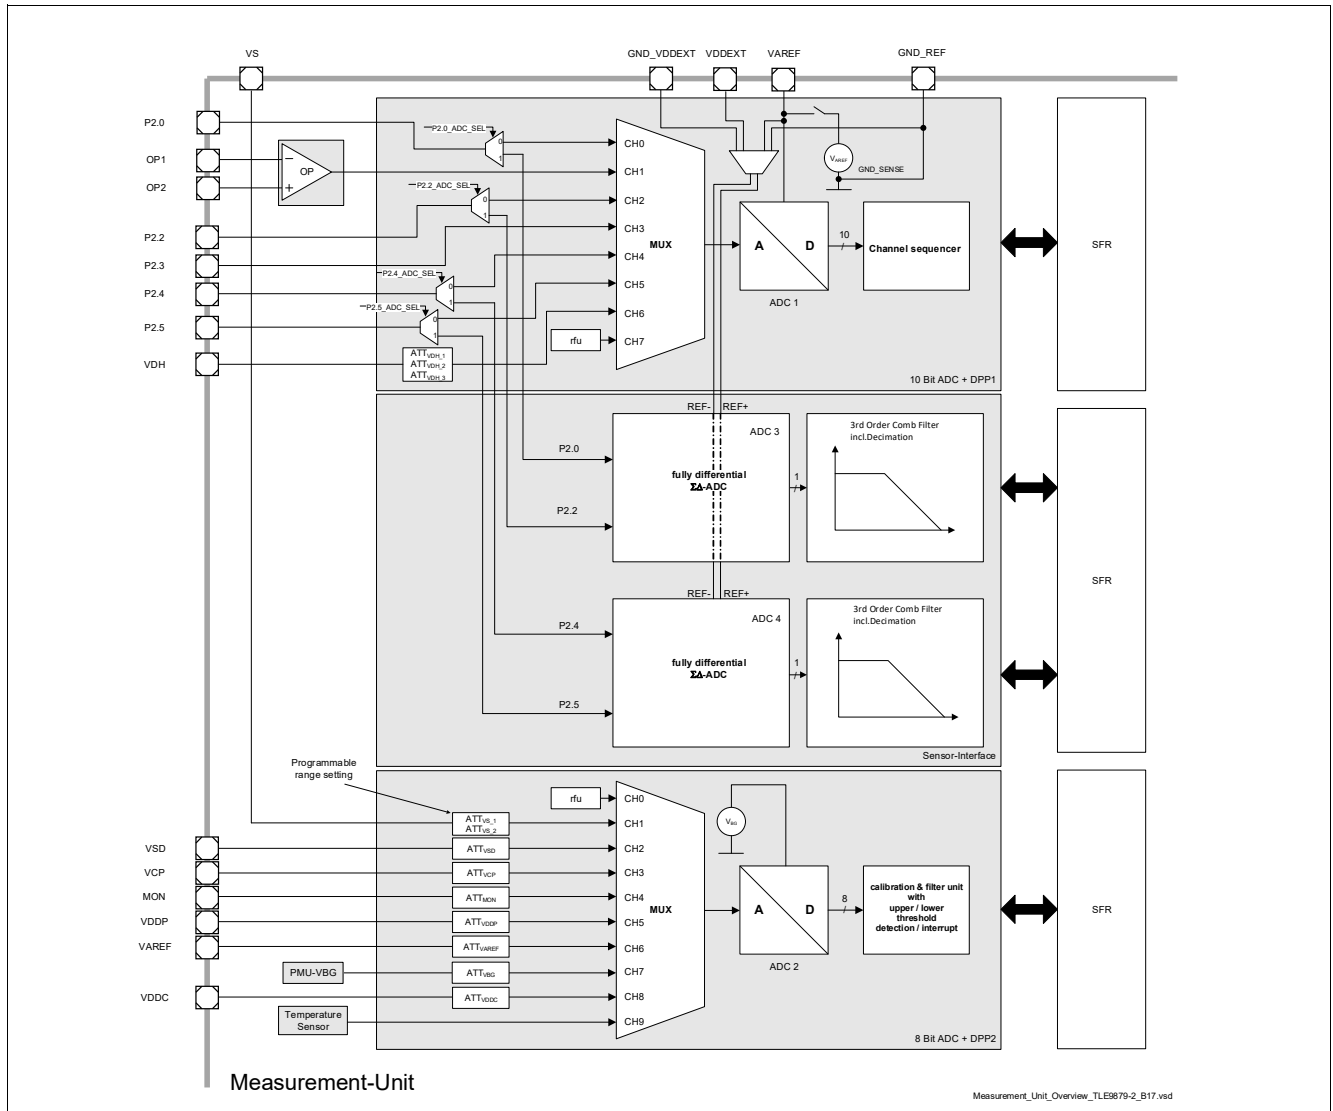


Figure 186 Measurement Unit-Overview TLE9879-2QXA40

Measurement Unit

22.2.1.1 Block Diagram BEMF Comparator

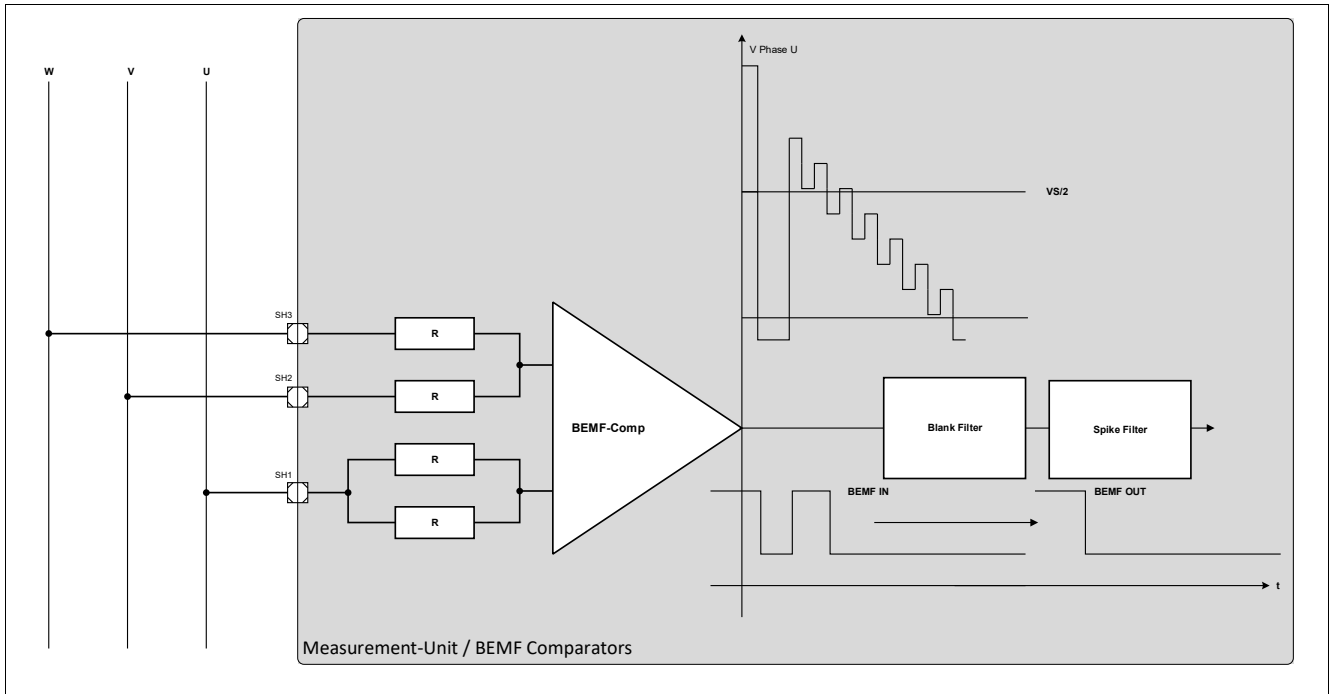


Figure 187 3 Times BEMF Comparator

## Measurement Unit

### 22.2.2 Measurement Unit Register Overview

All registers of blocks that belong to the measurement unit are mapped to base address see below.

**Table 156 Register Address Space for Measurement Unit Registers**

Module	Base Address	End Address	Note
MF	48018000 <sub>H</sub>	4801BFFF <sub>H</sub>	Measurement Unit

**Table 157 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Port 2 ADC Selection Register</b>			
<b>P2_ADCSEL_CTRL</b>	Port 2 ADC Selection Control Register	00 <sub>H</sub>	0000 0400 <sub>H</sub>
<b>VDH Input Attenuator Control Register</b>			
<b>VMON_SEN_CTRL</b>	Monitoring Supply Sense Control Register	04 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>BEMF Comparators Control and Status Register</b>			
<b>BEMFC_CTRL_STS</b>	BEMF Comparator Control Status Register	08 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>TRIM_BEMFx</b>	Trimming of BEMF comparators	20 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>Temperature Sensor Control Register</b>			
<b>TEMPSENSE_CTRL</b>	Temperature Sensor Control Register	10 <sub>H</sub>	0000 0003 <sub>H</sub>
<b>Supplement Modules Control and Status Register</b>			
<b>REF1_STS</b>	Reference 1 Status Register	14 <sub>H</sub>	0000 00C1 <sub>H</sub>
<b>REF2_CTRL</b>	Reference 2 Control Register	18 <sub>H</sub>	0000 0001 <sub>H</sub>

The registers are addressed wordwise.

### 22.3 8-bit - 10 Channel ADC Core (ADC2)

The 8-bit ADC Core operates at the VDDC Supply Voltage. This enables the user to operate the measurement system down to VS reset threshold. The ADC2 can also be operated independently from the DPP (Data Post Processing) unit. This enables the user to build up a software controlled measurement cycle. The main features of the 8-bit ADC core are listed below.

#### Module Features

- Conversion time = 15 system clock cycles.
- programmable sampling time (4 to 22 MI\_CLK cycles, default: 18 MI\_CLK cycles)
- Scalable clock frequency from 10 - 30 MHz.

The ADC2 is controlled in two different ways by the control module DPP2:


- Fully controlled by the sequencer inside DPP2.
- Partly controlled by the user within defined timeslots of Sequencer (EIM, Exceptional Interrupt Measurement)



## Measurement Unit

### 22.3.1 8-bit ADC Channel Allocation

The allocation of the 10 Channels of ADC2 is sketched below:

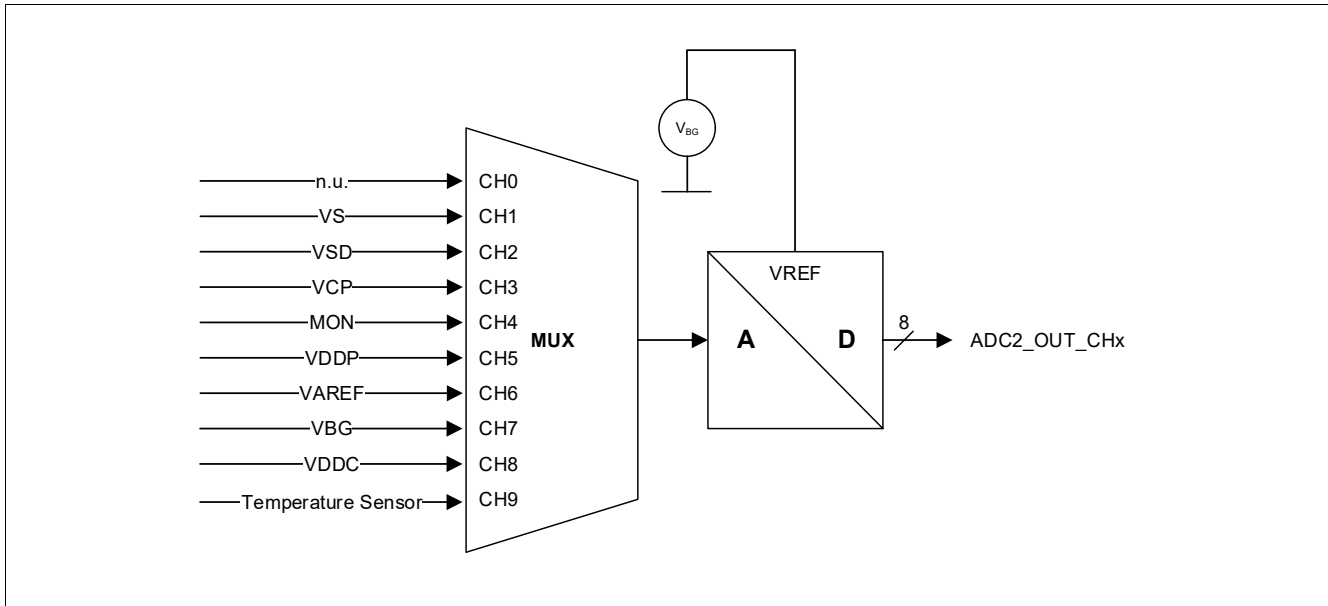

**Figure 188 8-bit ADC (ADC2) Channel Allocation**

#### ADC2 Channel Assignment:

- VS Pin Voltage Measurement.
- VSD Pin Voltage Measurement.
- Charge Pump Output Voltage (VCP).
- MON Pin Voltage Measurement
- VDDP Pin Voltage Measurement.
- ADC1 Reference Voltage Check (VAREF).
- ADC2 Reference Voltage Check (VBG).
- VDDC Pin Voltage Measurement.
- Device Temperature Measurement ( $T_j$ ).

### 22.3.2 Transfer Characteristics of ADC2

The transfer function of ADC2 can be expressed by the equation below:

$$\text{ADC2}_{\text{out}} = \text{floor} \left( \frac{V_{\text{inCHx}} * \text{Gain}_{\text{CHx}}}{V_{\text{LSB}}} + 1 \right) \quad (22.1)$$

where  $V_{\text{in}}$  is the input voltage and  $\text{Gain}_{\text{CHx}}$  the individual Channel Gain. The LSB Voltage is calculated:

$$V_{\text{LSB}} = \frac{V_{\text{BG}}}{2^8 - 1} = \frac{1.211\text{V}}{255} = 4.749\text{mV} \quad (22.2)$$

where **typ.  $V_{\text{BG}}$  is 1.211 V @ 27 °C**. Typ.  $V_{\text{BG}} = 1.211\text{V}$  results in  **$V_{\text{LSB}} = 4.749\text{mV}$** :

A detailed specification of both A/D-converters is given in Chapter **Electrical Characteristics in the Data Sheet**.

---

**Measurement Unit**

### 22.3.3 8-bit - 10 Channel Control Registers

The ADC2 control registers are located in the **Measurement Core Module** Block (see [Chapter 23](#)). Also the configurable attenuator factors are located there (see register CTRL\_STS).

## 22.4 ADC Input Selection

### 22.4.1 Functional Description

The 10-bit ADC (ADC1) and the SDADC are sharing Port 2.x inputs. The configuration is shown in [Chapter 22.2.1](#)

### 22.4.2 Port 2 ADC Selection Register

**Table 158 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Port 2 ADC Selection Register</b>			
<b>P2_ADCSEL_CTRL</b>	Port 2 ADC Selection Control Register	00 <sub>H</sub>	0000 0400 <sub>H</sub>

The registers are addressed byte-wise.


## Measurement Unit

### Port 2 ADC Selection Control Register

The register is reset by RESET\_TYPE\_3.

This register is being initialized by the BootROM during the bootup process to a value of 0000\_0400<sub>H</sub>

P2_ADCSEL_CTRL	Offset	Reset Value
Port 2 ADC Selection Control Register	00 <sub>H</sub>	0000 0000 <sub>H</sub>

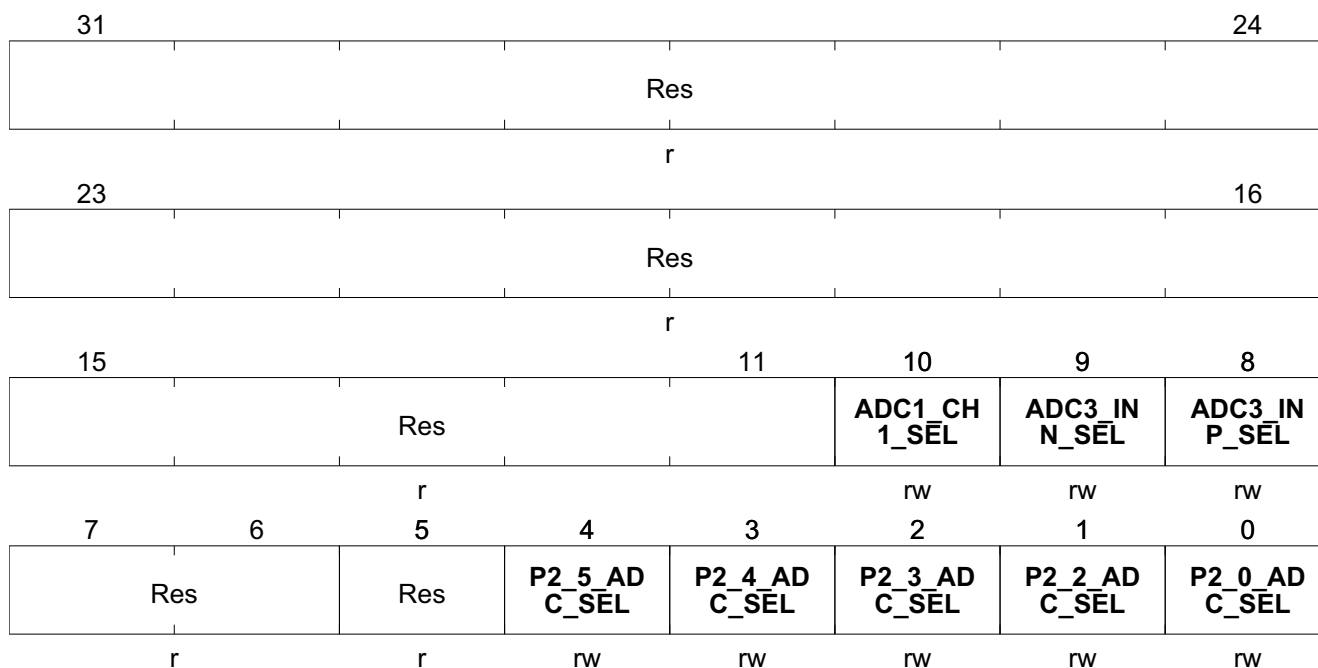

Field	Bits	Type	Description
<b>Res</b>	31:11	r	<b>Reserved</b> Always read as 0
<b>ADC1_CH1_SEL</b>	10	rw	<b>ADC1 Channel 1 Input Selection</b> 0 <sub>B</sub> <b>none</b> , Current Sense Amplifier disconnected from ADC1.Ch1 1 <sub>B</sub> <b>CS_AMP</b> , Current Sense Amplifier is connected to ADC1.Ch1
<b>ADC3_INN_SEL</b>	9	rw	<b>ADC3 Negative Input Selection<sup>1)</sup></b> 0 <sub>B</sub> <b>none</b> , ADC3.N input disconnected 1 <sub>B</sub> <b>Mux-Port 2.2</b> , Port 2.2 multiplexer is connected to ADC3.N
<b>ADC3_INP_SEL</b>	8	rw	<b>ADC3 Positive Input Selection<sup>1)</sup></b> 0 <sub>B</sub> <b>none</b> , ADC3.P input disconnected 1 <sub>B</sub> <b>Mux-Port 2.0</b> , Port 2.0 multiplexer is connected to ADC3.P
<b>Res</b>	7:6	r	<b>Reserved</b> Always read as 0x
<b>Res</b>	5	r	<b>Reserved</b> Always read as 0x

---

**Measurement Unit**

Field	Bits	Type	Description
<b>P2_5_ADC_SEL</b>	4	rw	<b>Port 2.5 Input Selection</b> 0 <sub>B</sub> <b>ADC1.Ch5</b> , Port 2.5 is connected to ADC1.Ch5 1 <sub>B</sub> <b>ADC4.N</b> , Port 2.5 is connected to ADC4.N <sup>1)</sup>
<b>P2_4_ADC_SEL</b>	3	rw	<b>Port 2.4 Input Selection</b> 0 <sub>B</sub> <b>ADC1.Ch4</b> , Port 2.4 is connected to ADC1.Ch4 1 <sub>B</sub> <b>ADC4.P</b> , Port 2.4 is connected to ADC4.P <sup>1)</sup>
<b>P2_3_ADC_SEL</b>	2	rw	<b>Port 2.3 Input Selection</b> 0 <sub>B</sub> <b>ADC1.Ch3</b> , Port 2.3 is connected to ADC1.Ch3 1 <sub>B</sub> <b>none</b> , ADC1.Ch3 disconnected from P2.3
<b>P2_2_ADC_SEL</b>	1	rw	<b>Port 2.2 Input Selection</b> 0 <sub>B</sub> <b>ADC1.Ch2</b> , Port 2.2 is connected to ADC1.Ch2 1 <sub>B</sub> <b>ADC3.N</b> , Port 2.2 is connected to ADC3.N <sup>1)</sup> , ADC3_INN_SEL must be set to '1'
<b>P2_0_ADC_SEL</b>	0	rw	<b>Port 2.0 Input Selection</b> 0 <sub>B</sub> <b>ADC1.Ch0</b> , Port 2.0 is connected to ADC1.Ch0 1 <sub>B</sub> <b>ADC3.P</b> , Port 2.0 is connected to ADC3.P <sup>1)</sup> , ADC3_INP_SEL must be set to '1'

1) for TLE9879-2QXA40 only; Reserved for other variants.

## Measurement Unit

### 22.5 VDH Input Voltage Attenuator

#### 22.5.1 Functional Description

The function of the VDH voltage attenuator is to scale down the applied voltage on the VDH pin for the on-chip 10-Bit ADC. The voltage attenuator has the following features:


##### Features

- Two selectable attenuation factors:  $ATT_{VDH_1}$ ,  $ATT_{VDH_2}$  (with  $ATT_{VDH_3}$  for a limited temperature range), please refer to the data sheet for the values
- Analog Mux switching time < 30  $\mu$ s
- Input resistance:  $R_{in\_VDH,measure}$  (see data sheet for value)

*Note:* External series resistor affects measurement resolution accuracy by changing the internal attenuation factor.

The next chapter lists the user configuration possibilities of the VDH input voltage attenuators.

*Note:* **It is important to disable the VDH attenuator before entering Stop Mode. Otherwise an increased system current consumption can be observed.**

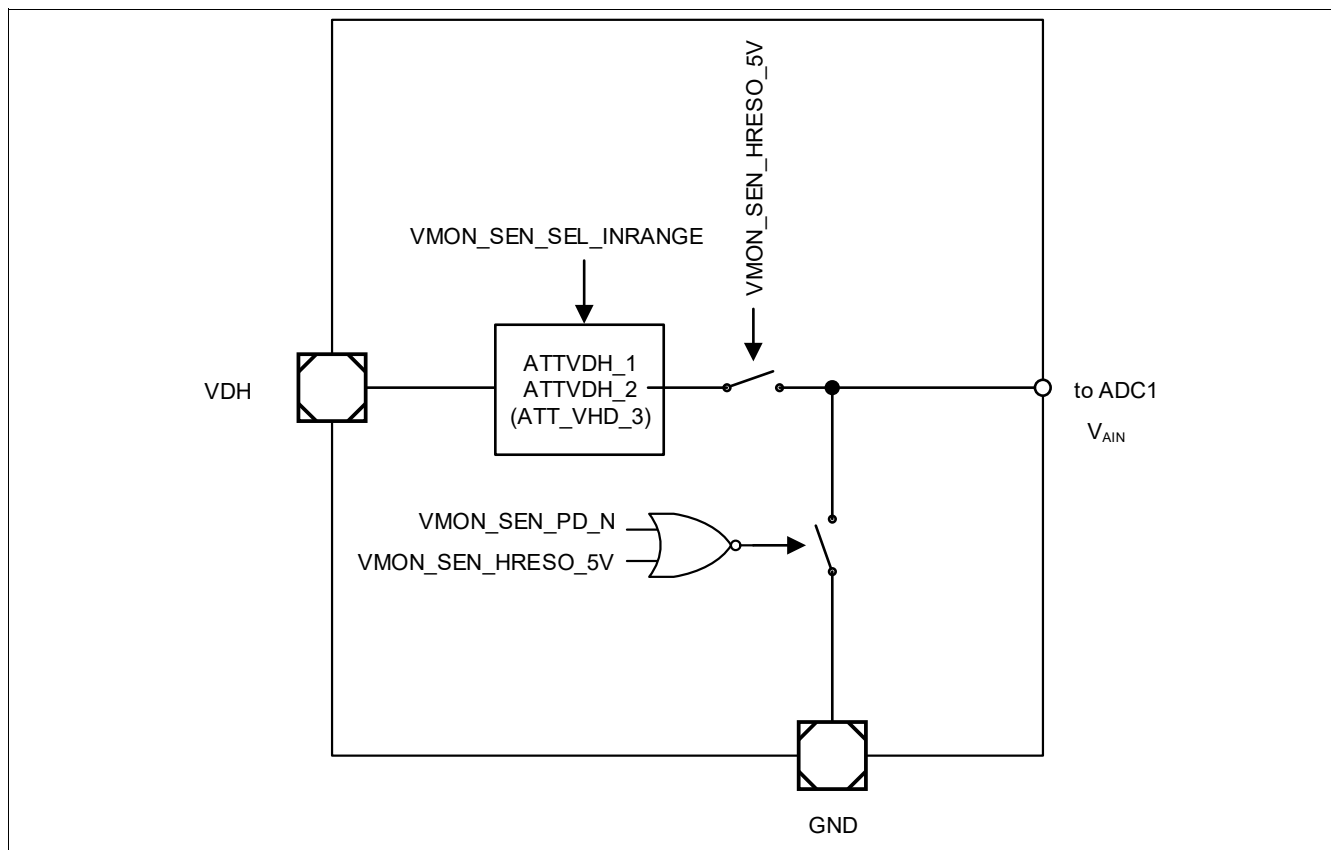

**Figure 189** Input Structure of HV-VDH Attenuator

## Measurement Unit

## 22.5.2 VDH Input Attenuator Control Register

Table 159 Register Overview


Register Short Name	Register Long Name	Offset Address	Reset Value
<b>VDH Input Attenuator Control Register</b>			
<b>VMON_SEN_CTRL</b>	Monitoring Supply Sense Control Register	04 <sub>H</sub>	0000 0000 <sub>H</sub>

The registers are addressed bitwise.

## VDH Monitoring Input Sense Control Register

The register is reset by RESET\_TYPE\_3.

VMON_SEN_CTRL	Offset	Reset Value
Monitoring Sense Control Register	04 <sub>H</sub>	0000 0000 <sub>H</sub>

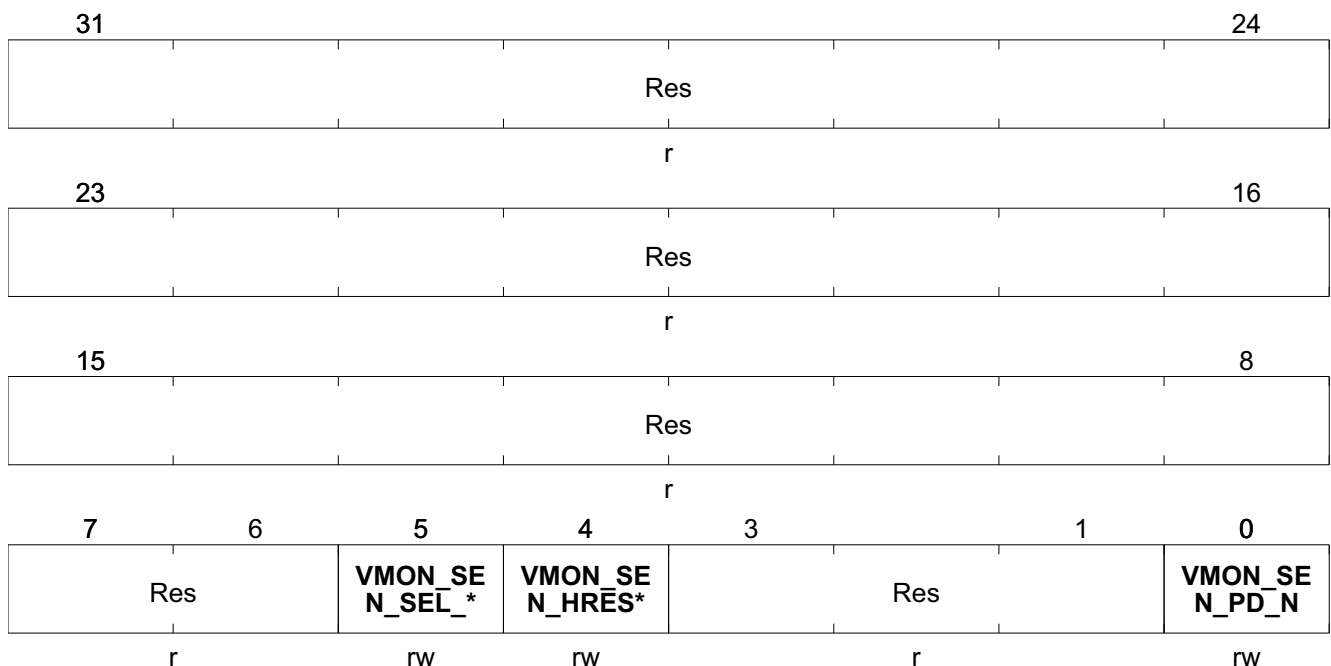

Field	Bits	Type	Description
<b>Res</b>	31:6	r	<b>Reserved</b> Always read as 0x
<b>VMON_SEN_SEL_INRANGE</b>	5	rw	<b>VDH Monitoring Input Attenuator Select Input Range</b> 0 <sub>B</sub> <b>0 - 20V Range</b> , is selected (ATT <sub>VDH_2</sub> , ATT <sub>VDH_3</sub> ) 1 <sub>B</sub> <b>0 - 30V Range</b> , is selected (ATT <sub>VDH_1</sub> )

---

**Measurement Unit**

Field	Bits	Type	Description
<b>VMON_SEN_HRESO_5V</b>	4	rw	<b>VDH Monitoring Input Attenuator High Impedance Output Control</b> 0 <sub>B</sub> <b>Attenuator Output Enable</b> , Connection to ADC input low ohmic 1 <sub>B</sub> <b>Attenuator Output Disable</b> , Connection to ADC input high ohmic
<b>Res</b>	3:1	r	<b>Reserved</b> Always read as 0x
<b>VMON_SEN_PD_N</b>	0	rw	<b>VDH Monitoring Input Attenuator enable</b> 0 <sub>B</sub> <b>DISABLE</b> , Attenuator switched off 1 <sub>B</sub> <b>ENABLE</b> , Attenuator switched on

## Measurement Unit


### 22.6 BEMF Comparators

#### 22.6.1 Functional Description

For the detection of the position of a motor the BEMF information can be used. This BEMF information is always sensed in the phase which is currently not active. As an example, the figure below shows the BEMF comparator of phase U and typical phase voltage and BEMF comparator output signals.

#### Module Features

- threshold derived from remaining active phases.
- low settling time < 1 $\mu$ s.
- Comparators can be switched off if not needed to avoid additional power consumption and undesired input currents in power down modes.

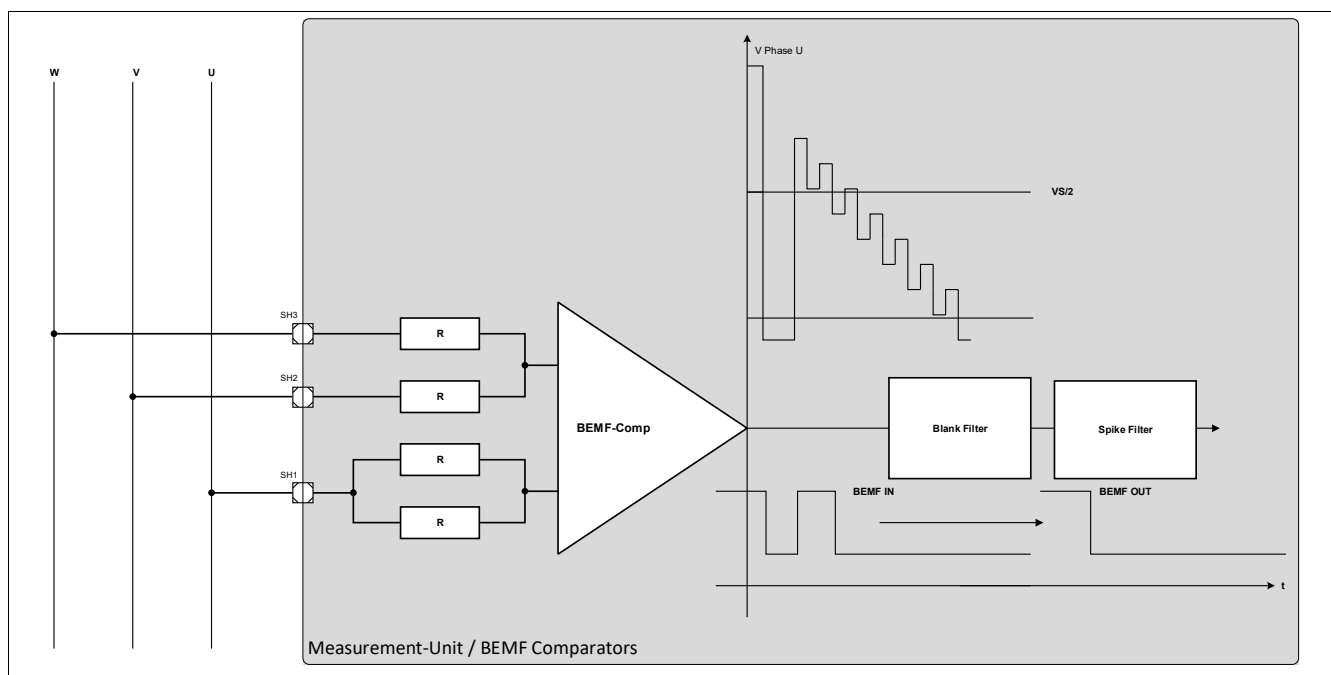

**Figure 190 Connection of BEMF Comparator of Phase U**



Measurement Unit

22.6.1.1 Postprocessing of BEMF Comparator Signals

In order to provide a suitable signal for the system PWM engine (CCU6) to trigger commutation events the outputs of the on-chip comparators need to be postprocessed. This postprocessing is shown in the figure below:

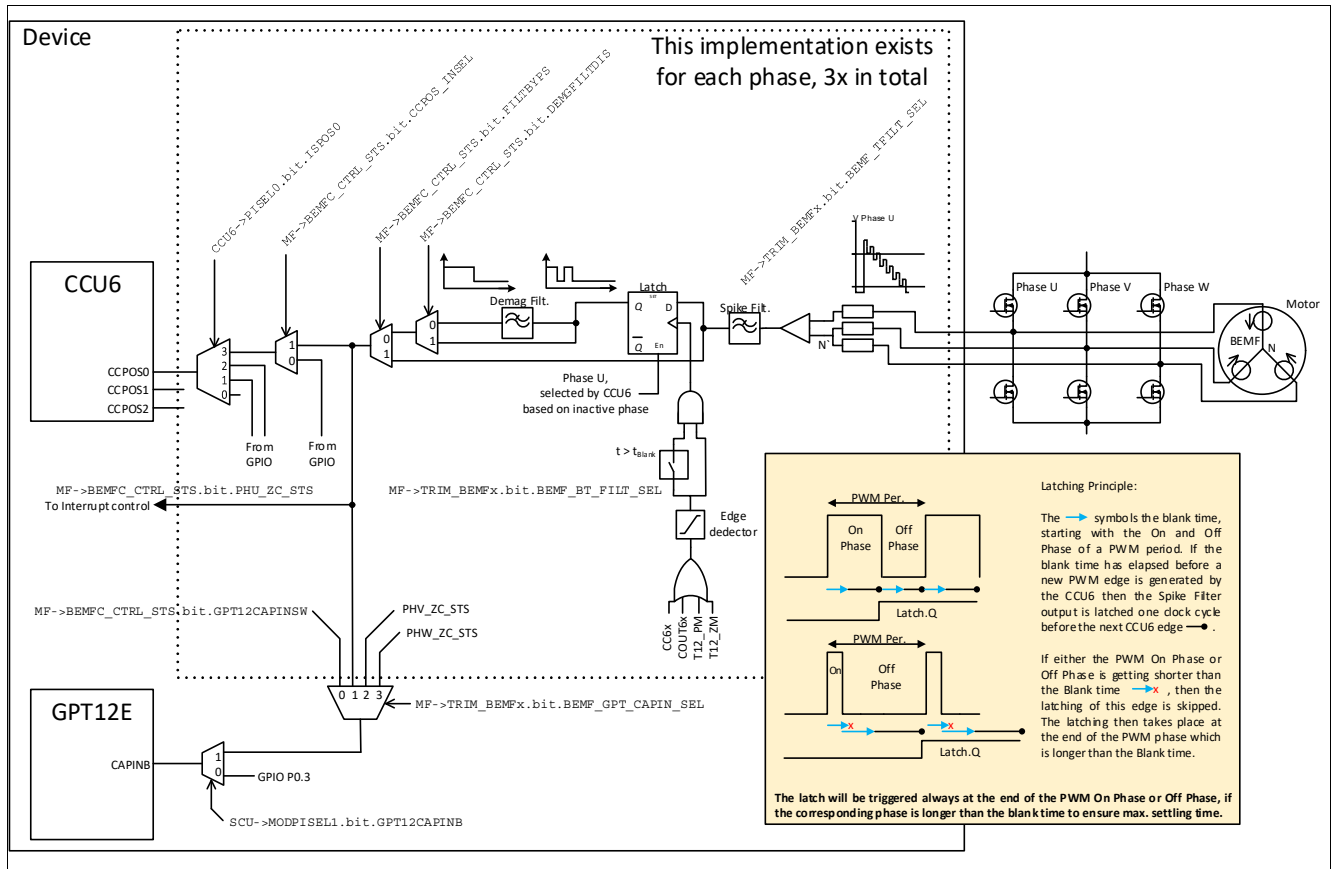


Figure 191 BEMF Comparator Postprocessing

The postprocessing is build out of a spike filter providing a low pass filtered signal at the input of the latch, the spike filter can be configured by [TRIM\\_BEMFx](#).

The latch is triggered by the CCU6, either by the channel signals, or by the Timer12 zero match or period match for 0% and 100% duty cycles. As highlighted in the yellow box, the latch will be triggered one clock cycle before the end of the current PWM phase, On Phase, or Off Phase. The blank filter ensures that the latching only takes place if the corresponding PWM phase has a width greater than the blank time. This provides the maximum possible settling time for the BEMF signal.

The output of the latch can either be selected directly, or being fed through the demagnetisation filter. The option to bypass the demag. filter provides more flexibility to the application to handle the start up of the motor, where due to improper phasing of the electric field inside the motor to its rotor no zero-crossing of the generated BEMF signal is yet present. The existence of the demag. pulse can then be used to toggle the CCPOSx signal.


If the motor is running in closed loop, the demag. filter shall be turned on, because then the undesired demag. pulse is removed and the CCPOSx signal toggles only at the zero-crossing of the BEMF.

Multiplexers at the output allow to feed out the BEMF signal either right after the spike filter, which is useful to check whether a motor is already, or still, rotating without commutation (windmilling), or before or after the demag. filter.

**Measurement Unit**

The status of the BEMF comparators can be routed to the CAPINB of the GPT12 module. As an example, if the GPT2.T5 is running freely in timer mode, a selected edge on the desired BEMF status captures the current timer value into the CAPREL register. If needed the GPT12.T5 can be reset by the capture event. The CAPREL register then holds the time (in GPT12.T5 clock ticks) between the selected edges of the BEMF status, which is an equivalent for the rotating speed of the motor.

As displayed in **Figure 191** the BEMF status signals can be routed to the CCPOSx inputs of the CCU6. Usually a HALL sensor is connected to the CCPOSx inputs. The three BEMF status signals together do count like a 3-times HALL pattern, therefore the CCU6 internal HALL pattern evaluation unit can be used for BEMF evaluation as well, see also **Chapter 18.7**.

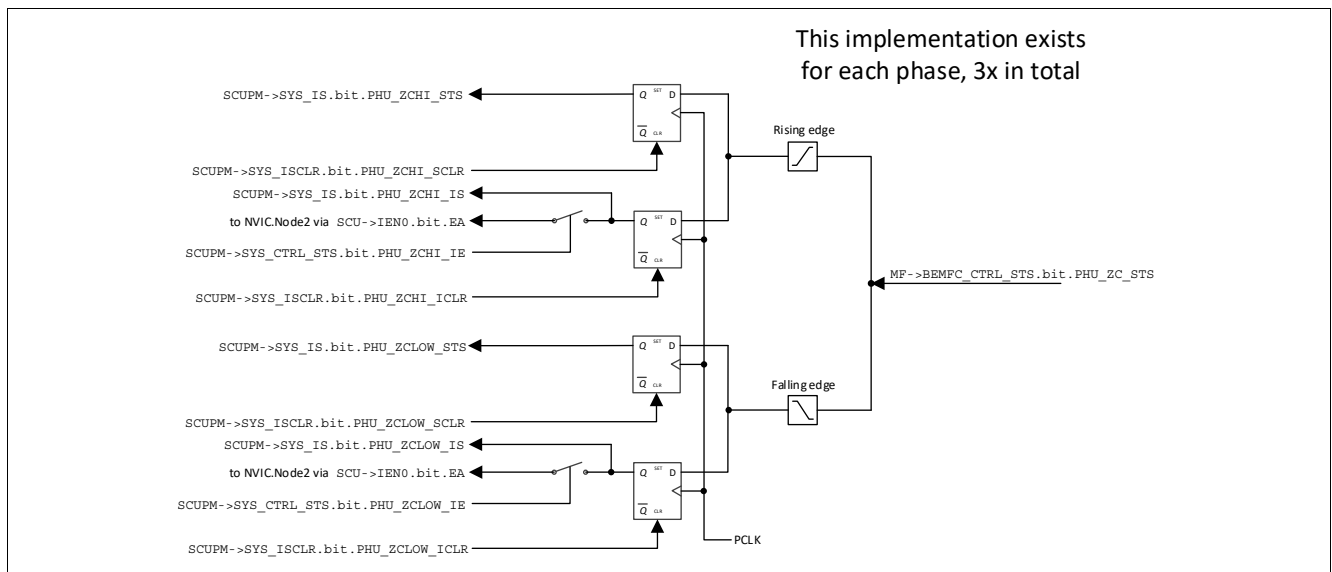

**Figure 192 BEMF Comparator Interrupt Structure**

**Figure 192** lists the interrupt structure for the Phase U, the implementation for the other two phases is analog.

## Measurement Unit

### 22.6.2 BEMF Comparators Control and Status Register

The next chapter lists the configuration and status readback possibilities of the BEMF comparators used for zero crossing detection.

**Table 160 Register Overview**


Register Short Name	Register Long Name	Offset Address	Reset Value
<b>BEMF Comparators Control and Status Register</b>			
<b>BEMFC_CTRL_STS</b>	BEMF Comparator Control Status Register	08 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>TRIM_BEMFx</b>	Trimming of BEMF comparators	20 <sub>H</sub>	0000 0000 <sub>H</sub>

The registers are addressed wordwise.

#### BEMF Comparator Control and Status Register

The register is reset by RESET\_TYPE\_3.

<b>BEMFC_CTRL_STS</b>	<b>Offset</b>	<b>Reset Value</b>
<b>BEMF Comparator Control Status Register</b>	<b>08<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

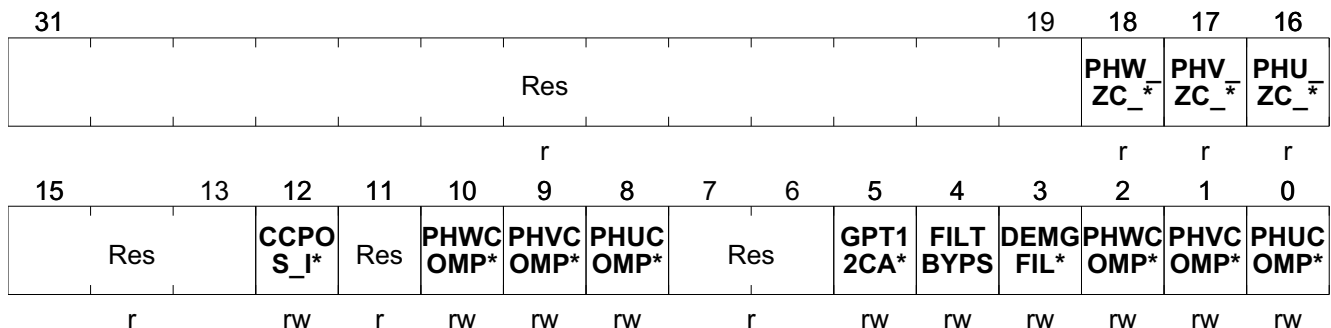

Field	Bits	Type	Description
<b>Res</b>	31:19	r	<b>Reserved</b> Always read as 0
<b>PHW_ZC_STS</b>	18	r	<b>Phase W Comparator zero crossing status</b> BEMF comparator outputs '1' when it is switched off 0 <sub>B</sub> <b>Below Threshold</b> , zero crossing comparator input is below threshold 1 <sub>B</sub> <b>Above Threshold</b> , zero crossing comparator input is above threshold

## Measurement Unit

Field	Bits	Type	Description
PHV_ZC_STS	17	r	<b>Phase V Comparator zero crossing status</b> BEMF comparator outputs '1' when it is switched off 0 <sub>B</sub> <b>Below Threshold</b> , zero crossing comparator input is below threshold 1 <sub>B</sub> <b>Above Threshold</b> , zero crossing comparator input is above threshold
PHU_ZC_STS	16	r	<b>Phase U Comparator zero crossing status</b> BEMF comparator outputs '1' when it is switched off 0 <sub>B</sub> <b>Below Threshold</b> , zero crossing comparator input is below threshold 1 <sub>B</sub> <b>Above Threshold</b> , zero crossing comparator input is above threshold
Res	15:13	r	<b>Reserved</b> Always read as 0
CCPOS_INSEL	12	rw	<b>CCPOSx_3 ISPOS select, x = 0,1,2</b> 0 <sub>B</sub> <b>ENABLE</b> , GPIO selected 1 <sub>B</sub> <b>ENABLE</b> , BEMF selected, set CCU6. <b>PISELO</b> .ISPOSx = 3
Res	11	r	<b>Reserved</b> Always read as 0
PHWCOMP_ON	10	rw	<b>Phase W Comparator on</b>  <i>Note: for a proper operation of BEMF functionality all three comparators need to be switched on</i>  0 <sub>B</sub> <b>DISABLE</b> , Comparator is switched off 1 <sub>B</sub> <b>ENABLE</b> , Comparator is switched on
PHVCOMP_ON	9	rw	<b>Phase V Comparator on</b>  <i>Note: for a proper operation of BEMF functionality all three comparators need to be switched on</i>  0 <sub>B</sub> <b>DISABLE</b> , Comparator is switched off 1 <sub>B</sub> <b>ENABLE</b> , Comparator is switched on
PHUCOMP_ON	8	rw	<b>Phase U Comparator on</b>  <i>Note: for a proper operation of BEMF functionality all three comparators need to be switched on</i>  0 <sub>B</sub> <b>DISABLE</b> , Comparator is switched off 1 <sub>B</sub> <b>ENABLE</b> , Comparator is switched on
Res	7:6	r	<b>Reserved</b> Always read as 0
GPT12CAPINSW	5	rw	<b>GPT12 CAPIN software trigger</b> set <b>TRIM_BEMFx.BEMF_GPT_CAPIN_SEL</b> = 0 0 <sub>B</sub> <b>Value 0</b> , software trigger reset 1 <sub>B</sub> <b>Value 1</b> , software trigger set

---

**Measurement Unit**


Field	Bits	Type	Description
<b>FILTBYP</b>	4	rw	<b>BEMF Comparator Output Filter Bypass</b> 0 <sub>B</sub> <b>ENABLE</b> , BEMF Comparator Output Filter enabled 1 <sub>B</sub> <b>DISABLE</b> , BEMF Comparator Output Filter disabled
<b>DEMGFILTDIS</b>	3	rw	<b>BEMF Comparator Demagnetisation (Demag) Filter Disable</b> 0 <sub>B</sub> <b>ENABLE</b> , BEMF Comparator Demag Filter enabled 1 <sub>B</sub> <b>DISABLE</b> , BEMF Comparator Demag Filter bypass
<b>PHWCOMP_EN</b>	2	rw	<b>Phase W Comparator enable</b>  <i>Note: for a proper operation of BEMF functionality all three comparators need to be enabled</i>  0 <sub>B</sub> <b>DISABLE</b> , Comparator is disabled 1 <sub>B</sub> <b>ENABLE</b> , Comparator is enabled
<b>PHVCOMP_EN</b>	1	rw	<b>Phase V Comparator enable</b>  <i>Note: for a proper operation of BEMF functionality all three comparators need to be enabled</i>  0 <sub>B</sub> <b>DISABLE</b> , Comparator is disabled 1 <sub>B</sub> <b>ENABLE</b> , Comparator is enabled
<b>PHUCOMP_EN</b>	0	rw	<b>Phase U Comparator enable</b>  <i>Note: for a proper operation of BEMF functionality all three comparators need to be enabled</i>  0 <sub>B</sub> <b>DISABLE</b> , Comparator is disabled 1 <sub>B</sub> <b>ENABLE</b> , Comparator is enabled

## Measurement Unit

### Trimming of BEMF comparators

The register is reset by RESET\_TYPE\_4.

TRIM_BEMFx	Offset	Reset Value
Trimming of BEMF comparators	20 <sub>H</sub>	0000 0000 <sub>H</sub>

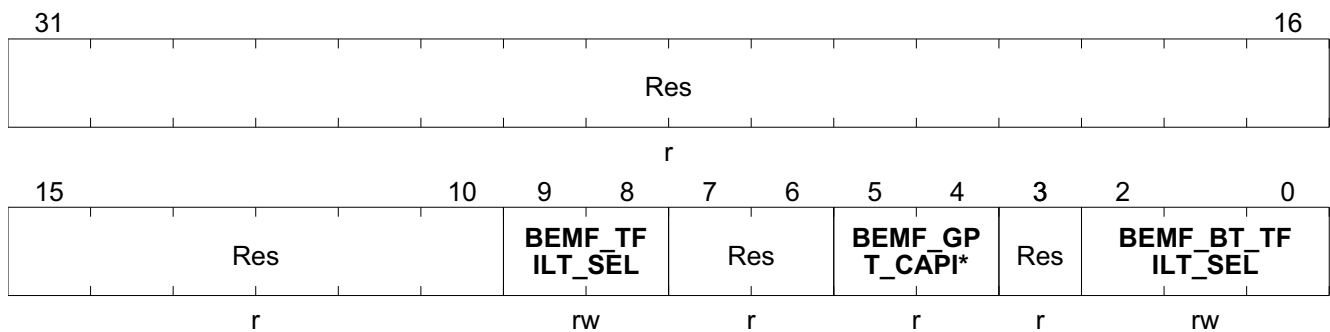

Field	Bits	Type	Description
Res	31:10	r	<b>Reserved</b> Always read as 0
BEMF_TFILT_SEL	9:8	rw	<b>Filter Time for BEMF Comparator Output Signal</b> 00 <sub>B</sub> <b>1_ μs</b> , 1 μs filter time 01 <sub>B</sub> <b>2_ μs</b> , 2 μs filter time 10 <sub>B</sub> <b>4_ μs</b> , 4 μs filter time 11 <sub>B</sub> <b>8_ μs</b> , 8 μs filter time
Res	7:6	r	<b>Reserved</b> Always read as 0
BEMF_GPT_CAPIN_SEL	5:4	rw	<b>GPT12 CAPIN input selector</b> set <b>MODPISEL1.GPT12CAPINB = 1</b> 00 <sub>B</sub> <b>SWTRIG</b> , trigger from <b>BEMFC_CTRL_STS.GPT12CAPINSW</b> 01 <sub>B</sub> <b>Phase U</b> , trigger from <b>BEMFC_CTRL_STS.PHU_ZC_STS</b> 10 <sub>B</sub> <b>Phase V</b> , trigger from <b>BEMFC_CTRL_STS.PHV_ZC_STS</b> 11 <sub>B</sub> <b>Phase W</b> , trigger from <b>BEMFC_CTRL_STS.PHW_ZC_STS</b>
Res	3:3	r	<b>Reserved</b> Always read as 0
BEMF_BT_TFILT_SEL	2:0	rw	<b>Blanking Time for BEMF Comparator Output Signal</b> 000 <sub>B</sub> <b>6_ μs</b> , 6 μs filter time 001 <sub>B</sub> <b>8_ μs</b> , 8 μs filter time 010 <sub>B</sub> <b>12_ μs</b> , 12 μs filter time 011 <sub>B</sub> <b>16_ μs</b> , 16 μs filter time 1xx <sub>B</sub> <b>3_ μs</b> , 3 μs filter time

---

**Measurement Unit**

## 22.7 Central and PMU Regulator Temperature Sensor

### 22.7.1 Functional Description

This module is a quasi combination of a main on-chip temperature sensor and a PMU Regulator temperature sensor.

#### Modules Features

- Temperature range -40 ...175°C
- Temperature range corresponds to single ended output voltage range 0.6 ...1.2V, resolution approx. 1.8°C
- The combined system temperature sensor plus ADC can be calibrated in software using calibration figures that are stored in the NVM at the production test.
- A dedicated calibration transistor facilitates on-chip reference temperature measurement. Hardware trimming is not implemented.

This temperature sensor, including two sensing elements, monitors the chip temperature ( $T_j$ ) and PMU Regulator temperature. One sensing element is placed in the centre of the device to get the average device temperature status and the other sensing element is close to the PMU Regulator.

The ADC output value is given by:

$$\text{ADC2out} = \text{floor} \left( \frac{V_{Temp}}{V_{LSB}} + 1 \right) \quad (22.3)$$

The LSB Voltage is calculated:

$$V_{LSB} = \frac{V_{BG}}{2^8 - 1} = \frac{1.211V}{255} = 4.749mV \quad (22.4)$$

Vtemp is the direct proportional to temperature input voltage and is calculated by:

$$V_{tEMP}(T) = a + b * (T - T_0) \quad (22.5)$$

where **the coefficient a is 666 mV, b is 2,31 mV/K and T<sub>0</sub> is 273 K.**

The next chapter lists the available registers to configure temperature sensors.

Measurement Unit

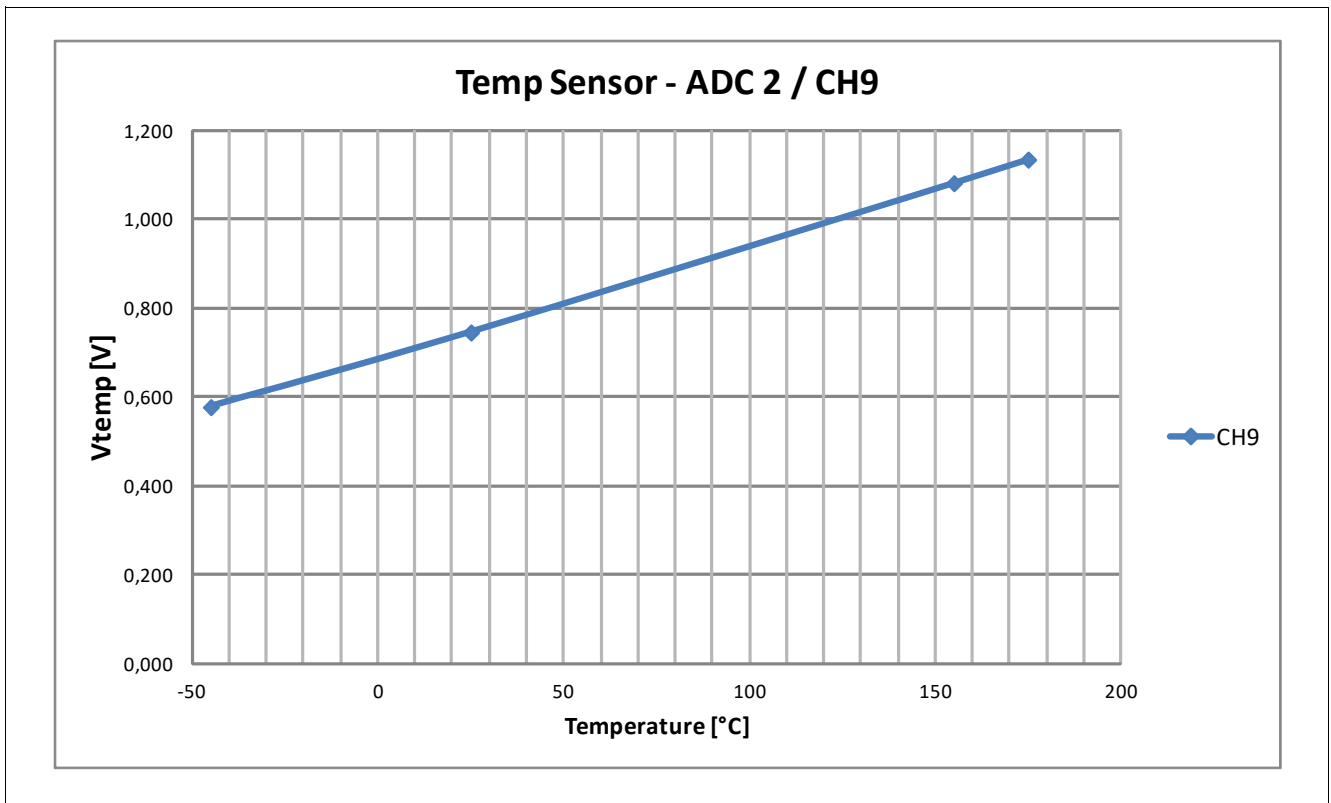


Figure 193 Measured Characteristic of On Chip Temperature Sensor



---

**Measurement Unit****22.7.2 Temperature Sensor Control Register**

The Temperature Sensor is fully controllable by the below listed SFR Register.

**Table 161 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Temperature Sensor Control Register</b>			
<b>TEMPSENSE_CTRL</b>	Temperature Sensor Control Register	10 <sub>H</sub>	0000 0003 <sub>H</sub>


The registers are addressed bitwise.

## Measurement Unit

### Temperature Sensor Control Register

The register is reset by RESET\_TYPE\_3.

TEMPSENSE_CTRL	Offset	Reset Value
Temperature Sensor Control Register	10 <sub>H</sub>	0000 0003 <sub>H</sub>

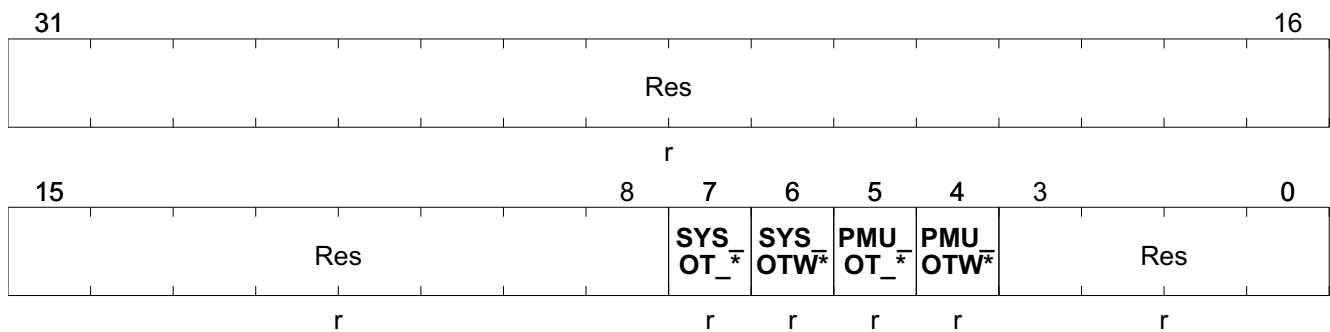

Field	Bits	Type	Description
Res	31:8	r	<b>Reserved</b> Always read as 0
SYS_OT_STS	7	r	<b>System Overtemperature (ADC2-Channel 9) Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , write clears status 1 <sub>B</sub> <b>ACTIVE</b> , interrupt status set
SYS_OTWARN_STS	6	r	<b>System Overtemperature Warning (ADC2-Channel 9) Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , write clears status 1 <sub>B</sub> <b>ACTIVE</b> , interrupt status set
PMU_OT_STS	5	r	<b>PMU Regulator Overtemperature (ADC2-Channel 9) Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , write clears status 1 <sub>B</sub> <b>ACTIVE</b> , interrupt status set
PMU_OTWARN_STS	4	r	<b>PMU Regulator Overtemperature Warning (ADC2-Channel 9) Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , write clears status 1 <sub>B</sub> <b>ACTIVE</b> , interrupt status set
Res	3:0	r	<b>Reserved</b> Always read as 0

## Measurement Unit

## 22.8 Supplement Modules

### 22.8.1 Functional Description

The purpose of the supplement modules is to enable a certain infrastructure on the device to guarantee a fail safe operation:


#### Module Features

- Bandgap Reference Voltage with accuracy  $\pm 1.5\%$  over complete temperature range.
- Bandgap is monitored by an independent reference voltage.
- ADC1 Reference with accuracy  $\pm 1\%$ .
- ADC1 Reference has overload detection.

#### 22.8.1.1 ADC2 Functional Safety Feature

ADC2 offers a functional safety feature, which allows to monitor the consistency of ADC2 results. The channel 7 of ADC2 monitors a voltage which is generated by a resistor of 26.66k and a 40  $\mu\text{A}$  current. This 40  $\mu\text{A}$  current is generated by a similar second resistor and a voltage, which is a second independent reference voltage in the system.

The root cause for a code change of channel 7 of ADC2 can only be explained by a ADC2 reference voltage variation. This feature can be used to validate the reference voltage of ADC2 and the results of the conversion.

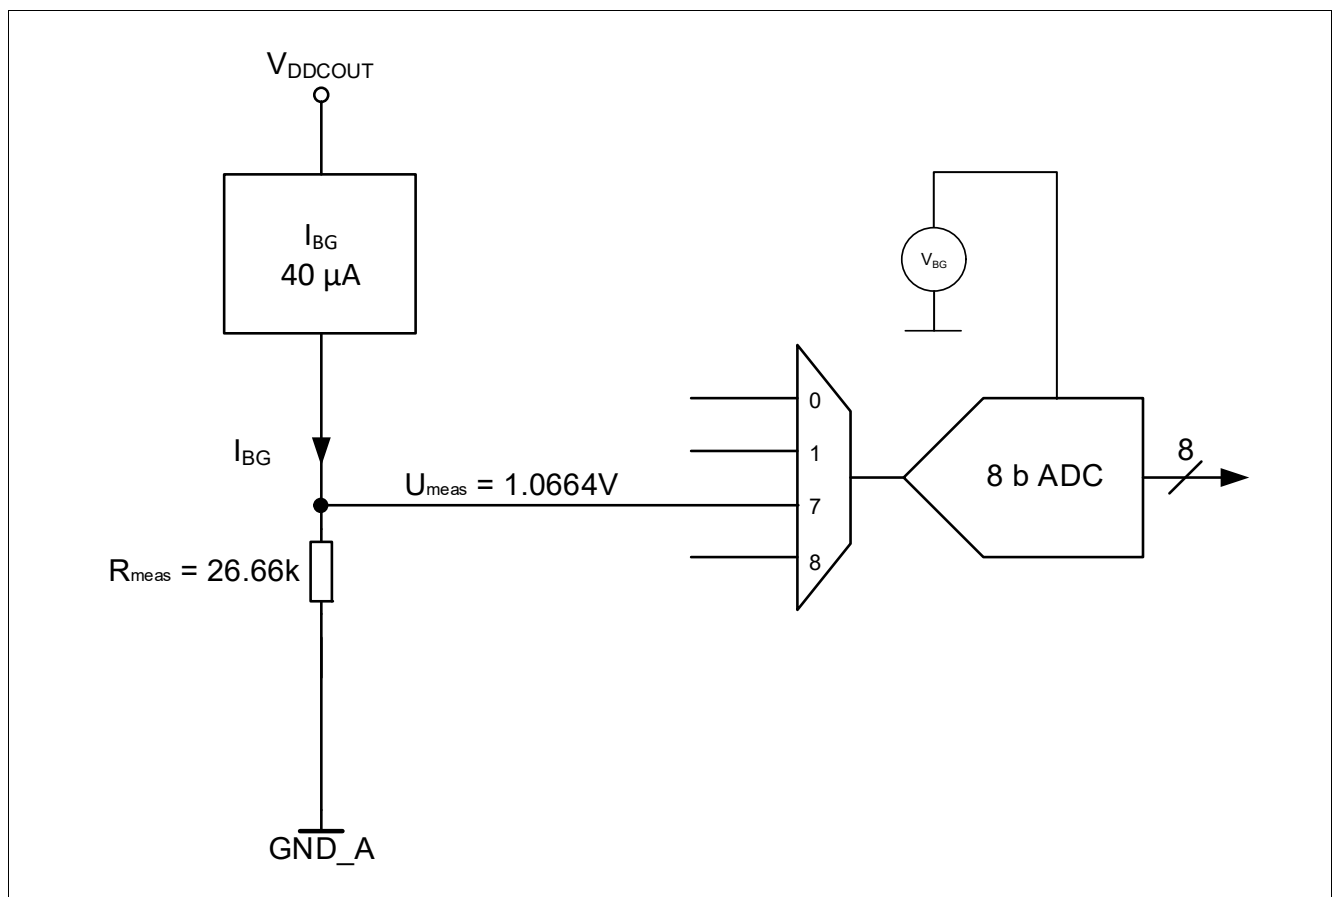

**Figure 194** Principle of ADC2 functional safety feature

---

**Measurement Unit**

## 22.8.2 Supplement Modules Control and Status Register

The next chapter lists the diagnosis and configuration possibilities of the supplement modules.

**Table 162 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Supplement Modules Control and Status Register</b>			
<b>REF1_STS</b>	Reference 1 Status Register	14 <sub>H</sub>	0000 00C1 <sub>H</sub>
<b>REF2_CTRL</b>	Reference 2 Control Register	18 <sub>H</sub>	0000 0001 <sub>H</sub>

The registers are addressed bitwise.


**Measurement Unit**

**Reference 1 Status Register**

The register is reset by RESET\_TYPE\_3.

This register is being initialized by the BootROM during the bootup process to a value of 0000\_08C1<sub>H</sub>

<b>REF1_STS</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Reference 1 Status Register</b>	<b>14<sub>H</sub></b>	<b>0000 00C1<sub>H</sub></b>

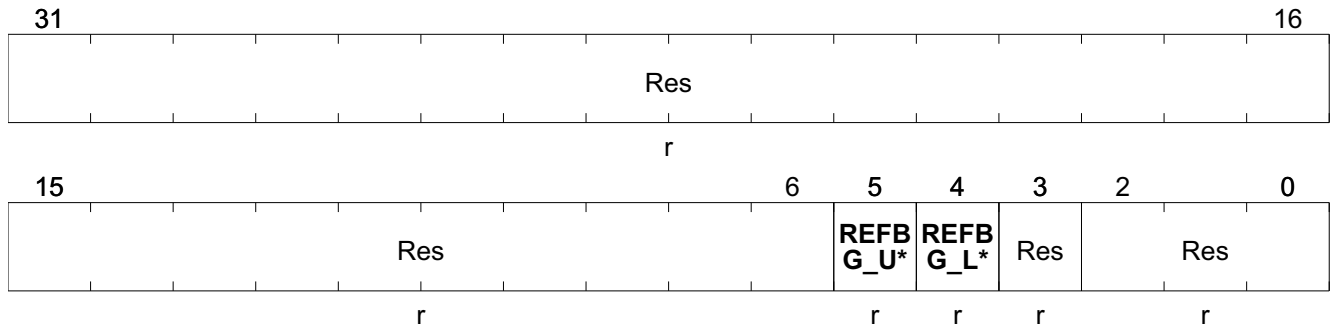


Field	Bits	Type	Description
Res	31:6	r	<b>Reserved</b> Always read as 0000003 <sub>H</sub>
REFBG_UPTHWARN_STS	5	r	<b>Status for Overvoltage Threshold Measurement of internal bandgap reference VBG</b> 0 <sub>B</sub> UPPER_TRIG_RESET, write clears status 1 <sub>B</sub> UPPER_TRIG_SET, trigger status set
REFBG_LOTHWARN_STS	4	r	<b>Status for Undervoltage Threshold Measurement of internal bandgap reference VBG</b> 0 <sub>B</sub> UPPER_TRIG_RESET, write clears status 1 <sub>B</sub> UPPER_TRIG_SET, trigger status set
Res	3	r	<b>Reserved</b> Always read as 0
Res	2:0	r	<b>Reserved</b> Always read as 001 <sub>B</sub>

## Measurement Unit

### Reference 2 Control Register

The register is reset by RESET\_TYPE\_3.

REF2_CTRL	Offset	Reset Value
Reference 2 Control Register	18 <sub>H</sub>	0000 0001 <sub>H</sub>

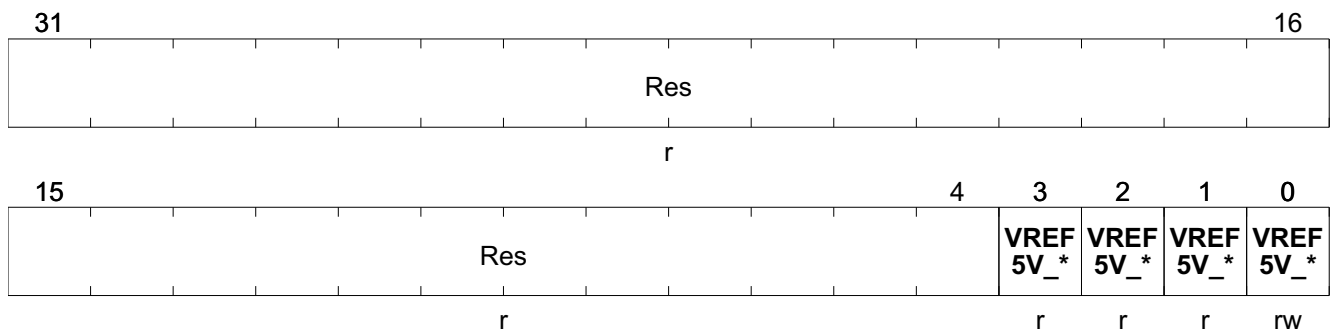

Field	Bits	Type	Description
Res	31:4	r	<b>Reserved</b> Always read as 1
VREF5V_OV_STS	3	r	<b>ADC1 Bit Reference Voltage Generation Overvoltage Bit</b> 0 <sub>B</sub> <b>no Overvoltage</b> , no Overvoltage detected 1 <sub>B</sub> <b>Overvoltage</b> , Overvoltage detected
VREF5V_UV_STS	2	r	<b>ADC1 Bit Reference Voltage Generation Undervoltage Bit</b> 0 <sub>B</sub> <b>no Undervoltage</b> , no Undervoltage detected 1 <sub>B</sub> <b>Undervoltage</b> , Undervoltage detected
VREF5V_OVL_STS	1	r	<b>ADC1 Bit Reference Voltage Generation Over Load Bit</b> 0 <sub>B</sub> <b>no OVERLOAD</b> , no OVERLOAD detected 1 <sub>B</sub> <b>OVERLOAD</b> , OVERLOAD detected
VREF5V_PD_N	0	rw	<b>ADC1 Bit Reference Voltage Generation Power Down Bit</b> 0 <sub>B</sub> <b>DISABLED</b> , Power Down 1 <sub>B</sub> <b>ACTIVE</b> , no Power Down

### Re-enabling of VAREF

In order to reenable VAREF, the VAREF enable flag has to be cleared, MF->[REF2\\_CTRL.VREF5V\\_PD\\_N](#) = 0. Then the status flags should be cleared, VREF5V\_LOWTH\_ICLR, VREF5V\_UPTH\_ICLR and VREF5V\_OVL\_ICLR in the register SCUPM->[SYS\\_ISCLR](#). After that reenable VAREF by setting MF->[REF2\\_CTRL.VREF5V\\_PD\\_N](#) = 1.

## 23 Measurement Core Module (incl. ADC2)

### 23.1 Features

- 10 individually programmable channels split into two groups of user configurable and non user configurable
- Individually programmable channel prioritization scheme for measurement unit
- Two independent filter stages with programmable low-pass and time filter characteristics for each channel
- Two channel configurations:
  - Programmable upper- and lower trigger thresholds comprising a fully programmable hysteresis
  - Two individually programmable trigger thresholds with limit hysteresis settings
- Individually programmable interrupts and statuses for all channel thresholds

### 23.2 Introduction

The basic function of this block is the digital postprocessing of several analog digitized measurement signals by means of filtering, level comparison and interrupt generation. The measurement postprocessing block consists of ten identical channel units attached to the outputs of the 10-channel 8-bit ADC (ADC2). It processes ten channels, where the channel sequence and prioritization is programmable within a wide range.

#### 23.2.1 Block Diagram

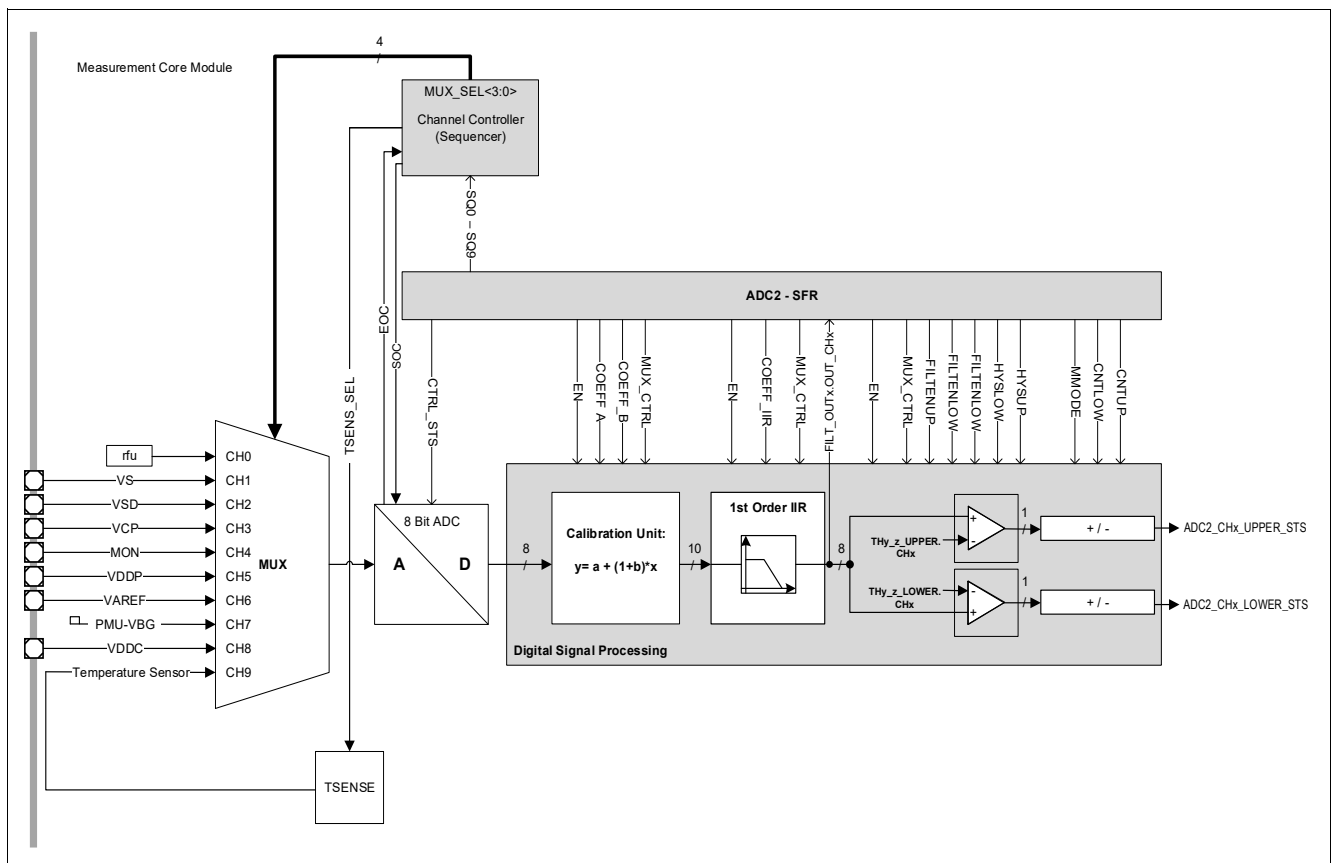


Figure 195 Module Block Diagram

---

**Measurement Core Module (incl. ADC2)****23.2.2 Measurement Core Module Modes Overview**

The basic function of this unit, is the digital signal processing of several analog digitized measurement signals by means of filtering, level comparison and interrupt generation. The Measurement Core module processes ten channels in a quasi parallel process.

As shown in the figure above, the ADC2 postprocessing unit consists of a channel controller (Sequencer), an 10-channel demultiplexer and the signal processing block, which filters and compares the sampled ADC2 values for each channel individually. The channel control block controls the multiplexer sequencing on the analog side before the ADC2 and on the digital domain after the ADC2. As described in the following section, the channel sequence can be controlled in a flexible way, which allows a certain degree of channel prioritization.

This capability can be used e.g. to set a higher priority to supply voltage channels compared to the other channel measurements. The Measurement Core Module offers additionally two different post-processing measurement modes for over-/undervoltage detection and for two-level threshold detection.

Usually the external register settings should only be changed during the start-up phase of the postprocessing module. Otherwise the signal processing might be disturbed.

The channel controller (sequencer) runs in one of the following modes:

“Normal Sequencer Mode” – channels are selected according to the 10 sequence registers which contain individual enablers for each of the 10 channels.

“Exceptional Interrupt Measurement” – following a hardware event , a high priority channel is inserted into the current sequence. The current actual measurement is not destroyed.

“Exceptional Sequence Measurement” – following a hardware event, a complete sequence is inserted after the current measurement is finished. The current sequence is interrupted by the exception sequence.

The threshold counter can be bypassed **FILT\_UP\_CTRL** and **FILT\_LO\_CTRL**.



---

**Measurement Core Module (incl. ADC2)****23.3 ADC2 - Core (8-bit ADC)****23.3.1 Functional Description****The different sequencer modes are controlled by SFR Register:**

- “Normal Sequencer Mode” described in the Chapter [Channel Controller](#).
- “Exceptional Interrupt Measurement” (EIM), upon hardware event , the channel programmed in [CHx\\_EIM](#) is inserted after the current measurement is finished. Afterwards the current sequence will be continued with the next measurement from the current sequence.
- “Exceptional Sequence Measurement“ (ESM), upon hardware event , the sequence programmed in [CHx\\_ESM](#) is inserted after the current measurement is finished. After the sequence (up to 10 measurements) exception is finished the next measurement from the interrupted sequence is selected. After the Exceptional Sequence Measurement is finished an interrupt is issued.

**Debug Suspend Mode:**

During Debug Suspend Mode the Sequencer is stopped once the current measurement is finished (after the next EOC event). As long as the Debug Suspend Mode is active no measurements are performed by the Sequencer. Once the Debug Suspend Mode is left, the Sequencer continues immediately with the next pending measurement.

Measurements can be still triggered in Debug Suspend Mode. EIM and ESM events are ignored during Debug Suspend Mode.

**The ADC2 timing is controlled by SFR Register (Special Function Register)**

- Sample time adjustment described in the register [CTRL2](#).

---

**Measurement Core Module (incl. ADC2)**
**23.3.2 ADC2 Control Registers**

The ADC2 is fully controllable by the below listed SFR Registers. The control must be enabled by setting all sequencer bits to zero. To enable the sequencer again this corresponding bits in the sequencer register must be set to one again.

**Table 163** shows the module base addresses.

**Table 163 Register Address Space**

Module	Base Address	End Address	Note
ADC2	4801C000 <sub>H</sub>	4801DFFF <sub>H</sub>	ADC2 - ADC-SAR8B

**Table 164 Register Overview**


Register Short Name	Register Long Name	Offset Address	Reset Value
<b>ADC2 Control Registers</b>			
<b>CTRL_STS</b>	ADC2 Control and Status Register	00 <sub>H</sub>	0000 0001 <sub>H</sub>
<b>HV_STS</b>	ADC2 HV Status Register	BC <sub>H</sub>	0000 0000 <sub>H</sub>

The registers are addressed wordwise.

**Measurement Core Module (incl. ADC2)**
**ADC2 Control and Status Register**

The register is reset by RESET\_TYPE\_3.

CTRL_STS	Offset	Reset Value
ADC2 Control and Status Register	00 <sub>H</sub>	0000 0001 <sub>H</sub>

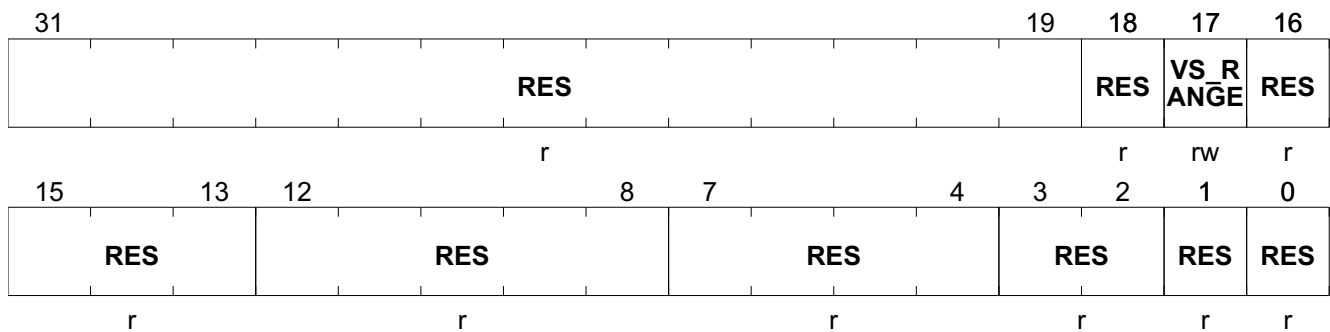


Field	Bits	Type	Description
RES	31:19	r	<b>Reserved</b> Always read as 0
RES	18	r	<b>Reserved</b> Always read as 0
VS_RANGE	17	rw	<b>ADC2 Channel 1 Range Selection</b>  <i>Note: changing this bit during ADC conversion might change the conversion results to a wrong value</i>  0 <sub>B</sub> <b>Range 1</b> , Range from 3 to 22V is selected (ATT <sub>VS_1</sub> ) 1 <sub>B</sub> <b>Range 2</b> , Range from 3 to 31V is selected (ATT <sub>VS_2</sub> )
RES	16	r	<b>Reserved</b> Always read as 0
RES	15:13	r	<b>Reserved</b> Always read as 0
RES	12:8	r	<b>Reserved</b> Always read as 0
RES	7:4	r	<b>Reserved</b> Always read as 0
RES	3:2	r	<b>Reserved</b> Always read as 0
RES	1	r	<b>Reserved</b> Always read as 0
RES	0	r	<b>Reserved</b> Always read as 1

Measurement Core Module (incl. ADC2)

ADC2 HV Status Register

The register is reset by RESET\_TYPE\_3.

<b>HV_STS</b>	<b>Offset</b>	<b>Reset Value</b>
<b>ADC2 HV Status Register</b>	<b>BC<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

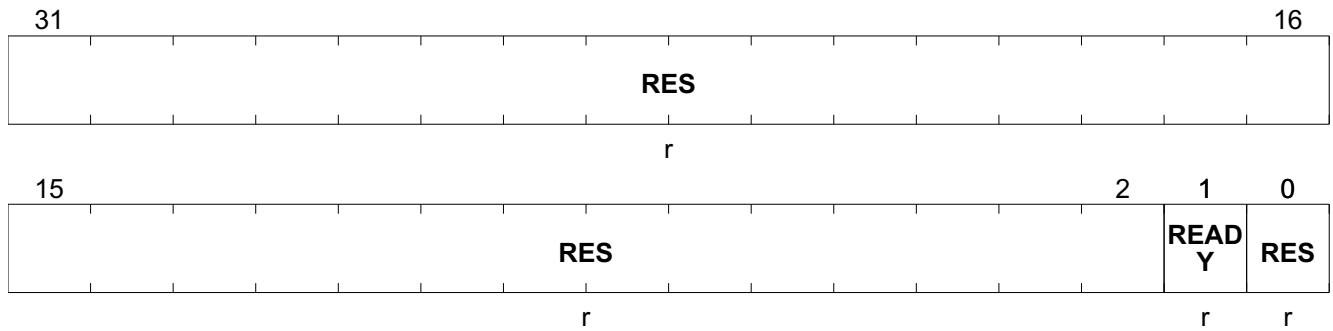

Field	Bits	Type	Description
<b>RES</b>	31:2	r	<b>Reserved</b> Always read as 0
<b>READY</b>	1	r	<b>HV ADC Ready bit</b> 0 <sub>B</sub> <b>Not ready</b> , Module in power down or in init phase 1 <sub>B</sub> <b>Ready</b> , set automatically 5 ADC clock cycles after module is enabled
<b>RES</b>	0	r	<b>Reserved</b> Always read as 0

## 23.4 Channel Controller

### 23.4.1 Functional Description

The task of channel controller is a prioritization of the individual measurement channels. The sequencing scheme is illustrated in the example of following table and can be programmed.

**Table 165 Measurement channel sequence definition example (used as default sequence)**

Measurement channel n $SQ'_z = \{SQ_{-x\_y\_int}[3:0], SQ_{-z}[5:0]\}$	MSB CH9	CH8	CH7	CH6	CH5	CH4	CH3	CH2	CH1	LSB CH0
Registers $SQ'_1[9:0]$	1	0	1	1	1	1	0	1	1	1
Registers $SQ'_2[9:0]$	0	1	1	1	1	0	1	0	0	0
Registers $SQ'_3[9:0]$	1	0	1	1	1	1	0	1	1	0
Registers $SQ'_4[9:0]$	0	1	1	1	1	0	1	0	0	1
Registers $SQ'_5[9:0]$	1	0	1	1	1	1	0	1	1	0
Registers $SQ'_6[9:0]$	0	1	1	1	1	0	1	0	0	0
Registers $SQ'_7[9:0]$	1	0	1	1	1	1	0	1	1	1
Registers $SQ'_8[9:0]$	0	1	1	1	1	0	1	0	0	0
Registers $SQ'_9[9:0]$	1	0	1	1	1	1	0	1	1	0
Registers $SQ'_{10}[9:0]$	0	1	1	1	1	0	1	0	0	1

The sequence registers  $SQ_n$  and  $SQ_{n\_int}$  define the time sequence of the measurement channels by the following rules:

- The sequence registers define the measurement sequence and are evaluated from register 1 to 10 and for each register from MSB to LSB, which defines a max. overall measurement periodicity of 100 sampling and conversion cycles.
- If the individual bit in the sequence register is set to '1', the corresponding channel is measured.
- If the individual bit in the sequence register is set to '0', the corresponding channel is skipped.

In the upper example, the resulting channel sequence is defined as:

CH9, CH7, CH6, CH5, CH4, CH2, CH1, CH0, CH8, CH7, CH6, CH5, CH3,....., CH8, CH7, CH6, CH5, CH3, CH0

In TLE987x Channels 0 - 5 can be fully programmed. Several Sequence registers, especially for channels 6-9, are protected to ensure a fast update of measurement results used for internal diagnosis. Hence the channels 6 and 7 are prioritized and are measured more often, the overall periodicity is mainly determined by these two channels. The channels 0-5 are measured depending on the amount of '1' bits, written in the sequence registers. The following equations can be used to calculate the periodicity of the required channel measurement.

## Measurement Core Module (incl. ADC2)

The total number of measurement done by the sequencer in a complete run-through expressed in A/D conversion cycles is defined as:

(23.1)

$$N_{\text{meas}} = \sum_{m=1}^{10} \left( \sum_{n=1}^{10} SQ'_m[n] \right)$$

The average measurement periodicity of channel n in A/D conversion cycles is defined as:

(23.2)

$$\frac{1}{T_{\text{meas}, n}} = \frac{\left( \sum_{m=1}^{10} SQ'_m[n] \right)}{T_{\text{meas}}}$$

Where  $T_{\text{meas}}$  is defined as:

(23.3)

$$T_{\text{meas}} = N_{\text{meas}} * (T_{\text{samp}, n} * T_{\text{conv}})$$

$N_{\text{meas}}$  is the number of measurements programmed in the SQ' registers,  $T_{\text{samp}, n}$  is the sampling time setting for channel n and  $T_{\text{conv}}$  is the ADC2 conversion time.

The timing of the analog MUX and the digital DEMUX is controlled by the channel controller accordingly. The analog MUX with sample and hold stage needs one clock cycle for channel switching and the ADC takes, as default setting, 18 clock cycles for the sampling of the input voltage. The conversion time for a single channel measurement value is 15 clock cycles.

As already mentioned above, the channel controller has a partly fixed sequence register setting which cannot be changed by the user. The fixed register setting is needed, to fulfill the sampling frequency requirements of the internal circuits, e.g. shutdown in case of overtemperature and protection for the bridge drivers (BDRV).

The minimum measurement periodicity, which can be achieved, by enabling only channel1 in the sequence registers, depends on the MI\_CLK frequency and is given by (example):

(23.4)

$$\frac{1}{t_{\text{meas\_ch1\_min}}} = \frac{ticks_{\text{sampling}} + ticks_{\text{conv}}}{f_{\text{MI\_CLK}}} = \frac{18 + 15}{20\text{MHz}} = 1.65\mu\text{s}$$

The following calculation includes the sampling time as well as the conversion time of ADC2 and the switching time of the channel multiplexer. If all programmable channels are enabled, the maximum periodicity of channel 1 is calculated by (example):

(23.5)

$$\frac{1}{t_{\text{meas\_ch1\_max}}} = \frac{n_{\text{channels}} \cdot (ticks_{\text{sampling}} + ticks_{\text{conv}} + ticks_{\text{mux\_switch}})}{f_{\text{MI\_CLK}}} = \frac{10 \cdot (18 + 15 + 1)}{20\text{MHz}} = 17\mu\text{s}$$

---

**Measurement Core Module (incl. ADC2)**

At a MI\_CLK frequency of 20 MHz, the channel 1 is measured with min. 1.65  $\mu$ s. The maximum update time of channel1 with 20 MHz clock frequency is 17  $\mu$ s. This is calculated based on the assumption, that all channels are enabled and channel1 is enabled in every sequence register. As a prerequisite for this calculation **CTRL2.SAMPLE\_TIME\_int = 7** (sample period = 18 MI\_CLK clock cycles) is set.

---

**Measurement Core Module (incl. ADC2)**
**23.4.2 Channel Controller Control Registers**

The Channel Controller can be configured by the registers listed in [Table 166](#). The registers which cannot be written by the user have the attribute **rwp**. Those registers are:

[SQ1\\_8\\_int](#),  
[SQ9\\_10\\_int](#)

**Table 166 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Channel Controller Control Registers</b>			
<a href="#">SQ_FB</a>	Sequencer Feedback Register	04 <sub>H</sub>	0000 0000 000X XXXX 0XXX XXXX 0000 XXXX <sub>B</sub>
<a href="#">CHx_EIM</a>	Channel Setting Bits for Exceptional Interrupt Measurement	08 <sub>H</sub>	0000 0000 <sub>H</sub>
<a href="#">CHx_ESM</a>	Channel Setting Bits for Exceptional Sequence Measurement	0C <sub>H</sub>	0000 0000 <sub>H</sub>
<a href="#">CTRL1</a>	Measurement Unit Control Register 1	14 <sub>H</sub>	0000 0000 <sub>H</sub>
<a href="#">CTRL2</a>	Measurement Unit Control Register 2	18 <sub>H</sub>	000F 0805 <sub>H</sub>
<a href="#">CTRL4</a>	Measurement Unit Control Register 4	1C <sub>H</sub>	0000 0F3F <sub>H</sub>
<a href="#">SQ1_4</a>	Measurement Channel Enable Bits for Cycle 1-4	20 <sub>H</sub>	2936 2837 <sub>H</sub>
<a href="#">SQ5_8</a>	Measurement Channel Enable Bits for Cycle 5-8	24 <sub>H</sub>	2837 2836 <sub>H</sub>
<a href="#">SQ9_10</a>	Measurement Channel Enable Bits for Cycle 9-10	28 <sub>H</sub>	0000 2936 <sub>H</sub>
<a href="#">SQ1_8_int</a>	Measurement Channel Enable Bits for Cycle 1-8	2C <sub>H</sub>	7B7B 7B1B <sub>H</sub>
<a href="#">SQ9_10_int</a>	Measurement Channel Enable Bits for Cycle 9 and 10	30 <sub>H</sub>	0000 007B <sub>H</sub>

The registers are addressed wordwise.




Measurement Core Module (incl. ADC2)

**Measurement Unit Control Register 1**

This register is dedicated for controlling the calibration unit of the measurement core module. The respective channel calibration can be enabled or disabled by the bits listed below.

The register is reset by RESET\_TYPE\_4.

<b>CTRL1</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Measurement Unit Control Register 1</b>	<b>14<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

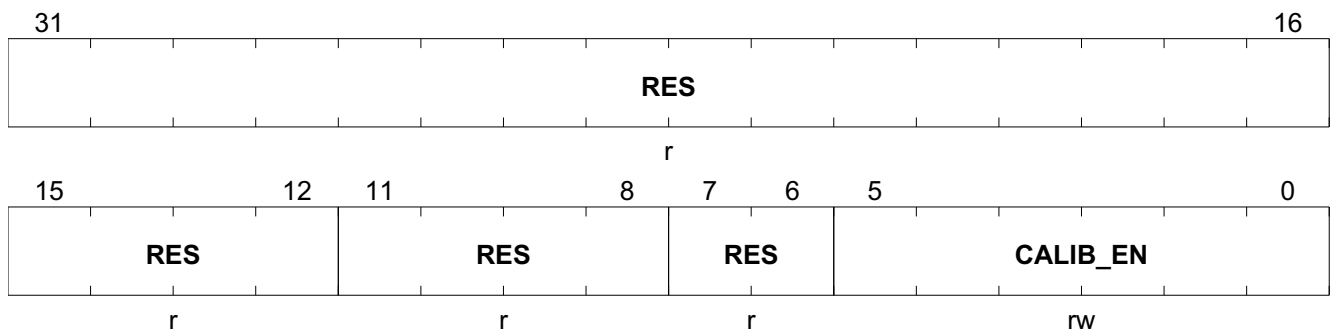

Field	Bits	Type	Description
<b>RES</b>	31:12	r	<b>Reserved</b> Always read as 0
<b>RES</b>	11:8	r	<b>Reserved</b>
<b>RES</b>	7:6	r	<b>Reserved</b> Always read as 0
<b>CALIB_EN</b>	5:0	rw	<b>Calibration Enable for Channels 0 to 5</b> The following values can be ored: 00 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 calibration enable 00 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 calibration enable 00 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 calibration enable 00 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 calibration enable 01 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 calibration enable 10 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 calibration enable


**Measurement Core Module (incl. ADC2)**
**Measurement Unit Control Register 2**

This register contains the sample time adjustment for ADC2. The default value is 18 clock cycles. Values above 18 clock cycles are not recommended, because they increase the overall response time of the measurement system.

The register is reset by RESET\_TYPE\_4.

This register is being initialized by the BootROM during the bootup process to a value of 0000\_0703<sub>H</sub>

CTRL2	Offset	Reset Value
Measurement Unit Control Register 2	18 <sub>H</sub>	000F 0805 <sub>H</sub>

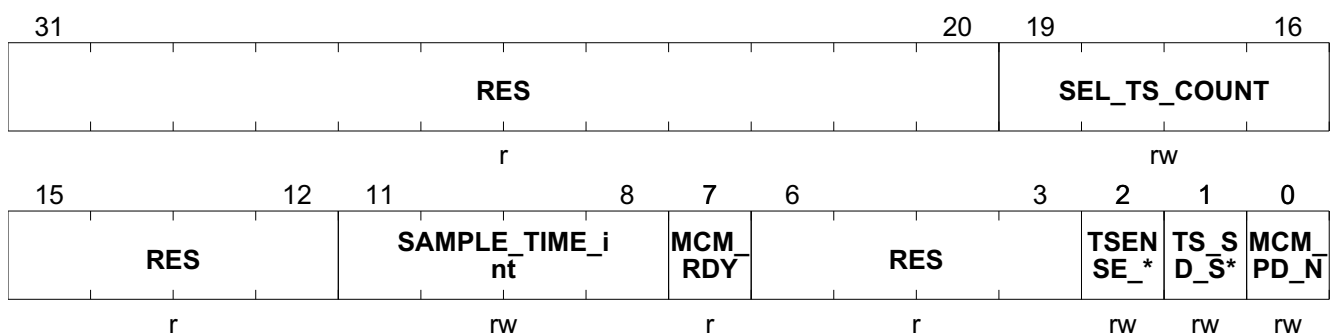

Field	Bits	Type	Description
<b>RES</b>	31:20	r	<b>Reserved</b> Always read as 0
<b>SEL_TS_COUNT</b>	19:16	rw	<b>Time for Automatic Muxing of SEL_TS</b> Defines how often all sequences SQ1-SQ10 shall be measured until the temperature sensor SEL_TS changes automatically (in case TS_SD_SEL_CONF is '1') 0 <sub>H</sub> <b>1</b> , Sequence 1 <sub>H</sub> <b>2</b> , Sequences 2 <sub>H</sub> <b>3</b> , Sequences 3 <sub>H</sub> <b>4</b> , Sequences 4 <sub>H</sub> <b>5</b> , Sequence 5 <sub>H</sub> <b>6</b> , Sequences 6 <sub>H</sub> <b>7</b> , Sequences 7 <sub>H</sub> <b>8</b> , Sequences 8 <sub>H</sub> <b>9</b> , Sequences 9 <sub>H</sub> <b>10</b> , Sequences A <sub>H</sub> <b>11</b> , Sequences B <sub>H</sub> <b>12.</b> , Sequences C <sub>H</sub> <b>13</b> , Sequences D <sub>H</sub> <b>14</b> , Sequences E <sub>H</sub> <b>15</b> , Sequences F <sub>H</sub> <b>16</b> , Sequences
<b>RES</b>	15:12	r	<b>Reserved</b> Always read as 0

## Measurement Core Module (incl. ADC2)

Field	Bits	Type	Description
<b>SAMPLE_TIME_int</b>	11:8	rw	<b>Sample time of ADC2</b> 0 <sub>H</sub> <b>MICLK4</b> , 4 MI_CLK clock periods 1 <sub>H</sub> <b>MICLK6</b> , 6 MI_CLK clock periods 2 <sub>H</sub> <b>MICLK8</b> , 8 MI_CLK clock periods 3 <sub>H</sub> <b>MICLK10</b> , 10 MI_CLK clock periods 4 <sub>H</sub> <b>MICLK12</b> , 12 MI_CLK clock periods 5 <sub>H</sub> <b>MICLK14</b> , 14 MI_CLK clock periods 6 <sub>H</sub> <b>MICLK16</b> , 16 MI_CLK clock periods 7 <sub>H</sub> <b>MICLK18</b> , 18 MI_CLK clock periods 8 <sub>H</sub> <b>MICLK20</b> , 20 MI_CLK clock periods 9 <sub>H</sub> <b>MICLK22</b> , 22 MI_CLK clock periods A <sub>H</sub> <b>n.u.</b> , not used B <sub>H</sub> <b>n.u.</b> , not used C <sub>H</sub> <b>n.u.</b> , not used D <sub>H</sub> <b>n.u.</b> , not used E <sub>H</sub> <b>n.u.</b> , not used F <sub>H</sub> <b>n.u.</b> , not used
<b>MCM_RDY</b>	7	r	<b>Ready Signal for MCM<sup>1)</sup> after Power On or Reset</b> 0 <sub>B</sub> <b>MCM Not Ready</b> , Measurement Core Module in startup phase 1 <sub>B</sub> <b>MCM Ready</b> , Measurement Core Module start-up phase finished
<b>RES</b>	6:3	r	<b>Reserved</b> Always read as 0
<b>TSENSE_SD_SEL</b>	2	rw	<b>TSENSE Sensor selection for ADC2 channel 9</b> 0 <sub>B</sub> <b>PMU_TSENSE</b> , PMU temperature sensor selected 1 <sub>B</sub> <b>Central_TSENSE</b> , Central Temperature Sensor selected
<b>TS_SD_SEL_CONF</b>	1	rw	<b>Temperature Sensor Control Configuration</b> 0 <sub>B</sub> <b>CONSTANT</b> , Temperature Sensor Selection done by bit field TSENSE_SD_SEL 1 <sub>B</sub> <b>NOT ACTIVE</b> , Temperature Sensor Selection automatically done by DPP
<b>MCM_PD_N</b>	0	rw	<b>Power Down Signal for MCM</b> 0 <sub>B</sub> <b>MCM Disabled</b> , Measurement Core Module Disabled 1 <sub>B</sub> <b>MCM Enabled</b> , Measurement Core Module Enabled


1) MCM = Measurement Core Module

Measurement Core Module (incl. ADC2)

Measurement Unit Control Register 4

The register is reset by RESET\_TYPE\_4.

CTRL4	Offset	Reset Value
Measurement Unit Control Register 4	1C <sub>H</sub>	0000 0F3F <sub>H</sub>

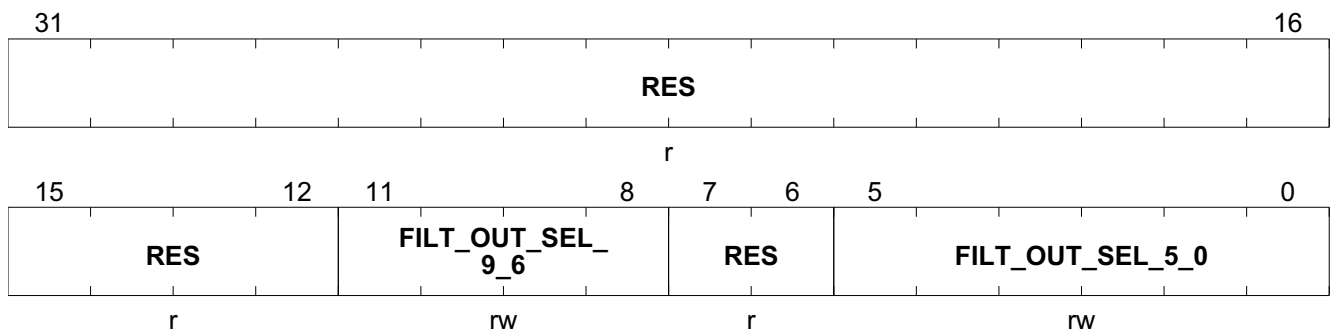

Field	Bits	Type	Description
RES	31:12	r	<b>Reserved</b> Always read as 0
FILT_OUT_SEL_9_6	11:8	rw	<b>Output Filter Selection for Channels 6 to 9</b> 0000 <sub>B</sub> <b>ADC2 Unfiltered Data</b> , can be monitored in the corresponding FILT_OUTx Registers. <sup>1)</sup> 0001 <sub>B</sub> <b>Channel 6 IIR Data enabled for FILT_OUT6 Register,</b> . 0010 <sub>B</sub> <b>Channel 7 IIR Data enabled for FILT_OUT7 Register,</b> . 0100 <sub>B</sub> <b>Channel 8 IIR Data enabled for FILT_OUT8 Register,</b> . 1000 <sub>B</sub> <b>Channel 9 IIR Data enabled for FILT_OUT9 Register,</b> . 1111 <sub>B</sub> <b>For Channels 9-6 IIR Data is enabled for FILT_OUTx Registers, .</b>
RES	7:6	r	<b>Reserved</b> Always read as 0

---

**Measurement Core Module (incl. ADC2)**

Field	Bits	Type	Description
FILT_OUT_SEL_5_0	5:0	rw	<b>Output Filter Selection for Channels 0 to 5</b> 00 0000 <sub>B</sub> <b>ADC2 Unfiltered Data can be monitored in the corresponding FILT_OUTx Registers, <sup>1)</sup></b> 00 0001 <sub>B</sub> <b>Channel 0 IIR Data enabled for FILT_OUT0 Register, .</b> 00 0010 <sub>B</sub> <b>Channel 1 IIR Data enabled for FILT_OUT1 Register, .</b> 00 0100 <sub>B</sub> <b>Channel 2 IIR Data enabled for FILT_OUT2 Register, .</b> 00 1000 <sub>B</sub> <b>Channel 3 IIR Data enabled for FILT_OUT3 Register, .</b> 01 0000 <sub>B</sub> <b>Channel 4 IIR Data enabled for FILT_OUT4 Register, .</b> 10 0000 <sub>B</sub> <b>Channel 5 IIR Data enabled for FILT_OUT5 Register, .</b> 11 1111 <sub>B</sub> <b>For Channels 5-0 IIR Data is enabled for FILT_OUTx Registers, .</b>


1) The unfiltered data can be either the calibrated data or the raw data, depending on calib\_en.

---

**Measurement Core Module (incl. ADC2)**
**Measurement Channel Enable Bits for Cycle 1-4**

The register is reset by RESET\_TYPE\_4.

<b>SQ1_4</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Measurement Channel Enable Bits for Cycle 1-4</b>	<b>20<sub>H</sub></b>	<b>2936 2837<sub>H</sub></b>

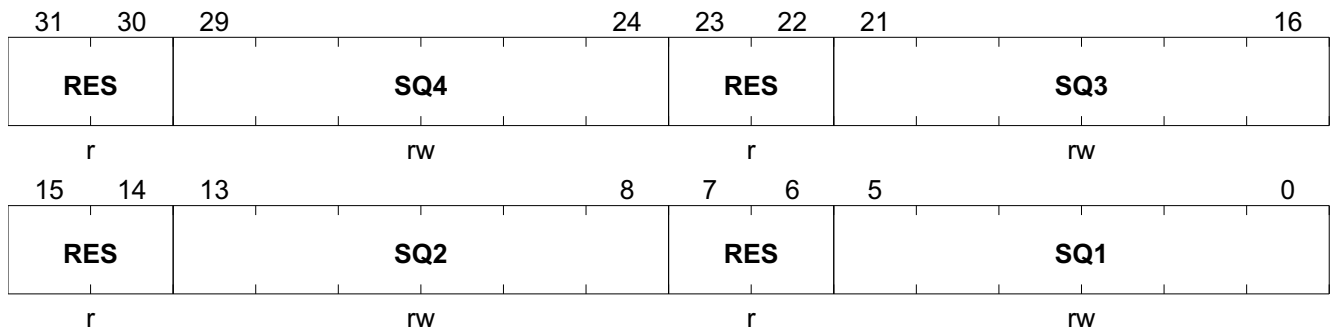

Field	Bits	Type	Description
<b>RES</b>	31:30	r	<b>Reserved</b> Always read as 0
<b>SQ4</b>	29:24	rw	<b>Sequence 4 channel enable</b> The following values can be ored: 00 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 00 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 00 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 00 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 01 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 10 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable
<b>RES</b>	23:22	r	<b>Reserved</b> Always read as 0
<b>SQ3</b>	21:16	rw	<b>Sequence 3 channel enable</b> The following values can be ored: 00 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 00 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 00 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 00 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 01 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 10 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable
<b>RES</b>	15:14	r	<b>Reserved</b> Always read as 0

---


**Measurement Core Module (incl. ADC2)**

Field	Bits	Type	Description
<b>SQ2</b>	13:8	rw	<b>Sequence 2 channel enable</b> The following values can be ored: 00 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 00 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 00 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 00 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 01 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 10 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable
<b>RES</b>	7:6	r	<b>Reserved</b> Always read as 0
<b>SQ1</b>	5:0	rw	<b>Sequence 1 channel enable</b> The following values can be ored: 00 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 00 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 00 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 00 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 01 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 10 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable

**Measurement Core Module (incl. ADC2)**
**Measurement Channel Enable Bits for Cycle 1-8**

The register is reset by RESET\_TYPE\_4.

SQ1_8_int	Offset	Reset Value
Measurement Channel Enable Bits for Cycle 1-8	2C <sub>H</sub>	7B7B 7B1B <sub>H</sub>

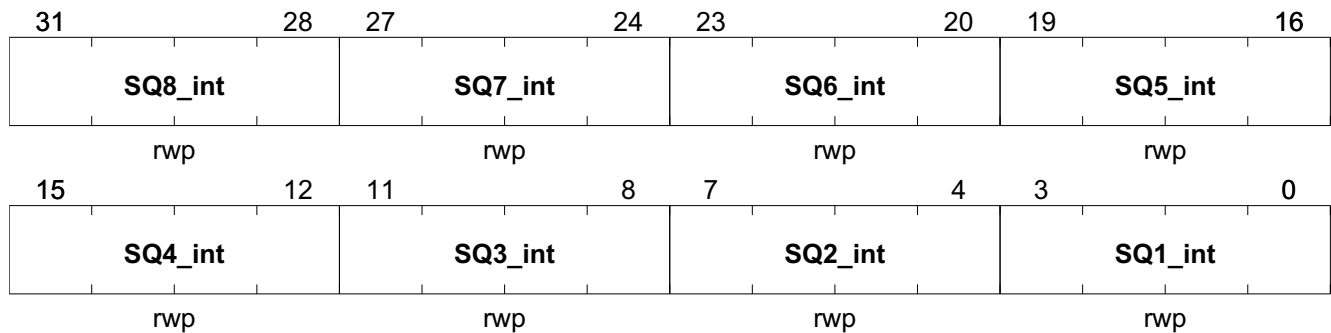

Field	Bits	Type	Description
<b>SQ8_int</b>	31:28	rwp	<b>Sequence 8 channel enable</b> The following values can be ored: 0001 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 0010 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable 0100 <sub>B</sub> <b>CH8_EN</b> , Channel 8 enable 1000 <sub>B</sub> <b>CH9_EN</b> , Channel 9 enable
<b>SQ7_int</b>	27:24	rwp	<b>Sequence 7 channel enable</b> The following values can be ored: 0001 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 0010 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable 0100 <sub>B</sub> <b>CH8_EN</b> , Channel 8 enable 1000 <sub>B</sub> <b>CH9_EN</b> , Channel 9 enable
<b>SQ6_int</b>	23:20	rwp	<b>Sequence 6 channel enable</b> The following values can be ored: 0001 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 0010 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable 0100 <sub>B</sub> <b>CH8_EN</b> , Channel 8 enable 1000 <sub>B</sub> <b>CH9_EN</b> , Channel 9 enable
<b>SQ5_int</b>	19:16	rwp	<b>Sequence 5 channel enable</b> The following values can be ored: 0001 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 0010 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable 0100 <sub>B</sub> <b>CH8_EN</b> , Channel 8 enable 1000 <sub>B</sub> <b>CH9_EN</b> , Channel 9 enable



---

**Measurement Core Module (incl. ADC2)**


Field	Bits	Type	Description
<b>SQ4_int</b>	15:12	rwp	<b>Sequence 4 channel enable</b> The following values can be ored: 0001 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 0010 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable 0100 <sub>B</sub> <b>CH8_EN</b> , Channel 8 enable 1000 <sub>B</sub> <b>CH9_EN</b> , Channel 9 enable
<b>SQ3_int</b>	11:8	rwp	<b>Sequence 3 channel enable</b> The following values can be ored: 0001 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 0010 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable 0100 <sub>B</sub> <b>CH8_EN</b> , Channel 8 enable 1000 <sub>B</sub> <b>CH9_EN</b> , Channel 9 enable
<b>SQ2_int</b>	7:4	rwp	<b>Sequence 2 channel enable</b> The following values can be ored: 0001 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 0010 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable 0100 <sub>B</sub> <b>CH8_EN</b> , Channel 8 enable 1000 <sub>B</sub> <b>CH9_EN</b> , Channel 9 enable
<b>SQ1_int</b>	3:0	rwp	<b>Sequence 1 channel enable</b> The following values can be ored: 0001 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 0010 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable 0100 <sub>B</sub> <b>CH8_EN</b> , Channel 8 enable 1000 <sub>B</sub> <b>CH9_EN</b> , Channel 9 enable

---

**Measurement Core Module (incl. ADC2)**
**Measurement Channel Enable Bits for Cycle 5-8**

The register is reset by RESET\_TYPE\_4.

<b>SQ5_8</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Measurement Channel Enable Bits for Cycle 5-8</b>	<b>24<sub>H</sub></b>	<b>2837 2836<sub>H</sub></b>

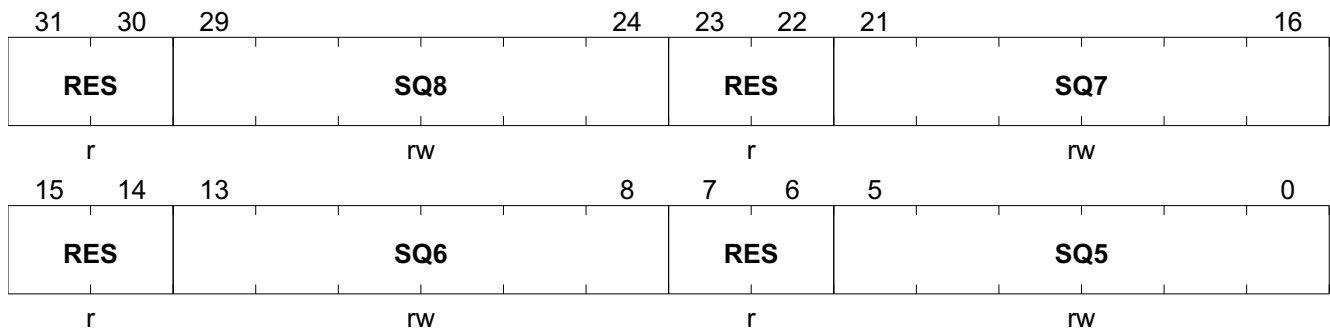

Field	Bits	Type	Description
<b>RES</b>	31:30	r	<b>Reserved</b> Always read as 0
<b>SQ8</b>	29:24	rw	<b>Sequence 8 channel enable</b> The following values can be ored: 00 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 00 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 00 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 00 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 01 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 10 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable
<b>RES</b>	23:22	r	<b>Reserved</b> Always read as 0
<b>SQ7</b>	21:16	rw	<b>Sequence 7 channel enable</b> The following values can be ored: 00 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 00 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 00 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 00 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 01 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 10 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable
<b>RES</b>	15:14	r	<b>Reserved</b> Always read as 0

---

**Measurement Core Module (incl. ADC2)**


Field	Bits	Type	Description
<b>SQ6</b>	13:8	rw	<b>Sequence 6 channel enable</b> The following values can be ored: 00 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 00 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 00 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 00 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 01 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 10 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable
<b>RES</b>	7:6	r	<b>Reserved</b> Always read as 0
<b>SQ5</b>	5:0	rw	<b>Sequence 5 channel enable</b> The following values can be ored: 00 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 00 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 00 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 00 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 01 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 10 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable

---

**Measurement Core Module (incl. ADC2)**
**Measurement Channel Enable Bits for Cycle 9-10**

The register is reset by RESET\_TYPE\_4.

<b>SQ9_10</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Measurement Channel Enable Bits for Cycle 9-10</b>	<b>28<sub>H</sub></b>	<b>0000 2936<sub>H</sub></b>

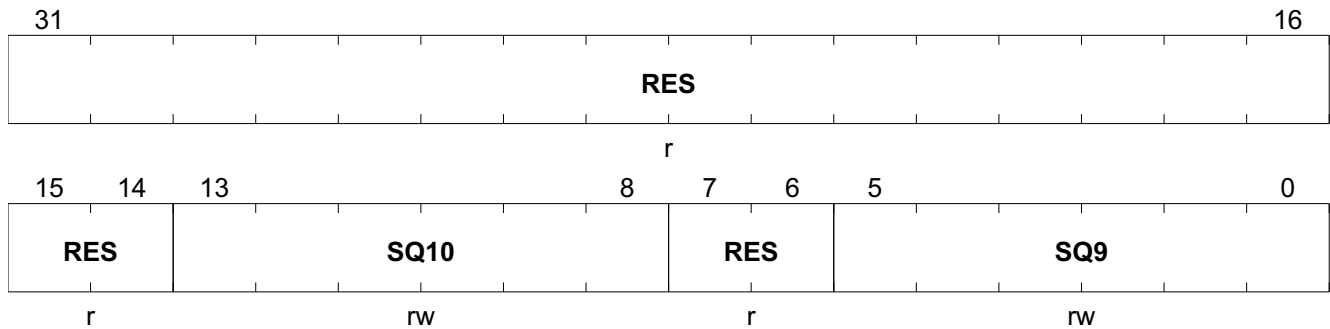


Field	Bits	Type	Description
<b>RES</b>	31:16	r	<b>Reserved</b> Always read as 0
<b>RES</b>	15:14	r	<b>Reserved</b> Always read as 0
<b>SQ10</b>	13:8	rw	<b>Sequence 10 channel enable</b> The following values can be ored: 00 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 00 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 00 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 00 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 01 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 10 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable
<b>RES</b>	7:6	r	<b>Reserved</b> Always read as 0
<b>SQ9</b>	5:0	rw	<b>Sequence 9 channel enable</b> The following values can be ored: 00 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 00 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 00 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 00 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 01 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 10 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable

Measurement Core Module (incl. ADC2)

Measurement Channel Enable Bits for Cycle 9 & 10

The register is reset by RESET\_TYPE\_4.

<b>SQ9_10_int</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Measurement Channel Enable Bits for Cycle 9 and 10</b>	30 <sub>H</sub>	0000 007B <sub>H</sub>

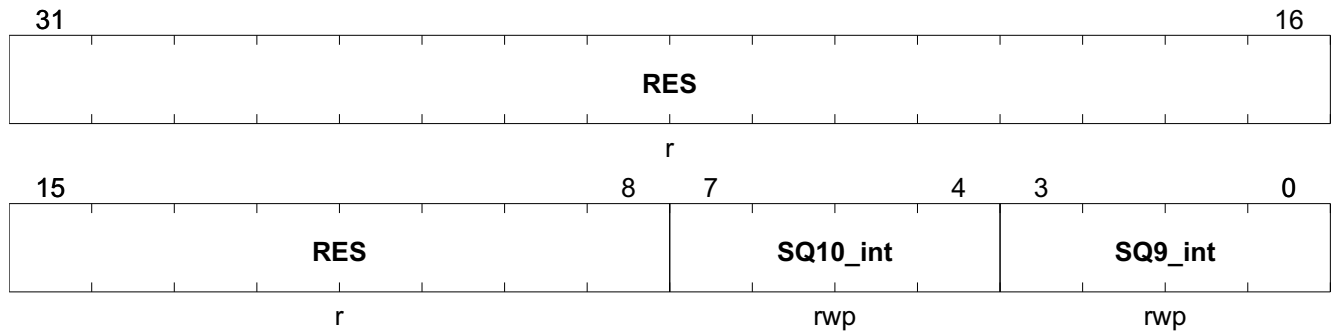

Field	Bits	Type	Description
<b>RES</b>	31:8	r	<b>Reserved</b> Always read as 0
<b>SQ10_int</b>	7:4	rwp	<b>Sequence 10 channel enable</b> The following values can be ored: 0001 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 0010 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable 0100 <sub>B</sub> <b>CH8_EN</b> , Channel 8 enable 1000 <sub>B</sub> <b>CH9_EN</b> , Channel 9 enable
<b>SQ9_int</b>	3:0	rwp	<b>Sequence 9 channel enable</b> The following values can be ored: 0001 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 0010 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable 0100 <sub>B</sub> <b>CH8_EN</b> , Channel 8 enable 1000 <sub>B</sub> <b>CH9_EN</b> , Channel 9 enable



---

**Measurement Core Module (incl. ADC2)**


Field	Bits	Type	Description
<b>ESM_ACTIVE</b>	10	r	<b>ADC2 ESM active</b> $0_B$ <b>not active</b> , ESM not active $1_B$ <b>active</b> , ESM active
<b>EIM_ACTIVE</b>	9	r	<b>ADC2 EIM active</b> $0_B$ <b>not active</b> , EIM not active $1_B$ <b>active</b> , EIM active
<b>SQ_STOP</b>	8	r	<b>ADC2 Sequencer Stop Signal for DPP</b> $0_B$ <b>DPP Running</b> , Postprocessing Sequencer in running mode $1_B$ <b>DPP Stopped</b> , Postprocessing Sequencer stopped
<b>RES</b>	7:4	r	<b>Reserved</b> Always read as 0
<b>SQ_FB</b>	3:0	r	<b>Current Sequence</b> Other bit combinations are <b>n.u.</b> , not used. $0000_B$ <b>SQ1</b> , Sequence 1 $0001_B$ <b>SQ2</b> , Sequence 2 $0010_B$ <b>SQ3</b> , Sequence 3 $0011_B$ <b>SQ4</b> , Sequence 4 $0100_B$ <b>SQ5</b> , Sequence 5 $0101_B$ <b>SQ6</b> , Sequence 6 $0110_B$ <b>SQ7</b> , Sequence 7 $0111_B$ <b>SQ8</b> , Sequence 8 $1000_B$ <b>SQ9</b> , Sequence 9 $1001_B$ <b>SQ10</b> , Sequence 10 $1010_B$ <b>ESM</b> , ESM $1011_B$ <b>CH_MASK</b> , Channel Mask = 0 $1100_B$ <b>SUSPEND</b> , Debug Suspend Mode

---

**Measurement Core Module (incl. ADC2)**
**Channel Setting Bits for Exceptional Interrupt Measurement**

The register is reset by RESET\_TYPE\_3.

<b>CHx_EIM</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Channel Setting Bits for Exceptional Interrupt Measurement</b>	<b>08<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

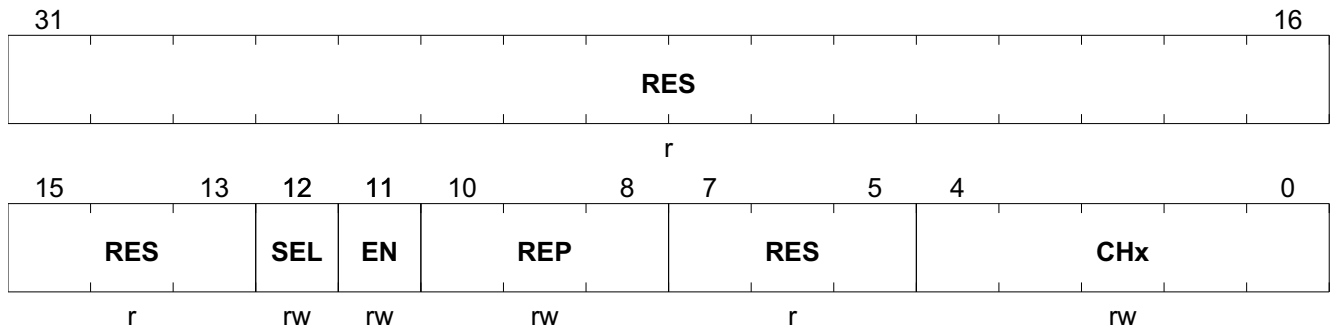

Field	Bits	Type	Description
<b>RES</b>	31:13	r	<b>Reserved</b> Always read as 0
<b>SEL</b>	12	rw	<b>Exceptional interrupt measurement (EIM) Trigger select</b> 0 <sub>B</sub> <b>CCU6_SEL</b> , ccu6_int triggers EIM 1 <sub>B</sub> <b>CP_SEL</b> , cp_clk triggers EIM
<b>EN</b>	11	rw	<b>Exceptional interrupt measurement (EIM) Trigger Event enable</b> 0 <sub>B</sub> <b>DISABLE</b> , start of EIM disabled 1 <sub>B</sub> <b>ENABLE</b> , start of EIM enabled
<b>REP</b>	10:8	rw	<b>Repeat count for exceptional interrupt measurement (EIM)</b> 000 <sub>B</sub> <b>1</b> , Measurements 001 <sub>B</sub> <b>2</b> , Measurements 010 <sub>B</sub> <b>4</b> , Measurements 011 <sub>B</sub> <b>8</b> , Measurements 100 <sub>B</sub> <b>16</b> , Measurements 101 <sub>B</sub> <b>32</b> , Measurements 110 <sub>B</sub> <b>64</b> , Measurements 111 <sub>B</sub> <b>128</b> , Measurements
<b>RES</b>	7:5	r	<b>Reserved</b> Always read as 0



---

**Measurement Core Module (incl. ADC2)**

Field	Bits	Type	Description
<b>CHx</b>	4:0	rw	<b>Channel set for exceptional interrupt measurement (EIM)</b> Other bit combinations are <b>n.u.</b> , not used. 00000 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 00001 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 00010 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 00011 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 00100 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 00101 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable 00110 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 11101 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable 11110 <sub>B</sub> <b>CH8_EN</b> , Channel 8 enable 11111 <sub>B</sub> <b>CH9_EN</b> , Channel 9 enable


---

---

**Measurement Core Module (incl. ADC2)**
**Channel Setting Bits for Exceptional Sequence Measurement**

The register is reset by RESET\_TYPE\_3.

CHx_ESM	Offset	Reset Value
Channel Setting Bits for Exceptional Sequence Measurement	0C <sub>H</sub>	0000 0000 <sub>H</sub>

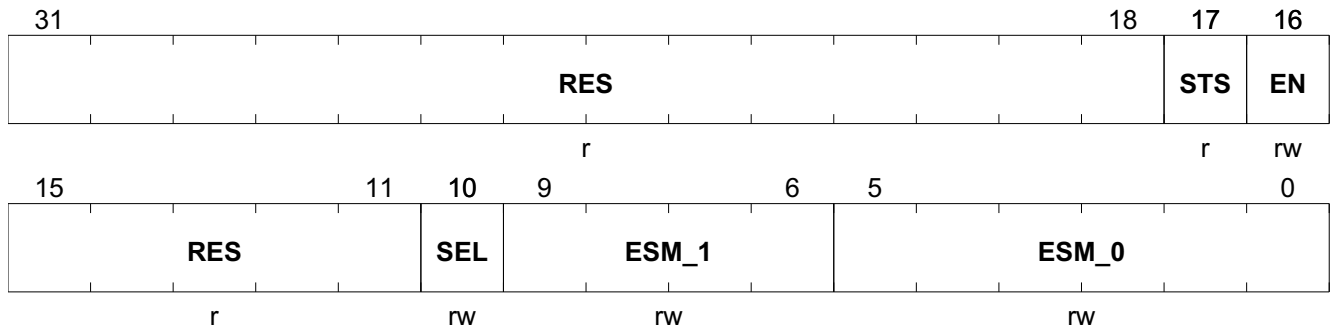

Field	Bits	Type	Description
<b>RES</b>	31:18	r	<b>Reserved</b> Always read as 0
<b>STS</b>	17	r	<b>Exceptional Sequence Measurement is finished</b> 0 <sub>B</sub> <b>Not Completed</b> , Exceptional Sequence Measurement not completed 1 <sub>B</sub> <b>Completed</b> , Exceptional Sequence Measurement completed
<b>EN</b>	16	rw	<b>Enable for Exceptional Sequence Measurement Trigger Event</b> 0 <sub>B</sub> <b>Disable</b> , start of ESM disabled 1 <sub>B</sub> <b>Enable</b> , start of ESM enabled
<b>RES</b>	15:11	r	<b>Reserved</b> Always read as 0
<b>SEL</b>	10	rw	<b>Exceptional Sequence Measurement Trigger Select</b> 0 <sub>B</sub> <b>CCU6_SEL</b> , ccu6_int starts ESM 1 <sub>B</sub> <b>CP_SEL</b> , cp_clk starts ESM
<b>ESM_1</b>	9:6	rw	<b>Channel Sequence for Exceptional Sequence Measurement (ESM)</b> The following values can be ored: 0001 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 0010 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable 0100 <sub>B</sub> <b>CH8_EN</b> , Channel 8 enable 1000 <sub>B</sub> <b>CH9_EN</b> , Channel 9 enable

---

**Measurement Core Module (incl. ADC2)**

Field	Bits	Type	Description
<b>ESM_0</b>	5:0	rw	<b>Channel Sequence for Exceptional Sequence Measurement (ESM)</b> The following values can be ored: 00 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 00 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 00 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 00 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 01 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 10 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable

## 23.5 Calibration Unit

### 23.5.1 Functional Description

The calibration unit of the Measurement Core module is dedicated to cancel offset and gain errors out of the signal chain. The upcoming two chapters describe usage and setup of the calibration unit.

#### 23.5.1.1 Method for determining the Calibration Parameters

As mentioned in the introduction of the calibration unit, the module can be used to correct gain and offset errors caused by non-idealities in the measurement chain. These non-idealities are caused by the corresponding measurement chain modules.

##### Those first order non-idealities are:

- Offset and Gain Error of ADC2.
- Offset and Gain Error of the Attenuator (especially voltage measurement).
- Offset and Gain Error of Reference Voltage caused by non-ideality of reference voltage.

All these factors are summed up in the overall Gain (factor **b**) and overall Offset (adder **a**) of the complete measurement chain. They are calculated from a two point test result and stored inside the NVM.

*Note:*        **The calibration of the HV-Monitoring-Pins was done with an external 1 kΩ resistor. The usage of a resistor with a bigger value requires a recalibration of the signal path due to a finite resistor value of the attenuator.**

#### 23.5.1.2 Setup of Calibration Unit

Each channel has its own calibration unit and thus also its dedicated Gain and Offset parameter. These parameters are stored in a 100TP page of the Flash Module. After each reset of RESET\_TYPE\_4 these coefficients are downloaded from NVM into the corresponding registers. The user may not take care about the configuration of these parameters. After this has been done, the values are used for the correction procedure. The figure below shows the formula performed by the calibration unit and the required **sfr**-Register to control its functionality in a generic way.

The parameters ADC2\_CALOFFS\_CHx and ADC2\_CALGAIN\_CHx are stored in an 8 bit, 2th complement format.

Measurement Core Module (incl. ADC2)

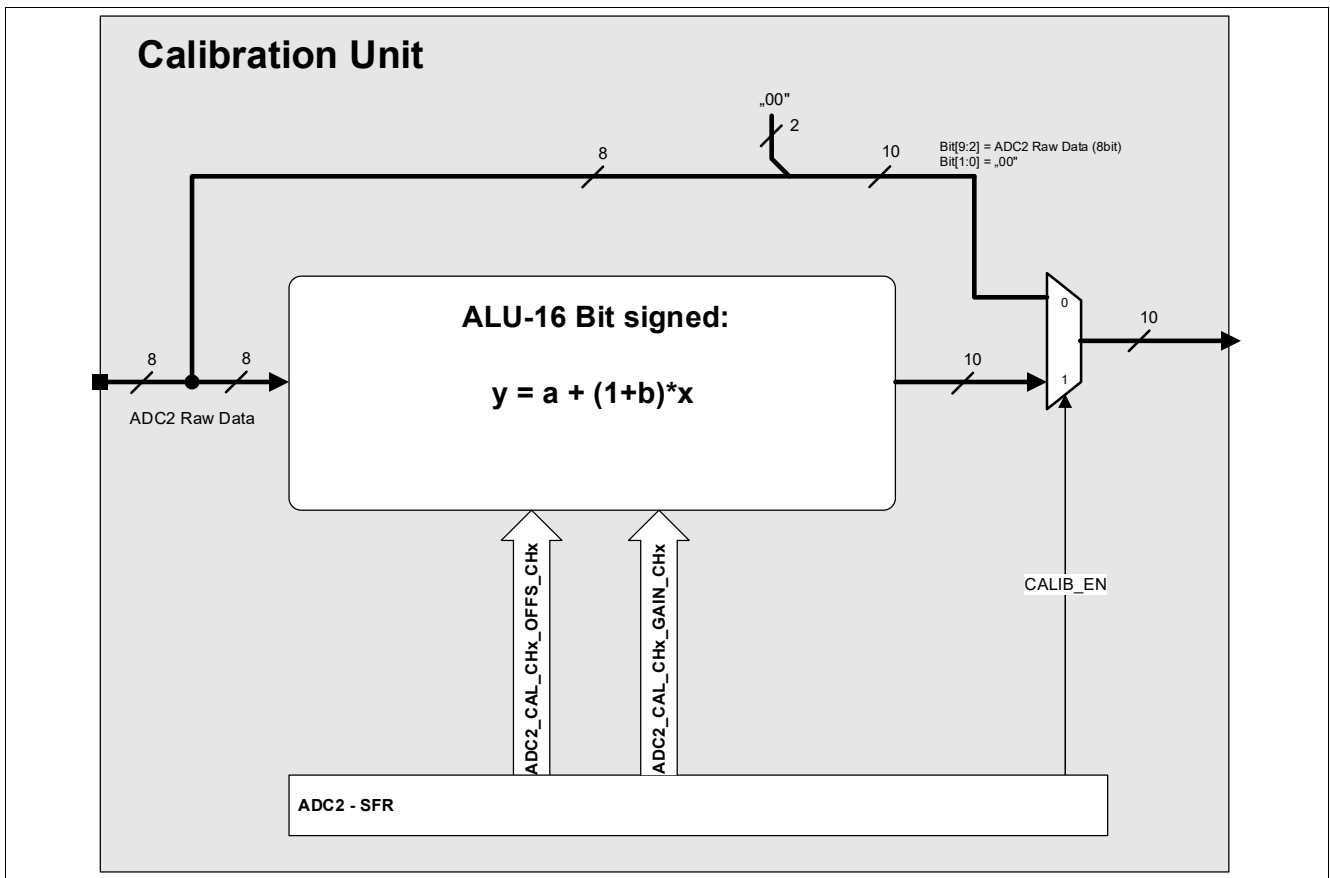


Figure 196 Structure of Calibration Unit

The function applied to calculate the calibrated ADC2 value is:

$$ADC2\_CHx\_cal = \left( 1 + \frac{ADC2\_CALGAIN\_CHx}{256} \right) * ADC2\_CHx\_uncal + \frac{ADC2\_CALOFFS\_CHx}{2} \tag{23.6}$$

---

**Measurement Core Module (incl. ADC2)**

### 23.5.2 Calibration Unit Control Registers

The Calibration Unit can be configured by the **SFR** Register shown below. The registers which cannot be written by the user have the attribute **rwp**. Those registers are:

[CAL\\_CH6\\_7](#),  
[CAL\\_CH8\\_9](#)

**Table 167 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Calibration Unit Control Registers</b>			
<a href="#">CAL_CH0_1</a>	ADC2 Calibration Value for Channel 0 & 1	34 <sub>H</sub>	0000 0000 <sub>H</sub>
<a href="#">CAL_CH2_3</a>	ADC2 Calibration Value for Channel 2 & 3	38 <sub>H</sub>	0000 0000 <sub>H</sub>
<a href="#">CAL_CH4_5</a>	ADC2 Calibration Value for Channel 4 & 5	3C <sub>H</sub>	0000 0000 <sub>H</sub>
<a href="#">CAL_CH6_7</a>	ADC2 Calibration Value for Channel 6 & 7	40 <sub>H</sub>	0000 0000 <sub>H</sub>
<a href="#">CAL_CH8_9</a>	ADC2 Calibration Value for Channel 8 & 9	44 <sub>H</sub>	0000 0000 <sub>H</sub>


The registers are addressed wordwise.

---

**Measurement Core Module (incl. ADC2)**
**ADC2 Calibration Value Channel 0 & 1**

The register is reset by RESET\_TYPE\_4.

<b>CAL_CH0_1</b>	<b>Offset</b>	<b>Reset Value</b>
<b>ADC2 Calibration Value for Channel 0 &amp; 1</b>	<b>34<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

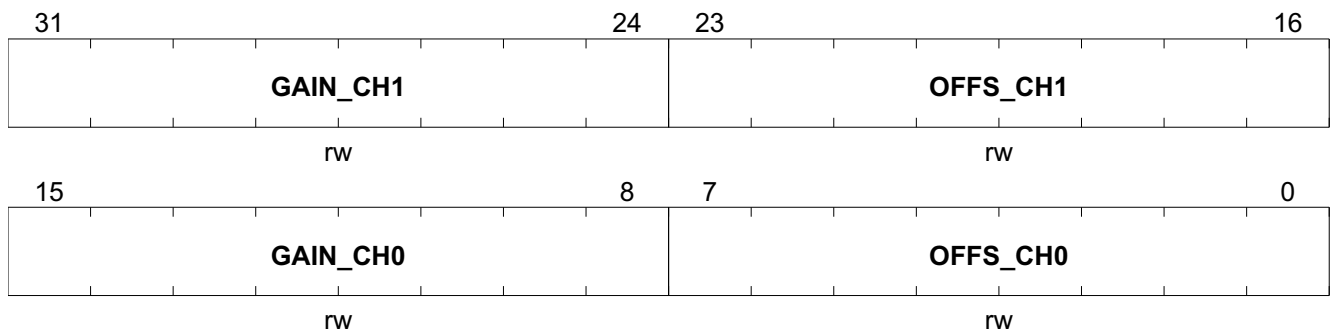


Field	Bits	Type	Description
<b>GAIN_CH1</b>	31:24	rw	<b>Gain Calibration for channel 1</b> For uncalibrated ADC output set CALIB_EN_1 = 0
<b>OFFS_CH1</b>	23:16	rw	<b>Offset Calibration for channel 1</b> For uncalibrated ADC output set CALIB_EN_1 = 0
<b>GAIN_CH0</b>	15:8	rw	<b>Gain Calibration for channel 0</b> For uncalibrated ADC output set CALIB_EN_0 = 0
<b>OFFS_CH0</b>	7:0	rw	<b>Offset Calibration for channel 0</b> For uncalibrated ADC output set CALIB_EN_0 = 0

---

**Measurement Core Module (incl. ADC2)**
**ADC2 Calibration Value for Channel 2 & 3**

The register is reset by RESET\_TYPE\_4.

<b>CAL_CH2_3</b>	<b>Offset</b>	<b>Reset Value</b>
<b>ADC2 Calibration Value for Channel 2 &amp; 3</b>	<b>38<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

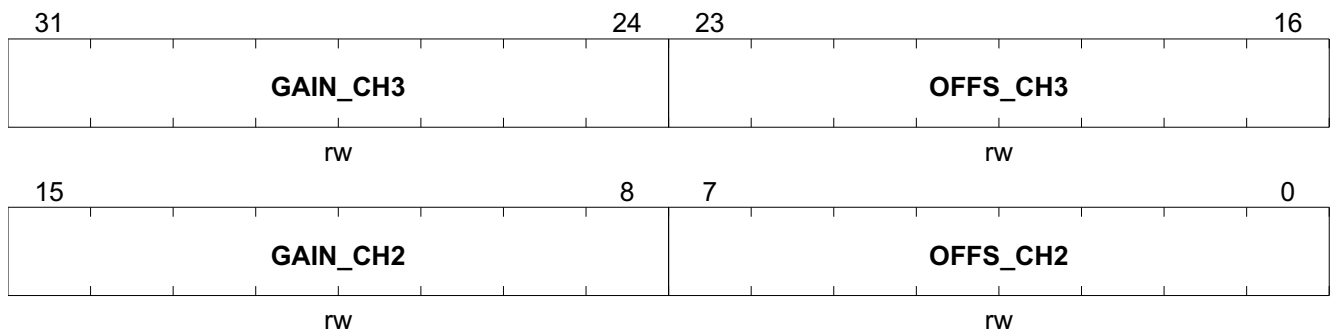

Field	Bits	Type	Description
<b>GAIN_CH3</b>	31:24	rw	<b>Gain Calibration for channel 3</b> For ADC output set CALIB_EN_3 = 0
<b>OFFS_CH3</b>	23:16	rw	<b>Offset Calibration for channel 3</b> For ADC output set CALIB_EN_3 = 0
<b>GAIN_CH2</b>	15:8	rw	<b>Gain Calibration for channel 2</b> For ADC output set CALIB_EN_2 = 0
<b>OFFS_CH2</b>	7:0	rw	<b>Offset Calibration for channel 2</b> For ADC output set CALIB_EN_2 = 0




---

**Measurement Core Module (incl. ADC2)**
**ADC2 Calibration Value for Channel 4 & 5**

The register is reset by RESET\_TYPE\_4.

<b>CAL_CH4_5</b>	<b>Offset</b>	<b>Reset Value</b>
<b>ADC2 Calibration Value for Channel 4 &amp; 5</b>	<b>3C<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

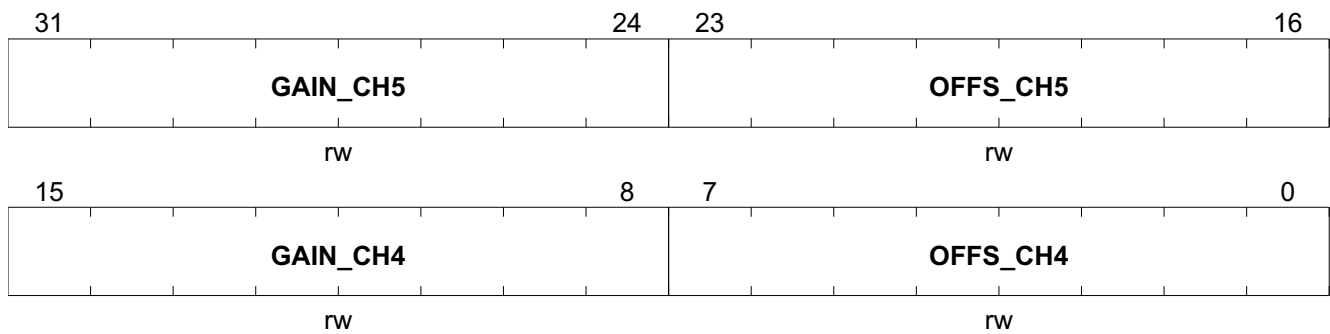


Field	Bits	Type	Description
<b>GAIN_CH5</b>	31:24	rw	<b>Gain Calibration for channel 5</b> For ADC output set CALIB_EN_5 = 0
<b>OFFS_CH5</b>	23:16	rw	<b>Offset Calibration for channel 5</b> For ADC output set CALIB_EN_5 = 0
<b>GAIN_CH4</b>	15:8	rw	<b>Gain Calibration for channel 4</b> For ADC output set CALIB_EN_4 = 0
<b>OFFS_CH4</b>	7:0	rw	<b>Offset Calibration for channel 4</b> For ADC output set CALIB_EN_4 = 0

Measurement Core Module (incl. ADC2)

**ADC2 Calibration Value for Channel 6 & 7**

The register is reset by RESET\_TYPE\_4.

<b>CAL_CH6_7</b>	<b>Offset</b>	<b>Reset Value</b>
<b>ADC2 Calibration Value for Channel 6 &amp; 7</b>	<b>40<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

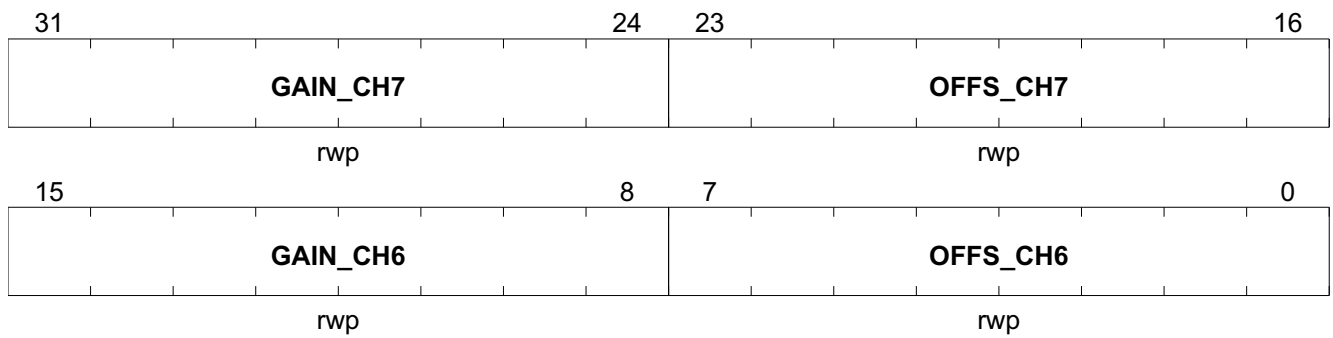


Field	Bits	Type	Description
<b>GAIN_CH7</b>	31:24	rwp	<b>Gain Calibration for channel 7</b> For ADC output set CALIB_EN_7 = 0
<b>OFFS_CH7</b>	23:16	rwp	<b>Offset Calibration for channel 7</b> For ADC output set CALIB_EN_7 = 0
<b>GAIN_CH6</b>	15:8	rwp	<b>Gain Calibration for channel 6</b> For ADC output set CALIB_EN_6 = 0
<b>OFFS_CH6</b>	7:0	rwp	<b>Offset Calibration for channel 6</b> For ADC output set CALIB_EN_6 = 0

Measurement Core Module (incl. ADC2)

ADC2 Calibration Value for Channel 8 & 9

The register is reset by RESET\_TYPE\_4.

<b>CAL_CH8_9</b>	<b>Offset</b>	<b>Reset Value</b>
<b>ADC2 Calibration Value for Channel 8 &amp; 9</b>	<b>44<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

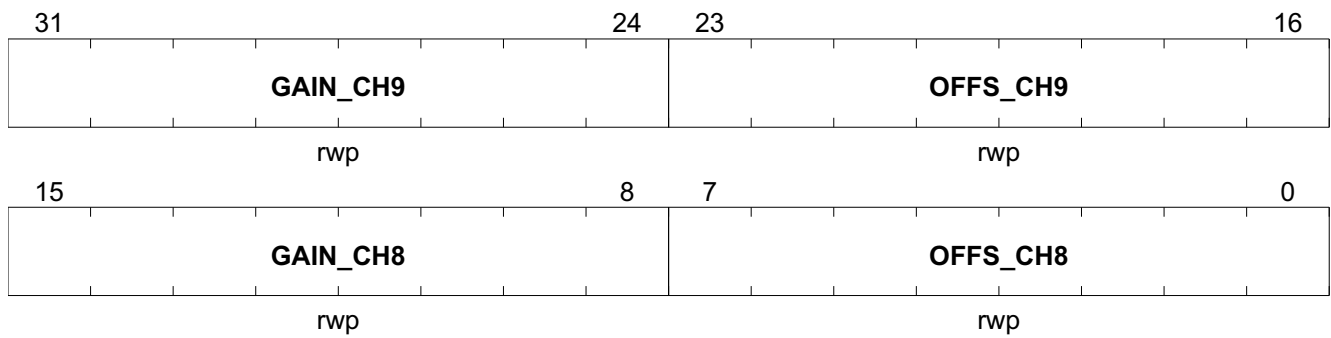


Field	Bits	Type	Description
<b>GAIN_CH9</b>	31:24	rwp	<b>Gain Calibration for channel 9</b> For ADC output set CALIB_EN_9 = 0
<b>OFFS_CH9</b>	23:16	rwp	<b>Offset Calibration for channel 9</b> For ADC output set CALIB_EN_9 = 0
<b>GAIN_CH8</b>	15:8	rwp	<b>Gain Calibration for channel 8</b> For ADC output set CALIB_EN_8 = 0
<b>OFFS_CH8</b>	7:0	rwp	<b>Offset Calibration for channel 8</b> For ADC output set CALIB_EN_8 = 0

## 23.6 IIR-Filter

### 23.6.1 Functional Description

To cancel low frequency noise out of the measured signal, every channel of the digital signal includes a first order IIR Filter. The structure of the IIR Filter is shown in the picture below.

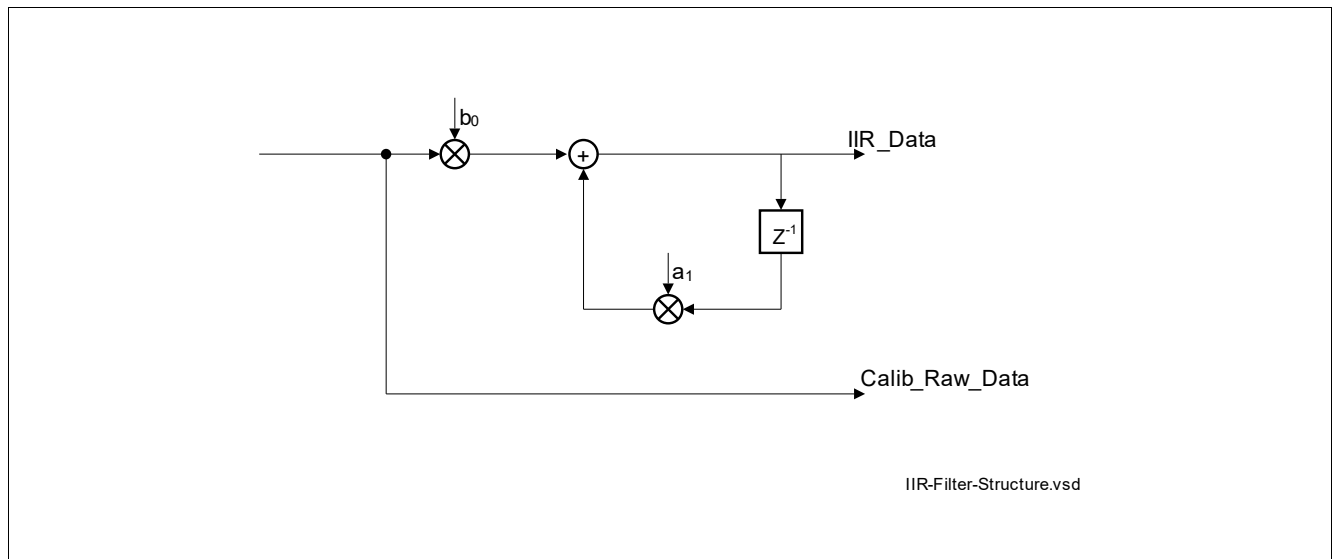

**Figure 197 IIR-Filter Implementation Structure**

$$H_{\text{IIR}}(z) = \frac{b_0}{(1 - a_1 z^{-1})} \quad (23.7)$$

This filter allows an effective suppression of high-frequency components like noise or crosstalk caused by HF-components in order to avoid the generation of unwanted interrupts. The coefficient  $b$  can be expressed as:

$$a_1 = 1 - b_0 \quad (23.8)$$

With the coefficient  $b$  implemented in the IIR Filter transfer function, it looks like:

$$H_{\text{IIR}}(z) = \frac{b_0}{(1 - (1 - b_0) z^{-1})} \quad (23.9)$$

Measurement Core Module (incl. ADC2)

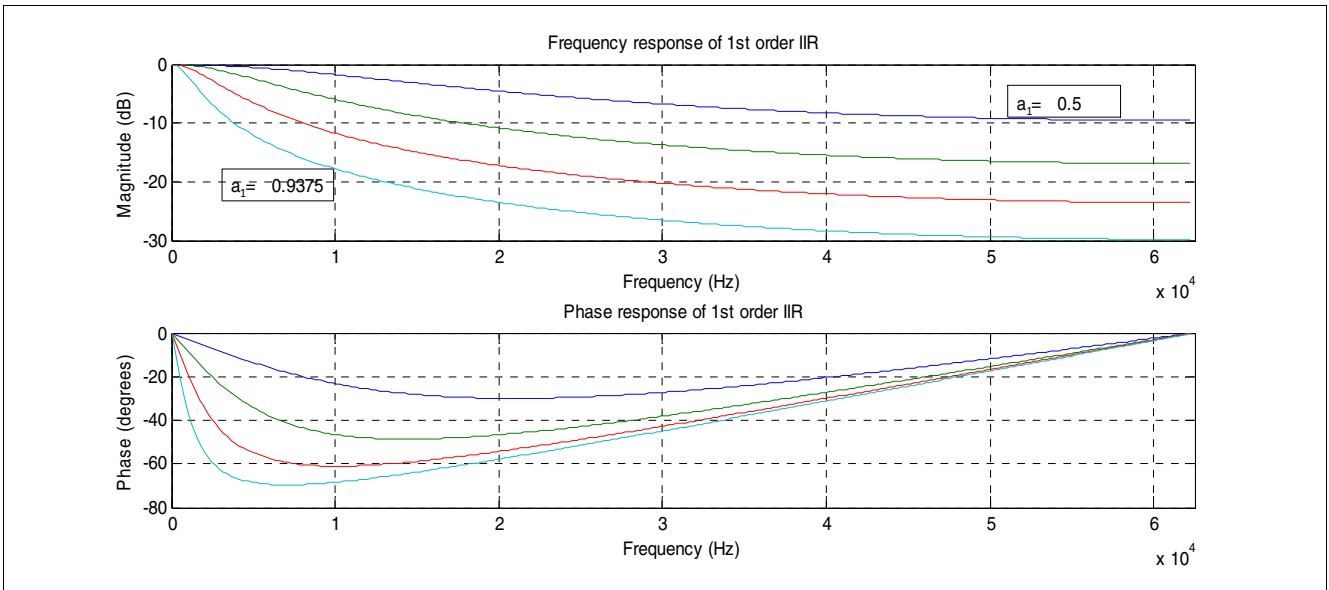


Figure 198 IIR Filter Transfer Function for different filter length fl (sampling frequency is assumed to be 125 kHz)

23.6.1.1 Step Response

The IIR filter’s step response time is shown in the figure below:

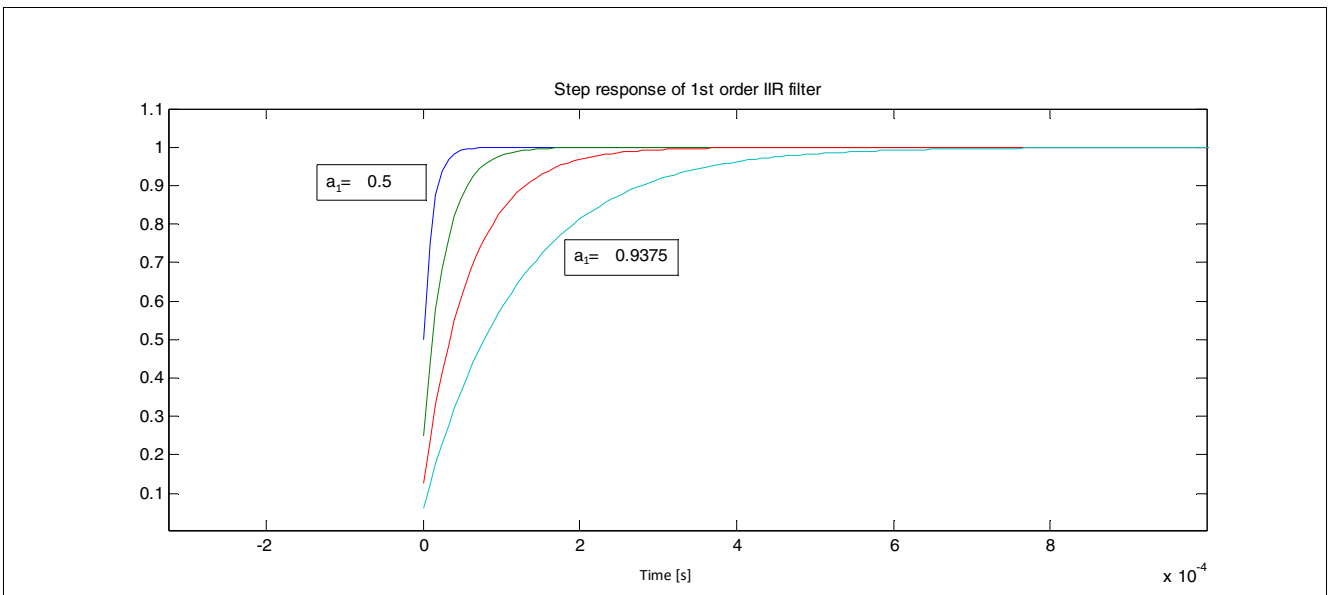


Figure 199 IIR Step Response Time

---

**Measurement Core Module (incl. ADC2)**

**Table 168** summarizes the main filter characteristics.

**Table 168 IIR filter characteristics**

<b>Filter coefficient</b>	<b>Group delay at <math>\omega=0</math></b>
<b><math>b_0</math></b>	<b><math>\tau</math>[samples]</b>
$2^{-1}$	2
$2^{-2}$	4
$2^{-3}$	8
$2^{-4}$	16

---

**Measurement Core Module (incl. ADC2)**

### 23.6.2 IIR Filter Control Registers

The IIR Filter can also be configured by the **sfr** Register shown below. The registers which cannot be written by the user have the attribute **rwp**. Those registers are:

#### FILTCOEFF6\_9

The **FILT\_OUT0** to **FILT\_OUT9** registers are 10 bits wide, but the ADC delivers only a resolution of 8 bits. **Table 169** shows how the lower two bits are determined.

**Table 169 ADC2\_FILT\_OUT register setting**

<b>CTRL1.CALIB_EN</b>	<b>CTRL4.FILT_OUT_SEL</b>	<b>FILT_OUT0.OUT_CHO</b>
0	0	“00”
0	1	“filt_out(3:2)”
1	0	“calib_out(1:0)”
1	1	“filt_out(3:2)”

The result of the calibration unit is 10 bits, the output is feed into the IIR filter. The internal result of the IIR filter is 12 bits, the output is converted to 10 bit and fed into the postprocessing. The user can monitor the calculated values in the **FILT\_OUT0** to **FILT\_OUT9** registers and gets access to 10 bit wide result information.

**Table 170 Register Overview**

<b>Register Short Name</b>	<b>Register Long Name</b>	<b>Offset Address</b>	<b>Reset Value</b>
<b>IIR Filter Control Registers</b>			
<b>FILTCOEFF0_5</b>	Filter Coefficients ADC Channel 0-5	48 <sub>H</sub>	0000 0AAA <sub>H</sub>
<b>FILTCOEFF6_9</b>	Filter Coefficients ADC Channel 6-9	4C <sub>H</sub>	0000 00D5 <sub>H</sub>
<b>FILT_OUT0</b>	ADC or Filter Output Channel 0	50 <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>
<b>FILT_OUT1</b>	ADC or Filter Output Channel 1	54 <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>
<b>FILT_OUT2</b>	ADC or Filter Output Channel 2	58 <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>
<b>FILT_OUT3</b>	ADC or Filter Output Channel 3	5C <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>
<b>FILT_OUT4</b>	ADC or Filter Output Channel 4	60 <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>

---

**Measurement Core Module (incl. ADC2)**
**Table 170 Register Overview** (cont'd)

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>FILT_OUT5</b>	ADC or Filter Output Channel 5	64 <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>
<b>FILT_OUT6</b>	ADC or Filter Output Channel 6	68 <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>
<b>FILT_OUT7</b>	ADC or Filter Output Channel 7	6C <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>
<b>FILT_OUT8</b>	ADC or Filter Output Channel 8	70 <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>
<b>FILT_OUT9</b>	ADC or Filter Output Channel 9	74 <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>

The registers are addressed wordwise.



## Measurement Core Module (incl. ADC2)

## Filter Coefficients ADC Channel 0-5


The register is reset by RESET\_TYPE\_4.

## FILTCOEFF0\_5

Offset

Reset Value

Filter Coefficients ADC Channel 0-5

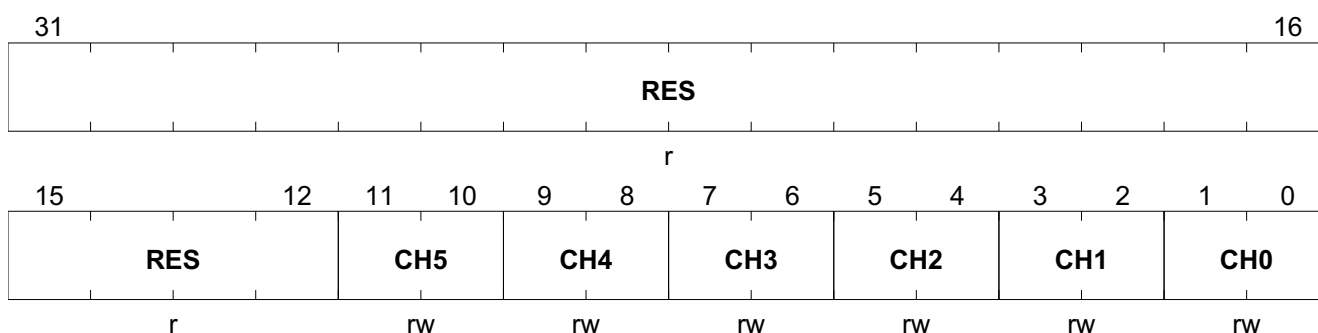48<sub>H</sub>0000 0AAA<sub>H</sub>

Field	Bits	Type	Description
RES	31:12	r	<b>Reserved</b> Always read as 0
CH5	11:10	rw	<b>Filter Coefficient <math>b_0</math> for ADC channel 5</b> 00 <sub>B</sub> <b>1/2</b> , weight of current sample 01 <sub>B</sub> <b>1/4</b> , weight of current sample 10 <sub>B</sub> <b>1/8</b> , weight of current sample 11 <sub>B</sub> <b>1/16</b> , weight of current sample
CH4	9:8	rw	<b>Filter Coefficient <math>b_0</math> for ADC channel 4</b> 00 <sub>B</sub> <b>1/2</b> , weight of current sample 01 <sub>B</sub> <b>1/4</b> , weight of current sample 10 <sub>B</sub> <b>1/8</b> , weight of current sample 11 <sub>B</sub> <b>1/16</b> , weight of current sample
CH3	7:6	rw	<b>Filter Coefficient <math>b_0</math> for ADC channel 3</b> 00 <sub>B</sub> <b>1/2</b> , weight of current sample 01 <sub>B</sub> <b>1/4</b> , weight of current sample 10 <sub>B</sub> <b>1/8</b> , weight of current sample 11 <sub>B</sub> <b>1/16</b> , weight of current sample
CH2	5:4	rw	<b>Filter Coefficient <math>b_0</math> for ADC channel 2</b> 00 <sub>B</sub> <b>1/2</b> , weight of current sample 01 <sub>B</sub> <b>1/4</b> , weight of current sample 10 <sub>B</sub> <b>1/8</b> , weight of current sample 11 <sub>B</sub> <b>1/16</b> , weight of current sample
CH1	3:2	rw	<b>Filter Coefficient <math>b_0</math> for ADC channel 1</b> 00 <sub>B</sub> <b>1/2</b> , weight of current sample 01 <sub>B</sub> <b>1/4</b> , weight of current sample 10 <sub>B</sub> <b>1/8</b> , weight of current sample 11 <sub>B</sub> <b>1/16</b> , weight of current sample

---

**Measurement Core Module (incl. ADC2)**

Field	Bits	Type	Description
CH0	1:0	rw	<b>Filter Coefficient <math>b_0</math> for ADC channel 0</b> 00 <sub>B</sub> <b>1/2</b> , weight of current sample 01 <sub>B</sub> <b>1/4</b> , weight of current sample 10 <sub>B</sub> <b>1/8</b> , weight of current sample 11 <sub>B</sub> <b>1/16</b> , weight of current sample




Measurement Core Module (incl. ADC2)

**ADC or Filter Output Channel 0**

The register is reset by RESET\_TYPE\_3. This registers reflects the current value of channel 0 of the measurement chain.

<b>FILT_OUT0</b>	<b>Offset</b>	<b>Reset Value</b>
<b>ADC or Filter Output Channel 0</b>	<b>50<sub>H</sub></b>	<b>0000 0000 0000 0000 0000 00XX XXXX XXXX<sub>B</sub></b>

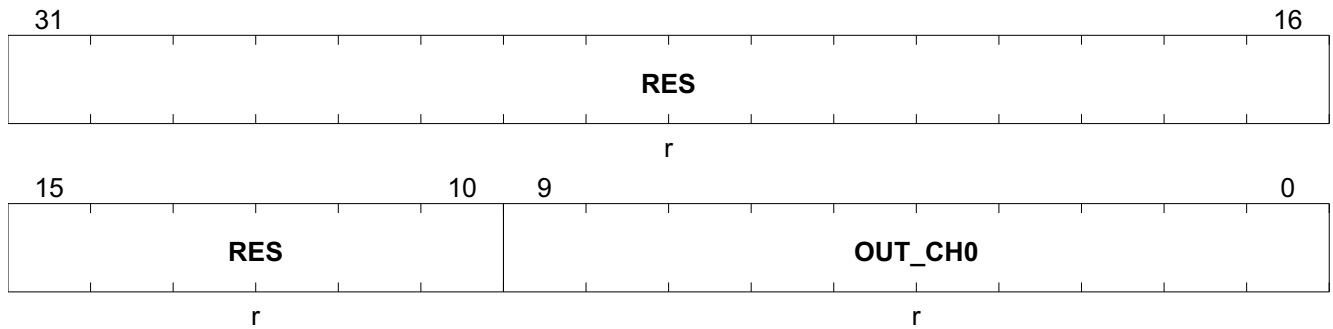

Field	Bits	Type	Description
<b>RES</b>	31:10	r	<b>Reserved</b> Always read as 0
<b>OUT_CH0</b>	9:0	r	<b>ADC2 output value channel 0</b> For filtered output set <b>CTRL4.FILT_OUT_SEL_5_0[0] = 1</b> For unfiltered output set <b>CTRL4.FILT_OUT_SEL_5_0[0] = 0</b>




Measurement Core Module (incl. ADC2)

ADC or Filter Output Channel 2

The register is reset by RESET\_TYPE\_3.

<b>FILT_OUT2</b>	<b>Offset</b>	<b>Reset Value</b>
ADC or Filter Output Channel 2	58 <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>

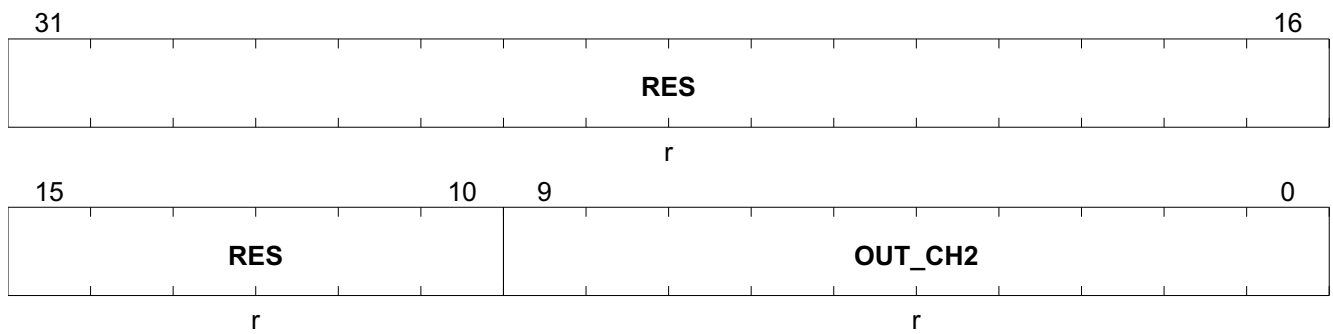


Field	Bits	Type	Description
<b>RES</b>	31:10	r	<b>Reserved</b> Always read as 0
<b>OUT_CH2</b>	9:0	r	<b>ADC or filter output value channel 2</b> For filtered output set <b>CTRL4.FILT_OUT_SEL_5_0[2] = 1</b> For unfiltered output set <b>CTRL4.FILT_OUT_SEL_5_0[2] = 0</b>

Measurement Core Module (incl. ADC2)

ADC or Filter Output Channel 3

The register is reset by RESET\_TYPE\_3.

<b>FILT_OUT3</b>	<b>Offset</b>	<b>Reset Value</b>
ADC or Filter Output Channel 3	5C <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>

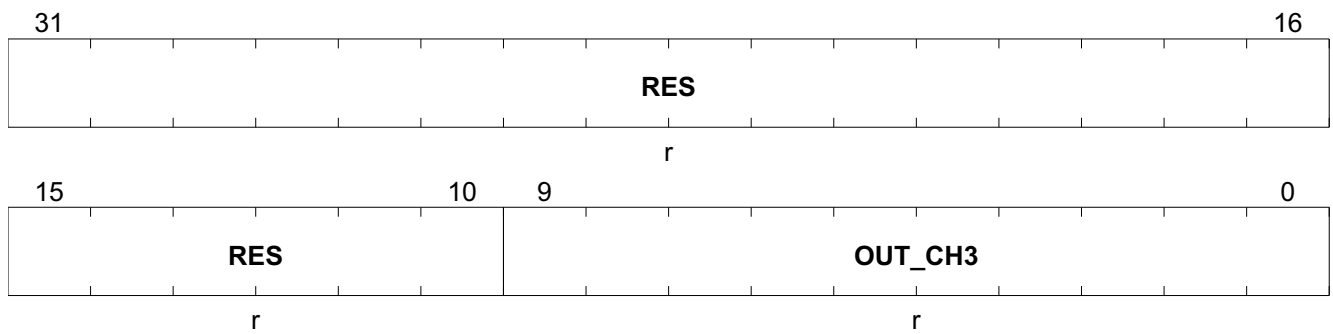

Field	Bits	Type	Description
RES	31:10	r	<b>Reserved</b> Always read as 0
OUT_CH3	9:0	r	<b>ADC or filter output value channel 3</b> For filtered output set <b>CTRL4.FILT_OUT_SEL_5_0[3] = 1</b> For unfiltered output set <b>CTRL4.FILT_OUT_SEL_5_0[3] = 0</b>








Measurement Core Module (incl. ADC2)

ADC or Filter Output Channel 6

The register is reset by RESET\_TYPE\_3.

FILT_OUT6	Offset	Reset Value
ADC or Filter Output Channel 6	68 <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>

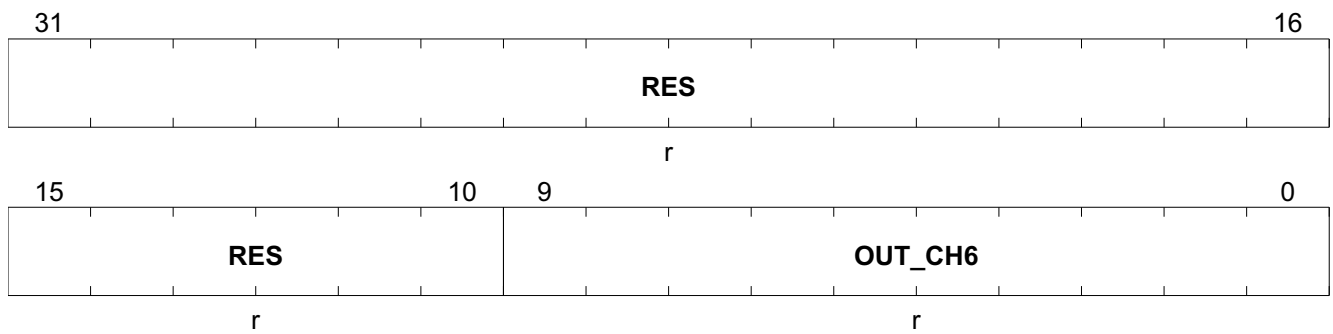

Field	Bits	Type	Description
RES	31:10	r	<b>Reserved</b> Always read as 0
OUT_CH6	9:0	r	<b>ADC or filter output value channel 6</b> For filtered output set <b>CTRL4.FILT_OUT_SEL_9_6[0] = 1</b> For unfiltered output set <b>CTRL4.FILT_OUT_SEL_9_6[0] = 0</b>




Measurement Core Module (incl. ADC2)

ADC or Filter Output Channel 8

The register is reset by RESET\_TYPE\_3.

FILT_OUT8	Offset	Reset Value
ADC or Filter Output Channel 8	70 <sub>H</sub>	0000 0000 0000 0000 0000 00XX XXXX XXXX <sub>B</sub>

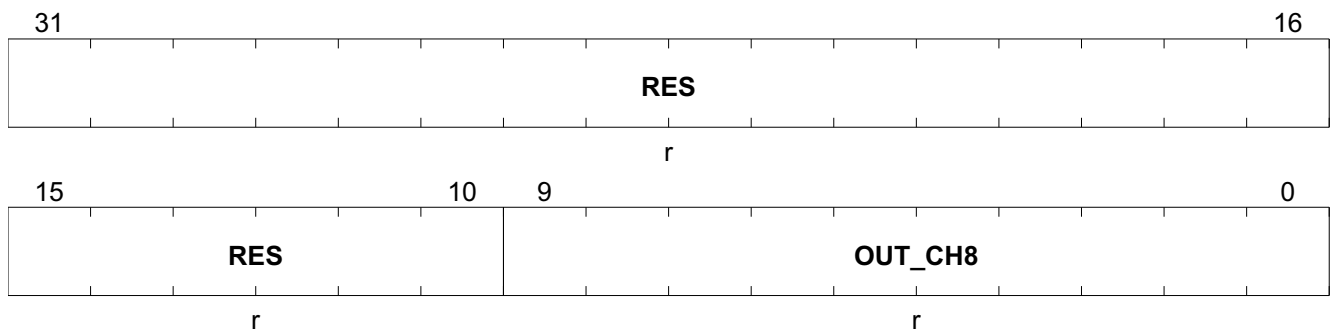


Field	Bits	Type	Description
RES	31:10	r	<b>Reserved</b> Always read as 0
OUT_CH8	9:0	r	<b>ADC or filter output value channel 8</b> For filtered output set <b>CTRL4.FILT_OUT_SEL_9_6[2] = 1</b> For unfiltered output set <b>CTRL4.FILT_OUT_SEL_9_6[2] = 0</b>



## 23.7 Signal Processing

### 23.7.1 Functional Description

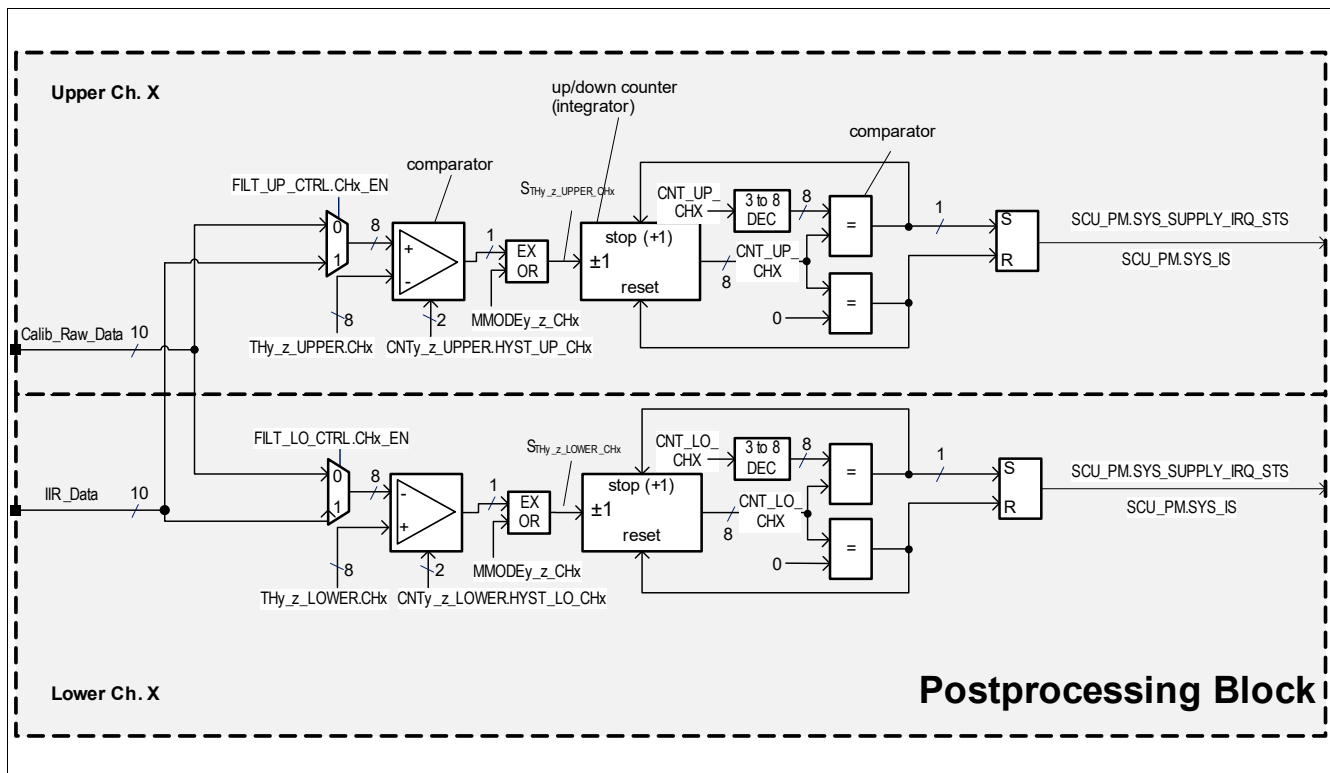

**Figure 200 Postprocessing channel block diagram for voltage and temperature measurements**

As shown in [Figure 200](#) an adjustable filter can be applied for the upper and the lower measurement channel, which averages 2, 4, 8 or 16 measurement values continuously. The filtered signal or the demultiplexed ADC output signal  $ADC\_OUTx$  is compared with an upper threshold  $THy\_z\_UPPPER.CHx$  and a lower threshold  $THy\_z\_LOWER.CHx$ . When the thresholds are exceeded, the comparator outputs get active. For all measurement modes a freely adjustable hysteresis can be defined which is defined with the  $CNTy\_z\_LOWER.HYST\_UP\_CHx$  and  $CNTy\_z\_LOWER.HYST\_LO\_CHx$  values.

In addition to the first filter stage, the second filters (counters) integrate the comparator output values  $S_{TH\_UP/LO\_CHX}$  until an individual upper and lower timing threshold  $2^{CNT\_UP/LO\_CHX}$  is reached. When reaching the upper timing threshold  $2^{CNT\_UP\_CHX}$ , the upper counter increment is stalled and the status output  $CHx\_UP\_STS$  is set. For  $MMODE\_OV = 1$ , the inverted lower comparator output signal  $S_{TH\_LO\_CHX}$  is normalized again. When the output signal is above  $THy\_z\_LOWER.CHx$ , the lower counter is incremented until the max. threshold  $2^{CNT\_LO\_CHX}$  is reached. Individual interrupts for the upper and lower channel can be triggered with the rising edge of the status signals  $UP/LO\_x\_STS$ .

In general the IIR filter stage suppresses higher frequency noise efficiently and triggering with the upper and lower threshold  $TH\_UP/LO\_CHx$  are dependent on the measured values. Hence short high-level spikes might pass the thresholds. In opposite to the first stage the nature of the second filter stage is more a time filter, which is less dependent on the measurement values but on event durations of  $S_{TH\_LO/UP\_CHX}$  as generated by the first comparator stage. Therefore the second stage has a lower noise suppression performance for higher frequencies and also adds a delay for the trigger time proportional to  $2^{CNT\_LO/HI\_CHX}$ .

Measurement Core Module (incl. ADC2)

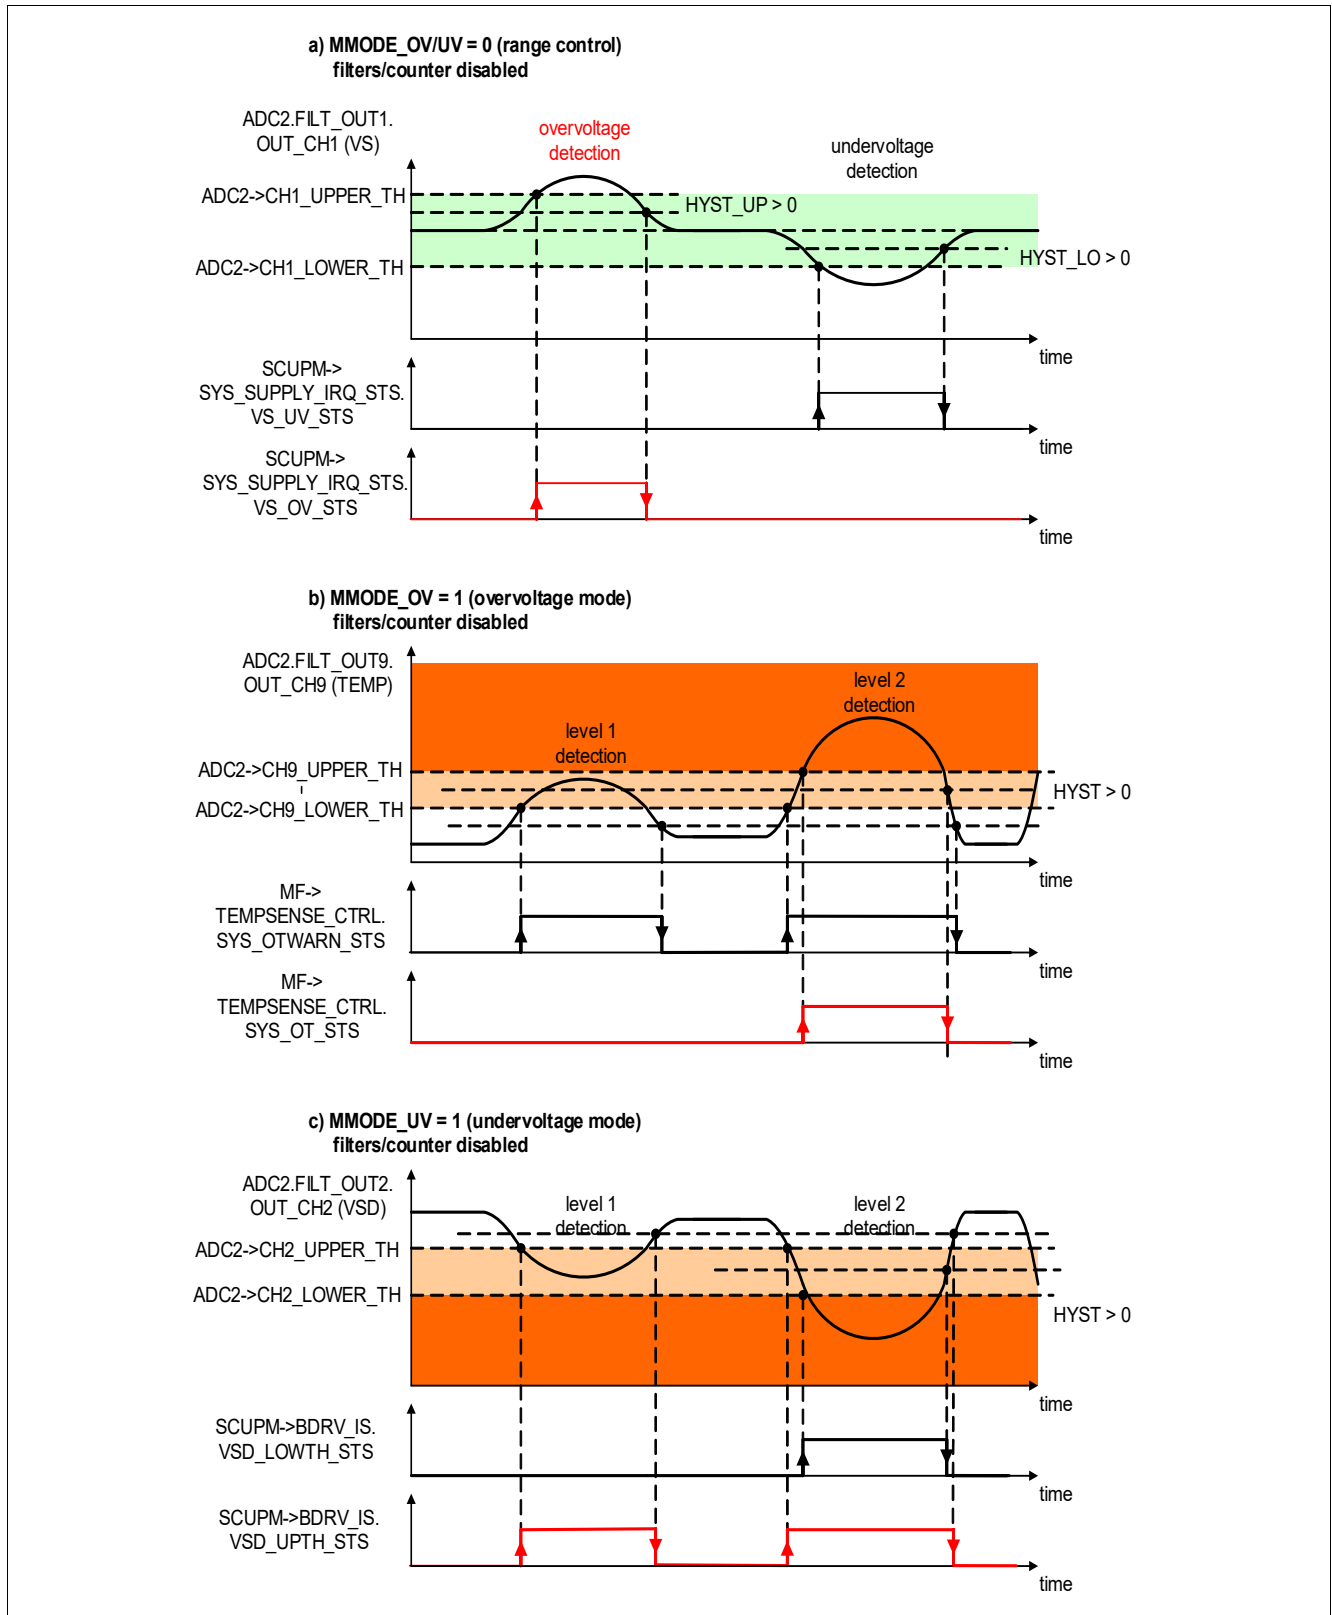


Figure 201 Measurement examples of a measurement channel with disabled filters

Figure 201 shows three examples, a range-control and an over- and undervoltage detection.

---

**Measurement Core Module (incl. ADC2)**

### 23.7.2 Postprocessing Control Registers

The Temperature Sensor is fully controllable by the below listed sfr Registers.

**Table 171 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Postprocessing Control Registers</b>			
<b>FILT_UP_CTRL</b>	Upper Threshold Filter Enable	78 <sub>H</sub>	0000 003F <sub>H</sub>
<b>FILT_LO_CTRL</b>	Lower Threshold Filter Enable	7C <sub>H</sub>	0000 003F <sub>H</sub>
<b>TH0_3_LOWER</b>	Lower Comparator Trigger Level Channel 0-3	80 <sub>H</sub>	3C2C 3A42 <sub>H</sub>
<b>TH4_5_LOWER</b>	Lower Comparator Trigger Level Channel 4&5	84 <sub>H</sub>	0000 9A2C <sub>H</sub>
<b>TH6_9_LOWER</b>	Lower Comparator Trigger Level Channel 6-9	88 <sub>H</sub>	C7D3 BBDB <sub>H</sub>
<b>TH0_3_UPPER</b>	Upper Comparator Trigger Level Channel 0-3	8C <sub>H</sub>	A8AB DAE2 <sub>H</sub>
<b>TH4_5_UPPER</b>	Upper Comparator Trigger Level Channel 4&5	90 <sub>H</sub>	0000 BC42 <sub>H</sub>
<b>TH6_9_UPPER</b>	Upper Comparator Trigger Level Channel 6-9	94 <sub>H</sub>	E2FA C6EE <sub>H</sub>
<b>CNT0_3_LOWER</b>	Lower Counter Trigger Level Channel 0-3	98 <sub>H</sub>	1213 1312 <sub>H</sub>
<b>CNT4_5_LOWER</b>	Lower Counter Trigger Level Channel 4&5	9C <sub>H</sub>	0000 0A0A <sub>H</sub>
<b>CNT6_9_LOWER</b>	Lower Counter Trigger Level Channel 6-9	A0 <sub>H</sub>	0A0A 0A0A <sub>H</sub>
<b>CNT0_3_UPPER</b>	Upper Counter Trigger Level Channel 0-3	A4 <sub>H</sub>	1213 1B1A <sub>H</sub>
<b>CNT4_5_UPPER</b>	Upper Counter Trigger Level Channel 4&5	A8 <sub>H</sub>	0000 1212 <sub>H</sub>
<b>CNT6_9_UPPER</b>	Upper Counter Trigger Level Channel 6-9	AC <sub>H</sub>	1A1A 1911 <sub>H</sub>
<b>MMODE0_5</b>	Overvoltage Measurement Mode of Ch 0-5	B0 <sub>H</sub>	0000 0000 <sub>H</sub>

The registers are addressed wordwise.




**Measurement Core Module (incl. ADC2)**
**Upper Threshold Filter Enable**

Setting the corresponding channel configuration flag connects the IIR filter output to the postprocessing for upper threshold detection of this channel.

The register is reset by RESET\_TYPE\_4.

FILT_UP_CTRL	Offset	Reset Value
Upper Threshold Filter Enable	78 <sub>H</sub>	0000 003F <sub>H</sub>

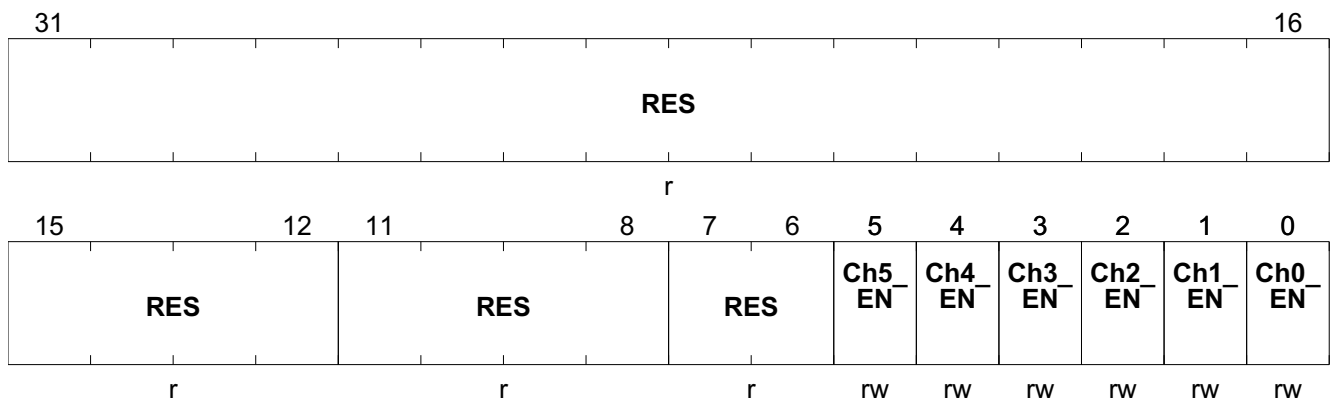

Field	Bits	Type	Description
RES	31:12	r	<b>Reserved</b> Always read as 0
RES	11:8	r	<b>Reserved</b> Always read as 0
RES	7:6	r	<b>Reserved</b> Always read as 0
Ch5_EN	5	rw	<b>Upper threshold IIR filter enable ch 5</b> 0 <sub>B</sub> , disable 1 <sub>B</sub> , enable
Ch4_EN	4	rw	<b>Upper threshold IIR filter enable ch 4</b> 0 <sub>B</sub> , disable 1 <sub>B</sub> , enable
Ch3_EN	3	rw	<b>Upper threshold IIR filter enable ch 3</b> 0 <sub>B</sub> , disable 1 <sub>B</sub> , enable
Ch2_EN	2	rw	<b>Upper threshold IIR filter enable ch 2</b> 0 <sub>B</sub> , disable 1 <sub>B</sub> , enable
Ch1_EN	1	rw	<b>Upper threshold IIR filter enable ch 1</b> 0 <sub>B</sub> , disable 1 <sub>B</sub> , enable
Ch0_EN	0	rw	<b>Upper threshold IIR filter enable ch 0</b> 0 <sub>B</sub> , disable 1 <sub>B</sub> , enable



## Measurement Core Module (incl. ADC2)

## Overvoltage Measurement Mode of Ch 0-5


The register is reset by RESET\_TYPE\_4.

## MMODE0\_5

## Offset

## Reset Value

## Overvoltage Measurement Mode of Ch 0-5

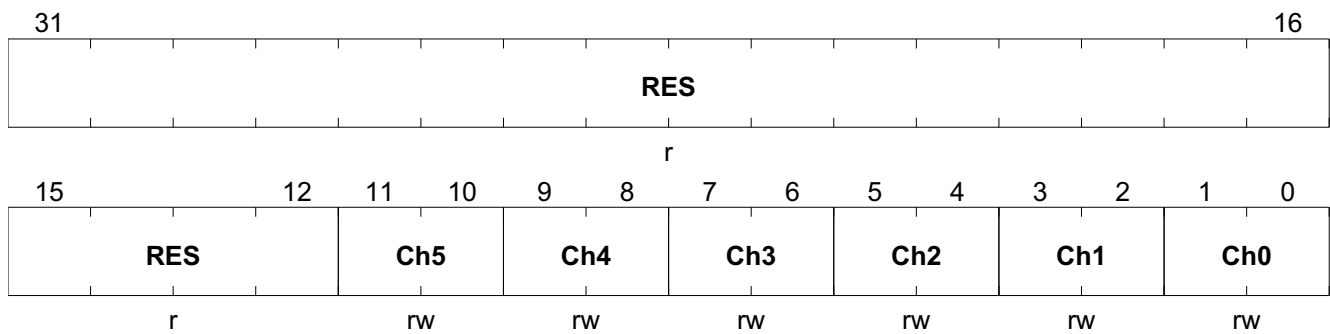B0<sub>H</sub>0000 0000<sub>H</sub>

Field	Bits	Type	Description
<b>RES</b>	31:12	r	<b>Reserved</b> Always read as 0
<b>Ch5</b>	11:10	rw	<b>Measurement mode ch 5</b> 00 <sub>B</sub> <b>MMODE0</b> , upper & lower voltage/limit measurement 01 <sub>B</sub> <b>MMODEUV</b> , undervoltage/-limit measurement 10 <sub>B</sub> <b>MMODEOV</b> , overvoltage/-limit measurement 11 <sub>B</sub> <b>RESERVED</b> , reserved
<b>Ch4</b>	9:8	rw	<b>Measurement mode ch 4</b> 00 <sub>B</sub> <b>MMODE0</b> , upper & lower voltage/limit measurement 01 <sub>B</sub> <b>MMODEUV</b> , undervoltage/-limit measurement 10 <sub>B</sub> <b>MMODEOV</b> , overvoltage/-limit measurement 11 <sub>B</sub> <b>RESERVED</b> , reserved
<b>Ch3</b>	7:6	rw	<b>Measurement mode ch 3</b> 00 <sub>B</sub> <b>MMODE0</b> , upper & lower voltage/limit measurement 01 <sub>B</sub> <b>MMODEUV</b> , undervoltage/-limit measurement 10 <sub>B</sub> <b>MMODEOV</b> , overvoltage/-limit measurement 11 <sub>B</sub> <b>RESERVED</b> , reserved
<b>Ch2</b>	5:4	rw	<b>Measurement mode ch 2</b> 00 <sub>B</sub> <b>MMODE0</b> , upper & lower voltage/limit measurement 01 <sub>B</sub> <b>MMODEUV</b> , undervoltage/-limit measurement 10 <sub>B</sub> <b>MMODEOV</b> , overvoltage/-limit measurement 11 <sub>B</sub> <b>RESERVED</b> , reserved
<b>Ch1</b>	3:2	rw	<b>Measurement mode ch 1</b> 00 <sub>B</sub> <b>MMODE0</b> , upper & lower voltage/limit measurement 01 <sub>B</sub> <b>MMODEUV</b> , undervoltage/-limit measurement 10 <sub>B</sub> <b>MMODEOV</b> , overvoltage/-limit measurement 11 <sub>B</sub> <b>RESERVED</b> , reserved

---

**Measurement Core Module (incl. ADC2)**

Field	Bits	Type	Description
<b>Ch0</b>	1:0	rw	<b>Measurement mode ch 0</b> 00 <sub>B</sub> <b>MMODE0</b> , upper & lower voltage/limit measurement 01 <sub>B</sub> <b>MMODEUV</b> , undervoltage/-limit measurement 10 <sub>B</sub> <b>MMODEOV</b> , overvoltage/-limit measurement 11 <sub>B</sub> <b>RESERVED</b> , reserved




Measurement Core Module (incl. ADC2)

Upper Comparator Trigger Level Channel 4 & 5

The register is reset by RESET\_TYPE\_4.

This register is being initialized by the BootROM during the bootup process to a value of 0000\_BC00<sub>H</sub>

<b>TH4_5_UPPER</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Upper Comparator Trigger Level Channel 4&amp;5</b>	<b>90<sub>H</sub></b>	<b>0000 BC42<sub>H</sub></b>

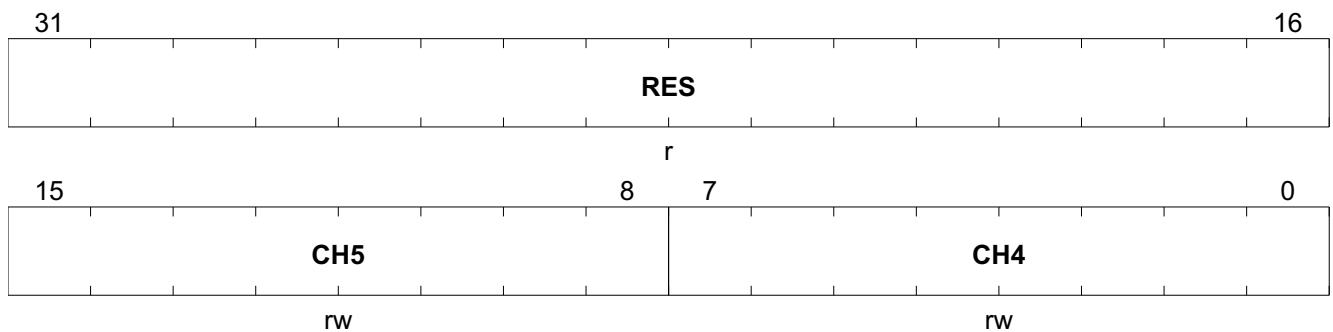

Field	Bits	Type	Description
<b>RES</b>	31:16	r	<b>Reserved</b> Always read as 0
<b>CH5</b>	15:8	rw	<b>Channel 5 upper trigger level, ADC2_CH5_UPPER_TH</b> Corresponding voltage value see equation. 00 <sub>H</sub> , min. threshold value = 0 FF <sub>H</sub> , max. threshold value = 255
<b>CH4</b>	7:0	rw	<b>Channel 4 upper trigger level, ADC2_CH4_UPPER_TH</b> Corresponding voltage value see equation. 00 <sub>H</sub> , min. threshold value = 0 FF <sub>H</sub> , max. threshold value = 255


---

**Measurement Core Module (incl. ADC2)**
**Upper Comparator Trigger Level Channel 6-9**

The register is reset by RESET\_TYPE\_4.

This register is being initialized by the BootROM during the bootup process to a value of DFFA\_CBFA<sub>H</sub>

<b>TH6_9_UPPER</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Upper Comparator Trigger Level Channel 6-9</b>	<b>94<sub>H</sub></b>	<b>E2FA C6EE<sub>H</sub></b>

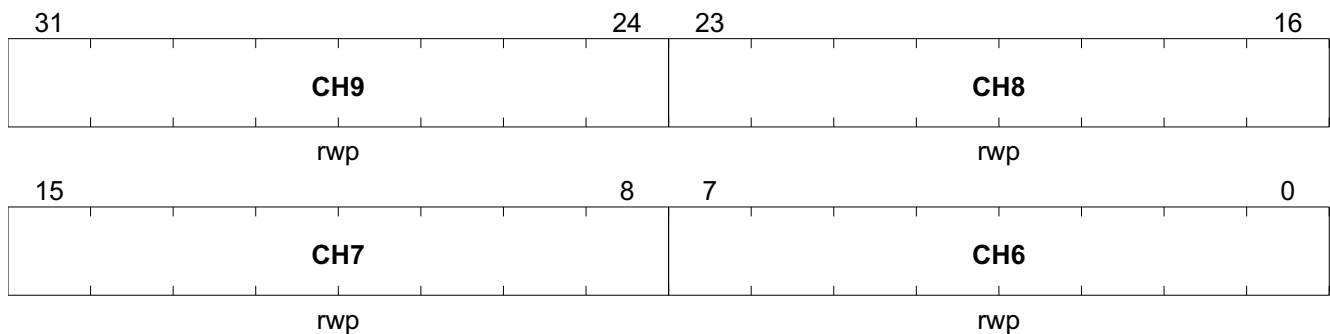

Field	Bits	Type	Description
<b>CH9</b>	31:24	rwp	<b>Channel 9 upper trigger level, ADC2_CH9_UPPER_TH</b> Corresponding voltage value see equation. 00 <sub>H</sub> , min. threshold value = 0 FF <sub>H</sub> , max. threshold value = 255
<b>CH8</b>	23:16	rwp	<b>Channel 8 upper trigger level, ADC2_CH8_UPPER_TH</b> Corresponding voltage value see equation. 00 <sub>H</sub> , min. threshold value = 0 FF <sub>H</sub> , max. threshold value = 255
<b>CH7</b>	15:8	rwp	<b>Channel 7 upper trigger level, ADC2_CH7_UPPER_TH</b> Corresponding voltage value see equation. 00 <sub>H</sub> , min. threshold value = 0 FF <sub>H</sub> , max. threshold value = 255
<b>CH6</b>	7:0	rwp	<b>Channel 6 upper trigger level, ADC2_CH6_UPPER_TH</b> Corresponding voltage value see equation. 00 <sub>H</sub> , min. threshold value = 0 FF <sub>H</sub> , max. threshold value = 255

---

**Measurement Core Module (incl. ADC2)**
**Upper Counter Trigger Level Channel 0-3**

The register is reset by RESET\_TYPE\_4.

**CNT0\_3\_UPPER****Offset****Reset Value****Upper Counter Trigger Level Channel 0-3****A4<sub>H</sub>****1213 1B1A<sub>H</sub>**

31	29	28	27	26	24	23	21	20	19	18	16
<b>RES</b>		<b>HYST_UP_CH3</b>		<b>CNT_UP_CH3</b>		<b>RES</b>		<b>HYST_UP_CH2</b>		<b>CNT_UP_CH2</b>	
r		rw		rw		r		rw		rw	
15	13	12	11	10	8	7	5	4	3	2	0
<b>RES</b>		<b>HYST_UP_CH1</b>		<b>CNT_UP_CH1</b>		<b>RES</b>		<b>HYST_UP_CH0</b>		<b>CNT_UP_CH0</b>	
r		rw		rw		r		rw		rw	

Field	Bits	Type	Description
<b>RES</b>	31:29	r	<b>Reserved</b> Always read as 0
<b>HYST_UP_CH3</b>	28:27	rw	<b>Channel 3 upper hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
<b>CNT_UP_CH3</b>	26:24	rw	<b>Upper timer trigger threshold channel 3</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
<b>RES</b>	23:21	r	<b>Reserved</b> Always read as 0
<b>HYST_UP_CH2</b>	20:19	rw	<b>Channel 2 upper hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16



## Measurement Core Module (incl. ADC2)

Field	Bits	Type	Description
<b>CNT_UP_CH2</b>	18:16	rw	<b>Upper timer trigger threshold channel 2</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
<b>RES</b>	15:13	r	<b>Reserved</b> Always read as 0
<b>HYST_UP_CH1</b>	12:11	rw	<b>Channel 1 upper hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
<b>CNT_UP_CH1</b>	10:8	rw	<b>Upper timer trigger threshold channel 1</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
<b>RES</b>	7:5	r	<b>Reserved</b> Always read as 0
<b>HYST_UP_CH0</b>	4:3	rw	<b>Channel 0 upper hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
<b>CNT_UP_CH0</b>	2:0	rw	<b>Upper timer trigger threshold channel 0</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements

## Measurement Core Module (incl. ADC2)

## Upper Counter Trigger Level Channel 4 &amp; 5


The register is reset by RESET\_TYPE\_4.

## CNT4\_5\_UPPER

## Offset

## Reset Value

## Upper Counter Trigger Level Channel 4&amp;5

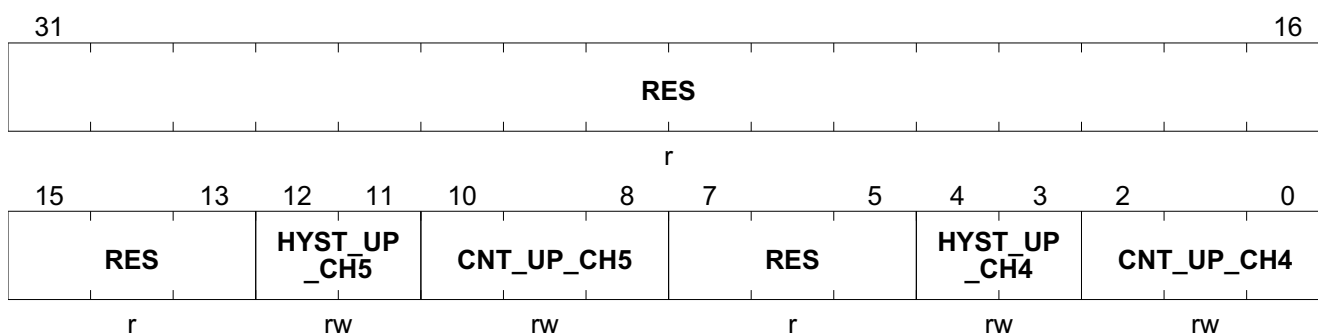A8<sub>H</sub>0000 1212<sub>H</sub>

Field	Bits	Type	Description
RES	31:13	r	<b>Reserved</b> Always read as 0
HYST_UP_CH5	12:11	rw	<b>Channel 5 upper hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
CNT_UP_CH5	10:8	rw	<b>Upper timer trigger threshold channel 5</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
RES	7:5	r	<b>Reserved</b> Always read as 0
HYST_UP_CH4	4:3	rw	<b>Channel 4 upper hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16

---

**Measurement Core Module (incl. ADC2)**

Field	Bits	Type	Description
<b>CNT_UP_CH4</b>	2:0	rw	<b>Upper timer trigger threshold channel 4</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements

---

**Measurement Core Module (incl. ADC2)**
**Upper Counter Trigger Level Channel 6-9**

The register is reset by RESET\_TYPE\_4.

**CNT6\_9\_UPPER**
**Upper Counter Trigger Level Channel 6-9**
**Offset**
**AC<sub>H</sub>**
**Reset Value**
**1A1A 1911<sub>H</sub>**

31	29	28	27	26	24	23	21	20	19	18	16
<b>RES</b>		<b>HYST_UP_CH9</b>		<b>CNT_UP_CH9</b>		<b>RES</b>		<b>HYST_UP_CH8</b>		<b>CNT_UP_CH8</b>	
r		rwp		rwp		r		rwp		rwp	
15	13	12	11	10	8	7	5	4	3	2	0
<b>RES</b>		<b>HYST_UP_CH7</b>		<b>CNT_UP_CH7</b>		<b>RES</b>		<b>HYST_UP_CH6</b>		<b>CNT_UP_CH6</b>	
r		rwp		rwp		r		rwp		rwp	

Field	Bits	Type	Description
<b>RES</b>	31:29	r	<b>Reserved</b> Always read as 0
<b>HYST_UP_CH9</b>	28:27	rwp	<b>Channel 9 upper hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
<b>CNT_UP_CH9</b>	26:24	rwp	<b>Upper timer trigger threshold channel 9</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
<b>RES</b>	23:21	r	<b>Reserved</b> Always read as 0
<b>HYST_UP_CH8</b>	20:19	rwp	<b>Channel 8 upper hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16

## Measurement Core Module (incl. ADC2)

Field	Bits	Type	Description
<b>CNT_UP_CH8</b>	18:16	rwp	<b>Upper timer trigger threshold channel 8</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
<b>RES</b>	15:13	r	<b>Reserved</b> Always read as 0
<b>HYST_UP_CH7</b>	12:11	rwp	<b>Channel 7 upper hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
<b>CNT_UP_CH7</b>	10:8	rwp	<b>Upper timer trigger threshold channel 7</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
<b>RES</b>	7:5	r	<b>Reserved</b> Always read as 0
<b>HYST_UP_CH6</b>	4:3	rwp	<b>Channel 6 upper hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
<b>CNT_UP_CH6</b>	2:0	rwp	<b>Upper timer trigger threshold channel 6</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements


---

**Measurement Core Module (incl. ADC2)**
**Lower Comparator Trigger Level Channel 0-3**

The register is reset by RESET\_TYPE\_4.

This register is being initialized by the BootROM during the bootup process to a value of 182F\_423A<sub>H</sub>

<b>TH0_3_LOWER</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Lower Comparator Trigger Level Channel 0-3</b>	<b>80<sub>H</sub></b>	<b>3C2C 3A42<sub>H</sub></b>

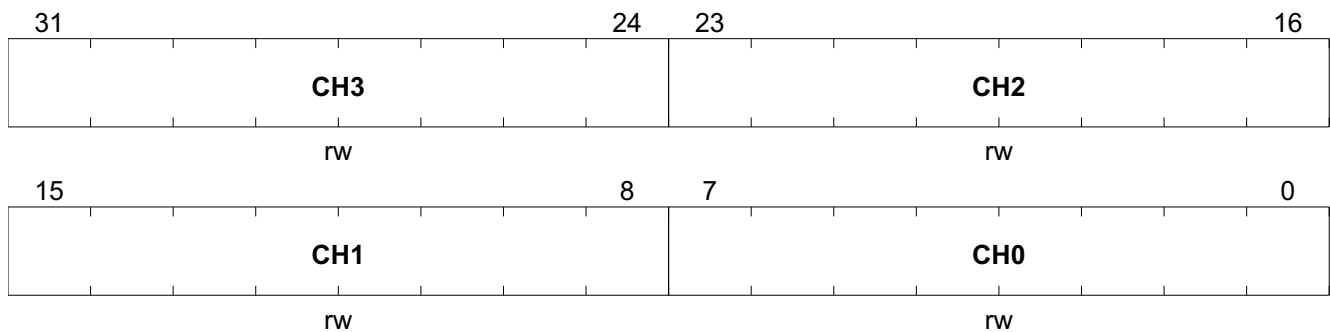

Field	Bits	Type	Description
<b>CH3</b>	31:24	rw	<b>Channel 3 lower trigger level, ADC2_CH3_LOWER_TH</b> 00 <sub>H</sub> , Min. threshold value FF <sub>H</sub> , Max. threshold value
<b>CH2</b>	23:16	rw	<b>Channel 2 lower trigger level, ADC2_CH2_LOWER_TH</b> 00 <sub>H</sub> , Min. threshold value FF <sub>H</sub> , Max. threshold value
<b>CH1</b>	15:8	rw	<b>Channel 1 lower trigger level, ADC2_CH1_LOWER_TH</b> 00 <sub>H</sub> , Min. threshold value FF <sub>H</sub> , Max. threshold value
<b>CH0</b>	7:0	rw	<b>Channel 0 lower trigger level, ADC2_CH0_LOWER_TH</b> 00 <sub>H</sub> , Min. threshold value FF <sub>H</sub> , Max. threshold value


Measurement Core Module (incl. ADC2)

Lower Comparator Trigger Level Channel 4 & 5

The register is reset by RESET\_TYPE\_4.

This register is being initialized by the BootROM during the bootup process to a value of 0000\_9A00<sub>H</sub>

<b>TH4_5_LOWER</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Lower Comparator Trigger Level Channel 4&amp;5</b>	<b>84<sub>H</sub></b>	<b>0000 9A2C<sub>H</sub></b>

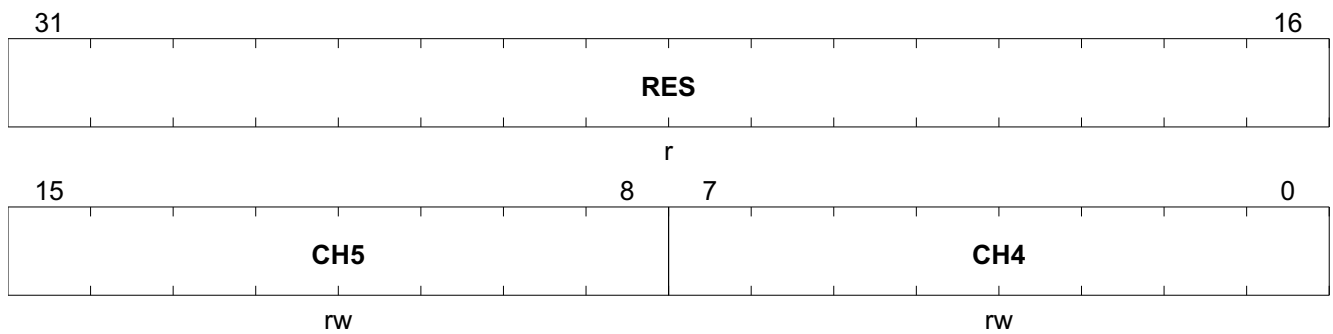

Field	Bits	Type	Description
<b>RES</b>	31:16	r	<b>Reserved</b> Always read as 0
<b>CH5</b>	15:8	rw	<b>Channel 5 lower trigger level, ADC2_CH5_LOWER_TH</b> 00 <sub>H</sub> , Min. threshold value FF <sub>H</sub> , Max. threshold value
<b>CH4</b>	7:0	rw	<b>Channel 4 lower trigger level, ADC2_CH4_LOWER_TH</b> 00 <sub>H</sub> , Min. threshold value FF <sub>H</sub> , Max. threshold value





**Measurement Core Module (incl. ADC2)**
**Lower Counter Trigger Level Channel 0-3**

The register is reset by RESET\_TYPE\_4.

<b>CNT0_3_LOWER</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Lower Counter Trigger Level Channel 0-3</b>	<b>98<sub>H</sub></b>	<b>1213 1312<sub>H</sub></b>

	31		29	28	27	26		24	23		21	20	19	18		16
	RES			HYST_LO_CH3		CNT_LO_CH3			RES			HYST_LO_CH2		CNT_LO_CH2		
	r			rw		rw			r			rw		rw		
	15		13	12	11	10		8	7		5	4	3	2		0
	RES			HYST_LO_CH1		CNT_LO_CH1			RES			HYST_LO_CH0		CNT_LO_CH0		
	r			rw		rw			r			rw		rw		

Field	Bits	Type	Description
<b>RES</b>	31:29	r	<b>Reserved</b> Always read as 0
<b>HYST_LO_CH3</b>	28:27	rw	<b>Channel 3 lower hysteresis</b>  0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
<b>CNT_LO_CH3</b>	26:24	rw	<b>Lower timer trigger threshold channel 3</b>  0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
<b>RES</b>	23:21	r	<b>Reserved</b> Always read as 0
<b>HYST_LO_CH2</b>	20:19	rw	<b>Channel 2 lower hysteresis</b>  0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16

## Measurement Core Module (incl. ADC2)


Field	Bits	Type	Description
CNT_LO_CH2	18:16	rw	<b>Lower timer trigger threshold channel 2</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
RES	15:13	r	<b>Reserved</b> Always read as 0
HYST_LO_CH1	12:11	rw	<b>Channel 1 lower hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
CNT_LO_CH1	10:8	rw	<b>Lower timer trigger threshold channel 1</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
RES	7:5	r	<b>Reserved</b> Always read as 0
HYST_LO_CH0	4:3	rw	<b>Channel 0 lower hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
CNT_LO_CH0	2:0	rw	<b>Lower timer trigger threshold channel 0</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements

---

**Measurement Core Module (incl. ADC2)**
**Lower Counter Trigger Level Channel 4 & 5**

The register is reset by RESET\_TYPE\_4.

<b>CNT4_5_LOWER</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Lower Counter Trigger Level Channel 4&amp;5</b>	<b>9C<sub>H</sub></b>	<b>0000 0A0A<sub>H</sub></b>

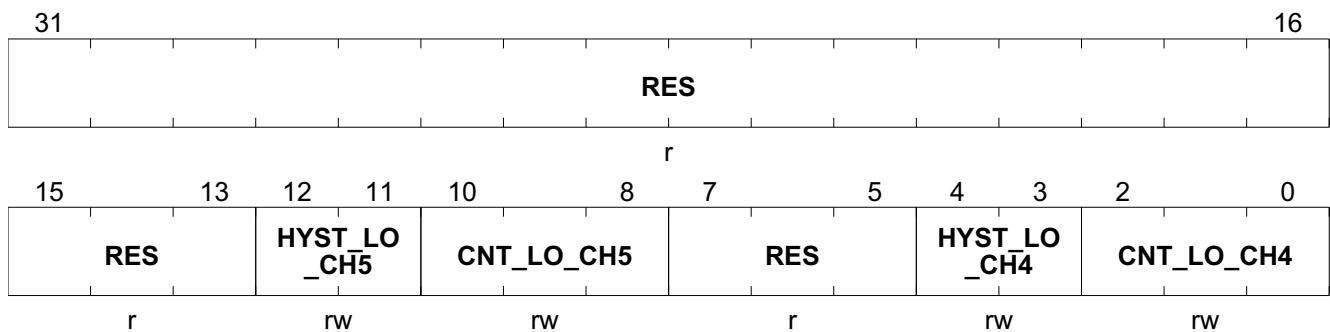

Field	Bits	Type	Description
<b>RES</b>	31:13	r	<b>Reserved</b> Always read as 0
<b>HYST_LO_CH5</b>	12:11	rw	<b>Channel 5 lower hysteresis</b>  0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
<b>CNT_LO_CH5</b>	10:8	rw	<b>Lower timer trigger threshold channel 5</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
<b>RES</b>	7:5	r	<b>Reserved</b> Always read as 0
<b>HYST_LO_CH4</b>	4:3	rw	<b>Channel 4 lower hysteresis</b>  0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16

---

**Measurement Core Module (incl. ADC2)**

Field	Bits	Type	Description
<b>CNT_LO_CH4</b>	2:0	rw	<b>Lower timer trigger threshold channel 4</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements

**Measurement Core Module (incl. ADC2)**
**Lower Counter Trigger Level Channel 6-9**

The register is reset by RESET\_TYPE\_4.

**CNT6\_9\_LOWER**
**Offset**
**Reset Value**
**Lower Counter Trigger Level Channel 6-9**
**A0<sub>H</sub>**
**0A0A 0A0A<sub>H</sub>**

31	29	28	27	26	24	23	21	20	19	18	16
<b>RES</b>		<b>HYST_LO_CH9</b>		<b>CNT_LO_CH9</b>		<b>RES</b>		<b>HYST_LO_CH8</b>		<b>CNT_LO_CH8</b>	
r		rwp		rwp		r		rwp		rwp	
15	13	12	11	10	8	7	5	4	3	2	0
<b>RES</b>		<b>HYST_LO_CH7</b>		<b>CNT_LO_CH7</b>		<b>RES</b>		<b>HYST_LO_CH6</b>		<b>CNT_LO_CH6</b>	
r		rwp		rwp		r		rwp		rwp	

Field	Bits	Type	Description
<b>RES</b>	31:29	r	<b>Reserved</b> Always read as 0
<b>HYST_LO_CH9</b>	28:27	rwp	<b>Channel 9 lower hysteresis</b>  0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
<b>CNT_LO_CH9</b>	26:24	rwp	<b>Lower timer trigger threshold channel 9</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
<b>RES</b>	23:21	r	<b>Reserved</b> Always read as 0
<b>HYST_LO_CH8</b>	20:19	rwp	<b>Channel 8 lower hysteresis</b>  0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16

## Measurement Core Module (incl. ADC2)

Field	Bits	Type	Description
CNT_LO_CH8	18:16	rwp	<b>Lower timer trigger threshold channel 8</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
RES	15:13	r	<b>Reserved</b> Always read as 0
HYST_LO_CH7	12:11	rwp	<b>Channel 7 lower hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
CNT_LO_CH7	10:8	rwp	<b>Lower timer trigger threshold channel 7</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements
RES	7:5	r	<b>Reserved</b> Always read as 0
HYST_LO_CH6	4:3	rwp	<b>Channel 6 lower hysteresis</b> 0 <sub>H</sub> <b>HYSTOFF</b> , hysteresis switched off 1 <sub>H</sub> <b>HYST4</b> , hysteresis = 4 2 <sub>H</sub> <b>HYST8</b> , hysteresis = 8 3 <sub>H</sub> <b>HYST16</b> , hysteresis = 16
CNT_LO_CH6	2:0	rwp	<b>Lower timer trigger threshold channel 6</b> 0 <sub>H</sub> , 1 measurement 1 <sub>H</sub> , 2 measurements 2 <sub>H</sub> , 4 measurements 3 <sub>H</sub> , 8 measurements 4 <sub>H</sub> , 16 measurements 5 <sub>H</sub> , 32 measurements 6 <sub>H</sub> , 64 measurements 7 <sub>H</sub> , 128 measurements

**Measurement Core Module (incl. ADC2)**

### 23.8 Start-up Behavior after Reset

After the end of a reset phase the measurement sources and the post-processing units need some time for settling. In order to avoid undesired triggering of interrupts until the measurement signal acquisition is in a steady state, the status signals are forced to zero during the start-up phase.

The end of the start-up phase is indicated by the ready signal MCM\_RDY.

**Measurement Core start-up procedure:** the startup time of the complete signal chain is 2200 EoC cycles. The IIR-filter coefficient is set to  $a=2^{-1}$  (fastest response time of the IIR-filter).

During the startup phase, the DPP will use SQ=11\_1111\_1111, regardless of the sequence registers configuration.

### 23.9 Postprocessing Default Values

The following table shows the assigned measurements of the particular channels and the reset default values which are read from Firmware during power-up. Since the channels 6-9 of the unit are exclusively used for internal measurements, they can only be partly accessed by the application software.

**Table 172 Grade 1 - Channel allocation and postprocessing default settings (effective after reset)**

Channel / MMODE <sup>1)</sup>	Analog	Digital <sup>2)</sup>	Hyste-resis <sup>3)</sup>	IIR - Filter <sup>4)</sup>	Counters <sup>5)</sup>	Functional Description
Ch. 1 / 0 <sub>H</sub> <b>VS</b>	5.78 V	42 <sub>H</sub>	2 <sub>H</sub> (8)	2 <sub>H</sub> (8)	3 <sub>H</sub> (8)	Battery supply voltage input, lower
	17.3 V	C5 <sub>H</sub>	3 <sub>H</sub> (16)		3 <sub>H</sub> (8)	upper
Ch. 2 / 0 <sub>H</sub> <b>VSD</b>	5.78 V	2F <sub>H</sub>	2 <sub>H</sub> (8)	2 <sub>H</sub> (8)	3 <sub>H</sub> (8)	VSD voltage, lower
	23.4 V	BD <sub>H</sub>	2 <sub>H</sub> (8)		3 <sub>H</sub> (8)	VSD voltage, upper
Ch. 3 / 0 <sub>H</sub> <b>VCP</b>	5.2 V	18 <sub>H</sub>	2 <sub>H</sub> (8)	2 <sub>H</sub> (8)	2 <sub>H</sub> (4)	VCP voltage, lower
	35 V	AB <sub>H</sub>	2 <sub>H</sub> (8)		2 <sub>H</sub> (4)	VCP voltage, upper
Ch. 4 / 0 <sub>H</sub> <b>MON/VBAT_SENSE</b>	-	00 <sub>H</sub>	2 <sub>H</sub> (8)	2 <sub>H</sub> (8)	3 <sub>H</sub> (8)	MON voltage, lower
	-	00 <sub>H</sub>	2 <sub>H</sub> (8)		3 <sub>H</sub> (8)	MON voltage, upper
Ch. 5 / 0 <sub>H</sub> <b>VDDP</b>	4.5 V	9A <sub>H</sub>	2 <sub>H</sub> (8)	2 <sub>H</sub> (8)	2 <sub>H</sub> (4)	+5V, Port supply voltage, lower
	5.5 V	BC <sub>H</sub>	2 <sub>H</sub> (8)		2 <sub>H</sub> (4)	+5V, Port supply voltage, upper
Ch. 6 / 0 <sub>H</sub> <b>VAREF</b>	4.5 V	CD <sub>H</sub>	2 <sub>H</sub> (8)	1 <sub>H</sub> (4)	2 <sub>H</sub> (4)	VAREF, lower
	5.5 V	FA <sub>H</sub>	2 <sub>H</sub> (8)		2 <sub>H</sub> (4)	VAREF upper
Ch. 7 / 0 <sub>H</sub> <b>VBG</b>	1.01 V	9E <sub>H</sub>	2 <sub>H</sub> (8)	1 <sub>H</sub> (4)	2 <sub>H</sub> (4)	VBG, lower
	1.3 V	CB <sub>H</sub>	2 <sub>H</sub> (8)		2 <sub>H</sub> (4)	VBG, upper
Ch. 8 / 0 <sub>H</sub> <b>VDDC</b>	1.35V	D3 <sub>H</sub>	3 <sub>H</sub> (16)	2 <sub>H</sub> (8)	3 <sub>H</sub> (8)	Core supply voltage, lower
	1.6 V	FA <sub>H</sub>	3 <sub>H</sub> (16)		4 <sub>H</sub> (16)	Core supply voltage, upper
Ch. 9 / 2 <sub>H</sub> <b>TEMP</b>	0.94 V	C6 <sub>H</sub>	3 <sub>H</sub> (8)	2 <sub>H</sub> (8)	3 <sub>H</sub> (8)	temperature sensor: lower hysteresis threshold value corresponding to approx. 120°C
	1.05 V	DF <sub>H</sub>	3 <sub>H</sub> (16)		3 <sub>H</sub> (8)	over-temperature threshold corresponding to nominal 168°C. The hysteresis corresponds to approximately 32°C.

**Measurement Core Module (incl. ADC2)**

- 1) MMODE of each channel is defined by sfr reset values: 00<sub>B</sub> range control, 01<sub>B</sub> under-voltage mode, 10<sub>B</sub> over-voltage mode. The measurement mode for CH6 - CH9 can not be programmed by the user.
- 2) register: THx\_y\_LOWER / THx\_y\_UPPER
- 3) register: CNTx\_y\_LOWER / CNTx\_y\_UPPER; selectable decimal values [0, 4, 8, 16]
- 4) register: FILTCOEFF0\_5 / FILTCOEFF6\_9
- 5) register: CNTx\_y\_UPPER.CNT\_UP\_CHx / CNTx\_y\_LOWER.CNT\_LO\_CHx

**Table 173 Grade 0 - Channel allocation and postprocessing default settings (effective after reset)**

Channel / MMODE <sup>1)</sup>	Analog	Digital <sup>2)</sup>	Hyste-resis <sup>3)</sup>	IIR - Filter <sup>4)</sup>	Counters <sup>5)</sup>	Functional Description
Ch. 1 / 0 <sub>H</sub> <b>VS</b>	5.78 V	42 <sub>H</sub>	2 <sub>H</sub> (8)	2 <sub>H</sub> (8)	3 <sub>H</sub> (8)	Battery supply voltage input, lower
	17.3 V	C5 <sub>H</sub>	3 <sub>H</sub> (16)		3 <sub>H</sub> (8)	upper
Ch. 2 / 0 <sub>H</sub> <b>VSD</b>	5.78 V	2F <sub>H</sub>	2 <sub>H</sub> (8)	2 <sub>H</sub> (8)	3 <sub>H</sub> (8)	VSD voltage, lower
	23.4 V	BD <sub>H</sub>	2 <sub>H</sub> (8)		3 <sub>H</sub> (8)	VSD voltage, upper
Ch. 3 / 0 <sub>H</sub> <b>VCP</b>	5.2 V	18 <sub>H</sub>	2 <sub>H</sub> (8)	2 <sub>H</sub> (8)	2 <sub>H</sub> (4)	VCP voltage, lower
	35 V	AB <sub>H</sub>	2 <sub>H</sub> (8)		2 <sub>H</sub> (4)	VCP voltage, upper
Ch. 4 / 0 <sub>H</sub> <b>MON</b>	-	00 <sub>H</sub>	2 <sub>H</sub> (8)	2 <sub>H</sub> (8)	3 <sub>H</sub> (8)	MON voltage, lower
	-	00 <sub>H</sub>	2 <sub>H</sub> (8)		3 <sub>H</sub> (8)	MON voltage, upper
Ch. 5 / 0 <sub>H</sub> <b>VDDP</b>	4.5 V	9A <sub>H</sub>	2 <sub>H</sub> (8)	2 <sub>H</sub> (8)	2 <sub>H</sub> (4)	+5V, Port supply voltage, lower
	5.5 V	BC <sub>H</sub>	2 <sub>H</sub> (8)		2 <sub>H</sub> (4)	+5V, Port supply voltage, upper
Ch. 6 / 0 <sub>H</sub> <b>VAREF</b>	4.5 V	CD <sub>H</sub>	2 <sub>H</sub> (8)	1 <sub>H</sub> (4)	2 <sub>H</sub> (4)	VAREF, lower
	5.5 V	FA <sub>H</sub>	2 <sub>H</sub> (8)		2 <sub>H</sub> (4)	VAREF upper
Ch. 7 / 0 <sub>H</sub> <b>VBG</b>	1.01 V	9E <sub>H</sub>	2 <sub>H</sub> (8)	1 <sub>H</sub> (4)	2 <sub>H</sub> (4)	VBG, lower
	1.3 V	CB <sub>H</sub>	2 <sub>H</sub> (8)		2 <sub>H</sub> (4)	VBG, upper
Ch. 8 / 0 <sub>H</sub> <b>VDDC</b>	1.35V	D3 <sub>H</sub>	3 <sub>H</sub> (16)	2 <sub>H</sub> (8)	3 <sub>H</sub> (8)	Core supply voltage, lower
	1.6 V	FA <sub>H</sub>	3 <sub>H</sub> (16)		4 <sub>H</sub> (16)	Core supply voltage, upper
Ch. 9 / 2 <sub>H</sub> <b>TEMP</b>	0.94 V	C6 <sub>H</sub>	3 <sub>H</sub> (8)	2 <sub>H</sub> (8)	3 <sub>H</sub> (8)	temperature sensor: lower hysteresis threshold value corresponding to approx. 120°C
	1.14 V	F0 <sub>H</sub>	3 <sub>H</sub> (16)		3 <sub>H</sub> (8)	over-temperature threshold corresponding to nominal 203°C. The hysteresis corresponds to approximately 32°C.

- 1) MMODE of each channel is defined by sfr reset values: 00<sub>B</sub> range control, 01<sub>B</sub> under-voltage mode, 10<sub>B</sub> over-voltage mode. The measurement mode for CH6 - CH9 can not be programmed by the user.
- 2) register: THx\_y\_LOWER / THx\_y\_UPPER
- 3) register: CNTx\_y\_LOWER / CNTx\_y\_UPPER; selectable decimal values [0, 4, 8, 16]
- 4) register: FILTCOEFF0\_5 / FILTCOEFF6\_9
- 5) register: CNTx\_y\_UPPER.CNT\_UP\_CHx / CNTx\_y\_LOWER.CNT\_LO\_CHx



## **24 10-Bit Analog Digital Converter (ADC1)**

### **24.1 Features**

The principal features of the ADC1 are:


- Up to 8 analog input channels (channel 7 reserved for future use)
- Flexible results handling
  - 8-bit and 10-bit resolution
- Flexible source selection due to sequencer
  - insert one exceptional sequence (ESM)
  - insert one interrupt measurement into the current sequence (EIM), single or up to 128 times
  - software mode
- Conversion sample time (separate for each channel) adjustable to adapt to sensors and reference
- Standard external reference (VAREF) to support ratiometric measurements and different signal scales
- DMA support, transfer ADC conversion results via DMA into RAM
- Support of suspend and power saving modes
- Result data protection for slow CPU access (wait-for-read mode)
- Programmable clock divider
- Integrated sample and hold circuitry

## 10-Bit Analog Digital Converter (ADC1)

### 24.2 Introduction

The TLE987x includes a high-performance 10-bit Analog-to-Digital Converter (ADC1) with eight multiplexed analog input channels. The ADC1 uses a successive approximation technique to convert the analog voltage levels from up to eight different sources. The analog input channels of the ADC1 are available at AN0, AN2 - AN5.

#### 24.2.1 Block Diagram

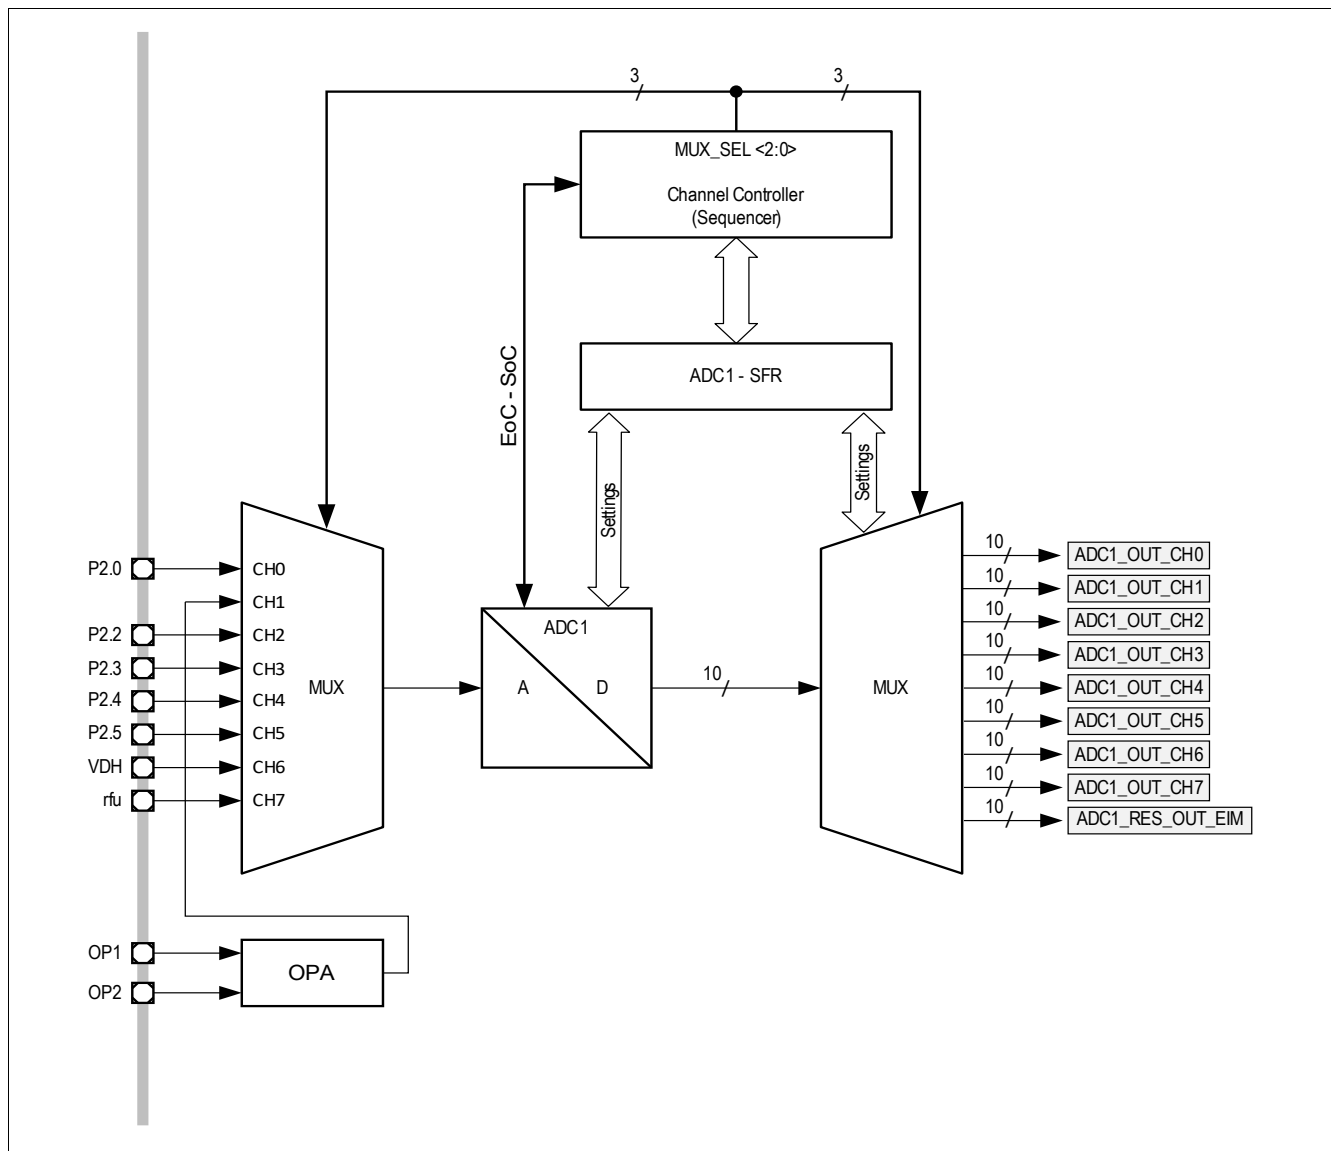

**Figure 202 ADC1 Top Level Block Diagram**

As shown in the figure above, the ADC1 postprocessing consists of a channel controller (Sequencer) and an 8-channel demultiplexer. The channel control block controls the multiplexer sequencing on the analog side before the ADC1 and on the digital domain after the ADC1. As described in the following section, the channel sequence can be controlled in a flexible way, which allows a certain degree of channel prioritization.

This capability can be used e.g. to give a higher priority to some channels compared to the other channel measurements.

## 10-Bit Analog Digital Converter (ADC1)

### 24.2.2 ADC1 Modes Overview

The channel controller (Sequencer) runs in one of the following modes:

“Normal Sequencer Mode”, channels are selected out of 8 Sequence registers which contain individual enables for each of the 8 channels (SQ\_FB.SQ\_RUN = 1).

“Exceptional Interrupt Measurement”, upon a hardware event, a high priority channel is inserted into the current sequence.

“Exceptional Sequence Measurement”, upon a hardware event, a complete sequence is inserted into the current sequence. The current sequence (up to 8 measurements) is interrupted before the ESM sequence is inserted.

“Suspend Mode”: Exceptional Sequencer and Interrupt Measurement can be triggered, (all sequence register loaded with “00” and SQ\_FB.SQ\_RUN = 1, measurements by software can not be triggered.

“Debug Suspend Mode”: The corresponding bit MODSUSP2.ADC1\_SUSP is set.

“Software Mode”, Exceptional Sequencer and Interrupt Measurement are ignored, each measurement is triggered by software, SQ\_FB.SQ\_RUN = 0

### 24.3 ADC1 - Core (10-Bit ADC)

#### 24.3.1 Functional Description

In order to enable the ADC1 the following registers need to be set in order to enable the ADC1

- PMCON1.ADC1DIS = 0
- GLOBCTR.ANON = 11
- ADC1->CTRL\_STS.PD\_N = 1
- program sequencer (via ADC1->SQ\_1\_4 and ADC1->SQ\_5\_8)
- start sequencer ADC1->SQ\_FB.SQ\_RUN = 1

**The different sequencer modes are controlled by SFR Register:**

- “Normal Sequencer Mode” described in the Chapter [Channel Controller](#).
- “Exceptional Interrupt Measurement” (EIM), upon hardware event, the channel programmed in [CHx\\_EIM](#) is inserted immediately. The current measurement is aborted. Afterwards the current sequence will be continued (with the aborted measurement). An EIM will only be performed if at least one channel in enabled in the sequencer registers.
- “Exceptional Sequence Measurement“ (ESM), upon hardware event, the sequence programmed in [CHx\\_ESM](#) is inserted immediately. The current measurement is aborted. After the sequence exception is finished the aborted sequence is selected and continued with the aborted measurement. After the Exceptional Sequence Measurement is finished an interrupt is issued. An ESM will only be performed if at least one channel in enabled in the sequencer registers. See [SQ1\\_4](#) and following sequence registers.
- “Software Mode”, in Software Mode the control of the Channel Controller (Sequencer) is disabled, instead the conversions are fully controlled by software. During Software Mode EIM and ESM hardware events are ignored. See [SQ1\\_4](#) and following sequence registers.

The default mode after reset of the ADC1 is Software Mode.

In case EIM and ESM hardware events occur at the same time, the EIM event is processed first.

While an ESM sequence is running, the sequence can be interrupted by one or more EIMs.

## 10-Bit Analog Digital Converter (ADC1)

The end of ESM and EIM is flagged via interrupt. In case of repeat count of EIM, the EIM interrupt is generated at the end of EIM sequence when the last EIM measurement is done.

### Software Mode:

- Software mode is entered
  - by disabling the Sequencer ADC1.SQ\_FB.SQ\_RUN to zero. The Software mode is entered when the current measurement is finished.
  - In software mode, the conversion are controlled via CTRL\_STS.
- The Software Mode is left
  - by enabling the Sequencer ADC1.SQ\_FB.SQ\_RUN to one. If the Sequencer is enabled, the Sequencer always starts with SQ1.

In Software Mode measurements are triggered by writing the CTRL\_STS.SOC bit. This bit is active as long as the conversion is in progress. The user polls the CTRL\_STS.EOC bit. Once this bit is '1' the conversion is finished and the EOC bit is cleared on read (rh). After the EOC bit is cleared a new conversion can be started CTRL\_STS.SOC.

In Software Mode DMA requests and interrupts are generated.

### Suspend Mode:

Suspend Mode is entered if all Sequences are programmed to zero but the Sequencer is still enabled, SQ\_FB.ASQ\_RUN is set to one. Exceptional Sequencer and Interrupt Measurement can be triggered, measurements by software can not be triggered (via CTRL\_STS.SOC).

In Suspend Mode DMA requests and interrupts (for ESM and EIM) are generated.

### Debug Suspend Mode:

During Debug Suspend Mode the Sequencer is stopped once the current measurement is finished (after the next EOC event). As long as the Debug Suspend Mode is active no measurements are performed by the Sequencer. EIM and ESM are ignored during Debug Suspend Mode.

During Debug Suspend Mode, conversions can be triggered via CTRL\_STS.SOC bit in Software Mode.

## 24.3.2 ADC1 Control and Status Registers

Table 174 shows the module base address.

**Table 174 Register Address Space**

Module	Base Address	End Address	Note
ADC1	40004000 <sub>H</sub>	40007FFF <sub>H</sub>	ADC-SAR10B/DPP

**Table 175 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>ADC1 Control and Status Registers</b>			
CTRL_STS	ADC1 Control and Status Register	00 <sub>H</sub>	0000 0000 <sub>H</sub>
GLOBCTR	Global Control Register	04 <sub>H</sub>	0000 0000 <sub>H</sub>
GLOBSTR	Global Status Register	74 <sub>H</sub>	0000 0000 <sub>H</sub>


The registers are addressed wordwise.

## 10-Bit Analog Digital Converter (ADC1)

### Global Status Register

The register is reset by RESET\_TYPE\_3.

GLOBSTR	Offset	Reset Value
Global Status Register	74 <sub>H</sub>	0000 0000 <sub>H</sub>

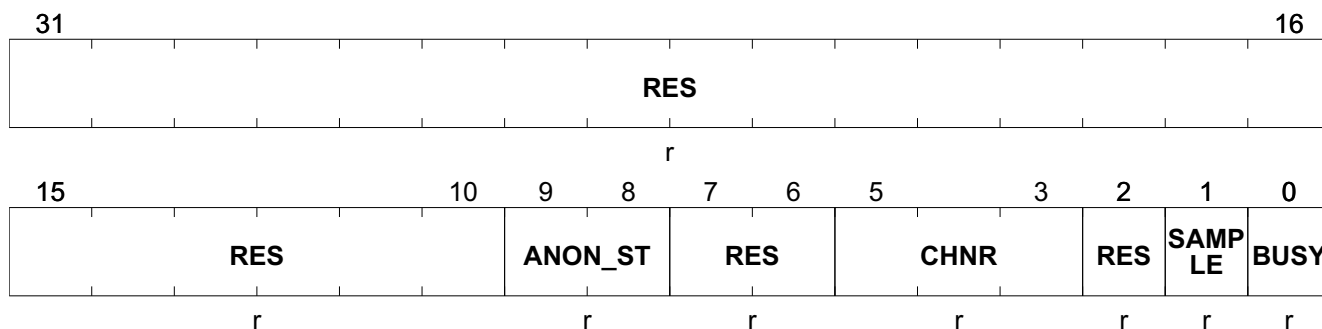


Field	Bits	Type	Description
<b>RES</b>	31:16	r	<b>Reserved</b> Always read as 0
<b>RES</b>	15:10	r	<b>Reserved</b> Always read as 0
<b>ANON_ST</b>	9:8	r	<b>Analog Part Switched On</b> 00 <sub>B</sub> <b>OFF</b> , ADC1 switched off 01 <sub>B</sub> <b>S_STANDBY</b> , Slow standby mode 10 <sub>B</sub> <b>F_STANDBY</b> , Fast standby mode 11 <sub>B</sub> <b>NORMAL</b> , Normal Operation
<b>RES</b>	7:6	r	<b>Reserved</b> Always read as 0
<b>CHNR</b>	5:3	r	<b>Channel Number</b> Indicates the current or last converted analog input channel. This bitfield is updated when a conversion is started.
<b>RES</b>	2	r	<b>Reserved</b> Always read as 0
<b>SAMPLE</b>	1	r	<b>Sample Phase Indication</b> 0 <sub>B</sub> <b>IDLE</b> , ADC1 is idle or converting 1 <sub>B</sub> <b>ACTIVE</b> , The Input signal is being sampled
<b>BUSY</b>	0	r	<b>Analog Part Busy</b> 0 <sub>B</sub> <b>IDLE</b> , ADC1 idle 1 <sub>B</sub> <b>ACTIVE</b> , ADC1 Conversion is currently running

## 10-Bit Analog Digital Converter (ADC1)

### Global Control Register

The register is reset by RESET\_TYPE\_3.

GLOBCTR	Offset	Reset Value
Global Control Register	04 <sub>H</sub>	0000 0000 <sub>H</sub>

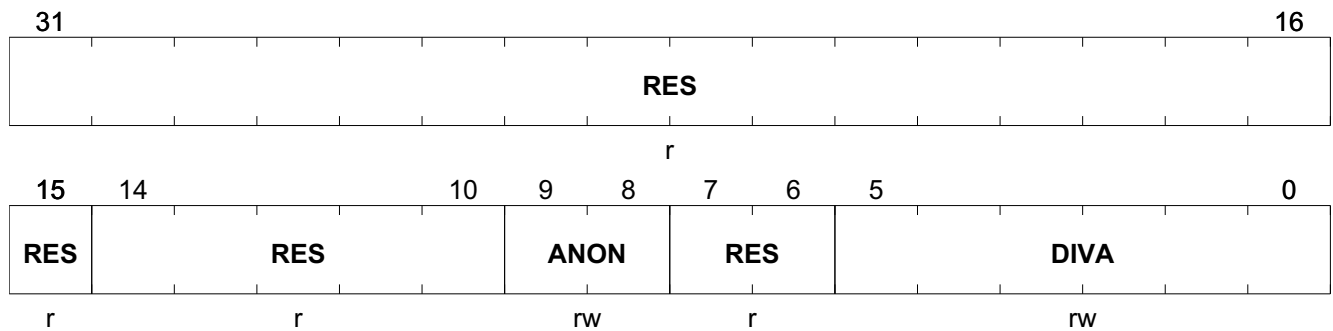


Field	Bits	Type	Description
RES	31:16	r	<b>Reserved</b> Always read as 0
RES	15	r	<b>Reserved</b> Always read as 0
RES	14:10	r	<b>Reserved</b> Always read as 0
ANON	9:8	rw	<b>Analog Part Switched On</b> 00 <sub>B</sub> <b>OFF</b> , ADC1 switched off 01 <sub>B</sub> <b>S_STANDBY</b> , Slow standby mode 10 <sub>B</sub> <b>F_STANDBY</b> , Fast standby mode 11 <sub>B</sub> <b>NORMAL</b> , Normal Operation
RES	7:6	r	<b>Reserved</b> Always read as 0
DIVA	5:0	rw	<b>Divide Factor for the Analog internal clock</b> Defines the frequency of the basic converter clock $f_{ADCI}$ (base clock for conversion and sample phase). 00 <sub>H</sub> , $F_{adci} = F_{adc}$ 01 <sub>H</sub> , $F_{adci} = F_{adc}/2$ 02 <sub>H</sub> , $F_{adci} = F_{adc}/3$ 03 <sub>H</sub> , ... 3F <sub>H</sub> , $F_{adci} = F_{adc}/64$

## 10-Bit Analog Digital Converter (ADC1)

### ADC1 Control and Status Register

The register is reset by RESET\_TYPE\_3.

CTRL_STS	Offset	Reset Value
ADC1 Control and Status Register	00 <sub>H</sub>	0000 0000 <sub>H</sub>

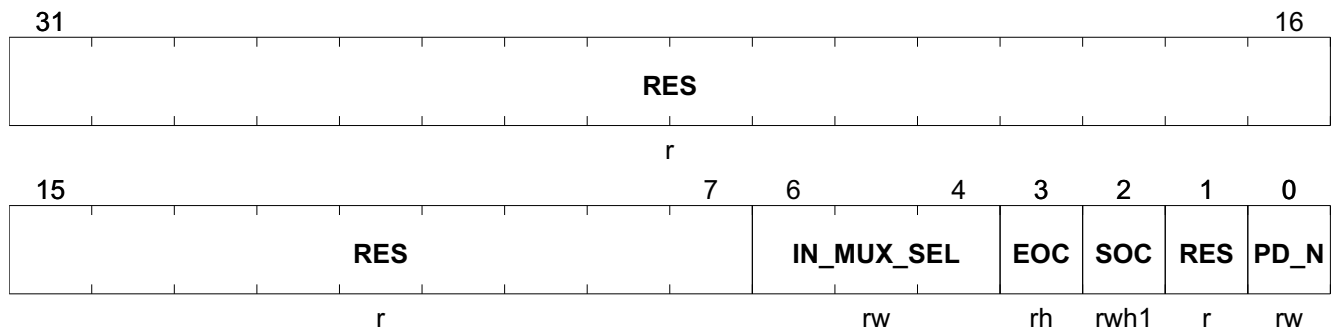

Field	Bits	Type	Description
RES	31:7	r	<b>Reserved</b> Always read as 0
IN_MUX_SEL	6:4	rw	<b>Channel for software mode</b> 000 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 001 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 010 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 011 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 100 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 101 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable 110 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 111 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable
EOC	3	rh	<b>ADC1 End of Conversion (software mode)</b> 0 <sub>B</sub> <b>Pending</b> , conversion still running 1 <sub>B</sub> <b>Finished</b> , conversion has finished
SOC	2	rwh1	<b>ADC1 Start of Conversion (software mode)</b>  <i>Note: Bit is set by software to start conversion and it is cleared by hardware once the conversion is finished. ADC2_SOC can be only written if the DPP is in software mode.</i>  0 <sub>B</sub> <b>Disable</b> , no conversion is started 1 <sub>B</sub> <b>Enable</b> , conversion is started
RES	1	r	<b>Reserved</b> Always read as 0
PD_N	0	rw	<b>ADC1 Power Down Signal</b> 0 <sub>B</sub> <b>POWER DOWN</b> , ADC1 is powered down 1 <sub>B</sub> <b>ACTIVE</b> , ADC1 is switched on

## 10-Bit Analog Digital Converter (ADC1)

### 24.4 Channel Controller

#### 24.4.1 Functional Description

The task of each channel controller is a prioritization of the individual measurement channels. The sequencing scheme is illustrated in the example of following table and can be programmed individually for measurement unit.

**Table 176 Measurement Channel Sequence (Definition Example)**

Measurement channel n	MSB CH7	CH6	CH5	CH4	CH3	CH2	CH1	LSB CH0
SQ <sub>1</sub> [7:0]	1	1	1	1	0	1	1	1
SQ <sub>2</sub> [7:0]	1	1	1	0	1	0	0	0
SQ <sub>3</sub> [7:0]	1	1	1	1	0	1	1	0
SQ <sub>4</sub> [7:0]	1	1	1	0	1	0	0	1
SQ <sub>5</sub> [7:0]	1	1	1	1	0	1	1	0
SQ <sub>6</sub> [7:0]	1	1	1	0	1	0	0	0
SQ <sub>7</sub> [7:0]	1	1	1	1	0	1	1	1
SQ <sub>8</sub> [7:0]	1	1	1	0	1	0	0	0

The sequence registers SQ<sub>n</sub> define the time sequence of the measurement channels by the following rules:

- The sequence registers define the measurement sequence and are evaluated from register 1 to 8 and for each bit from MSB to LSB, which defines a max. overall measurement count of 64 sampling and conversion cycles.
- If the individual bit in the sequence register is set to '1', the corresponding channel is measured.
- If the individual bit in the sequence register is set to '0', the corresponding channel is skipped.

In the upper example, the resulting channel sequence is defined as:

CH7, CH6, CH5, CH4, CH2, CH1, CH0, CH7, CH6, CH5, CH3,....

The following equations can be used to calculate the periodicity of the required channel measurement.

The overall measurement periodicity of all measurements in A/D conversion cycles is defined as:

(24.1)

$$\overline{N_{\text{meas}}} = \sum_{m=1}^8 \left( \sum_{n=1}^8 SQ_m[n] \right)$$

The average measurement periodicity of channel n in A/D conversion cycles is defined as

(24.2)

$$\overline{N_{\text{meas } n}} = \frac{\left( \sum_{m=1}^8 SQ_m[n] \right)}{T_{\text{meas}}}$$



## 10-Bit Analog Digital Converter (ADC1)

Once a channel is selected by the sequence, the corresponding

- Data Width selection: 8- or 10-bit, **DWSEL**
- Sample Time  $t_{\text{SAMPLE}} = (2 + \text{STC}) / f_{\text{ADCI}}$ , **STC\_0\_3** and **STC\_4\_7** is selected.

### Conversion Time

The total time required for a conversion depends on several user-definable factors:

- The ADC conversion clock frequency, where  $f_{\text{ADCI}} = f_{\text{ADC}} / (\text{DIVA}+1)$ .
- The selected sample time, where  $t_{\text{sample}} = (2 + \text{STC}) \times t_{\text{ADCI}}$  (STC = additional sample time defined in **STC\_0\_3** and **STC\_4\_7**)
- The selected result width N (8/10 bits), defined in **DWSEL**
- Synchronization steps done at module clock speed

The conversion time is the sum of sample time, conversion steps, and synchronization. It can be computed with the following formula:

$$t_{\text{conv}} = (3 + \text{STC} + N) \times t_{\text{ADCI}} + 1 \times t_{\text{ADC}} \quad (24.3)$$

Minimum conversion time:  $t_{\text{CN}} = [3+0+8(\text{result width})] * 1 (\text{min DIVA}) + 1 = 12$  clock cycles

## 24.4.2 Channel Controller Control Registers

**Table 177 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Channel Controller Control Registers</b>			
<b>CHx_EIM</b>	Channel Setting Bits for Exceptional Interrupt Measurement	08 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CHx_ESM</b>	Channel Setting Bits for Exceptional Sequence Measurement	0C <sub>H</sub>	0000 0000 <sub>H</sub>
<b>SQ1_4</b>	Measurement Channel Enable Bits for Cycle 1-4	18 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>SQ5_8</b>	Measurement Channel Enable Bits for Cycle 5-8	1C <sub>H</sub>	0000 0000 <sub>H</sub>
<b>DWSEL</b>	Measurement Channel Data Width Selection	24 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>STC_0_3</b>	Measurement Channel Sample Time Control 0-3	28 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>STC_4_7</b>	Measurement Channel Sample Time Control 4-7	2C <sub>H</sub>	0000 0000 <sub>H</sub>
<b>SQ_FB</b>	Sequencer Feedback Register	50 <sub>H</sub>	0000 0000 <sub>H</sub>


The registers are addressed wordwise.

## 10-Bit Analog Digital Converter (ADC1)

### Measurement Channel Enable Bits for Cycle 1-4

The register is reset by RESET\_TYPE\_4.

SQ1_4	Offset	Reset Value
Measurement Channel Enable Bits for Cycle 1-4	18 <sub>H</sub>	0000 0000 <sub>H</sub>

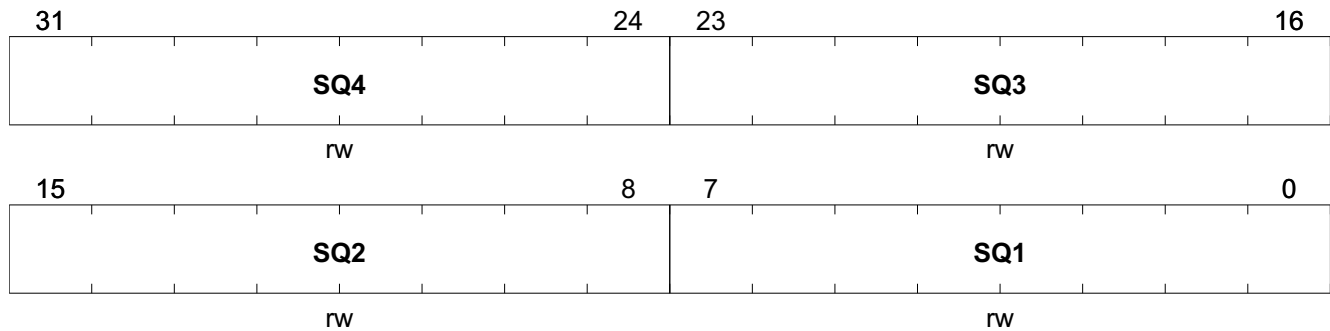

Field	Bits	Type	Description
<b>SQ4</b>	31:24	rw	<b>Sequence 4 channel enable</b> The following values can be ored: 0000 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 0000 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 0000 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 0000 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 0001 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 0010 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable 0100 0000 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 1000 0000 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable
<b>SQ3</b>	23:16	rw	<b>Sequence 3 channel enable</b> The following values can be ored: 0000 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 0000 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 0000 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 0000 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 0001 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 0010 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable 0100 0000 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 1000 0000 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable

---

**10-Bit Analog Digital Converter (ADC1)**


Field	Bits	Type	Description
<b>SQ2</b>	15:8	rw	<p><b>Sequence 2 channel enable</b></p> <p>The following values can be ored:</p> <p>0000 0001<sub>B</sub><b>CH0_EN</b>, Channel 0 enable            0000 0010<sub>B</sub><b>CH1_EN</b>, Channel 1 enable            0000 0100<sub>B</sub><b>CH2_EN</b>, Channel 2 enable            0000 1000<sub>B</sub><b>CH3_EN</b>, Channel 3 enable            0001 0000<sub>B</sub><b>CH4_EN</b>, Channel 4 enable            0010 0000<sub>B</sub><b>CH5_EN</b>, Channel 5 enable            0100 0000<sub>B</sub><b>CH6_EN</b>, Channel 6 enable            1000 0000<sub>B</sub><b>CH7_EN</b>, Channel 7 enable</p>
<b>SQ1</b>	7:0	rw	<p><b>Sequence 1 channel enable</b></p> <p>The following values can be ored:</p> <p><i>Note: SQ1-SQ4 should be only written is sequencer is disabled /Software Mode enabled SQ_RUN = 0. SQ1-SQ4 should not be written with "0000 0000".</i></p> <p>0000 0001<sub>B</sub><b>CH0_EN</b>, Channel 0 enable            0000 0010<sub>B</sub><b>CH1_EN</b>, Channel 1 enable            0000 0100<sub>B</sub><b>CH2_EN</b>, Channel 2 enable            0000 1000<sub>B</sub><b>CH3_EN</b>, Channel 3 enable            0001 0000<sub>B</sub><b>CH4_EN</b>, Channel 4 enable            0010 0000<sub>B</sub><b>CH5_EN</b>, Channel 5 enable            0100 0000<sub>B</sub><b>CH6_EN</b>, Channel 6 enable            1000 0000<sub>B</sub><b>CH7_EN</b>, Channel 7 enable</p>

## 10-Bit Analog Digital Converter (ADC1)

### Measurement Channel Enable Bits for Cycle 5-8

The register is reset by RESET\_TYPE\_4.

SQ5_8	Offset	Reset Value
Measurement Channel Enable Bits for Cycle 5-8	1C <sub>H</sub>	0000 0000 <sub>H</sub>

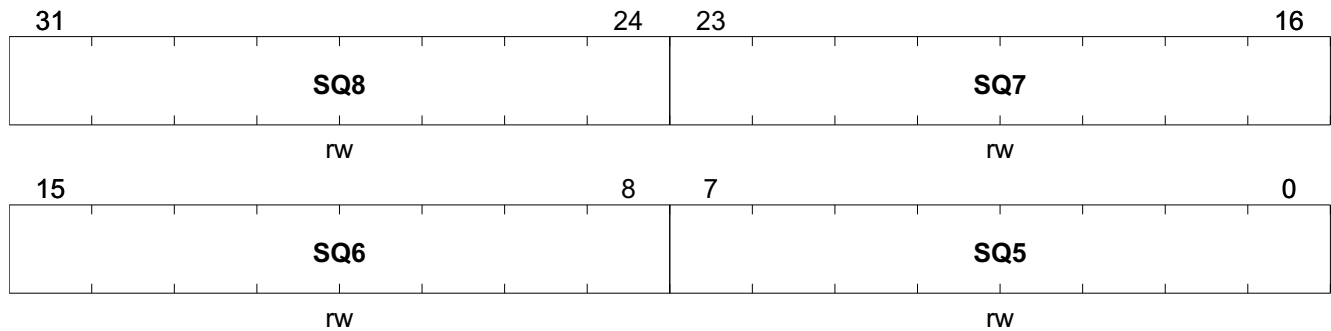

Field	Bits	Type	Description
<b>SQ8</b>	31:24	rw	<b>Sequence 8 channel enable</b> The following values can be ored: 0000 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 0000 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 0000 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 0000 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 0001 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 0010 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable 0100 0000 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 1000 0000 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable
<b>SQ7</b>	23:16	rw	<b>Sequence 7 channel enable</b> The following values can be ored: 0000 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 0000 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 0000 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 0000 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 0001 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 0010 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable 0100 0000 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 1000 0000 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable

---

**10-Bit Analog Digital Converter (ADC1)**


Field	Bits	Type	Description
<b>SQ6</b>	15:8	rw	<p><b>Sequence 6 channel enable</b></p> <p>The following values can be ored:</p> <p>0000 0001<sub>B</sub><b>CH0_EN</b>, Channel 0 enable            0000 0010<sub>B</sub><b>CH1_EN</b>, Channel 1 enable            0000 0100<sub>B</sub><b>CH2_EN</b>, Channel 2 enable            0000 1000<sub>B</sub><b>CH3_EN</b>, Channel 3 enable            0001 0000<sub>B</sub><b>CH4_EN</b>, Channel 4 enable            0010 0000<sub>B</sub><b>CH5_EN</b>, Channel 5 enable            0100 0000<sub>B</sub><b>CH6_EN</b>, Channel 6 enable            1000 0000<sub>B</sub><b>CH7_EN</b>, Channel 7 enable</p>
<b>SQ5</b>	7:0	rw	<p><b>Sequence 5 channel enable</b></p> <p>The following values can be ored:</p> <p><i>Note: SQ5-SQ8 should be only written is sequencer is disabled /Software Mode enabled SQ_RUN = 0.            SQ5-SQ8 should not be written with "0000 0000"</i></p> <p>0000 0001<sub>B</sub><b>CH0_EN</b>, Channel 0 enable            0000 0010<sub>B</sub><b>CH1_EN</b>, Channel 1 enable            0000 0100<sub>B</sub><b>CH2_EN</b>, Channel 2 enable            0000 1000<sub>B</sub><b>CH3_EN</b>, Channel 3 enable            0001 0000<sub>B</sub><b>CH4_EN</b>, Channel 4 enable            0010 0000<sub>B</sub><b>CH5_EN</b>, Channel 5 enable            0100 0000<sub>B</sub><b>CH6_EN</b>, Channel 6 enable            1000 0000<sub>B</sub><b>CH7_EN</b>, Channel 7 enable</p>

## 10-Bit Analog Digital Converter (ADC1)

### Measurement Channel Data Width Selection

The register is reset by RESET\_TYPE\_4.

DWSEL	Offset	Reset Value
Measurement Channel Data Width Selection	24 <sub>H</sub>	0000 0000 <sub>H</sub>

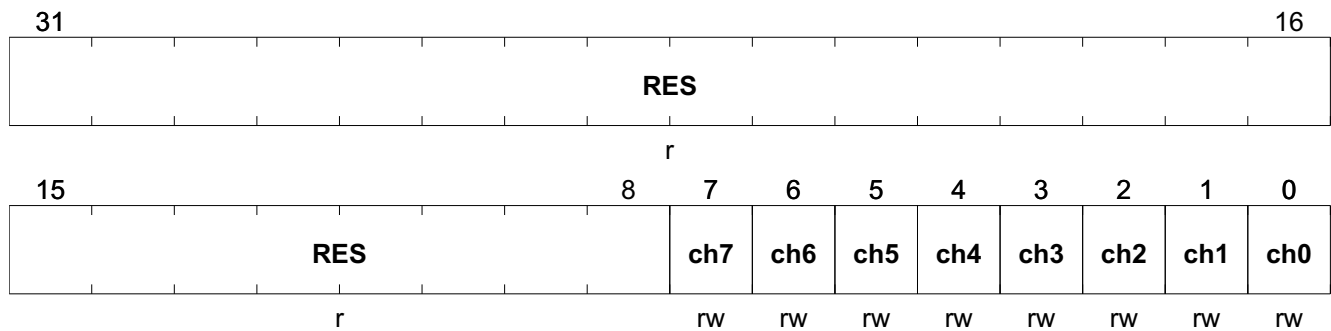


Field	Bits	Type	Description
<b>RES</b>	31:8	r	<b>Reserved</b> Always read as 0
<b>ch7</b>	7	rw	<b>Data Width channel 7</b> 0 <sub>B</sub> <b>10BIT</b> , The result is 10 bits wide (bits 11 .. 2) 1 <sub>B</sub> <b>8BIT</b> , The result is 8 bits wide (bits 11 .. 4)
<b>ch6</b>	6	rw	<b>Data Width channel 6</b> 0 <sub>B</sub> <b>10BIT</b> , The result is 10 bits wide (bits 11 .. 2) 1 <sub>B</sub> <b>8BIT</b> , The result is 8 bits wide (bits 11 .. 4)
<b>ch5</b>	5	rw	<b>Data Width channel 5</b> 0 <sub>B</sub> <b>10BIT</b> , The result is 10 bits wide (bits 11 .. 2) 1 <sub>B</sub> <b>8BIT</b> , The result is 8 bits wide (bits 11 .. 4)
<b>ch4</b>	4	rw	<b>Data Width channel 4</b> 0 <sub>B</sub> <b>10BIT</b> , The result is 10 bits wide (bits 11 .. 2) 1 <sub>B</sub> <b>8BIT</b> , The result is 8 bits wide (bits 11 .. 4)
<b>ch3</b>	3	rw	<b>Data Width channel 3</b> 0 <sub>B</sub> <b>10BIT</b> , The result is 10 bits wide (bits 11 .. 2) 1 <sub>B</sub> <b>8BIT</b> , The result is 8 bits wide (bits 11 .. 4)
<b>ch2</b>	2	rw	<b>Data Width channel 2</b> 0 <sub>B</sub> <b>10BIT</b> , The result is 10 bits wide (bits 11 .. 2) 1 <sub>B</sub> <b>8BIT</b> , The result is 8 bits wide (bits 11 .. 4)
<b>ch1</b>	1	rw	<b>Data Width channel 1</b> 0 <sub>B</sub> <b>10BIT</b> , The result is 10 bits wide (bits 11 .. 2) 1 <sub>B</sub> <b>8BIT</b> , The result is 8 bits wide (bits 11 .. 4)
<b>ch0</b>	0	rw	<b>Data Width channel 0</b> 0 <sub>B</sub> <b>10BIT</b> , The result is 10 bits wide (bits 11 .. 2) 1 <sub>B</sub> <b>8BIT</b> , The result is 8 bits wide (bits 11 .. 4)

## 10-Bit Analog Digital Converter (ADC1)

### Measurement Channel Sample Time Control 0-3

The register is reset by RESET\_TYPE\_4.

STC_0_3	Offset	Reset Value
Measurement Channel Sample Time Control 0-3	28 <sub>H</sub>	0000 0000 <sub>H</sub>

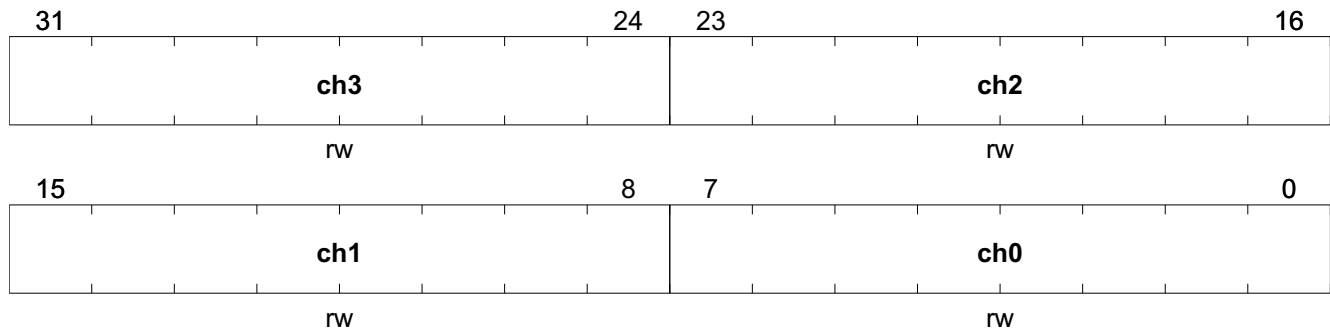


Field	Bits	Type	Description
<b>ch3</b>	31:24	rw	<b>Sample Time Control for Channel 3</b> Number of additional clock cycles to be added to the minimum sample phase of 2 analog clock cycles: $t_{\text{SAMPLE}} = (2 + \text{STC}) / f_{\text{ADCI}}$
<b>ch2</b>	23:16	rw	<b>Sample Time Control for Channel 2</b> Number of additional clock cycles to be added to the minimum sample phase of 2 analog clock cycles: $t_{\text{SAMPLE}} = (2 + \text{STC}) / f_{\text{ADCI}}$
<b>ch1</b>	15:8	rw	<b>Sample Time Control for Channel 1</b> Number of additional clock cycles to be added to the minimum sample phase of 2 analog clock cycles: $t_{\text{SAMPLE}} = (2 + \text{STC}) / f_{\text{ADCI}}$
<b>ch0</b>	7:0	rw	<b>Sample Time Control for Channel 0</b> Number of additional clock cycles to be added to the minimum sample phase of 2 analog clock cycles: $t_{\text{SAMPLE}} = (2 + \text{STC}) / f_{\text{ADCI}}$

10-Bit Analog Digital Converter (ADC1)

Measurement Channel Sample Time Control 4-7

The register is reset by RESET\_TYPE\_4.

<b>STC_4_7</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Measurement Channel Sample Time Control 4-7</b>	<b>2C<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

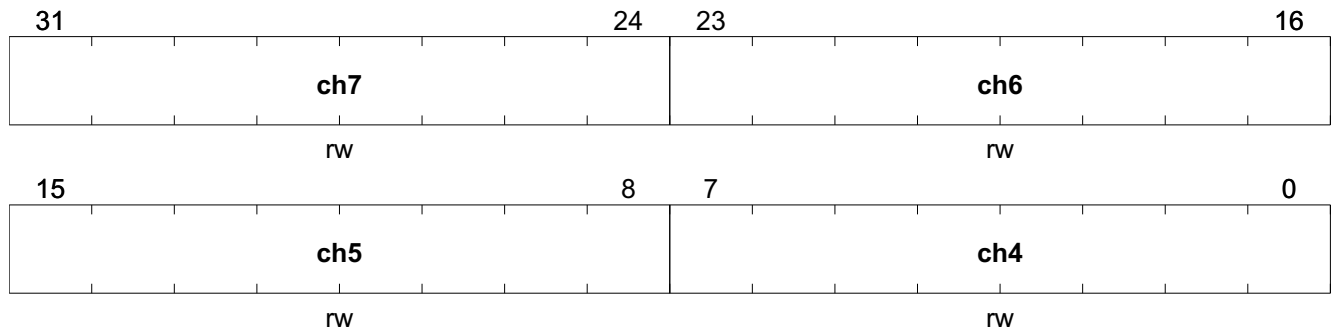

Field	Bits	Type	Description
<b>ch7</b>	31:24	rw	<b>Sample Time Control for Channel 7</b> Number of additional clock cycles to be added to the minimum sample phase of 2 analog clock cycles: $t_{SAMPLE} = (2 + STC) / f_{ADCI}$
<b>ch6</b>	23:16	rw	<b>Sample Time Control for Channel 6</b> Number of additional clock cycles to be added to the minimum sample phase of 2 analog clock cycles: $t_{SAMPLE} = (2 + STC) / f_{ADCI}$
<b>ch5</b>	15:8	rw	<b>Sample Time Control for Channel 5</b> Number of additional clock cycles to be added to the minimum sample phase of 2 analog clock cycles: $t_{SAMPLE} = (2 + STC) / f_{ADCI}$
<b>ch4</b>	7:0	rw	<b>Sample Time Control for Channel 4</b> Number of additional clock cycles to be added to the minimum sample phase of 2 analog clock cycles: $t_{SAMPLE} = (2 + STC) / f_{ADCI}$




## 10-Bit Analog Digital Converter (ADC1)

### Sequencer Feedback Register

The register is reset by RESET\_TYPE\_3.

<b>SQ_FB</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Sequencer Feedback Register</b>	<b>50<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

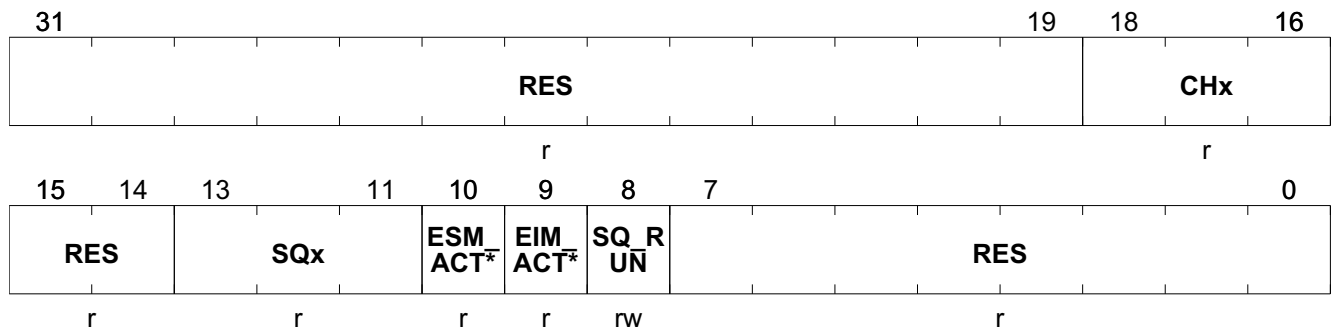

Field	Bits	Type	Description
<b>RES</b>	31:19	r	<b>Reserved</b> Always read as 0
<b>CHx</b>	18:16	r	<b>Current Channel</b> 000 <sub>B</sub> <b>CH0</b> , Channel 0 001 <sub>B</sub> <b>CH1</b> , Channel 1 010 <sub>B</sub> <b>CH2</b> , Channel 2 011 <sub>B</sub> <b>CH3</b> , Channel 3 100 <sub>B</sub> <b>CH4</b> , Channel 4 101 <sub>B</sub> <b>CH5</b> , Channel 5 110 <sub>B</sub> <b>CH6</b> , Channel 6 111 <sub>B</sub> <b>CH7</b> , Channel 7
<b>RES</b>	15:14	r	<b>Reserved</b> Always read as 0
<b>SQx</b>	13:11	r	<b>Current Active Sequence in Sequencer Mode</b> 000 <sub>B</sub> <b>SQ0</b> , Sequence 1 001 <sub>B</sub> <b>SQ1</b> , Sequence 2 010 <sub>B</sub> <b>SQ2</b> , Sequence 3 011 <sub>B</sub> <b>SQ3</b> , Sequence 4 100 <sub>B</sub> <b>SQ4</b> , Sequence 5 101 <sub>B</sub> <b>SQ5</b> , Sequence 6 110 <sub>B</sub> <b>SQ6</b> , Sequence 7 111 <sub>B</sub> <b>SQ7</b> , Sequence 8
<b>ESM_ACTIVE</b>	10	r	<b>ADC1 ESM active</b> 0 <sub>B</sub> <b>not active</b> , ESM not active 1 <sub>B</sub> <b>active</b> , ESM active
<b>EIM_ACTIVE</b>	9	r	<b>ADC1 EIM active</b> 0 <sub>B</sub> <b>not active</b> , EIM not active 1 <sub>B</sub> <b>active</b> , EIM active

---

**10-Bit Analog Digital Converter (ADC1)**


Field	Bits	Type	Description
<b>SQ_RUN</b>	8	rw	<b>ADC1 Sequencer RUN</b> $0_B$ <b>SQ Stopped</b> , Postprocessing Sequencer in stopped / Software mode $1_B$ <b>SQ Running</b> , Postprocessing Sequencer is running
<b>RES</b>	7:0	r	<b>Reserved</b> Always read as 0

## 10-Bit Analog Digital Converter (ADC1)

### Channel Setting for Exceptional Interrupt Measurement

The register is reset by RESET\_TYPE\_3.

CHx_EIM	Offset	Reset Value
Channel Setting Bits for Exceptional Interrupt Measurement	08 <sub>H</sub>	0000 0000 <sub>H</sub>

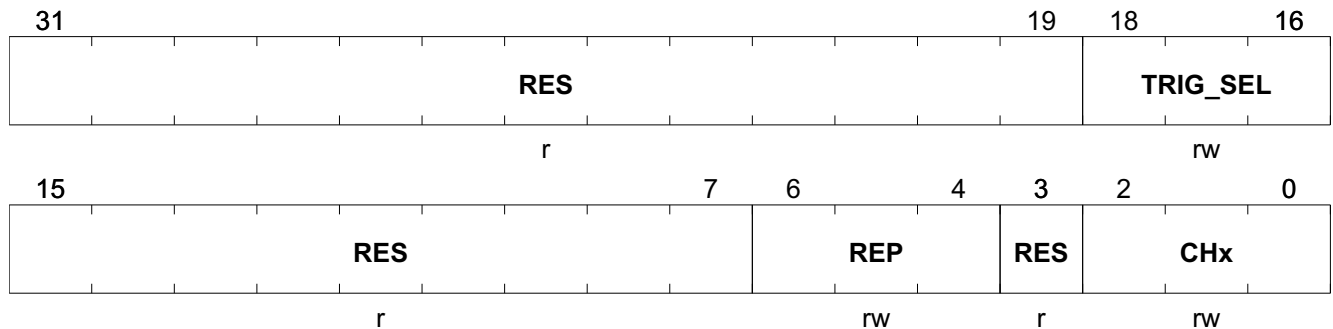

Field	Bits	Type	Description
<b>RES</b>	31:19	r	<b>Reserved</b> Always read as 0
<b>TRIG_SEL</b>	18:16	rw	<b>Trigger selection for exceptional interrupt measurement (EIM)</b> 000 <sub>B</sub> <b>NONE</b> , 001 <sub>B</sub> <b>COU63</b> , CCU6 Channel3 010 <sub>B</sub> <b>GPT12_T6OUT</b> , 011 <sub>B</sub> <b>GPT12_T3OUT</b> , 100 <sub>B</sub> <b>T2</b> , t2_adc_trigger 101 <sub>B</sub> <b>T21</b> , t21_adc_trigger 110 <sub>B</sub> <b>CCU_6_INT</b> , ccu6_int, Timer3 output 111 <sub>B</sub> <b>RES</b> , reserved
<b>RES</b>	15:7	r	<b>Reserved</b> Always read as 0
<b>REP</b>	6:4	rw	<b>Repeat count for exceptional interrupt measurement (EIM)</b> 000 <sub>B</sub> <b>1</b> , Measurement 001 <sub>B</sub> <b>2</b> , Measurements 010 <sub>B</sub> <b>4</b> , Measurements 011 <sub>B</sub> <b>8</b> , Measurements 100 <sub>B</sub> <b>16</b> , Measurements 101 <sub>B</sub> <b>32</b> , Measurements 110 <sub>B</sub> <b>64</b> , Measurements 111 <sub>B</sub> <b>128</b> , Measurements
<b>RES</b>	3	r	<b>Reserved</b> Always read as 0

---

**10-Bit Analog Digital Converter (ADC1)**


Field	Bits	Type	Description
CHx	2:0	rw	<b>Channel set for exceptional interrupt measurement (EIM)</b>
			000 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable
			001 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable
			010 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable
			011 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable
			100 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable
			101 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable
			110 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable
			111 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable

## 10-Bit Analog Digital Converter (ADC1)

### Channel Setting for Exceptional Sequence Measurement

The register is reset by RESET\_TYPE\_3.

CHx_ESM	Offset	Reset Value
Channel Setting Bits for Exceptional Sequence Measurement	0C <sub>H</sub>	0000 0000 <sub>H</sub>

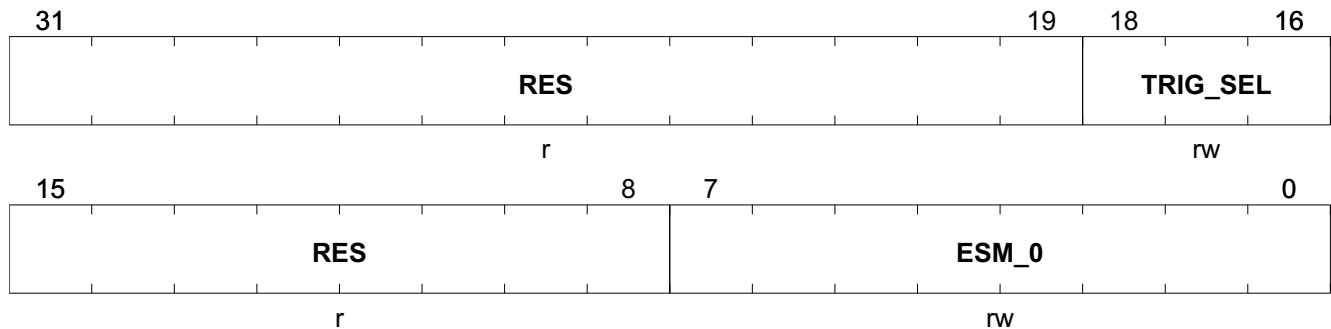

Field	Bits	Type	Description
RES	31:19	r	<b>Reserved</b> Always read as 0
TRIG_SEL	18:16	rw	<b>Trigger selection for exceptional interrupt measurement (ESM)</b> 000 <sub>B</sub> <b>NONE</b> , 001 <sub>B</sub> <b>COU63</b> , CCU6 Channel3 010 <sub>B</sub> <b>GPT12_T6OUT</b> , 011 <sub>B</sub> <b>GPT12_T3OUT</b> , 100 <sub>B</sub> <b>T2</b> , t2_adc_trigger 101 <sub>B</sub> <b>T21</b> , t21_adc_trigger 110 <sub>B</sub> <b>CCU_6_INT</b> , ccu6_int, Timer3 output 111 <sub>B</sub> <b>RES</b> , reserved
RES	15:8	r	<b>Reserved</b> Always read as 0
ESM_0	7:0	rw	<b>Channel Sequence for Exceptional Sequence Measurement (ESM)</b> Note: update to ESM sequence should be written while trigger selection (ADC1_ESM_TRIG_SEL) is set to none. The following values can be stored: 0000 0001 <sub>B</sub> <b>CH0_EN</b> , Channel 0 enable 0000 0010 <sub>B</sub> <b>CH1_EN</b> , Channel 1 enable 0000 0100 <sub>B</sub> <b>CH2_EN</b> , Channel 2 enable 0000 1000 <sub>B</sub> <b>CH3_EN</b> , Channel 3 enable 0001 0000 <sub>B</sub> <b>CH4_EN</b> , Channel 4 enable 0010 0000 <sub>B</sub> <b>CH5_EN</b> , Channel 5 enable 0100 0000 <sub>B</sub> <b>CH6_EN</b> , Channel 6 enable 1000 0000 <sub>B</sub> <b>CH7_EN</b> , Channel 7 enable

## 10-Bit Analog Digital Converter (ADC1)

### 24.5 Conversion Result Handling

#### 24.5.1 Functional Description

Each Result Register **RES\_OUT0** - **RES\_OUT7** has a valid flag and an optional wait-for-read mode (WFR) configuration bit.

The valid flag indicates if the corresponding result register contains valid data. The valid bit is set by hardware once the ADC conversion is ready and stored in the corresponding result register. It is cleared once the result is read by software (or DMA request).

##### Wait-for-read mode

The wait-for-read mode is a feature to prevent data loss due to overwriting a result register with a new conversion result before the CPU (or DMA transfer) has read the previous data.

Wait-for-read mode prevents overwriting of result register. The conversion is always started, however the result is only written to the result register in case the valid bit is set to zero. In case the valid bit is set to one, the result of the ADC is ignored.

#### 24.5.2 Result Registers

In Software Mode, the WFR configuration bit is ignored. In software mode the result register is always updated, but VF is still set and OF retains its value.

**Table 178 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Result Registers</b>			
<b>RES_OUT_EIM</b>	ADC1 Output Channel EIM	40 <sub>H</sub>	0000 0XXX <sub>H</sub>
<b>RES_OUT7</b>	ADC1 Output Channel 7	54 <sub>H</sub>	0000 0XXX <sub>H</sub>
<b>RES_OUT6</b>	ADC1 Output Channel 6	58 <sub>H</sub>	0000 0XXX <sub>H</sub>
<b>RES_OUT5</b>	ADC1 Output Channel 5	5C <sub>H</sub>	0000 0XXX <sub>H</sub>
<b>RES_OUT4</b>	ADC1 Output Channel 4	60 <sub>H</sub>	0000 0XXX <sub>H</sub>
<b>RES_OUT3</b>	ADC1 Output Channel 3	64 <sub>H</sub>	0000 0XXX <sub>H</sub>
<b>RES_OUT2</b>	ADC1 Output Channel 2	68 <sub>H</sub>	0000 0XXX <sub>H</sub>
<b>RES_OUT1</b>	ADC1 Output Channel 1	6C <sub>H</sub>	0000 0XXX <sub>H</sub>
<b>RES_OUT0</b>	ADC1 Output Channel 0	70 <sub>H</sub>	0000 0XXX <sub>H</sub>


The registers are addressed wordwise.

## 10-Bit Analog Digital Converter (ADC1)

### ADC1 Output Channel 0

The register is reset by RESET\_TYPE\_3.

RES_OUT0	Offset	Reset Value
ADC1 Output Channel 0	70 <sub>H</sub>	0000 0XXX <sub>H</sub>

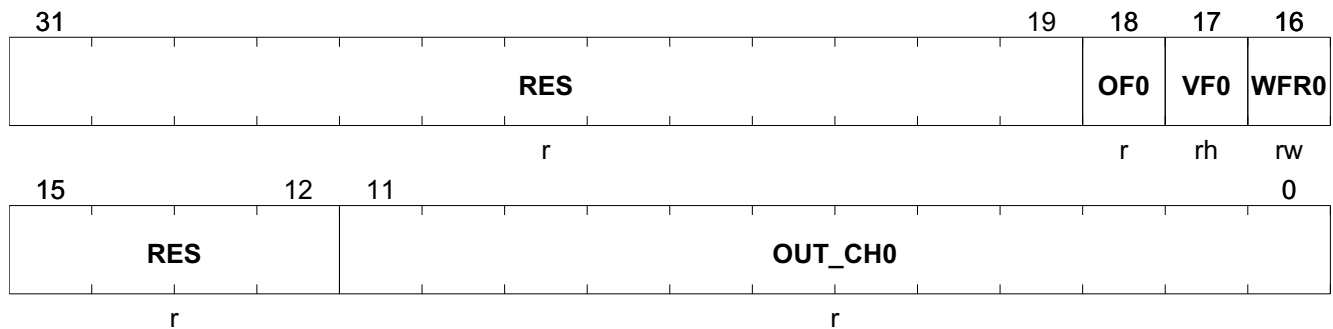

Field	Bits	Type	Description
<b>RES</b>	31:19	r	<b>Reserved</b> Always read as 0
<b>OF0</b>	18	r	<b>Overrun Flag</b> Indicates if the result register is overwritten with new content (bit is set if VFx = 1 and new result is updated by hardware).  <i>Note:</i> Only set in WFRx = DISABLE and no software mode, clear on read of result register  0 <sub>B</sub> <b>NO OVERRUN</b> , Result register not overwritten 1 <sub>B</sub> <b>OVERRUN</b> , Result register overwritten
<b>VFO</b>	17	rh	<b>Valid Flag</b> Indicates valid contents in result register bit field OUT_CH0  <i>Note:</i> Bit is set by hardware on update of result register and it is cleared by software once the result register is read  0 <sub>B</sub> <b>NOT VALID</b> , No new valid data available 1 <sub>B</sub> <b>VALID</b> , Result register contains valid data and has not yet been read
<b>WFR0</b>	16	rw	<b>Wait-for-Read Mode</b> Enables wait-for-read mode for result register 0 <sub>B</sub> <b>DISABLE</b> , overwrite mode 1 <sub>B</sub> <b>ENABLE</b> , wait-for-read mode enabled
<b>RES</b>	15:12	r	<b>Reserved</b> Always read as 0

---

**10-Bit Analog Digital Converter (ADC1)**

Field	Bits	Type	Description
OUT_CH0	11:0	r	<b>Output reset value Channel 0</b> 8 bit conversion: OUT_CH0[11:4] = result[7:0], the four LSB OUT_CH0[3:0] are padded with "0000" 10 bit conversion: OUT_CH0[11:2] = result[9:0], the two LSB OUT_CH0[1:0] are padded with "00"




## 10-Bit Analog Digital Converter (ADC1)

### ADC1 Output Channel 1

The register is reset by RESET\_TYPE\_3.

RES_OUT1	Offset	Reset Value
ADC1 Output Channel 1	6C <sub>H</sub>	0000 0XXX <sub>H</sub>

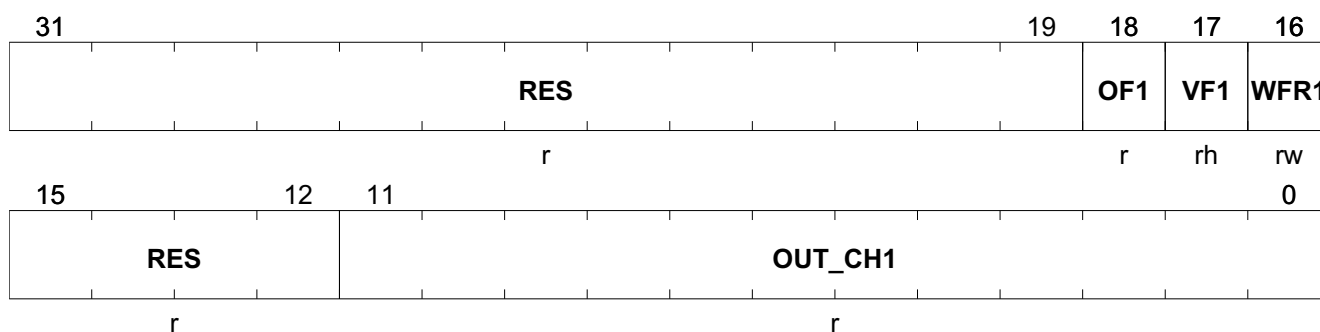

Field	Bits	Type	Description
<b>RES</b>	31:19	r	<b>Reserved</b> Always read as 0
<b>OF1</b>	18	r	<b>Overrun Flag</b> Indicates if the result register is overwritten with new content (bit is set if VFx = 1 and new result is updated by hardware).  <i>Note:</i> Only set in WFRx = DISABLE and no software mode, clear on read of result register  0 <sub>B</sub> <b>NO OVERRUN</b> , Result register not overwritten 1 <sub>B</sub> <b>OVERRUN</b> , Result register overwritten
<b>VF1</b>	17	rh	<b>Valid Flag</b> Indicates valid contents in result register bit field OUT_CH1  <i>Note:</i> Bit is set by hardware on update of result register and it is cleared by software once the result register is reads  0 <sub>B</sub> <b>NOT VALID</b> , No new valid data available 1 <sub>B</sub> <b>VALID</b> , Result register contains valid data and has not yet been read
<b>WFR1</b>	16	rw	<b>Wait-for-Read Mode</b> Enables wait-for-read mode for result register 0 <sub>B</sub> <b>DISABLE</b> , overwrite mode 1 <sub>B</sub> <b>ENABLE</b> , wait-for-read mode enabled
<b>RES</b>	15:12	r	<b>Reserved</b> Always read as 0

---

**10-Bit Analog Digital Converter (ADC1)**


Field	Bits	Type	Description
OUT_CH1	11:0	r	<b>ADC1 Output result value Channel 1</b> 8 bit conversion: OUT_CH1[11:4] = result[7:0], the four LSB OUT_CH1[3:0] are padded with "0000" 10 bit conversion: OUT_CH1[11:2] = result[9:0], the two LSB OUT_CH1[1:0] are padded with "00"

## 10-Bit Analog Digital Converter (ADC1)

### ADC1 Output Channel 2

The register is reset by RESET\_TYPE\_3.

RES_OUT2	Offset	Reset Value
ADC1 Output Channel 2	68 <sub>H</sub>	0000 0XXX <sub>H</sub>

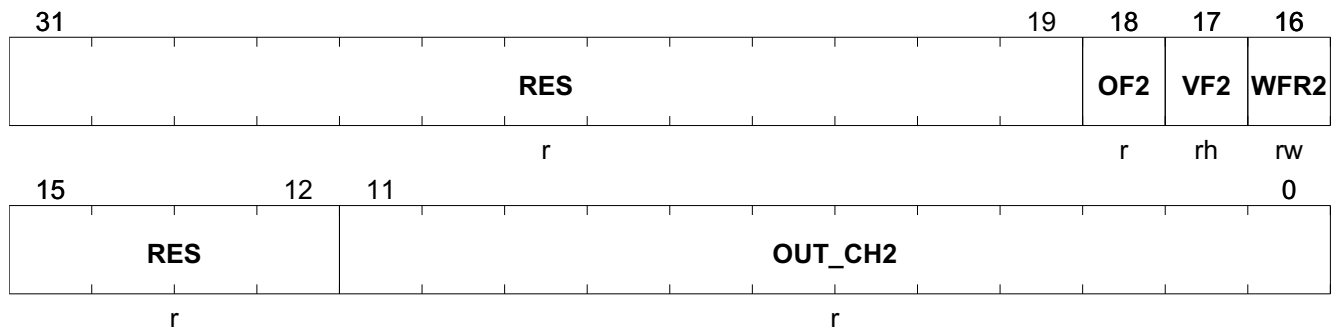

Field	Bits	Type	Description
<b>RES</b>	31:19	r	<b>Reserved</b> Always read as 0
<b>OF2</b>	18	r	<b>Overrun Flag</b> Indicates if the result register is overwritten with new content (bit is set if VFx = 1 and new result is updated by hardware).  <i>Note:</i> Only set in WFRx = DISABLE and no software mode, clear on read of result register  0 <sub>B</sub> <b>NO OVERRUN</b> , Result register not overwritten 1 <sub>B</sub> <b>OVERRUN</b> , Result register overwritten
<b>VF2</b>	17	rh	<b>Valid Flag</b> Indicates valid contents in result register bit field OUT_CH2  <i>Note:</i> Bit is set by hardware on update of result register and it is cleared by software once the result register is read  0 <sub>B</sub> <b>NOT VALID</b> , No new valid data available 1 <sub>B</sub> <b>VALID</b> , Result register contains valid data and has not yet been read
<b>WFR2</b>	16	rw	<b>Wait-for-Read Mode</b> Enables wait-for-read mode for result register 0 <sub>B</sub> <b>DISABLE</b> , overwrite mode 1 <sub>B</sub> <b>ENABLE</b> , wait-for-read mode enabled
<b>RES</b>	15:12	r	<b>Reserved</b> Always read as 0

---

**10-Bit Analog Digital Converter (ADC1)**


Field	Bits	Type	Description
OUT_CH2	11:0	r	<b>ADC1 Output result value Channel 2</b> 8 bit conversion: OUT_CH2[11:4] = result[7:0], the four LSB OUT_CH2[3:0] are padded with "0000" 10 bit conversion: OUT_CH2[11:2] = result[9:0], the two LSB OUT_CH2[1:0] are padded with "00"

## 10-Bit Analog Digital Converter (ADC1)

### ADC1 Output Channel 3

The register is reset by RESET\_TYPE\_3.

RES_OUT3	Offset	Reset Value
ADC1 Output Channel 3	64 <sub>H</sub>	0000 0XXX <sub>H</sub>

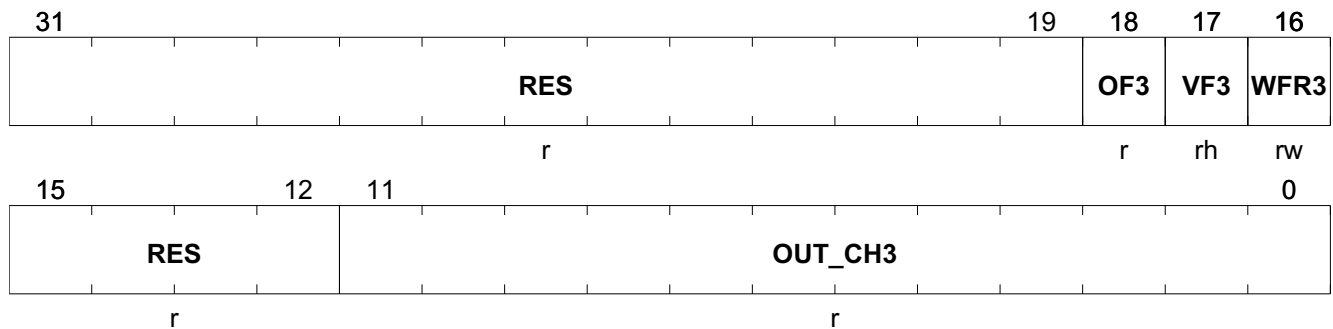

Field	Bits	Type	Description
<b>RES</b>	31:19	r	<b>Reserved</b> Always read as 0
<b>OF3</b>	18	r	<b>Overrun Flag</b> Indicates if the result register is overwritten with new content (bit is set if VFx = 1 and new result is updated by hardware).  <i>Note:</i> Only set in WFRx = DISABLE and no software mode, clear on read of result register  0 <sub>B</sub> <b>NO OVERRUN</b> , Result register not overwritten 1 <sub>B</sub> <b>OVERRUN</b> , Result register overwritten
<b>VF3</b>	17	rh	<b>Valid Flag</b> Indicates valid contents in result register bit field OUT_CH3  <i>Note:</i> Bit is set by hardware on update of result register and it is cleared by software once the result register is read  0 <sub>B</sub> <b>NOT VALID</b> , No new valid data available 1 <sub>B</sub> <b>VALID</b> , Result register contains valid data and has not yet been read
<b>WFR3</b>	16	rw	<b>Wait-for-Read Mode</b> Enables wait-for-read mode for result register 0 <sub>B</sub> <b>DISABLE</b> , overwrite mode 1 <sub>B</sub> <b>ENABLE</b> , wait-for-read mode enabled
<b>RES</b>	15:12	r	<b>Reserved</b> Always read as 0

---

**10-Bit Analog Digital Converter (ADC1)**


Field	Bits	Type	Description
OUT_CH3	11:0	r	<b>ADC1 Output result value Channel 3</b> 8 bit conversion: OUT_CH3[11:4] = result[7:0], the four LSB OUT_CH3[3:0] are padded with "0000" 10 bit conversion: OUT_CH3[11:2] = result[9:0], the two LSB OUT_CH3[1:0] are padded with "00"

## 10-Bit Analog Digital Converter (ADC1)

### ADC1 Output Channel 4

The register is reset by RESET\_TYPE\_3.

RES_OUT4	Offset	Reset Value
ADC1 Output Channel 4	60 <sub>H</sub>	0000 0XXX <sub>H</sub>

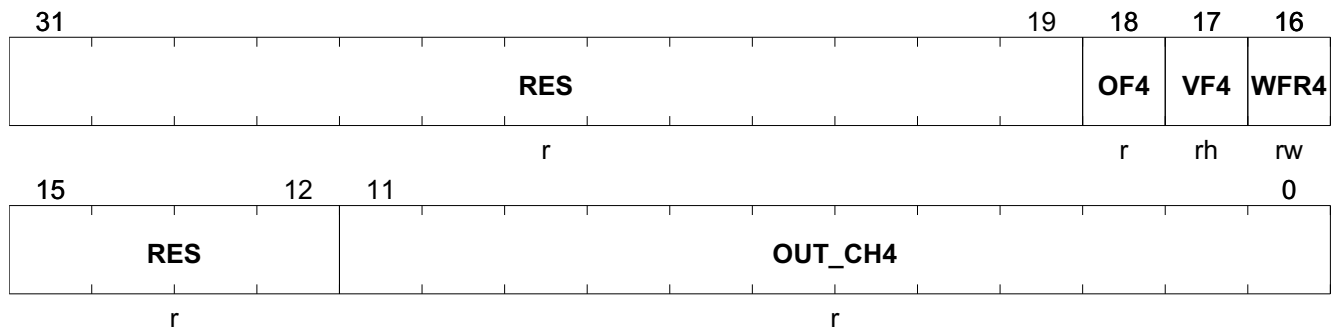

Field	Bits	Type	Description
<b>RES</b>	31:19	r	<b>Reserved</b> Always read as 0
<b>OF4</b>	18	r	<b>Overrun Flag</b> Indicates if the result register is overwritten with new content (bit is set if VFx = 1 and new result is updated by hardware).  <i>Note:</i> Only set in WFRx = DISABLE and no software mode, clear on read of result register  0 <sub>B</sub> <b>NO OVERRUN</b> , Result register not overwritten 1 <sub>B</sub> <b>OVERRUN</b> , Result register overwritten
<b>VF4</b>	17	rh	<b>Valid Flag</b> Indicates valid contents in result register bit field OUT_CH4  <i>Note:</i> Bit is set by hardware on update of result register and it is cleared by software once the result register is read  0 <sub>B</sub> <b>NOT VALID</b> , No new valid data available 1 <sub>B</sub> <b>VALID</b> , Result register contains valid data and has not yet been read
<b>WFR4</b>	16	rw	<b>Wait-for-Read Mode</b> Enables wait-for-read mode for result register 0 <sub>B</sub> <b>DISABLE</b> , overwrite mode 1 <sub>B</sub> <b>ENABLE</b> , wait-for-read mode enabled
<b>RES</b>	15:12	r	<b>Reserved</b> Always read as 0

---

**10-Bit Analog Digital Converter (ADC1)**

Field	Bits	Type	Description
OUT_CH4	11:0	r	<b>ADC1 Output result value Channel 4</b> 8 bit conversion: OUT_CH4[11:4] = result[7:0], the four LSB OUT_CH4[3:0] are padded with "0000" 10 bit conversion: OUT_CH4[11:2] = result[9:0], the two LSB OUT_CH4[1:0] are padded with "00"




## 10-Bit Analog Digital Converter (ADC1)

### ADC1 Output Channel 5

The register is reset by RESET\_TYPE\_3.

RES_OUT5	Offset	Reset Value
ADC1 Output Channel 5	5C <sub>H</sub>	0000 0XXX <sub>H</sub>

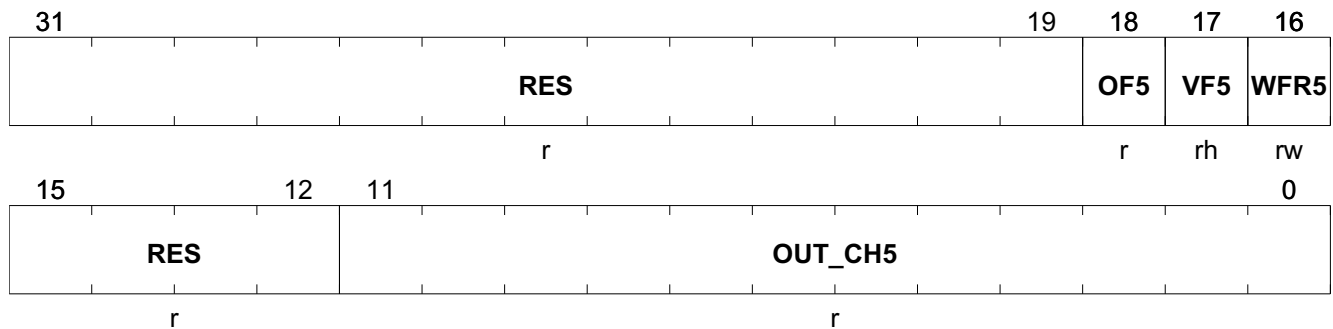

Field	Bits	Type	Description
<b>RES</b>	31:19	r	<b>Reserved</b> Always read as 0
<b>OF5</b>	18	r	<b>Overrun Flag</b> Indicates if the result register is overwritten with new content (bit is set if VFx = 1 and new result is updated by hardware).  <i>Note:</i> Only set in WFRx = DISABLE and no software mode, clear on read of result register  0 <sub>B</sub> <b>NO OVERRUN</b> , Result register not overwritten 1 <sub>B</sub> <b>OVERRUN</b> , Result register overwritten
<b>VF5</b>	17	rh	<b>Valid Flag</b> Indicates valid contents in result register bit field OUT_CH5  <i>Note:</i> Bit is set by hardware on update of result register and it is cleared by software once the result register is read  0 <sub>B</sub> <b>NOT VALID</b> , No new valid data available 1 <sub>B</sub> <b>VALID</b> , Result register contains valid data and has not yet been read
<b>WFR5</b>	16	rw	<b>Wait-for-Read Mode</b> Enables wait-for-read mode for result register 0 <sub>B</sub> <b>DISABLE</b> , overwrite mode 1 <sub>B</sub> <b>ENABLE</b> , wait-for-read mode enabled
<b>RES</b>	15:12	r	<b>Reserved</b> Always read as 0

---

**10-Bit Analog Digital Converter (ADC1)**


Field	Bits	Type	Description
OUT_CH5	11:0	r	<b>ADC1 Output result value Channel 5</b> 8 bit conversion: OUT_CH5[11:4] = result[7:0], the four LSB OUT_CH5[3:0] are padded with "0000" 10 bit conversion: OUT_CH5[11:2] = result[9:0], the two LSB OUT_CH5[1:0] are padded with "00"

## 10-Bit Analog Digital Converter (ADC1)

### ADC1 Output Channel 6

The register is reset by RESET\_TYPE\_3.

RES_OUT6	Offset	Reset Value
ADC1 Output Channel 6	58 <sub>H</sub>	0000 0XXX <sub>H</sub>

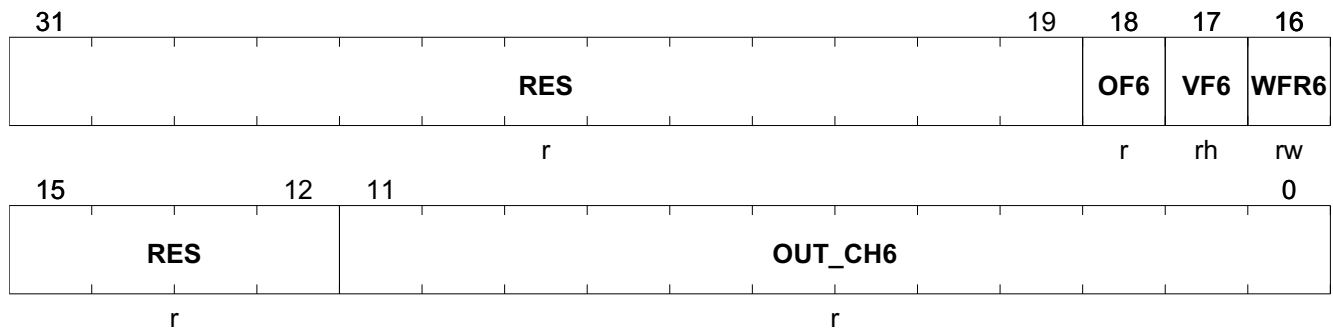

Field	Bits	Type	Description
<b>RES</b>	31:19	r	<b>Reserved</b> Always read as 0
<b>OF6</b>	18	r	<b>Overrun Flag</b> Indicates if the result register is overwritten with new content (bit is set if VFx = 1 and new result is updated by hardware).  <i>Note:</i> Only set in WFRx = DISABLE and no software mode, clear on read of result register  0 <sub>B</sub> <b>NO OVERRUN</b> , Result register not overwritten 1 <sub>B</sub> <b>OVERRUN</b> , Result register overwritten
<b>VF6</b>	17	rh	<b>Valid Flag</b> Indicates valid contents in result register bit field OUT_CH6  <i>Note:</i> Bit is set by hardware on update of result register and it is cleared by software once the result register is read  0 <sub>B</sub> <b>NOT VALID</b> , No new valid data available 1 <sub>B</sub> <b>VALID</b> , Result register contains valid data and has not yet been read
<b>WFR6</b>	16	rw	<b>Wait-for-Read Mode</b> Enables wait-for-read mode for result register 0 <sub>B</sub> <b>DISABLE</b> , overwrite mode 1 <sub>B</sub> <b>ENABLE</b> , wait-for-read mode enabled
<b>RES</b>	15:12	r	<b>Reserved</b> Always read as 0

---

**10-Bit Analog Digital Converter (ADC1)**


Field	Bits	Type	Description
OUT_CH6	11:0	r	<b>ADC1 Output result value Channel 6</b> 8 bit conversion: OUT_CH6[11:4] = result[7:0], the four LSB OUT_CH6[3:0] are padded with "0000" 10 bit conversion: OUT_CH6[11:2] = result[9:0], the two LSB OUT_CH6[1:0] are padded with "00"

## 10-Bit Analog Digital Converter (ADC1)

### ADC1 Output Channel 7

The register is reset by RESET\_TYPE\_3.

RES_OUT7	Offset	Reset Value
ADC1 Output Channel 7	54 <sub>H</sub>	0000 0XXX <sub>H</sub>

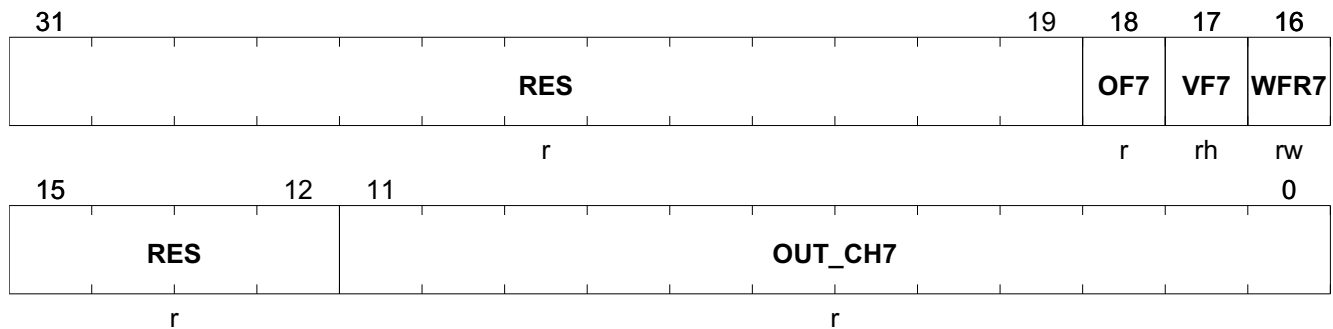

Field	Bits	Type	Description
<b>RES</b>	31:19	r	<b>Reserved</b> Always read as 0
<b>OF7</b>	18	r	<b>Overrun Flag</b> Indicates if the result register is overwritten with new content (bit is set if VFx = 1 and new result is updated by hardware).  <i>Note:</i> Only set in WFRx = DISABLE and no software mode, clear on read of result register  0 <sub>B</sub> <b>NO OVERRUN</b> , Result register not overwritten 1 <sub>B</sub> <b>OVERRUN</b> , Result register overwritten
<b>VF7</b>	17	rh	<b>Valid Flag</b> Indicates valid contents in result register bit field OUT_CH7  <i>Note:</i> Bit is set by hardware on update of result register and it is cleared by software once the result register is read  0 <sub>B</sub> <b>NOT VALID</b> , No new valid data available 1 <sub>B</sub> <b>VALID</b> , Result register contains valid data and has not yet been read
<b>WFR7</b>	16	rw	<b>Wait-for-Read Mode</b> Enables wait-for-read mode for result register 0 <sub>B</sub> <b>DISABLE</b> , overwrite mode 1 <sub>B</sub> <b>ENABLE</b> , wait-for-read mode enabled
<b>RES</b>	15:12	r	<b>Reserved</b> Always read as 0

---

**10-Bit Analog Digital Converter (ADC1)**


Field	Bits	Type	Description
OUT_CH7	11:0	r	<b>ADC1 Output result value Channel 7</b> 8 bit conversion: OUT_CH7[11:4] = result[7:0], the four LSB OUT_CH7[3:0] are padded with "0000" 10 bit conversion: OUT_CH7[11:2] = result[9:0], the two LSB OUT_CH7[1:0] are padded with "00"

## 10-Bit Analog Digital Converter (ADC1)

### ADC1 Output EIM Channel

The register is reset by RESET\_TYPE\_3.

RES_OUT_EIM	Offset	Reset Value
ADC1 Output Channel EIM	40 <sub>H</sub>	0000 0XXX <sub>H</sub>

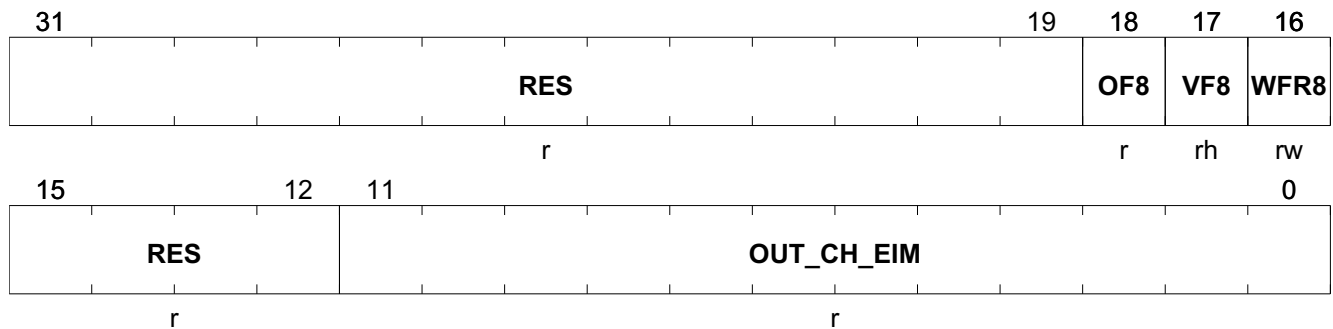

Field	Bits	Type	Description
<b>RES</b>	31:19	r	<b>Reserved</b> Always read as 0
<b>OF8</b>	18	r	<b>Overrun Flag</b> Indicates if the result register is overwritten with new content (bit is set if VFx = 1 and new result is updated by hardware).  <i>Note:</i> Only set in WFRx = DISABLE and no software mode, clear on read of result register  0 <sub>B</sub> <b>NO OVERRUN</b> , Result register not overwritten 1 <sub>B</sub> <b>OVERRUN</b> , Result register overwritten
<b>VF8</b>	17	rh	<b>Valid Flag</b> Indicates valid contents in result register bit field OUT_CH_EIM  <i>Note:</i> Bit is set by hardware on update of result register and if all repeat counts have been processed. It is cleared by software once the result register is read  0 <sub>B</sub> <b>NOT VALID</b> , No new valid data available 1 <sub>B</sub> <b>VALID</b> , Result register contains valid data and has not yet been read
<b>WFR8</b>	16	rw	<b>Wait-for-Read Mode</b> Enables wait-for-read mode for result register 0 <sub>B</sub> <b>DISABLE</b> , overwrite mode 1 <sub>B</sub> <b>ENABLE</b> , wait-for-read mode enabled

---

**10-Bit Analog Digital Converter (ADC1)**

Field	Bits	Type	Description
<b>RES</b>	15:12	r	<b>Reserved</b> Always read as 0
<b>OUT_CH_EIM</b>	11:0	r	<b>ADC1 output result value EIM</b> 8 bit conversion: OUT_CH_EIM[11:4] = result[7:0], the four LSB OUT_CH_EIM[3:0] are padded with "0000" 10 bit conversion: OUT_CH_EIM[11:2] = result[9:0], the two LSB OUT_CH_EIM[1:0] are padded with "00"



---

## 10-Bit Analog Digital Converter (ADC1)

### 24.6 DMA Requests

The DMA Controller implements the following hardware DMA requests:

ADC1 one sequence done, burst request

ADC1 exceptional sequence (ESM) done, burst request

ADC1 channel 0 conversion done

ADC1 channel 1 conversion done

ADC1 channel 2 conversion done

ADC1 channel 3 conversion done

ADC1 channel 4 conversion done

ADC1 channel 5 conversion done

ADC1 channel 6 conversion done

ADC1 channel 7 conversion done

DMA requests are generated if the VFx flag of the respective result register is set to '1' (in all sequencer mode except software mode).

### 24.7 Interrupts

The ADC1 generates the following interrupts:

ADC1 Exceptional Sequence Measurement finished, status bit **IS.ESM\_STS**

ADC1 Exceptional Interrupt Measurement finished, status bit **IS.EIM\_STS**

ADC1 channel 0 conversion done interrupt, **IS.CH0**

ADC1 channel 1 conversion done interrupt, **IS.CH1**

ADC1 channel 2 conversion done interrupt, **IS.CH2**

ADC1 channel 3 conversion done interrupt, **IS.CH3**

ADC1 channel 4 conversion done interrupt, **IS.CH4**

ADC1 channel 5 conversion done interrupt, **IS.CH5**

ADC1 channel 6 conversion done interrupt, **IS.CH6**

ADC1 channel 7 conversion done interrupt, **IS.CH7**

Interrupts are generated if the VFx flag of the respective result register is set to '1' (in all sequencer modes except software mode).

**Figure 203** shows the interrupt generation of ADC1.

10-Bit Analog Digital Converter (ADC1)

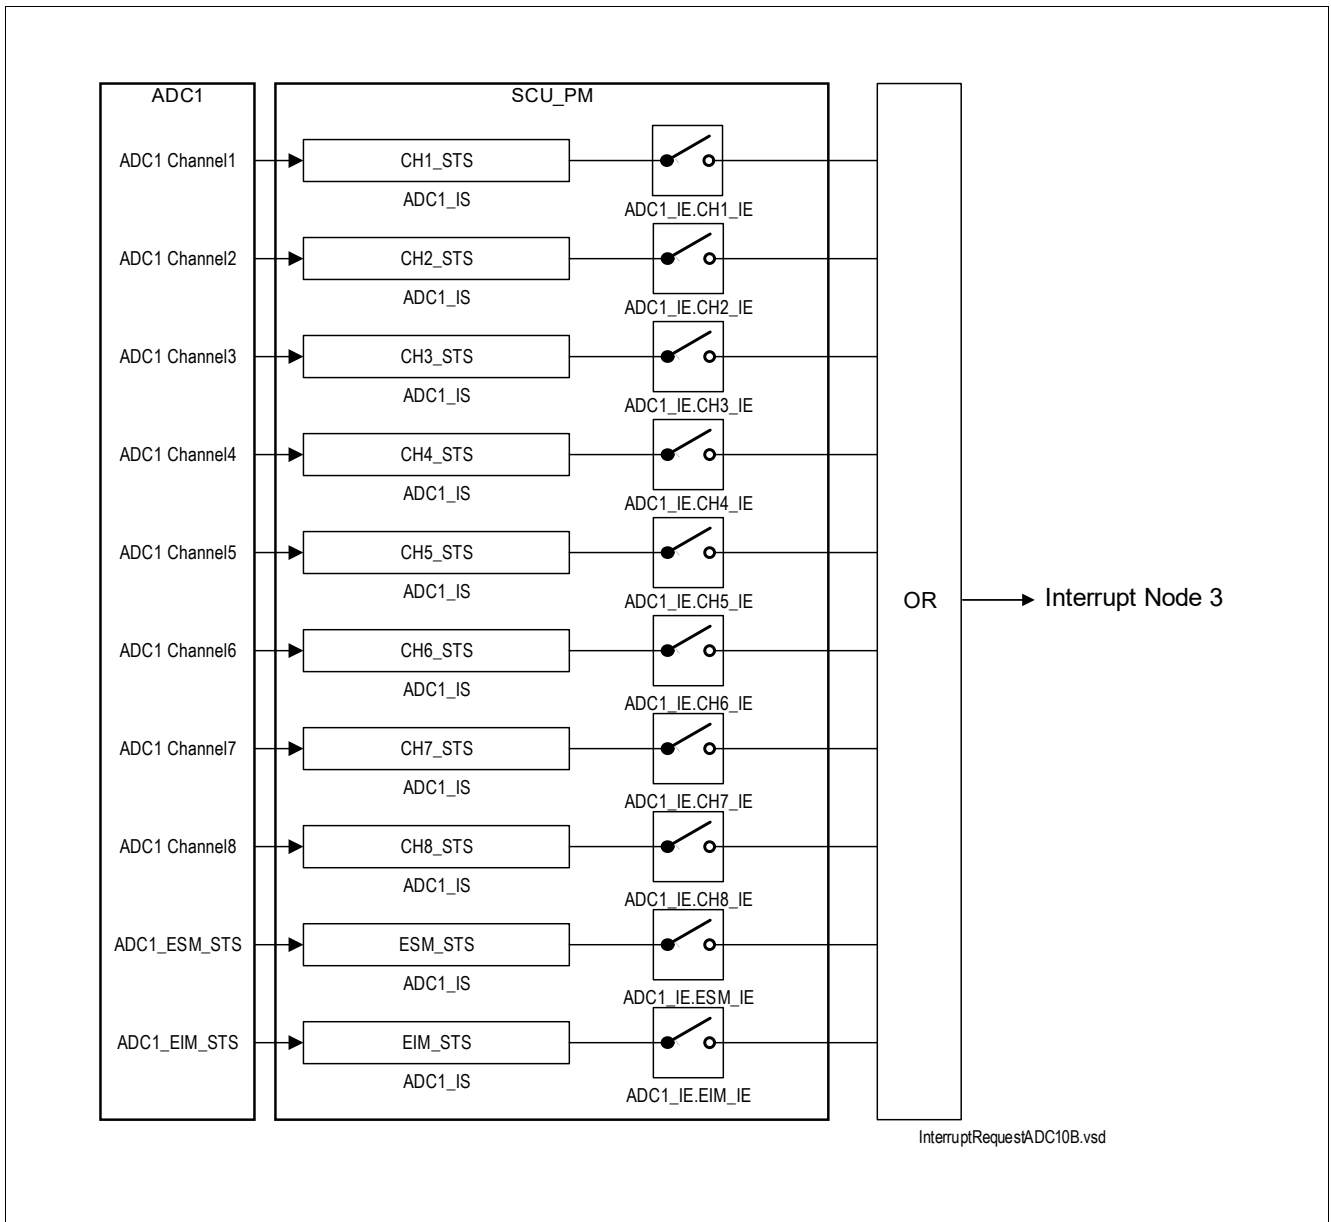


Figure 203 ADC1 Interrupt Generation

---

**10-Bit Analog Digital Converter (ADC1)****24.7.1 Interrupt Registers****Table 179 Register Overview**

<b>Register Short Name</b>	<b>Register Long Name</b>	<b>Offset Address</b>	<b>Reset Value</b>
<b>Interrupt Registers</b>			
<b>IS</b>	ADC1 Interrupt Status Register	78 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>IE</b>	ADC1 Interrupt Enable Register	7C <sub>H</sub>	0000 0000 <sub>H</sub>
<b>ICLR</b>	ADC1 Interrupt Status Clear Register	80 <sub>H</sub>	0000 0000 <sub>H</sub>


The registers are addressed wordwise.

## 10-Bit Analog Digital Converter (ADC1)

### ADC1 Interrupt Status Register

The register is reset by RESET\_TYPE\_3.

IS	Offset	Reset Value
ADC1 Interrupt Status Register	78 <sub>H</sub>	0000 0000 <sub>H</sub>

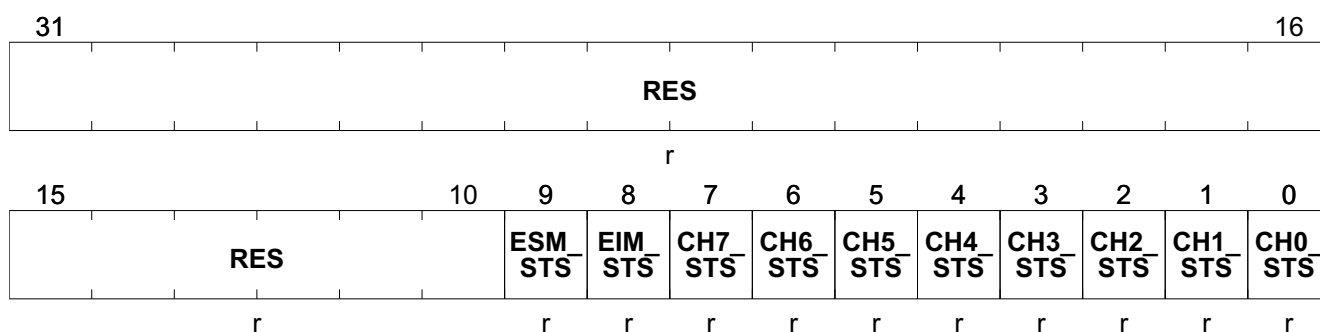

Field	Bits	Type	Description
RES	31:10	r	<b>Reserved</b> Always read as 0
ESM_STS	9	r	<b>Exceptional Sequence Measurement (ESM) Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , No ESM has occurred 1 <sub>B</sub> <b>ACTIVE</b> , ESM occurred
EIM_STS	8	r	<b>Exceptional Interrupt Measurement (EIM) Status</b> 0 <sub>B</sub> <b>INACTIVE</b> , No EIM occurred 1 <sub>B</sub> <b>ACTIVE</b> , EIM occurred
CH7_STS	7	r	<b>ADC1 Channel 7 Interrupt Status</b> Conversion of Channel has finished 0 <sub>B</sub> <b>INACTIVE</b> , No Channel 7 Interrupt has occurred 1 <sub>B</sub> <b>ACTIVE</b> , Channel 7 Interrupt has occurred
CH6_STS	6	r	<b>ADC1 Channel 6 Interrupt Status</b> Conversion of Channel has finished 0 <sub>B</sub> <b>INACTIVE</b> , No Channel 6 Interrupt has occurred 1 <sub>B</sub> <b>ACTIVE</b> , Channel 6 Interrupt has occurred
CH5_STS	5	r	<b>ADC1 Channel 5 Interrupt Status</b> Conversion of Channel has finished 0 <sub>B</sub> <b>INACTIVE</b> , No Channel 5 Interrupt has occurred 1 <sub>B</sub> <b>ACTIVE</b> , Channel 5 Interrupt has occurred
CH4_STS	4	r	<b>ADC1 Channel 4 Interrupt Status</b> Conversion of Channel has finished 0 <sub>B</sub> <b>INACTIVE</b> , No Channel 4 Interrupt has occurred 1 <sub>B</sub> <b>ACTIVE</b> , Channel 4 Interrupt has occurred
CH3_STS	3	r	<b>ADC1 Channel 3 Interrupt Status</b> Conversion of Channel has finished 0 <sub>B</sub> <b>INACTIVE</b> , No Channel 3 Interrupt has occurred 1 <sub>B</sub> <b>ACTIVE</b> , Channel 3 Interrupt has occurred

---

**10-Bit Analog Digital Converter (ADC1)**


Field	Bits	Type	Description
<b>CH2_STS</b>	2	r	<b>ADC1 Channel 2 Interrupt Status</b> Conversion of Channel has finished 0 <sub>B</sub> <b>INACTIVE</b> , No Channel 2 Interrupt has occurred 1 <sub>B</sub> <b>ACTIVE</b> , Channel 2 Interrupt has occurred
<b>CH1_STS</b>	1	r	<b>ADC1 Channel 1 Interrupt Status</b> Conversion of Channel has finished 0 <sub>B</sub> <b>INACTIVE</b> , No Channel 1 Interrupt has occurred 1 <sub>B</sub> <b>ACTIVE</b> , Channel 1 Interrupt has occurred
<b>CH0_STS</b>	0	r	<b>ADC1 Channel 0 Interrupt Status</b> Conversion of Channel has finished 0 <sub>B</sub> <b>INACTIVE</b> , No Channel 0 Interrupt has occurred 1 <sub>B</sub> <b>ACTIVE</b> , Channel 0 Interrupt has occurred

## 10-Bit Analog Digital Converter (ADC1)

### ADC1 Interrupt Status Clear Register

The register is reset by RESET\_TYPE\_3.

ICLR	Offset	Reset Value
ADC1 Interrupt Status Clear Register	80 <sub>H</sub>	0000 0000 <sub>H</sub>

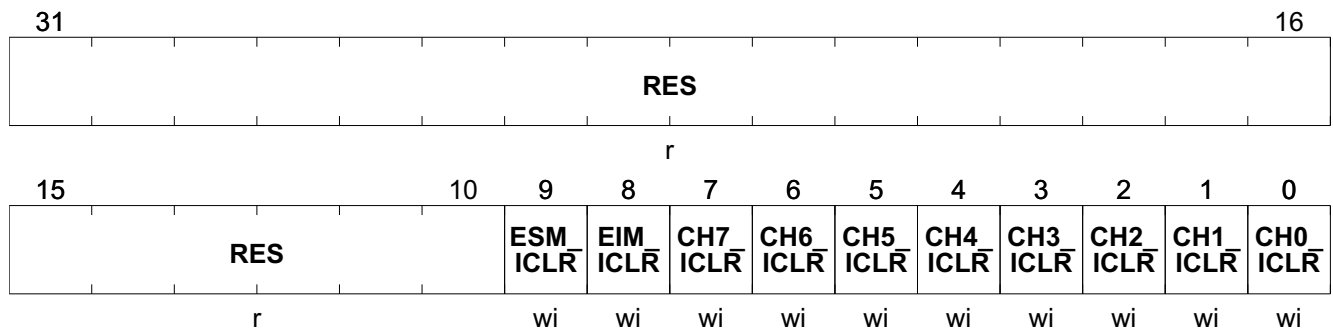

Field	Bits	Type	Description
RES	31:10	r	<b>Reserved</b> Always read as 0
ESM_ICLR	9	wi	<b>Exceptional Sequence Measurement (ESM) Status Clear</b> 0 <sub>B</sub> <b>Do not clear</b> , ESM is not cleared 1 <sub>B</sub> <b>Clear</b> , ESM is cleared
EIM_ICLR	8	wi	<b>Exceptional Interrupt Measurement (EIM) Status Clear</b> 0 <sub>B</sub> <b>Do not clear</b> , EIM is not cleared 1 <sub>B</sub> <b>Clear</b> , EIM is cleared
CH7_ICLR	7	wi	<b>ADC1 Channel 7 Interrupt Status Clear</b> Interrupt status is cleared 0 <sub>B</sub> <b>Do not clear</b> , interrupt status is not cleared 1 <sub>B</sub> <b>Clear</b> , interrupt status is cleared
CH6_ICLR	6	wi	<b>ADC1 Channel 6 Interrupt Status Clear</b> Interrupt status is cleared 0 <sub>B</sub> <b>Do not clear</b> , interrupt status is not cleared 1 <sub>B</sub> <b>Clear</b> , interrupt status is cleared
CH5_ICLR	5	wi	<b>ADC1 Channel 5 Interrupt Status Clear</b> Interrupt status is cleared 0 <sub>B</sub> <b>Do not clear</b> , interrupt status is not cleared 1 <sub>B</sub> <b>Clear</b> , interrupt status is cleared
CH4_ICLR	4	wi	<b>ADC1 Channel 4 Interrupt Status Clear</b> Interrupt status is cleared 0 <sub>B</sub> <b>Do not clear</b> , interrupt status is not cleared 1 <sub>B</sub> <b>Clear</b> , interrupt status is cleared
CH3_ICLR	3	wi	<b>ADC1 Channel 3 Interrupt Status Clear</b> Interrupt status is cleared 0 <sub>B</sub> <b>Do not clear</b> , interrupt status is not cleared 1 <sub>B</sub> <b>Clear</b> , interrupt status is cleared

---

**10-Bit Analog Digital Converter (ADC1)**


Field	Bits	Type	Description
<b>CH2_ICLR</b>	2	wi	<b>ADC1 Channel 2 Interrupt Status Clear</b> Interrupt status is cleared 0 <sub>B</sub> <b>Do not clear</b> , interrupt status is not cleared 1 <sub>B</sub> <b>Clear</b> , interrupt status is cleared
<b>CH1_ICLR</b>	1	wi	<b>ADC1 Channel 1 Interrupt Status Clear</b> Interrupt status is cleared 0 <sub>B</sub> <b>Do not clear</b> , interrupt status is not cleared 1 <sub>B</sub> <b>Clear</b> , interrupt status is cleared
<b>CH0_ICLR</b>	0	wi	<b>ADC1 Channel 0 Interrupt Status Clear</b> Interrupt status is cleared 0 <sub>B</sub> <b>Do not clear</b> , interrupt status is not cleared 1 <sub>B</sub> <b>Clear</b> , interrupt status is cleared

## 10-Bit Analog Digital Converter (ADC1)

### ADC1 Interrupt Enable Register

The register is reset by RESET\_TYPE\_3.

IE	Offset	Reset Value
ADC1 Interrupt Enable Register	7C <sub>H</sub>	0000 0000 <sub>H</sub>

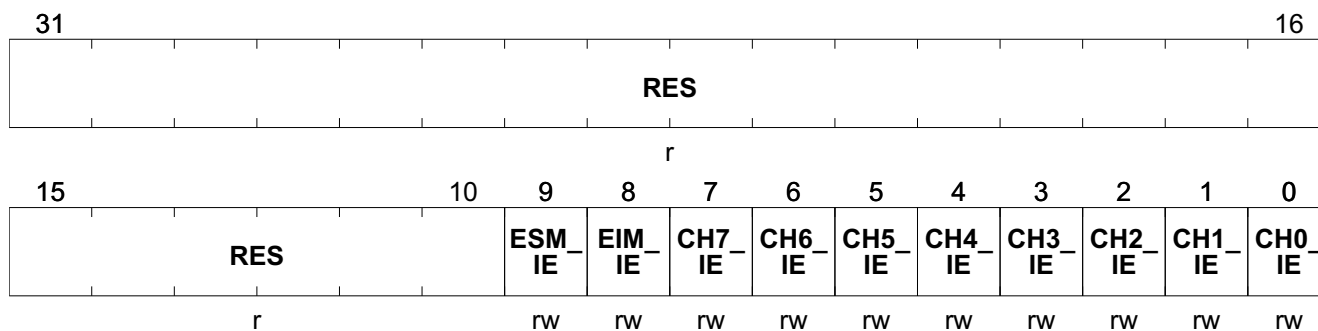

Field	Bits	Type	Description
RES	31:10	r	<b>Reserved</b> Always read as 0
ESM_IE	9	rw	<b>Exceptional Sequence Measurement (ESM) Interrupt Enable</b> 0 <sub>B</sub> <b>DISABLED</b> , Interrupt disabled 1 <sub>B</sub> <b>ENABLED</b> , Interrupt enabled
EIM_IE	8	rw	<b>Exceptional Interrupt Measurement (EIM) Interrupt Enable</b> 0 <sub>B</sub> <b>DISABLED</b> , Interrupt disabled 1 <sub>B</sub> <b>ENABLED</b> , Interrupt enabled
CH7_IE	7	rw	<b>ADC1 Channel 7 Interrupt Enable</b> 0 <sub>B</sub> <b>DISABLED</b> , Interrupt disabled 1 <sub>B</sub> <b>ENABLED</b> , Interrupt enabled
CH6_IE	6	rw	<b>ADC1 Channel 6 Interrupt Enable</b> 0 <sub>B</sub> <b>DISABLED</b> , Interrupt disabled 1 <sub>B</sub> <b>ENABLED</b> , Interrupt enabled
CH5_IE	5	rw	<b>ADC1 Channel 5 Interrupt Enable</b> 0 <sub>B</sub> <b>DISABLED</b> , Interrupt disabled 1 <sub>B</sub> <b>ENABLED</b> , Interrupt enabled
CH4_IE	4	rw	<b>ADC1 Channel 4 Interrupt Enable</b> 0 <sub>B</sub> <b>DISABLED</b> , Interrupt disabled 1 <sub>B</sub> <b>ENABLED</b> , Interrupt enabled
CH3_IE	3	rw	<b>ADC1 Channel 3 Interrupt Enable</b> 0 <sub>B</sub> <b>DISABLED</b> , Interrupt disabled 1 <sub>B</sub> <b>ENABLED</b> , Interrupt enabled
CH2_IE	2	rw	<b>ADC1 Channel 2 Interrupt Enable</b> 0 <sub>B</sub> <b>DISABLED</b> , Interrupt disabled 1 <sub>B</sub> <b>ENABLED</b> , Interrupt enabled



---

**10-Bit Analog Digital Converter (ADC1)**

Field	Bits	Type	Description
CH1_IE	1	rw	<b>ADC1 Channel 1 Interrupt Enable</b> 0 <sub>B</sub> <b>DISABLED</b> , Interrupt disabled 1 <sub>B</sub> <b>ENABLED</b> , Interrupt enabled
CH0_IE	0	rw	<b>ADC1 Channel 0 Interrupt Enable</b> 0 <sub>B</sub> <b>DISABLED</b> , Interrupt disabled 1 <sub>B</sub> <b>ENABLED</b> , Interrupt enabled

10-Bit Analog Digital Converter (ADC1)

24.8 Module Interfaces

24.8.1 ADC1 Hardware Trigger Selection

Hardware Trigger Inputs

Figure 204 shows the ADC1 trigger selection.

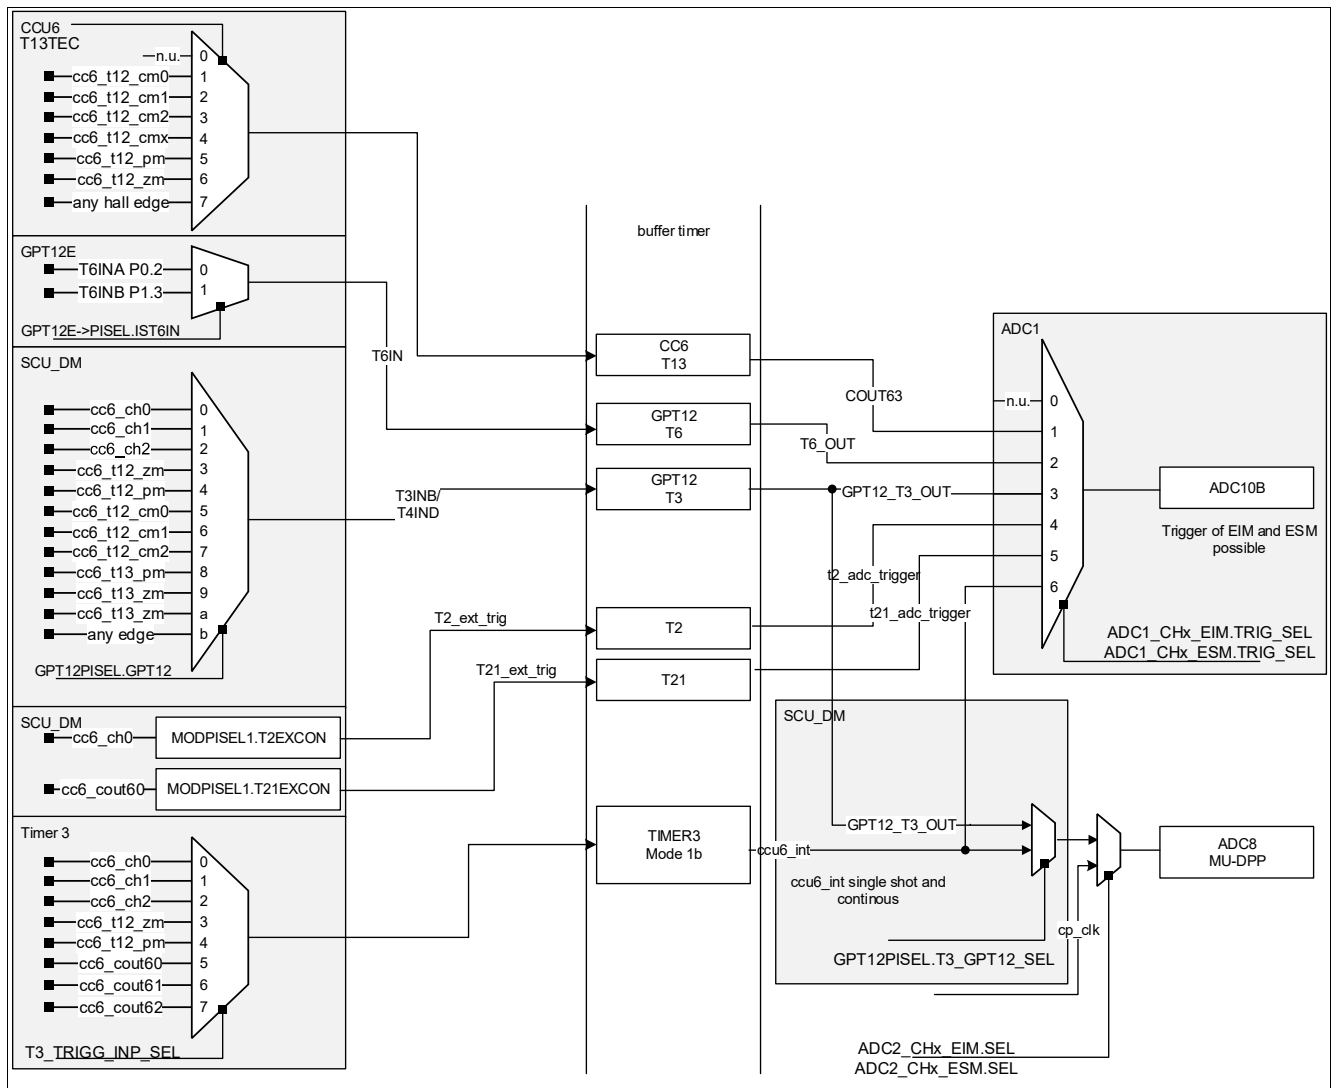



Figure 204 ADC1 Trigger Selection

**14-Bit Sigma Delta ADC (ADC3 / ADC4) - only valid for TLE9879-2QXA40**
**25 14-Bit Sigma Delta ADC (ADC3 / ADC4) - only valid for TLE9879-2QXA40**
**25.1 Features**
**Module Features:**

- full differential capacitive input.
- 14 Bit resolution.
- full differential scale:  $V_{diff,lin}$
- extended differential input range with reduced accuracy:  $V_{diff,nonlin}$
- sampling frequency:  $f_{ADC3/4}$
- programmable oversampling ratio:  $OSR$
- high supply rejection ratio
- internal clock jittering

**25.2 Functional Description**

The 2 integrated 14 Bit Sigma Delta ADCs are building a Sensor Interface for an external AMR / GMR Sensor. The application configuration is shown below.

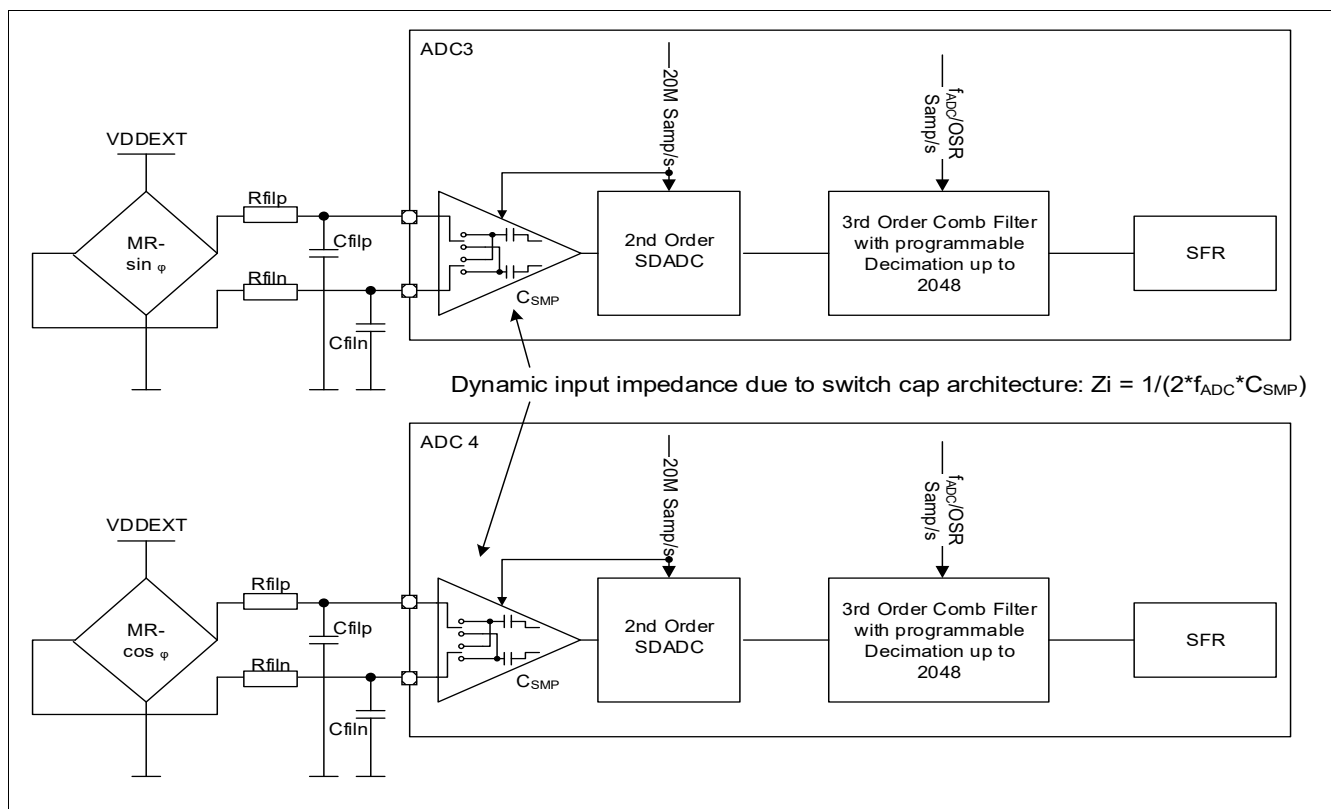

**Figure 205 Application of Integrated Sigma Delta ADCs**

### 14-Bit Sigma Delta ADC (ADC3 / ADC4) - only valid for TLE9879-2QXA40

The AMR / GMR Sensor provides two output signals, which are  $V_x = A_x \cos \phi_x + B_x$  and  $V_y = A_y \cos \phi_y + B_y$ . The sine and cosine are a result of the sensed motor rotation. The figure below shows the described output signal. Both signals  $V_x = A_x \cos \phi_x + B_x$  and  $V_y = A_y \cos \phi_y + B_y$  have an amplitude A and an Offset B (here called  $V_{CMX}$  and  $V_{CMY}$ ). The min/max-values of A and B are listed in the electrical characteristics of the product.

To determine the angle of this motor rotation two Sigma Delta ADC modules are required. The following well known equation gives the required angle:

(25.1)

$$\varphi = \arctan\left(\frac{V_x}{V_y}\right)$$

With the knowledge of the angle  $\phi$  the motor motion can be controlled. The Sensor is supplied with the VDDEXT supply. As its output signal is ratiometric to its supply voltage, the ADC has also to take the supply voltage as reference.

The ADCs used for this application contain second order Sigma Delta ADCs, with programmable oversampling ratios of up to 2048. Its inputs are connected to Port 2.w, Port 2.x, Port 2.y and Port 2.z. The required input configuration registers are placed in the 10 Bit SAR ADC module.

**Attention:** *to ensure a proper functionality of the ADC Module, it is required that already at power-up a proper configuration of the ADC inputs is done, otherwise ADC can become instable. In addition it is recommended to activate the analog ADC 30 fADC clock cycles prior to enabling the digital filter section. This is accomplished by setting the corresponding control register bits in subsequent SFR write operations. First valid results are available after  $3 \cdot \text{OSR} / \text{fADC}$*

The bandwidth of the sensor shown as an example is 30 kHz. Nevertheless there are applications with higher motor operating frequency and thus higher sensor bandwidth. The maximum input bandwidth is limited by the Nyquist criteria with the overall sampling rate defined using the following formula:

$$f_{\text{SAMP}} = f_{\text{ADC}} / \text{OSR}.$$

Thus at high OSR rates an additional external low pass filter is required to limit the input signal bandwidth.

Note: due to the switched capacitor nature of each ADC's input stage an fADC dependent input impedance has to be considered: the input signal will be attenuated depending on the external series resistances at each ADC input.

A rough estimation of the ADC's input impedance is given below:

$$z_l(\text{ADC}) = 1 / (2 \cdot f_{\text{ADC}} \cdot 100\text{fF});$$

$$\text{i.e.: } f_{\text{ADC}} = 20\text{MHz}; z_l = 250\text{KOhm}$$

The required angle resolution is  $< 0,1^\circ$  (TUE), which is  $< 13$  Bit.

The detailed structure of the used SDADC is shown below. It has the following components:

- differential capacitive input with a fixed gain stage
- 2 SC-Integrators running at  $f_s = 20$  MHz
- Quantizer
- two feedback DACs
- 3rd order comb filter

14-Bit Sigma Delta ADC (ADC3 / ADC4) - only valid for TLE9879-2QXA40

25.2.1 Input Voltage Range of SDADC

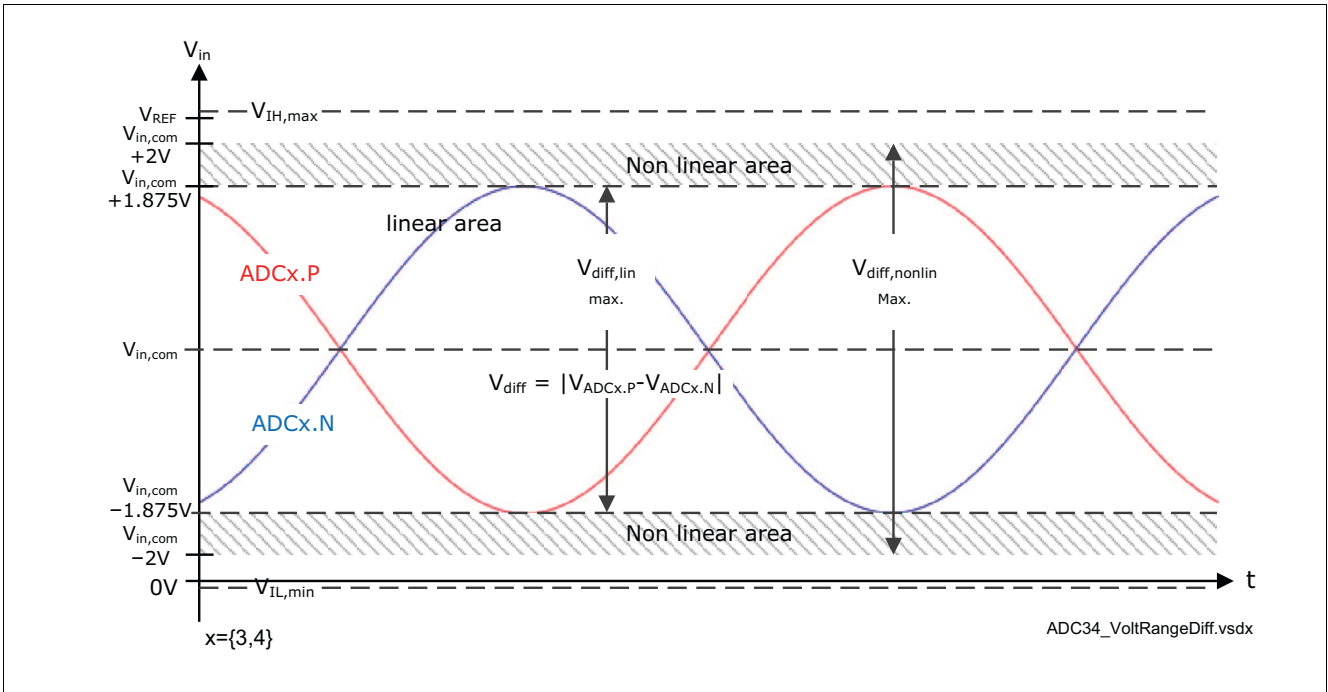


Figure 206 Input Voltage Range

25.2.2 Interpretation of SDADC output code

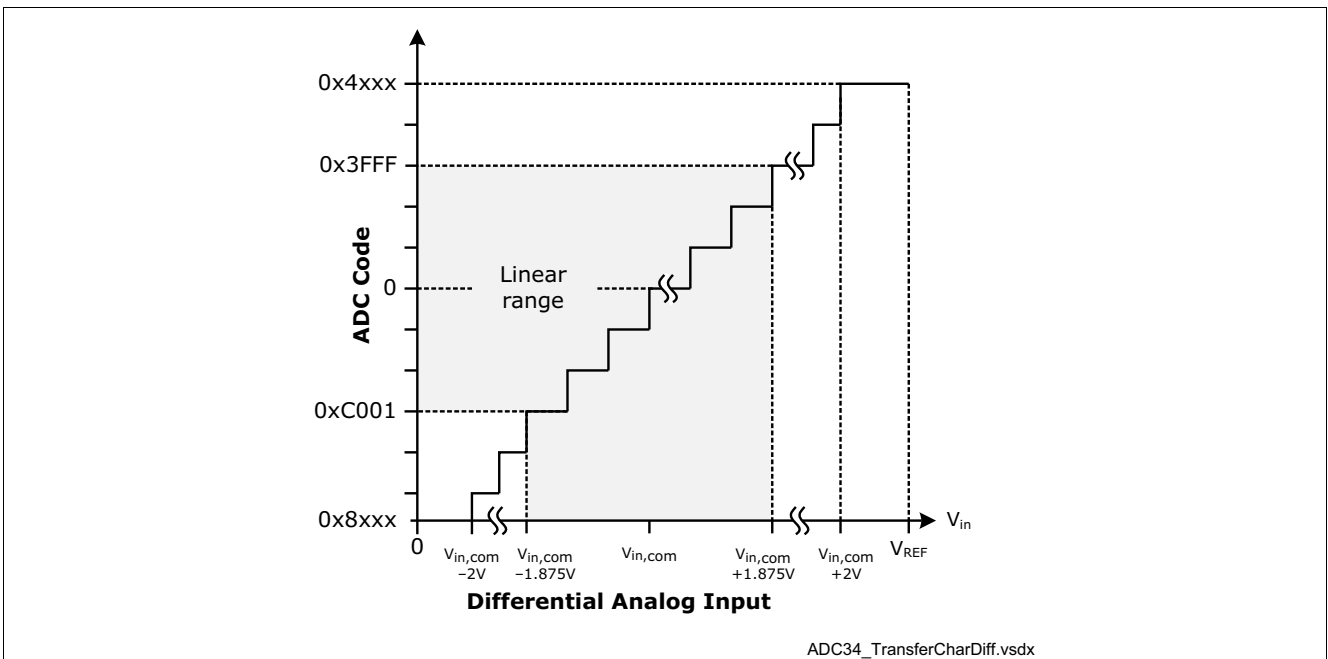


Figure 207 SDADC output code over input voltage

---

**14-Bit Sigma Delta ADC (ADC3 / ADC4) - only valid for TLE9879-2QXA40**
**25.2.3 Calculation of SDADC output code**

The code at the output of the decimation filter is calculated as follows:

$$\text{DEC\_Filt\_Output} = \left( \frac{V_{ADCx.P} - V_{ADCx.N}}{V_{REF}} \right) * ATT_{ADC34} * (2^{14} - 1)$$

**Figure 208 Calculation of SDADC output code**

**25.2.4 Offset Compensation**

The SDADC makes it possible to measure the offset of the internal circuit (caused by integrated circuit non-idealities) using an integrated dedicated block to determine the offset value, which then can be compensated by subtracting it from every subsequent measurement.

During the offset measurement phase the inputs of the SDADC are disconnected from the module and switched to an internal voltage, so it is not possible to measure the input signal at the same time.

To enable the offset measurement the corresponding enable bit **ADC3\_OFS\_MEAS\_EN** for ADC3 or **ADC4\_OFS\_MEAS\_EN** for ADC4 has to be set.

The offset result can be read in the **ADC3\_ADC4\_RESU** register.

**14-Bit Sigma Delta ADC (ADC3 / ADC4) - only valid for TLE9879-2QXA40**

### 25.3 SDADC Control Register

The next chapter lists the configuration possibilities of the two SDADCs, ADC3 and ADC4, used as TMR / AMR / GMR Sensor interface.

**Table 180 Register Address Space**

Module	Base Address	End Address	Note
ADC34	40008000 <sub>H</sub>	4000BFFF <sub>H</sub>	SDADC

**Table 181 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>SDADC Control Register,</b>			
<b>CTRL_STS</b>	ADC3 & ADC4 Control and Status	00 <sub>H</sub>	0480 0000 <sub>H</sub>
<b>RESU</b>	ADC3_ADC4_RESU	04 <sub>H</sub>	0000 0000 <sub>H</sub>

The registers are addressed wordwise.

#### ADC3 / ADC4 Control and Status

The register is reset by RESET\_TYPE\_3.

The following register consists of control and status bits. This Register is cleared by every reset.

CTRL_STS	Offset	Reset Value
ADC3 & ADC4 Control and Status	00 <sub>H</sub>	0480 0000 <sub>H</sub>

31		28		27		24		23		22		21		20		19		18		17		16			
ADC4_OSR				ADC34_DITHVAL				ADC3_4_D*		ADC34_EoC_CNT		ADC4_Eo*		Res		ADC4_SOC		ADC4_OF*		ADC4_EN					
rw				rw				rw		rw		r		r		rw		rw		rw					
15		12		11		10		8		7		6		5		4		3		2		1		0	
ADC3_OSR				ADC3_4_R*		Res		Res		Res		ADC3_Eo*		Res		ADC3_SOC		ADC3_OF*		ADC3_EN					
rw				rw		r		r		r		r		r		rw		rw		rw					

Field	Bits	Type	Description
ADC4_OSR	31:28	rw	<b>ADC4 Oversampling Ratio</b> 0111 <sub>B</sub> <b>128</b> , Factor 128 1000 <sub>B</sub> <b>256</b> , Factor 256 1001 <sub>B</sub> <b>512</b> , Factor 512 1010 <sub>B</sub> <b>1024</b> , Factor 1024 1011 <sub>B</sub> <b>2048</b> , Factor 2048

**14-Bit Sigma Delta ADC (ADC3 / ADC4) - only valid for TLE9879-2QXA40**

Field	Bits	Type	Description
<b>ADC34_DITHVAL</b>	27:24	rw	<b>ADC3/4 Dither Value (Amplitude) = ADC34_DITHVAL * 12,5mV</b> 0000 <sub>B</sub> <b>0</b> , Factor 0 0001 <sub>B</sub> <b>1</b> , Factor 1 0010 <sub>B</sub> <b>2</b> , Factor 2 0011 <sub>B</sub> <b>3</b> , Factor 3 0100 <sub>B</sub> <b>4</b> , Factor 4 0101 <sub>B</sub> <b>5</b> , Factor 5 0110 <sub>B</sub> <b>6</b> , Factor 6 0111 <sub>B</sub> <b>7</b> , Factor 7 1000 <sub>B</sub> <b>8</b> , Factor 8 1001 <sub>B</sub> <b>9</b> , Factor 9 1010 <sub>B</sub> <b>10</b> , Factor 10 1011 <sub>B</sub> <b>11</b> , Factor 11 1011 <sub>B</sub> <b>12</b> , Factor 12 1011 <sub>B</sub> <b>13</b> , Factor 13 1011 <sub>B</sub> <b>14</b> , Factor 14 1011 <sub>B</sub> <b>15</b> , Factor 15
<b>ADC34_DITHEN</b>	23	rw	<b>ADC3/4 Dithering Enable</b> 0 <sub>B</sub> <b>Disable</b> , ADC34 Dithering 1 <sub>B</sub> <b>Enable</b> , ADC34 Dithering
<b>ADC34_EoC_CNT</b>	22:21	rw	<b>ADC3/4 EoC counter</b> 00 <sub>B</sub> <b>0</b> , ADC EoC with every real conversion (IRQ with every EoC) 01 <sub>B</sub> <b>8</b> , ADC EoC with every 8th real conversion (IRQ with every EoC) 10 <sub>B</sub> <b>16</b> , ADC EoC with every 16th real conversion (IRQ with every EoC) 11 <sub>B</sub> <b>32</b> , ADC EoC with every 32nd real conversion (IRQ with every EoC)
<b>ADC4_EoC_STS</b>	20	r	<b>ADC4 End of Conversion</b> 0 <sub>B</sub> <b>Conversion ongoing</b> , ADC4 conversion still in progress 1 <sub>B</sub> <b>Conversion finished</b> , ADC4 conversion terminated
<b>ADC4_EoC</b>	19	r	<b>ADC4 End of Conversion (DMA Ch13 Request)</b> 0 <sub>B</sub> <b>No DMA Request</b> , ADC4 does not request DMA resource 1 <sub>B</sub> <b>DMA Request</b> , ADC4 requests DMA resource
<b>ADC4_SOC</b>	18	rw	<b>ADC4 conversion enable (set after enabling ADC to allow settling of the analog converter part)<sup>1)</sup></b> 0 <sub>B</sub> <b>Disable</b> , ADC4 data processing 1 <sub>B</sub> <b>Enable</b> , ADC4 data processing
<b>ADC4_OFS_MEAS_EN</b>	17	rw	<b>ADC4 Offset Measurement Enable</b> 0 <sub>B</sub> <b>DISABLE</b> , Offset Measurement 1 <sub>B</sub> <b>ENABLE</b> , Offset Measurement



**14-Bit Sigma Delta ADC (ADC3 / ADC4) - only valid for TLE9879-2QXA40**

Field	Bits	Type	Description
<b>ADC4_EN</b>	16	rw	<b>ADC4 analog frontend Enable</b> 0 <sub>B</sub> <b>DISABLE</b> , ADC4 analog frontend switched off 1 <sub>B</sub> <b>ENABLE</b> , ADC4 analog frontend switched on
<b>ADC3_OSR</b>	15:12	rw	<b>ADC3 Oversampling Ratio</b> 0111 <sub>B</sub> <b>128</b> , Factor 128 1000 <sub>B</sub> <b>256</b> , Factor 256 1001 <sub>B</sub> <b>512</b> , Factor 512 1010 <sub>B</sub> <b>1024</b> , Factor 1024 1011 <sub>B</sub> <b>2048</b> , Factor 2048
<b>Res</b>	11	rw	<b>Reserved</b> Must be written as 0
<b>Res</b>	10:8	r	<b>Reserved</b> Always read as 0
<b>Res</b>	7	r	<b>Reserved</b> Always read as 0
<b>ADC34_DREQ_SEL</b>	6:5	rw	<b>DMA request source select for DMA Ch13</b> 00 <sub>B</sub> <b>no DMA request</b> , DMA request masked for both ADCs 01 <sub>B</sub> <b>ADC3 DREQ</b> , only ADC3_EOC DMA request 10 <sub>B</sub> <b>ADC4 DREQ</b> , only ADC4_EOC DMA request 11 <sub>B</sub> <b>ADC34 DREQ</b> , ADC3_EOC or ADC4_EOC DMA request
<b>ADC3_EoC_STS</b>	4	r	<b>ADC3 End of Conversion</b> 0 <sub>B</sub> <b>Conversion ongoing</b> , ADC3 conversion still in progress 1 <sub>B</sub> <b>Conversion finished</b> , ADC3 conversion terminated
<b>ADC3_EoC</b>	3	r	<b>ADC3 End of Conversion (DMA Ch13 Request)</b> 0 <sub>B</sub> <b>No DMA Request</b> , ADC3 does not request DMA resource 1 <sub>B</sub> <b>DMA Request</b> , ADC3 requests DMA resource
<b>ADC3_SOC</b>	2	rw	<b>ADC3 conversion enable (set after enabling ADC to allow settling of the analog converter part)<sup>2)</sup></b> 0 <sub>B</sub> <b>Disable</b> , ADC3 data processing 1 <sub>B</sub> <b>Enable</b> , ADC3 data processing
<b>ADC3_OFS_MEAS_EN</b>	1	rw	<b>ADC3 Offset Measurement Enable</b> 0 <sub>B</sub> <b>DISABLE</b> , Offset Measurement 1 <sub>B</sub> <b>ENABLE</b> , Offset Measurement
<b>ADC3_EN</b>	0	rw	<b>ADC3 analog frontend Enable</b> 0 <sub>B</sub> <b>DISABLE</b> , ADC3 analog frontend switched off 1 <sub>B</sub> <b>ENABLE</b> , ADC3 analog frontend switched on


- 1) ADC4\_SOC: Note that while ADC4\_SOC is set the digital data processing is active independent of the state of the analog frontend (ADC4\_EN). It is therefore recommended to deactivate the SDADC by clearing both, ADC4\_SOC and ADC4\_EN within one register access
- 2) ADC3\_SOC: Note that while ADC3\_SOC is set the digital data processing is active independent of the state of the analog frontend (ADC3\_EN). It is therefore recommended to deactivate the SDADC by clearing both, ADC3\_SOC and ADC3\_EN within one register access

**14-Bit Sigma Delta ADC (ADC3 / ADC4) - only valid for TLE9879-2QXA40**

**ADC3\_ADC4\_RESU**

The register is reset by RESET\_TYPE\_3.

RESU	Offset	Reset Value
ADC3_ADC4_RESU	04 <sub>H</sub>	0000 0000 <sub>H</sub>

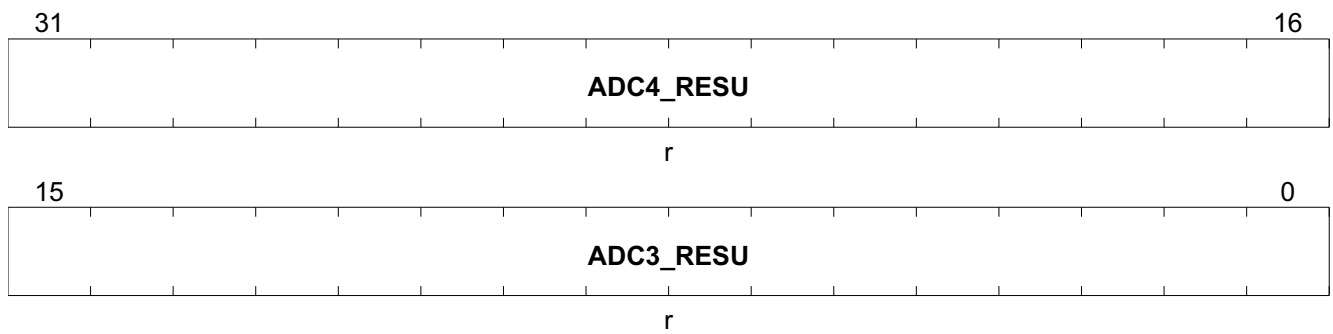

Field	Bits	Type	Description
ADC4_RESU	31:16	r	<b>ADC4 Result Register</b> 2th Complement ADC Conversion Result
ADC3_RESU	15:0	r	<b>ADC3 Result Register</b> 2th Complement ADC Conversion Result

## High-Voltage Monitor Input

# 26 High-Voltage Monitor Input

## 26.1 Features


- High-voltage input with  $V_{\text{MONth}}$  threshold voltage
- Integrated selectable pull-up and pull-down current sources
- Wake capability for power saving modes
- Level change sensitivity configurable for transitions from low to high, high to low or both directions
- MON inputs can also be evaluated with **ADC2** in active mode (see also Chapter **Analog Digital Converter**).

## 26.2 Introduction

This module is dedicated to monitor external voltage levels above or below a specified threshold or it can be used to detect a wake-up event at the high-voltage MON pin in low-power mode. The input is sensitive to an input level monitoring, this is available when the module is switched to active mode with the SFR bit EN.

To use the Wake function during low power mode of the IC, the monitoring pin is switched to Sleep Mode via the SFR bit EN.

### 26.2.1 Block Diagram

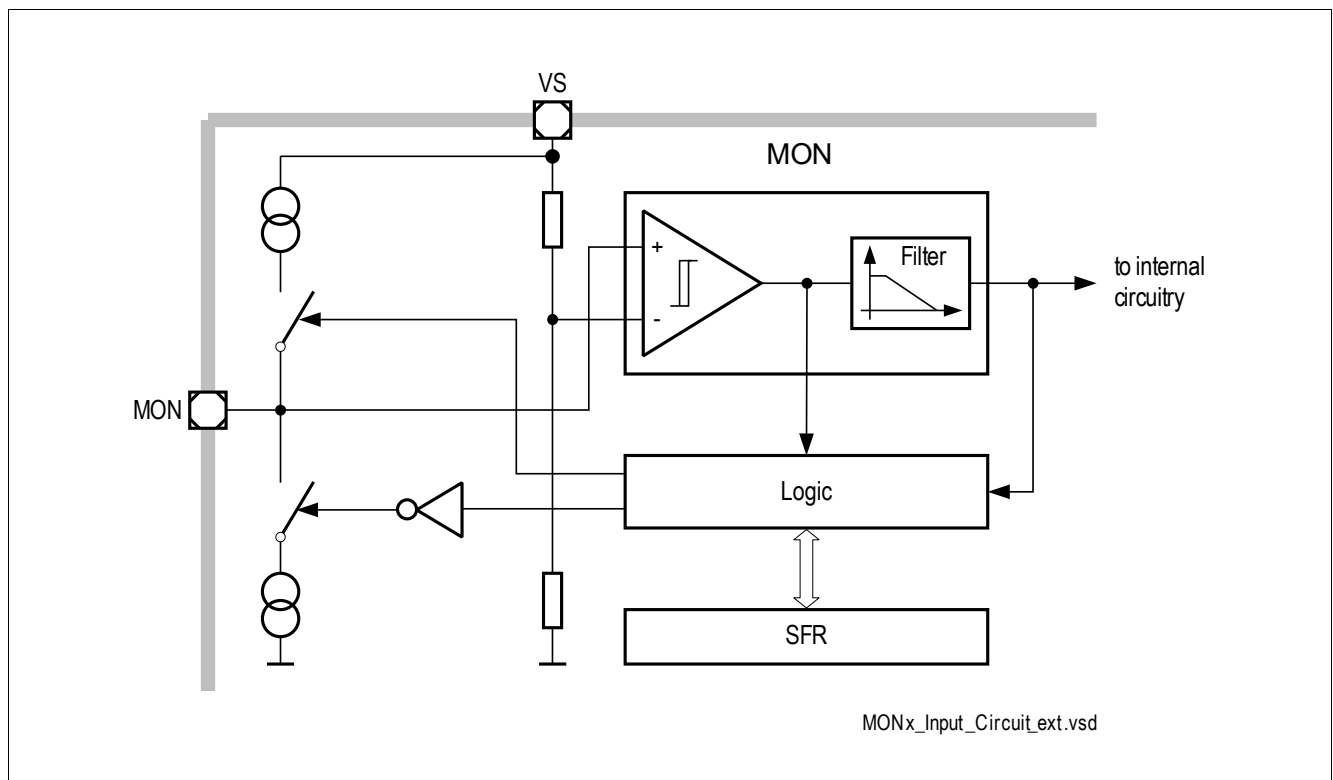

**Figure 209 Monitoring Input Block Diagram**

## High-Voltage Monitor Input

### 26.3 Functional Description


For a wake-up on a positive voltage transition, the **RISE** bit has to be configured. For a wake-up on a negative voltage transition, the corresponding bit **FALL** has to be set. This configuration can also be used for level change detection in active mode.

As the system provides the functionality of cyclic sense, the IN can be configured as a wake-up source for this mode. This is done by setting the bit **CYC**.

The IN also includes an input circuit with pull-up (can be activated by **PU** bit) and pull-down (can be activated by **PD** Bit) current sources to define a certain voltage level with open inputs and a filter function to avoid wake-up events caused by unwanted voltage transients at the module input.

When automatic current source selection is enabled, a voltage level at the IN input of  $V_{MON\_th} < V_{MONx} < V_S - 1V$  activates the pull-up current source. If the IN voltage is between  $1V < V_{MONx} < V_{MON\_th}$  the pull-down sink is activated, providing stable levels at the monitoring/wake-up inputs. Below and above these voltage ranges the current is minimized to a leakage current. This automatic activation of the current sources, has to be done by setting **PU** and **PD** bit to one at the same time.

**Note:** In case a Monitoring Input is deactivated by setting bit **EN** to zero, it can neither be used as a wake-up source nor can it be used to detect logic levels!

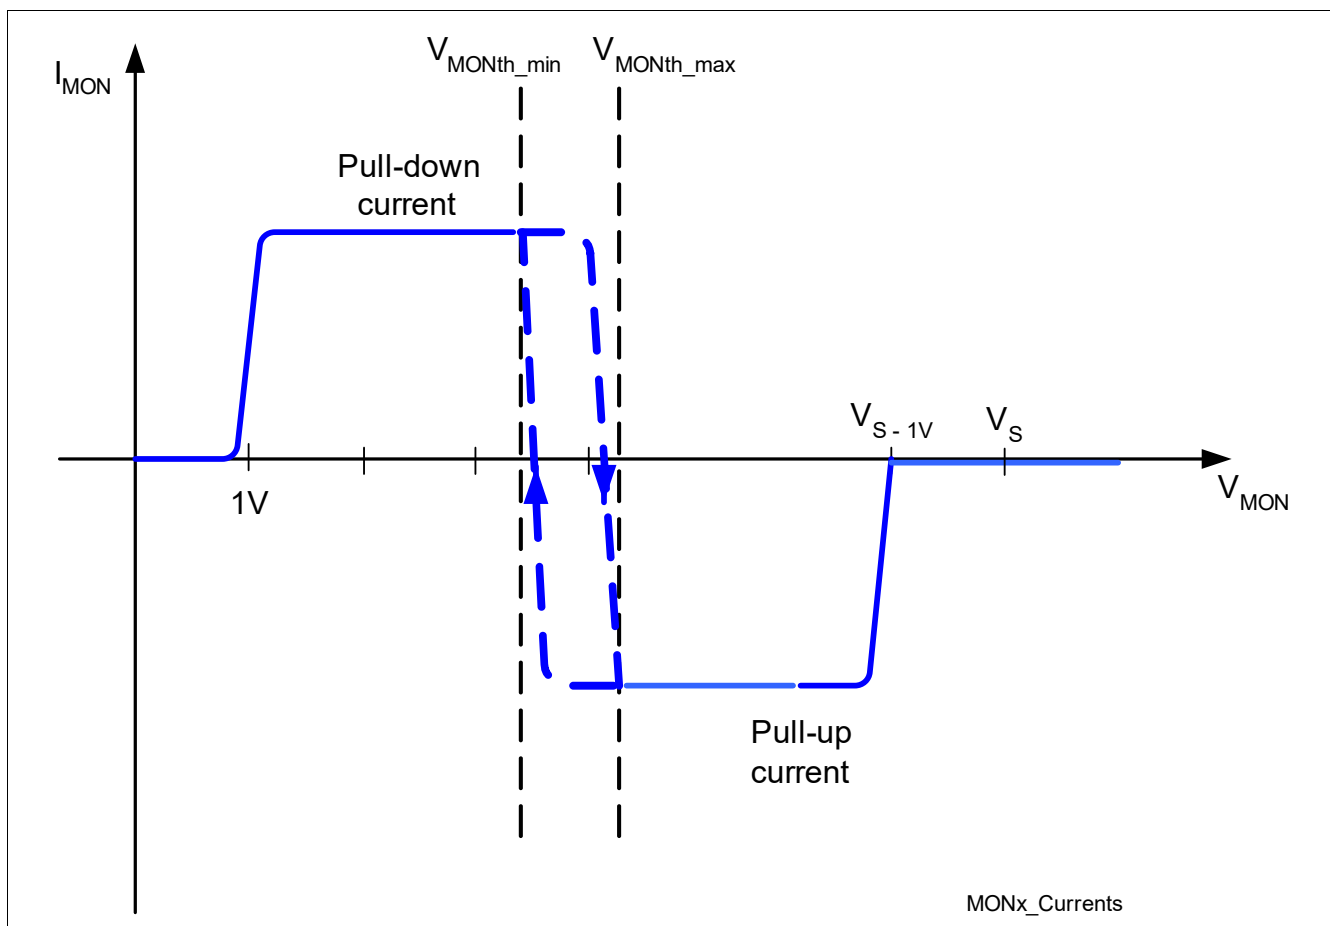

**Figure 210** Module - HV\_MON Input Characteristics for switchable pull current and static pull-down (on top) or pull-up

## High-Voltage Monitor Input

The following tables provides an overview of the configuration possibilities on the INs via **SFR**.

**Table 182** includes all pull-up and pull-down setup scenarios which can be chosen for one IN. **Table 183** shows an overview of the available states of a IN.

**Table 182 Pull-Up / Pull-Down Input Current**

PU	PD	Output Current	Description
0	0	leakage current <sup>1)</sup>	pull-up/down current source disabled
0	1	pull-down	pull-down current source enabled (for low active switches)
1	0	pull-up	pull-up current source enabled (for high active switches)
1	1	switchable <sup>2)</sup>	pull-up/down depending on input voltage

1) all current sources switched off.

2) will be automatically switched by the MON\_IN circuit depending on level of input signal.

**Table 183 EN MON Mode definition**

EN	Mode	Description
0	disabled <sup>1)</sup>	Monitoring input is disabled (no wake-up possible!)
1	Sleep Mode	Monitoring input is set to low power mode (use for device Low Power Mode)
1	normal mode	Monitoring input is in active mode

1) if a IN is disabled it cannot be used as a wake-up source anymore.

## High-Voltage Monitor Input

### 26.4 Register Definition

This chapter describes the configuration register for MON1.

The **Base Address** for this Register is 50004000<sub>H</sub>.

The registers listed below are located in the **SFR** address space. To access them, no paging is required.

**Table 184 Register Address Space**

Module	Base Address	End Address	Note
MON	50004000 <sub>H</sub>	50004FFF <sub>H</sub>	Monitor Inputs

**Table 185 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Register Definition, Monitor Input Registers</b>			
<b>CNF</b>	Settings Monitor 1	034 <sub>H</sub>	0100 0111 <sub>B</sub>

The registers are addressed wordwise.

#### 26.4.1 Monitor Input Registers

The monitor input registers are part of the PMU. This is due to the fact that this circuit requires supply and clock, during system wide low power modes.

##### Settings Monitor 1

The register is reset by RESET\_TYPE\_2.

CNF	Offset	Reset Value
Settings Monitor 1	034 <sub>H</sub>	0100 0111 <sub>B</sub>

7	6	5	4	3	2	1	0
STS	RES	PU	PD	CYC	RISE	FALL	EN
r	r	rw	rw	rw	rw	rw	rw

Field	Bits	Type	Description
STS	7	r	<p><b>MON Status Input will only be updated if one of the wake flags CNF.RISE or CNF.FALL are set</b></p> <p><b>For direct MON status see MODIEN3.MONSTS</b></p> <p>0<sub>B</sub> , MON input has low status</p> <p>1<sub>B</sub> , MON input has high status</p>
RES	6	r	<b>Reserved</b>

---

**High-Voltage Monitor Input**

Field	Bits	Type	Description
<b>PU</b>	5	rw	<b>Pull-Up Current Source for MON Input Enable</b>  <i>Note: Works only if EN is enabled</i>  0 <sub>B</sub> , Pull-up source disabled 1 <sub>B</sub> , Pull-up source enabled
<b>PD</b>	4	rw	<b>Pull-Down Current Source for MON Input Enable</b>  <i>Note: Works only if EN is enabled</i>  0 <sub>B</sub> , Pull-down source disabled 1 <sub>B</sub> , Pull-down source enabled
<b>CYC</b>	3	rw	<b>MON for Cycle Sense Enable</b>  <i>Note: Works only if EN is enabled</i>  0 <sub>B</sub> , Cycle Sense disabled 1 <sub>B</sub> , Cycle Sense enabled
<b>RISE</b>	2	rw	<b>MON Wake-up on Rising Edge Enable</b>  <i>Note: Works only if EN is enabled</i>  0 <sub>B</sub> , Wake-up disabled 1 <sub>B</sub> , Wake-up enabled
<b>FALL</b>	1	rw	<b>MON Wake-up on Falling Edge Enable</b>  <i>Note: Works only if EN is enabled</i>  0 <sub>B</sub> , Wake-up disabled 1 <sub>B</sub> , Wake-up enabled
<b>EN</b>	0	rw	<b>MON Enable</b> 0 <sub>B</sub> , MON disabled 1 <sub>B</sub> , MON enabled

---

**Bridge Driver (incl. Charge Pump)****27 Bridge Driver (incl. Charge Pump)****27.1 Features**

The MOSFET Driver is intended to drive external normal level NFET transistors in bridge configuration. The driver provides many diagnostic possibilities to detect faults.

**Functional Features**

- External Power NFET Transistor Driver Stage with driver capability of  $Q_{tot\_max}$  (see data sheet for values).
- Implemented adjustable cross conduction protection.
- Supply voltage (VSD) monitoring incl. adjustable over- and undervoltage shutdown with configurable interrupt signalling.
- VSD operating range:  $V_{SD\_AM}$  (see data sheet for values)
- VDS comparators for short circuit detection in on- and off-state
- Open-Load detection in off-state
- Flexible PWM frequency range, rates above 25 kHz require power dissipation and duty cycle resolution analysis


**27.2 Introduction**

The MOSFET Driver Stage can be used for controlling external Power NFET Transistors (normal level). The module output is controlled by SFR or System PWM Machine (CCU6).



## Bridge Driver (incl. Charge Pump)

### 27.2.1 Block Diagram

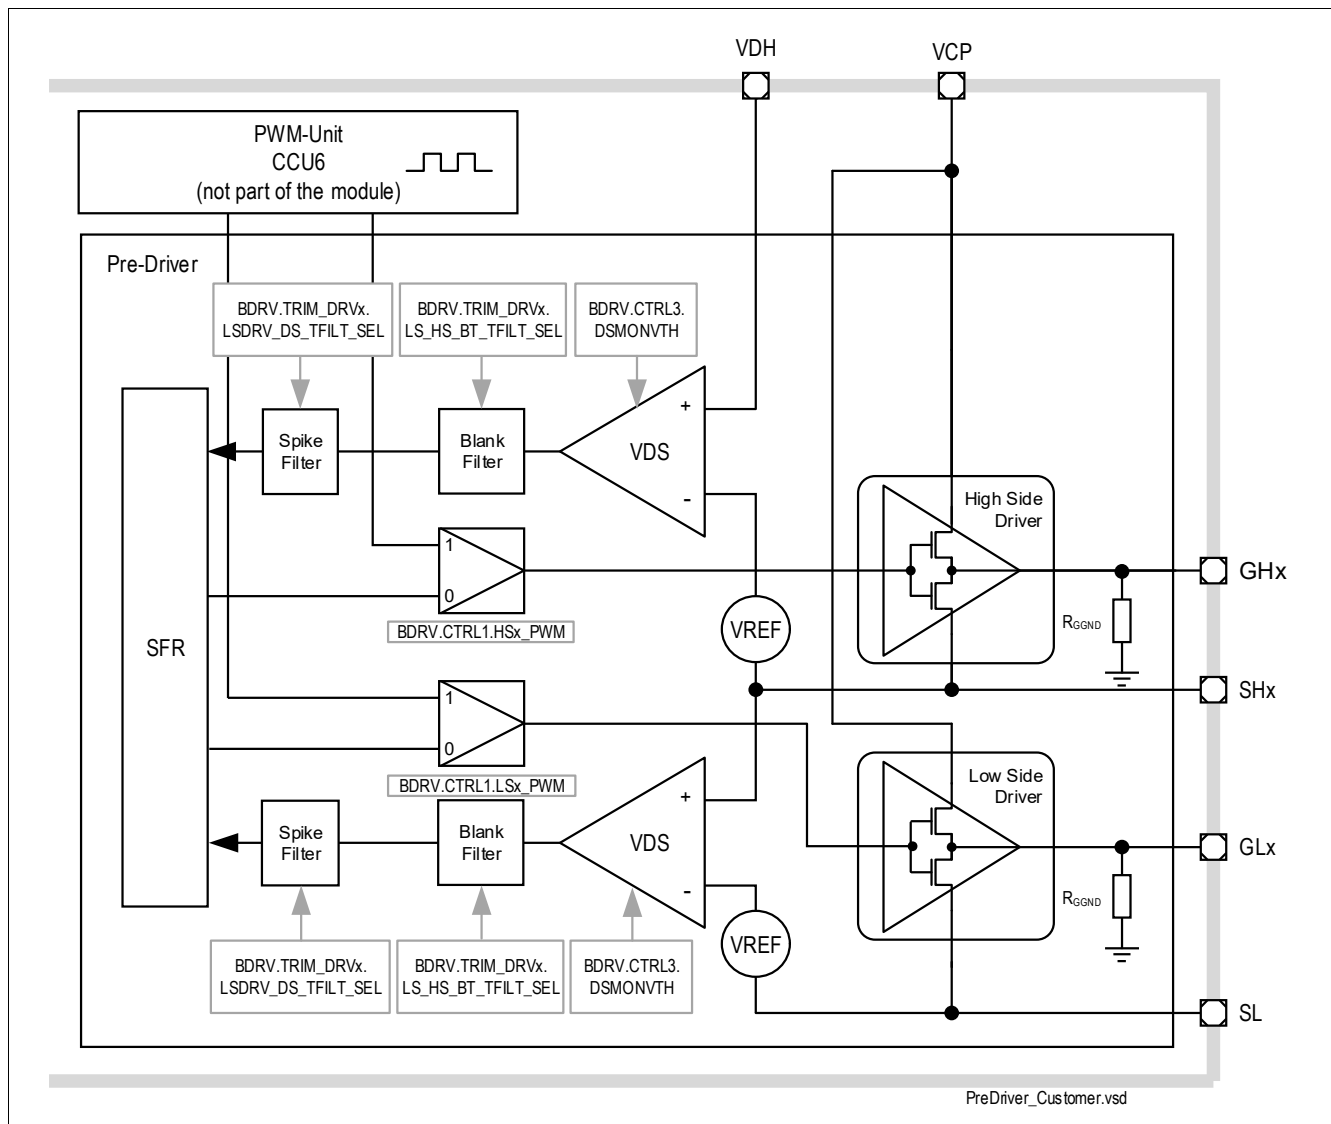

**Figure 211 Driver Module Block Diagram (incl. system connections)**

### 27.2.2 General

The Driver can be controlled in two different ways:

- In Normal Mode the output stage is fully controllable through the SFR registers CTRLx (x = 1,2,3). Protection functions such as overcurrent and open-load detection are available.
- The PWM Mode can also be enabled by the corresponding bit in **CTRL1** and **CTRL2**. The PWM must be configured in the System PWM Module (CCU6). All protection functions are available in PWM mode as well.

#### Protection Functions

- Overcurrent detection and shutdown feature for external MOSFET by Drain Source measurement
- Programmable minimum cross current protection time
- Open-load detection feature in Off-state for external MOSFET.

Bridge Driver (incl. Charge Pump)

### 27.3 Functional Description

#### 27.3.1 Normal Operation

For Normal Operation the output stages are controlled by software, using SFR registers. The driver is designed to drive mainly capacitive loads with a small resistance. The maximum load dc current is 10 mA. The main features provided by the Driver module are the following:

- **Adjustable Slew Rate** for improved EMI behavior. The slew rate can be adapted by the corresponding bits in the **CTRL3** register.
- **Off-State Open-Load Detection** with two different thresholds and currents. The detailed principle of the Off-State Open-Load detection is shown in the chapter **OFF-State Short Circuit Detection**.

#### 27.3.2 Slew Rate Control

For Slew Rate Control the charge and discharge current of the MOSFET gate can be adjusted. This is done by programming the corresponding bits in the SFR.

A separate slew rate control is implemented for both, turn-on and turn-off control phases

The drive current for the MOSFET gate can be shaped for the charge and discharge phase. Therefore 4 current steps with timings can be programmed for charge and discharge phase. The drive current for each current step can be programmed with 5 bits (32 levels) and the length of the current step with 3 bits (50ns each step).

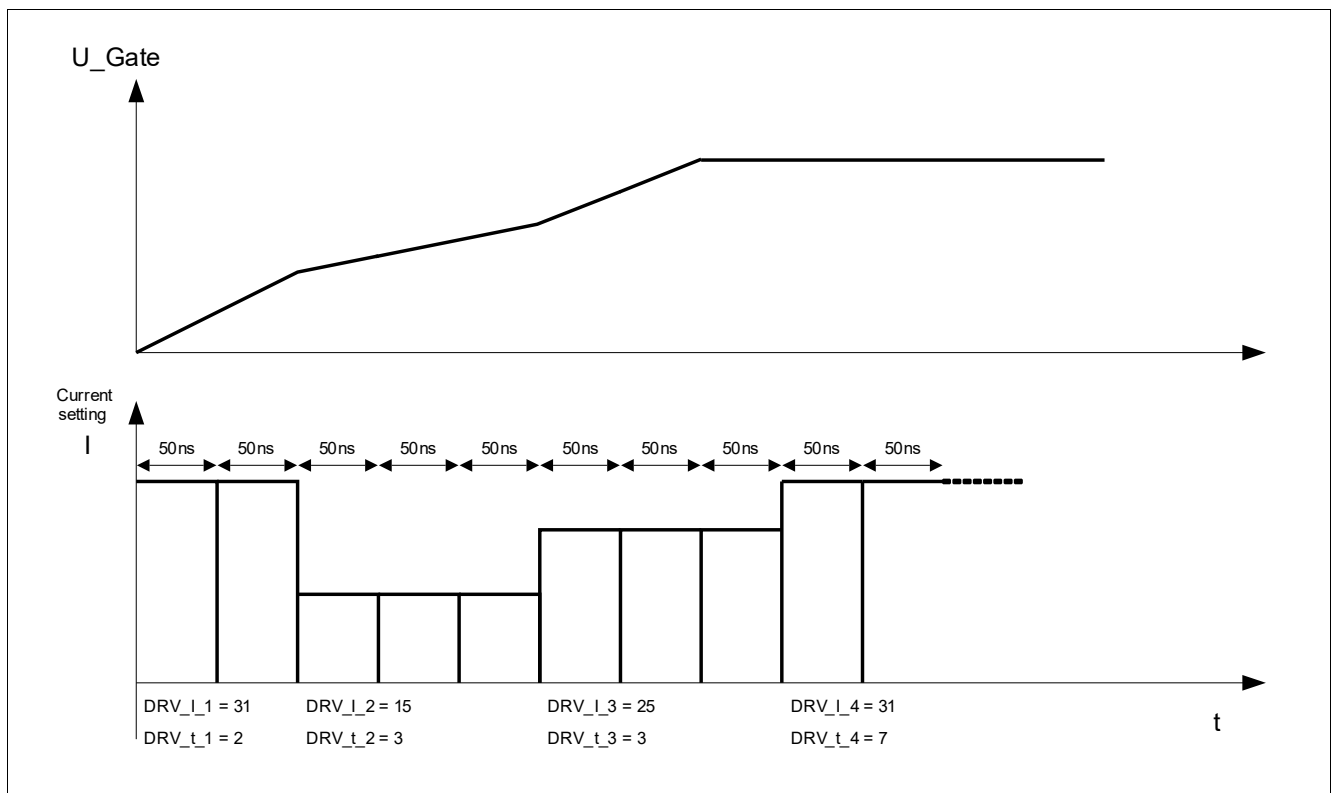


Figure 212 Driver Slew Rate Control

Bridge Driver (incl. Charge Pump)

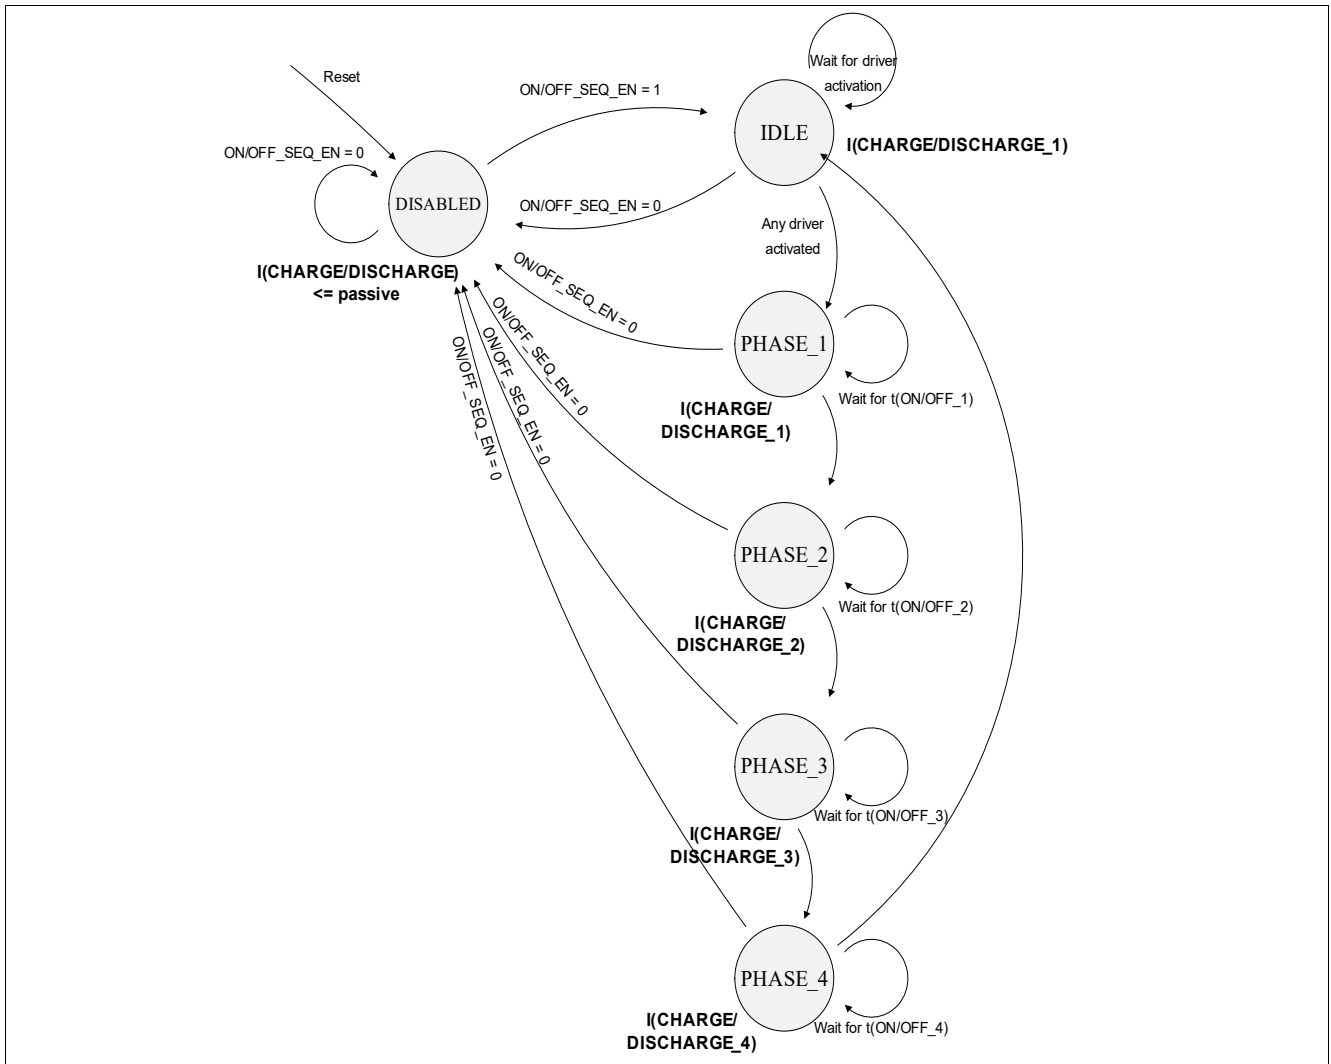


Figure 213 Driver Slew Rate Control Sequencer

Bridge Driver (incl. Charge Pump)

27.3.3 PWM Operation

In PWM Mode the Driver Stages are controlled by the on-chip PWM Generator (CCU6). The PWM Mode of the Driver Stages has to be enabled by the corresponding bit in **CTRL1.LSx/HSx\_PWM** and **CTRL2.LSx/HSx\_PWM**. The control of the Driver Stages by the PWM Generator gets only active when all LSx/HSx\_PWM bits are set to one. The proper PWM Generator configuration must be done in the SFRs of the PWM Module (CCU6).

In PWM Mode the Driver should be enabled by the corresponding bits in the **CTRL1/CTRL2** register, first. If this has been done the PWM State Machine can be enabled to deliver the PWM Signal. This procedure is recommended to avoid any unwanted glitches at the driver output.

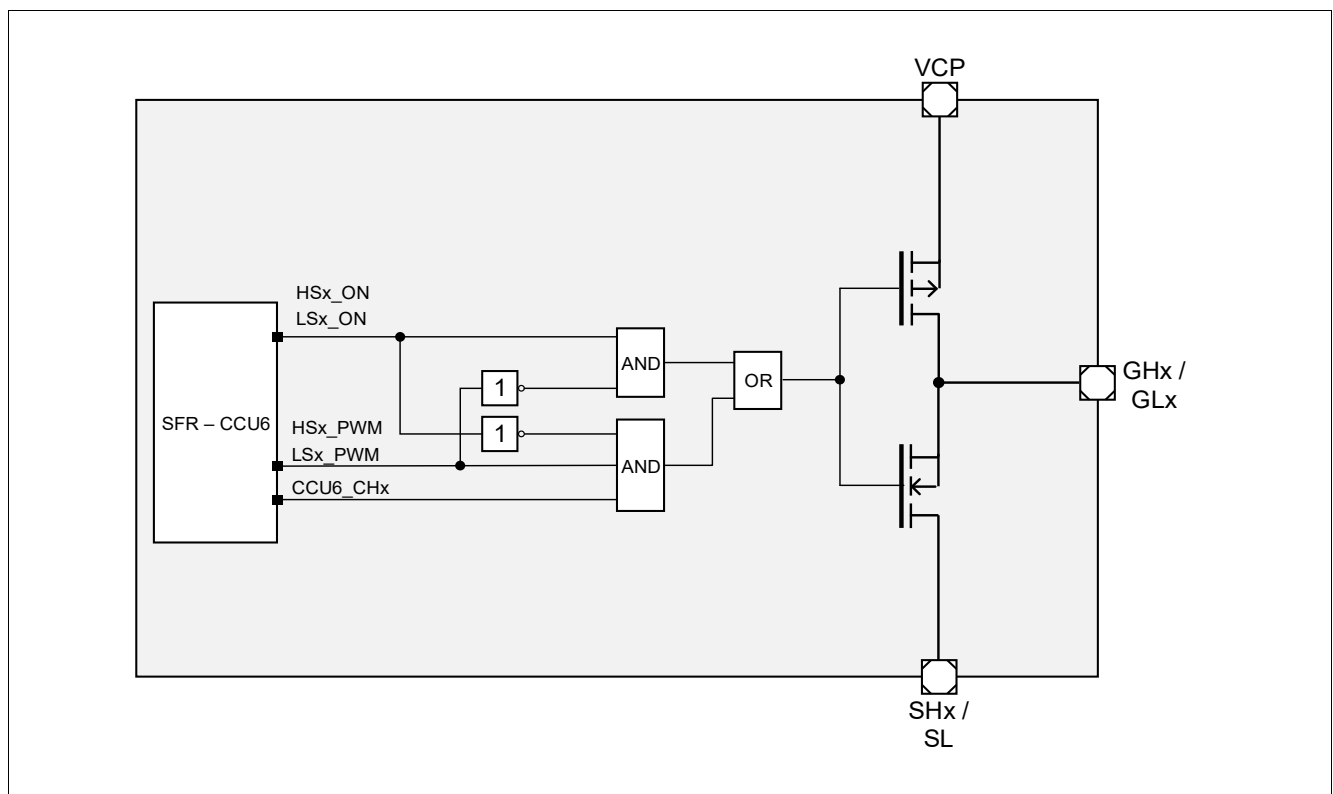


Figure 214 Control Logic of Driver in PWM Mode

The MOSFET Drivers are mapped to following CCU6 channels:

Table 186 Driver Control by CCU6

Driver dedicated to external FET:	Corresponding CCU6 channel (CCU6_Chx)	Comment
LS1	COUT60	
LS2	COUT61	
LS3	COUT62	
HS1	CC60	
HS2	CC61	
HS3	CC62	

Bridge Driver (incl. Charge Pump)

27.3.4 Supply-Generation of Driver

The driver is supplied by a 2 Stage Charge Pump. The charge pump enables a duty cycle range from 0 - 100%. The regulated output voltage is typically  $VSD + 14V$ . The charge pump output VCP is monitored via an undervoltage comparator. If undervoltage is detected the drivers will be switched off. The threshold for this undervoltage detection can be adjusted by **VCP\_LOWTH2**.

As shown in **Figure 215** the pump requires three external capacitors.


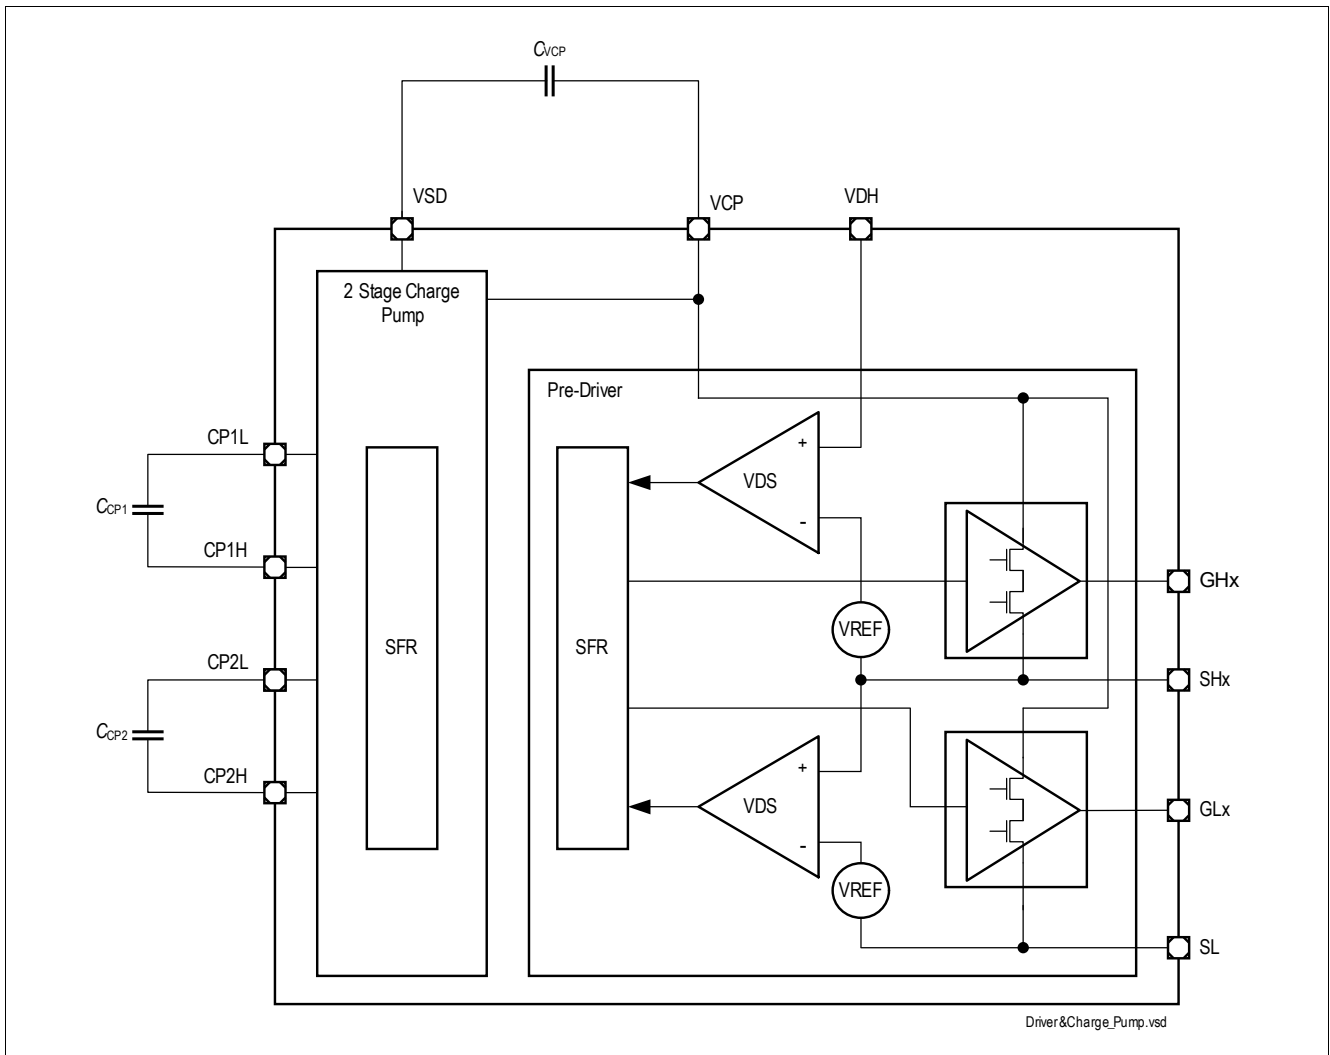


Figure 215 Supply Generation of Driver

## Bridge Driver (incl. Charge Pump)

### 27.3.4.1 Clock Generator of Driver Supply

The clock generator of the charge pump uses a spread spectrum technique to minimize emission caused by the charge pump operation on the supply voltage VSD. The structure of the clock generation for the charge pump is shown in the figure below:

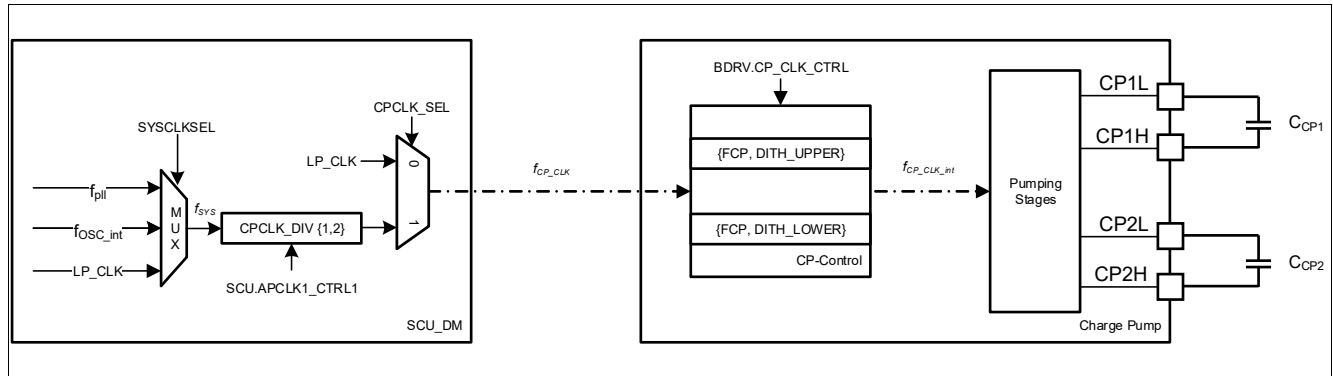

**Figure 216** Clock Generation of Charge Pump Block

The charge pump clock  $f_{CP\_CLK\_int}$  is derived from the system clock  $f_{sys}$  or LP\_CLK. Inside the SCU\_DM the system clock is divided by a configurable value and provided as  $f_{CP\_CLK}$  to the charge pump control block. During operation the frequency of the charge pump is varied between two frequency boundaries. These boundaries are defined by the concatenation of {FCP, DITH\_UPPER} bits for the upper boundary and {FCP, DITH\_LOWER} bits for the lower boundary (the concatenated bits represent a frequency divider value for  $f_{CP\_CLK}$ ).

### 27.3.5 Overcurrent Detection - VDS measurement

The Drain Source Voltage (VDS) of each MOSFET is monitored by a comparator. In case the VDS voltage is higher than the limit set in DSMONVTH during the on phase of the MOSFET all drivers are switched off. The bit HSx\_OC\_STS or LSx\_OC\_STS is set.

The feature of switching off all drivers (global shutdown) in case one driver has detected a short condition can be disabled by bit HSx\_OC\_DIS / LSx\_OC\_DIS. If the bit is set to one only the driver which detected the short will be turned off (local shutdown).

The filter time for the VDS measurements can be adjusted by the bits HSDRV\_DS\_TFILT\_SEL and LSDRV\_DS\_TFILT\_SEL.

The blank time for the VDS measurement can be adjusted by the bits LS\_HS\_BT\_TFILT\_SEL.

---

**Bridge Driver (incl. Charge Pump)****27.3.6 OFF-State Short Circuit Detection**

The Short circuit detection in OFF State is mainly performed by an internally generated test current and the built-in Drain-Source monitoring.

**To perform the short circuit detection in off state the following procedure has to be executed:**

- The MOSFET Drivers are in off-state
- To detect short circuit on the low side MOSFET, a test current I<sub>TEST</sub> out of SH1 is activated by a high side current source on pin SH1. This is done by setting the bit HS1\_DCS\_EN.
- After the test current has settled the VDS Status flag shows the status on the low side MOSFET. If VDS status flag is set the complete voltage drop is across the high side current source, VDS measurement on the LS MOSFET is below the VDS threshold, indicating a short on the low side FET.

Bridge Driver (incl. Charge Pump)

27.3.7 Channel turn on/off delay measurement

For functional test and drive scheme timing optimization a dedicated timer is available to measure the delay between intended external MOS activation and actual turn on (VDS supervision). The principle function is shown in the following figure:

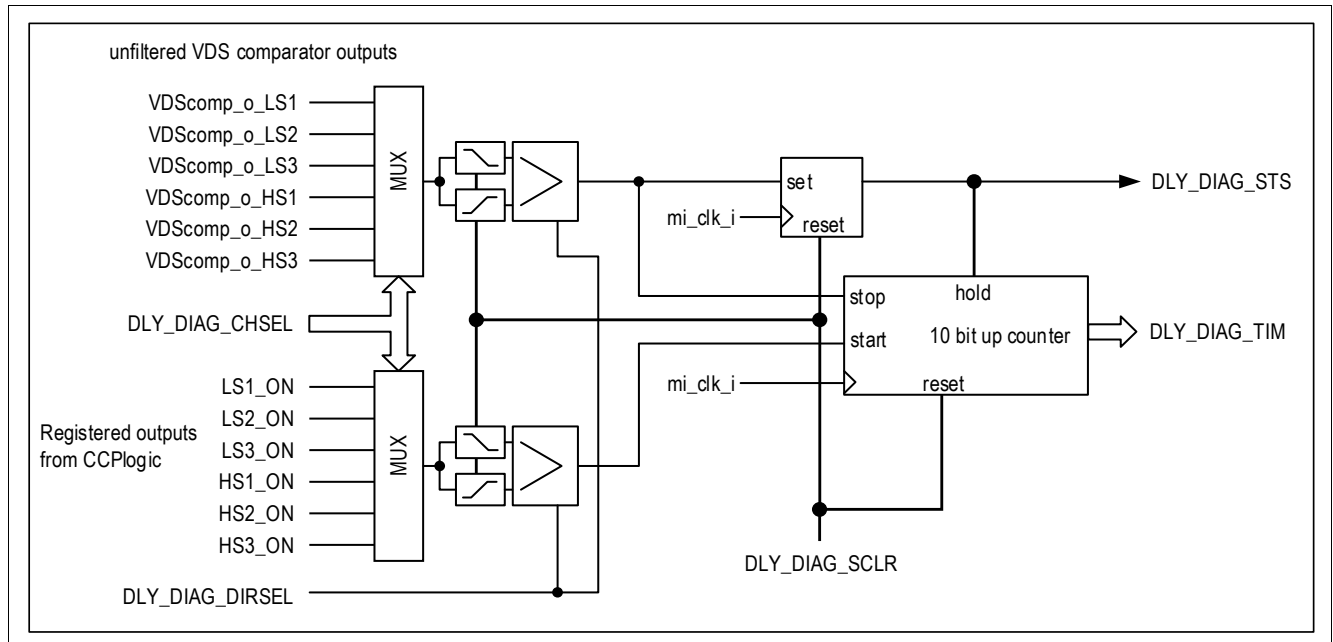


Figure 217 Principle of channel turn on/off timing measurement.



Bridge Driver (incl. Charge Pump)

27.4 Application Hints

27.4.1 Bridge Driver Diagnosis

27.4.1.1 Off-Diagnosis

Off-Diagnosis describes the capability to recognize a short on a motor contact to either VBAT or GND without the need to set the MOSFETs in "ON"-state. An unwanted cross-current flow through the bridge MOSFETs can be prevented that way.

27.4.1.1.1 Preparation

In order to run the Off-Diagnosis the following settings needs to be applied to the Bridge Driver registers:

**A: All phases must be switched in "Enabled"-state (but not "ON"-state)**

31	30	29	28	27	26	25	24
HS2_OC_DTS_	HS2_OC_STS_	HS2_SUP_ERR_STS	HS2_DS_STS_	HS2_DCS_EN	HS2_ON	HS2_PWM	HS2_EN
rw	r	r	r	rw	rwhir	rwhir	rw
23	22	21	20	19	18	17	16
HS1_OC_DTS_	HS1_OC_STS_	HS1_SUP_ERR_STS	HS1_DS_STS_	HS1_DCS_EN	HS1_ON	HS1_PWM	HS1_EN
rw	r	r	r	rw	rwhir	rwhir	rw
15	14	13	12	11	10	9	8
LS2_OC_DTS_	LS2_OC_STS_	LS2_SUP_ERR_STS	LS2_DS_STS_	LS2_DCS_EN	LS2_ON	LS2_PWM	LS2_EN
rw	r	r	r	rw	rwhir	rwhir	rw
7	6	5	4	3	2	1	0
LS1_OC_DTS_	LS1_OC_STS_	LS1_SUP_ERR_STS	LS1_DS_STS_	LS1_DCS_EN	LS1_ON	LS1_PWM	LS1_EN
rw	r	r	r	rw	rwhir	rwhir	rw

BDRV\_CTRL1\_Enable.vsd

Figure 218 CTRL1

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
HS3_OC_	HS3_OC_	HS3_SUP	HS3_DS_	HS3_DCS	HS3_ON	HS3_PWM	HS3_EN	LS3_OC_	LS3_OC_	LS3_SUP	LS3_DS_	LS3_DCS	LS3_ON	LS3_PWM	LS3_EN
rw	r	r	r	rw	rwhir	rwhir	rw	rw	r	r	r	rw	rwhir	rwhir	rw


Figure 219 CTRL2

The DS-Status Flags are still set in this state of the Bridge Driver, but since the Drain-Source-Current Sources are not enabled these flags do not have a meaning yet.

**Bridge Driver (incl. Charge Pump)**

**B:**


For a detection of a short of the motor contacts to GND or VBAT the value of the **CTRL3.DSMONVTH** shall be set to the minimum value. The **CTRL3.IDISCHARGE\_TRIM** value, which sets the current driven by the DS-Current sources, shall be set to a very small value. A value of 1 would be sufficient.

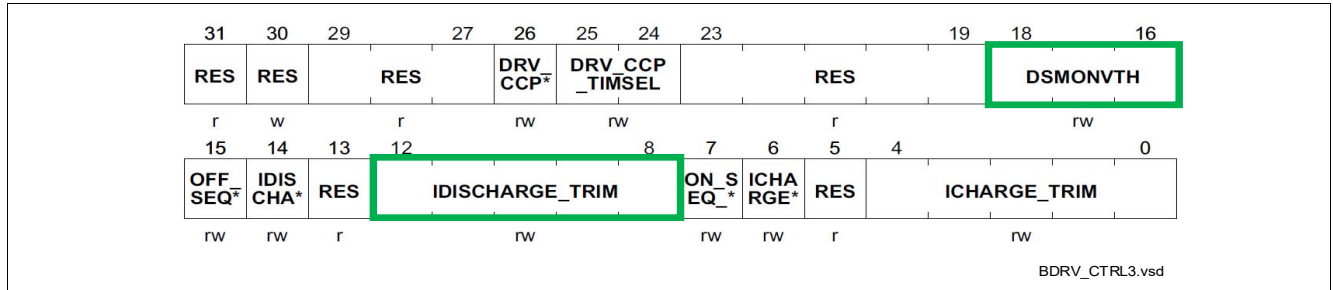


**Figure 220 CTRL3**

**C: Enable Drain-Source Current Sources on the High-Side (HSx) drivers**

The DS-Current sources are internally connected to the corresponding SHx pins of the device. The "Enable"-Flags of each phase remains set. It is recommended to even enable the DS-Current source flag for the LSx drivers, just to be able to recognize the validity of the LSx\_DS\_STS flags inside the BDRV interrupt service routine, but it is not required for the Off-Diagnosis.

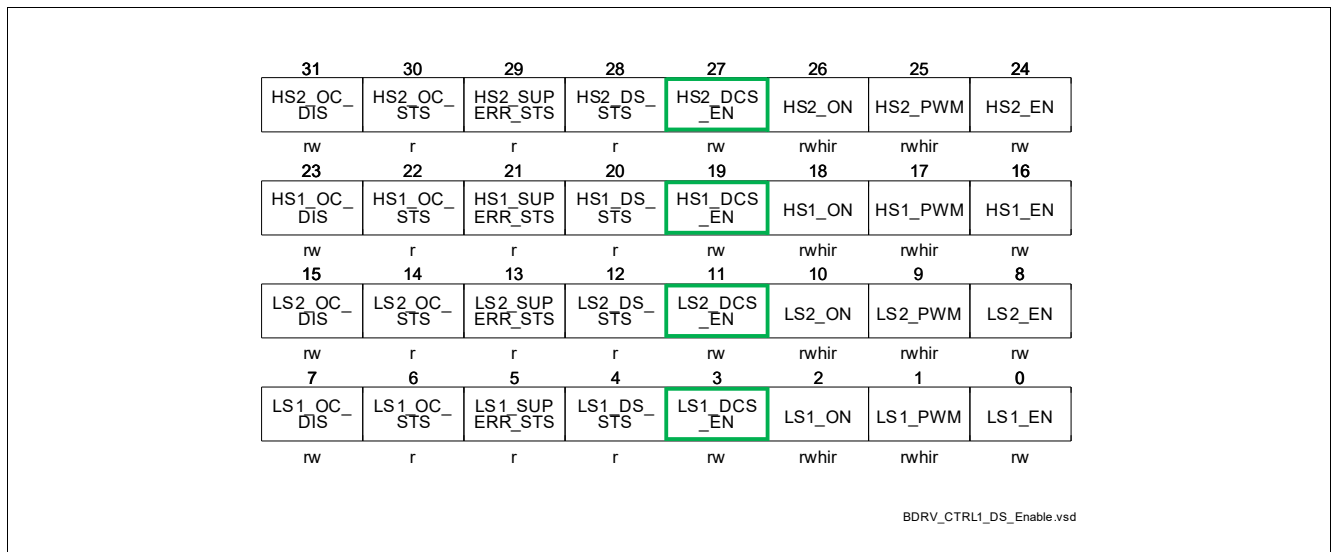

**Figure 221 CTRL1**

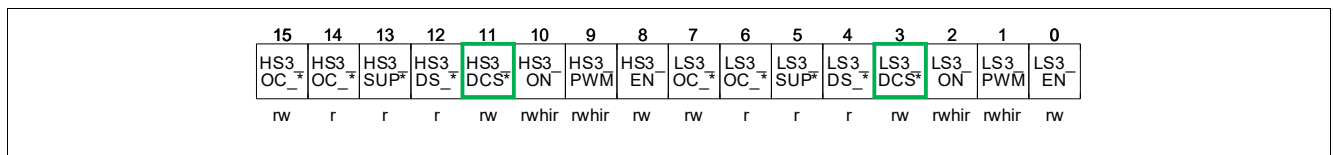

**Figure 222 CTRL2**

**Bridge Driver (incl. Charge Pump)**

**D:**

Assuming the motor contacts do not have a short to VBAT or to GND, all the DS-Status flags of each phase can be cleared now, and shall stay cleared.

31	30	29	28	27	26	25	24
HS2_OC_DIS	HS2_OC_STS	HS2_SUP_ERR_STS	HS2_DS_STS	HS2_DCS_EN	HS2_ON	HS2_PWM	HS2_EN
rw	r	r	r	rw	rwhir	rwhir	rw
23	22	21	20	19	18	17	16
HS1_OC_DIS	HS1_OC_STS	HS1_SUP_ERR_STS	HS1_DS_STS	HS1_DCS_EN	HS1_ON	HS1_PWM	HS1_EN
rw	r	r	r	rw	rwhir	rwhir	rw
15	14	13	12	11	10	9	8
LS2_OC_DIS	LS2_OC_STS	LS2_SUP_ERR_STS	LS2_DS_STS	LS2_DCS_EN	LS2_ON	LS2_PWM	LS2_EN
rw	r	r	r	rw	rwhir	rwhir	rw
7	6	5	4	3	2	1	0
LS1_OC_DIS	LS1_OC_STS	LS1_SUP_ERR_STS	LS1_DS_STS	LS1_DCS_EN	LS1_ON	LS1_PWM	LS1_EN
rw	r	r	r	rw	rwhir	rwhir	rw

BDRV\_CTRL1\_DS\_Status.vsd

**Figure 223 CTRL1**

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
HS3_OC_*	HS3_OC_*	HS3_SUP*	HS3_DS_*	HS3_DCS*	HS3_ON	HS3_PWM	HS3_EN	LS3_OC_*	LS3_OC_*	LS3_SUP*	LS3_DS_*	LS3_DCS*	LS3_ON	LS3_PWM	LS3_EN
rw	r	r	r	rw	rwhir	rwhir	rw	rw	r	r	r	rw	rwhir	rwhir	rw

BDRV\_CTRL2\_DS\_Status.vsd

**Figure 224 CTRL2**

In case one of these flags cannot be cleared then this is already an indication of a short of a motor contact to VBAT or to GND.

**27.4.1.1.2 Detection**

Evaluate the state of the HSx\_DS\_STS flags and of the LSx\_DS\_STS flags in order to check if a short is present. If any HSx\_DS\_STS flag is set, then it means at least one of the motor contacts has a short to VBAT. If any LSx\_DS\_STS flag is set, then it means at least one of the motor contacts has a short to GND. Due to the fact that the motor coils do have a very low resistance usually all HSx\_DS\_STS flags are set together and analogue for the LSx\_DS\_STS flags as well. In case no motor is connected, then only the flags for the phase which sees the short are set.

To return to normal operation, disable the DS-Current sources for each phase, the value of the DS-STS flags have to be ignored from now on.

**27.4.1.2 On-Diagnosis**

The On-Diagnosis supervises the current flowing through the MOSFETs with the internal Drain-Source monitoring. The enabling of the integrated Drain-Source-Current source is not required for the On-Diagnosis.

---

**Bridge Driver (incl. Charge Pump)****27.4.1.2.1 Preparation**

The bridge driver will be operated in a normal way. All the phases are enabled and those phases which are required to operate the motor in the required way are either statically "ON" or set to "PWM" (connection to CCU6). These settings are defined by the application in order to drive the motor.

The bit field **CTRL3.DSMONVTH** defines the threshold for the DS-monitoring to recognize an over-current condition in one of the MOSFETs. The DSMONVTH value defines a voltage across the drain-source path of a MOSFET, the required current flowing through the MOSFET needs to be calculated based on the RDS\_ON value of the MOSFET.

Example: 8mOhm MOSFET (RDS\_ON=8mOhm), DSMONVTH = 0.5V

$$I = \frac{U}{R} = \frac{0.5V}{8mOhm} = 62.5A$$

(27.1)

If the current flow through the MOSFET exceeds 62.5A the DS-monitoring will recognize an over-current condition and shut off the phase, or even the entire bridge (see **CTRL1** registerbits).

## Bridge Driver (incl. Charge Pump)

### 27.4.1.2.2 Detection

Two ways of evaluating the On-Diagnosis are possible:

1. Polling: the user application shall read the **CTRL1/CTRL2** registers and check the OC\_STS flags of each phase to recognize whether an over-current condition has happened.
2. Interrupt based: the user shall enable the BDRV interrupt node **NVIC\_ISERO**. `Int_BDRV = 1`; the user shall enable the HSx\_OC\_IE flags, along with the LSx\_OC\_IE flags inside the **BDRV\_IRQ\_CTRL** register.

31						21						20	19	18	17	16		
Res											VSD UPT*	VSD LOW*	VCP UPT*	VCP LOW*	VCP LOW*			
r						r						rw	rw	rw	rw	rw		
15	14	13	12	11	10	9	6						5	4	3	2	1	0
HS3 OC_*	LS3 OC_*	HS2 OC_*	HS1 OC_*	LS2 OC_*	LS1 OC_*	Res						HS3 DS_*	LS3 DS_*	HS2 DS_*	HS1 DS_*	LS2 DS_*	LS1 DS_*	
rw	rw	rw	rw	rw	rw	r						rw	rw	rw	rw	rw	rw	

Figure 225 BRDV\_IRQ\_CTRL

Inside the BDRV Interrupt service routine the user shall check the HSx\_OC\_STS and LSx\_OC\_STS flags to see which MOSFET has detected the overcurrent condition. These flags need to be cleared before the ISR will be exited.

31						29						28	27	26	25	24	23	21						20	19	18	17	16
Res											VSD UPT*	VSD LOW*	VCP UPT*	VCP LOW*	VCP LOW*	Res						VSD UPT*	VSD LOW*	VCP UPT*	VCP LOW*	VCP LOW*		
r						w						w	w	w	w	w	r						w	w	w	w	w	w
15	14	13	12	11	10	9	6						5	4	3	2	1	0										
HS3 OC_*	LS3 OC_*	HS2 OC_*	HS1 OC_*	LS2 OC_*	LS1 OC_*	Res						HS3 DS_*	LS3 DS_*	HS2 DS_*	HS1 DS_*	LS2 DS_*	LS1 DS_*											
w	w	w	w	w	w	r						w	w	w	w	w	w											

Figure 226 BDRV\_ISCLR

---

**Bridge Driver (incl. Charge Pump)****27.4.1.3 Open-Load Detection**

The Open-Load detection can be used to check whether a motor is connected to the bridge or not.

The Open-Load detection operates similar to the Off-Diagnosis

**27.4.1.3.1 Preparation**

In order to run the Off-Diagnosis the following settings need to be applied to the bridge driver registers

1. All phases must be switched in "Enabled"-state (but not "ON"-state).
2. For a detection of a motor, **CTRL3.DSMONVTH** shall be set to the maximum value. The **CTRL3.IDISCHARGE\_TRIM** value, which sets the current driven by the DS-Current sources, shall be set to a very small value. A value of 1 would be sufficient.
3. Enable Drain-Source Current Sources on the High-Side (HSx) drivers. The DS-Current sources are internally connected to the corresponding SHx pins of the device. The "Enable"-Flags of each phase remains set. The LSx DS-Current Source flag remains disabled.
4. For a 3-phase Motor the checking of the Motor connection shall be done in three steps, for each phase separately. The HSx DS-Current Source has to be enabled always for 2 phases together, then the 3rd phase is checked whether a motor-phase is connected. This has to be iterated around until all three phases are checked. Always two phases the HSx\_DCS\_EN is set, while the remaining phase the HSx\_DCS\_EN flag is off.
5. Apply some settlement time (few  $\mu$ s) for the voltage at each MOSFET to stabilize.
6. Assuming the motor contacts are all connected, all the DS-Status flags of each phase can be cleared now, and shall stay cleared. If a flag cannot be cleared of a phase then the DS\_STS flags remain set and will signal an unconnected motor contact.

---

**Bridge Driver (incl. Charge Pump)**

## 27.5 Register Definition

The Bridge Driver registers are located in the address space below.

**Table 187 Register Address Space**

Module	Base Address	End Address	Note
BDRV	40034000 <sub>H</sub>	40037FFF <sub>H</sub>	Bridge Driver

**Table 188 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Register Definition, Driver Register</b>			
<b>CTRL1</b>	Half Bridge Driver Control 1	00 <sub>H</sub>	0101 0101 <sub>H</sub>
<b>CTRL2</b>	Half Bridge Driver Control 2	04 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>CTRL3</b>	Half Bridge Driver Control 3	08 <sub>H</sub>	0001 1111 <sub>H</sub>
<b>OFF_SEQ_CTRL</b>	Turn-on Slewrate Sequencer Control	10 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>ON_SEQ_CTRL</b>	Turn-off Slewrate Sequencer Control	14 <sub>H</sub>	0000 0000 <sub>H</sub>
<b>Register Definition, Driver Trimming Register</b>			
<b>TRIM_DRVx</b>	Trimming of Driver	18 <sub>H</sub>	8000 0000 <sub>H</sub>
<b>Register Definition, Charge Pump Control and Status Register</b>			
<b>CP_CTRL_STS</b>	Charge Pump Control and Status Register	20 <sub>H</sub>	0000 0004 <sub>H</sub>
<b>CP_CLK_CTRL</b>	Charge Pump Clock Control Register	24 <sub>H</sub>	0000 CA16 <sub>H</sub>

The registers are addressed wordwise.

## Bridge Driver (incl. Charge Pump)

### 27.5.1 Driver Register

#### B6-Bridge (Half Bridge) Driver Control Register 1

The register is reset by RESET\_TYPE\_3.

**Attention:** *The Bridge Driver module can only be enabled when all FET drivers are enabled in the register below.*

**CTRL1** **Offset** **Reset Value**  
**B6-Bridge Driver Control 1** **00<sub>H</sub>** **0101 0101<sub>H</sub>**

31	30	29	28	27	26	25	24
HS2_OC_ DIS	HS2_OC_ STS	HS2_SUP ERR_STS	HS2_DS_ STS	HS2_DCS _EN	HS2_ON	HS2_PWM	HS2_EN
rw	r	r	r	rw	rwhir	rwhir	rw
23	22	21	20	19	18	17	16
HS1_OC_ DIS	HS1_OC_ STS	HS1_SUP ERR_STS	HS1_DS_ STS	HS1_DCS _EN	HS1_ON	HS1_PWM	HS1_EN
rw	r	r	r	rw	rwhir	rwhir	rw
15	14	13	12	11	10	9	8
LS2_OC_ DIS	LS2_OC_ STS	LS2_SUP ERR_STS	LS2_DS_ STS	LS2_DCS _EN	LS2_ON	LS2_PWM	LS2_EN
rw	r	r	r	rw	rwhir	rwhir	rw
7	6	5	4	3	2	1	0
LS1_OC_ DIS	LS1_OC_ STS	LS1_SUP ERR_STS	LS1_DS_ STS	LS1_DCS _EN	LS1_ON	LS1_PWM	LS1_EN
rw	r	r	r	rw	rwhir	rwhir	rw

Field	Bits	Type	Description
HS2_OC_DIS	31	rw	<b>High Side Driver Overcurrent Shutdown Select</b> 0 <sub>H</sub> <b>Global Shutdown</b> , all bridges will be shut down in case of overcurrent 1 <sub>H</sub> <b>Local Shutdown</b> , only local bridge will be shut down in case of overcurrent
HS2_OC_STS	30	r	<b>External High Side 2 FET Over-current Status</b> 0 <sub>B</sub> <b>no Over-current</b> , no over-current Condition occurred. 1 <sub>B</sub> <b>Over-current</b> , over-current occurred; switch is automatically shut down.
HS2_SUPERR_STS	29	r	<b>High Side Driver 2 Supply Error Status</b> 0 <sub>B</sub> <b>NORMAL</b> , supply is in required range. 1 <sub>B</sub> <b>SUPPLY ERROR</b> , detected; this flag is an OR of the VSD_x_STS and VCP_x_STS flags.



---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
<b>HS2_DS_STS</b>	28	r	<p><b>High Side Driver 2 Drain Source Monitoring Status in OFF-State</b></p> <p><i>Note:</i> the status of the bit is valid only after HSx_DCS_EN bit was set to one.</p> <p>0<sub>B</sub> <b>no short on external FET</b>, no short detected.            1<sub>B</sub> <b>short on external FET detected</b>, short detected.</p>
<b>HS2_DCS_EN</b>	27	rw	<p><b>High Side Driver 2 Diagnosis Current Source Enable</b></p> <p><i>Note:</i> the status of the bit is valid only after LS2_DCS_EN bit was set to one.</p> <p>0<sub>H</sub> <b>DISABLE</b>, disable current source            1<sub>H</sub> <b>ENABLE</b>, enable current source; short diagnosis can be performed by evaluating the LSx/HSx_DS_STS Flag</p>
<b>HS2_ON</b>	26	rwhir	<p><b>High Side Driver 2 On</b></p> <p>0<sub>B</sub> <b>OFF</b>, Driver off            1<sub>B</sub> <b>ON</b>, Driver on</p>
<b>HS2_PWM</b>	25	rwhir	<p><b>High Side Driver 2 PWM Enable</b></p> <p>0<sub>B</sub> <b>DISABLE</b>, disables control by PWM input            1<sub>B</sub> <b>ENABLE</b>, enables control by PWM input</p>
<b>HS2_EN</b>	24	rw	<p><b>High Side Driver 2 Enable</b></p> <p>0<sub>B</sub> <b>DISABLE</b>, Driver circuit power off            1<sub>B</sub> <b>ENABLE</b>, Driver circuit power on</p>
<b>HS1_OC_DIS</b>	23	rw	<p><b>High Side Driver Overcurrent Shutdown Select</b></p> <p>0<sub>H</sub> <b>Global Shutdown</b>, all bridges will be shut down in case of overcurrent            1<sub>H</sub> <b>Local Shutdown</b>, only local bridge will be shut down in case of overcurrent</p>
<b>HS1_OC_STS</b>	22	r	<p><b>External High Side 1 FET Over-current Status</b></p> <p>0<sub>B</sub> <b>no Over-current</b>, no over-current Condition occurred.            1<sub>B</sub> <b>Over-current</b>, over-current occurred; switch is automatically shut down.</p>
<b>HS1_SUPERR_STS</b>	21	r	<p><b>High Side Driver 1 Supply Error Status</b></p> <p>0<sub>B</sub> <b>NORMAL</b>, supply is in required range.            1<sub>B</sub> <b>SUPPLY ERROR</b>, detected; this flag is an OR of the VDS_x_STS and VCP_x_STS flags.</p>

---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
<b>HS1_DS_STS</b>	20	r	<p><b>High Side Driver 1 Drain Source Monitoring Status in OFF-State</b></p> <p><i>Note: the status of the bit is valid only after HSx_DCS_EN bit was set to one.</i></p> <p>0<sub>B</sub> <b>no short on external FET</b>, no short detected.            1<sub>B</sub> <b>short on external FET detected</b>, short detected.</p>
<b>HS1_DCS_EN</b>	19	rw	<p><b>High Side Driver 1 Diagnosis Current Source Enable</b></p> <p>0<sub>H</sub> <b>DISABLE</b>, disable current source            1<sub>H</sub> <b>ENABLE</b>, enable current source; short diagnosis can be performed by evaluating the LSx/HSx_DS_STS Flag</p>
<b>HS1_ON</b>	18	rwhir	<p><b>High Side Driver 1 On</b></p> <p>0<sub>B</sub> <b>OFF</b>, Driver off            1<sub>B</sub> <b>ON</b>, Driver on</p>
<b>HS1_PWM</b>	17	rwhir	<p><b>High Side Driver 1 PWM Enable</b></p> <p>0<sub>B</sub> <b>DISABLE</b>, disables control by PWM input            1<sub>B</sub> <b>ENABLE</b>, enables control by PWM input</p>
<b>HS1_EN</b>	16	rw	<p><b>High Side Driver 1 Enable</b></p> <p>0<sub>B</sub> <b>DISABLE</b>, Driver circuit power off            1<sub>B</sub> <b>ENABLE</b>, Driver circuit power on</p>
<b>LS2_OC_DIS</b>	15	rw	<p><b>Low Side Driver Overcurrent Shutdown Select</b></p> <p>0<sub>H</sub> <b>Global Shutdown</b>, all bridges will be shut down in case of overcurrent            1<sub>H</sub> <b>Local Shutdown</b>, only local bridge will be shut down in case of overcurrent</p>
<b>LS2_OC_STS</b>	14	r	<p><b>External Low Side 2 FET Over-current Status</b></p> <p>0<sub>B</sub> <b>no Over-current</b>, no over-current Condition occurred.            1<sub>B</sub> <b>Over-current</b>, over-current occurred; switch is automatically shut down.</p>
<b>LS2_SUPERR_STS</b>	13	r	<p><b>Low Side Driver 2 Supply Error Status</b></p> <p>0<sub>B</sub> <b>NORMAL</b>, supply is in required range.            1<sub>B</sub> <b>SUPPLY ERROR</b>, detected; this flag is an OR of the VDS_x_STS and VCP_x_STS flags.</p>
<b>LS2_DS_STS</b>	12	r	<p><b>Low Side Driver 2 Drain Source Monitoring Status in OFF-State</b></p> <p><i>Note: the status of the bit is valid only after HSx_DCS_EN bit was set to one.</i></p> <p>0<sub>B</sub> <b>no short on external FET</b>, no short detected.            1<sub>B</sub> <b>short on external FET detected</b>, short detected.</p>

---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
<b>LS2_DCS_EN</b>	11	rw	<p><b>Low Side Driver 2 Diagnosis Current Source Enable</b></p> <p><i>Note: this bit has no effect as a low side driver diagnosis current source is not implemented.</i></p> <p>0<sub>H</sub> <b>DISABLE</b>, disable current source            1<sub>H</sub> <b>ENABLE</b>, enable current source; short diagnosis can be performed by evaluating the LSx/HSx_DS_STS Flag</p>
<b>LS2_ON</b>	10	rwhir	<p><b>Low Side Driver 2 On</b></p> <p>0<sub>B</sub> <b>OFF</b>, Driver off            1<sub>B</sub> <b>ON</b>, Driver on</p>
<b>LS2_PWM</b>	9	rwhir	<p><b>Low Side Driver 2 PWM Enable</b></p> <p>0<sub>B</sub> <b>DISABLE</b>, disables control by PWM input            1<sub>B</sub> <b>ENABLE</b>, enables control by PWM input</p>
<b>LS2_EN</b>	8	rw	<p><b>Low Side Driver 2 Enable</b></p> <p>0<sub>B</sub> <b>DISABLE</b>, Driver circuit power off            1<sub>B</sub> <b>ENABLE</b>, Driver circuit power on</p>
<b>LS1_OC_DIS</b>	7	rw	<p><b>Low Side Driver 1 Overcurrent Shutdown Select</b></p> <p>0<sub>H</sub> <b>Global Shutdown</b>, all bridges will be shut down in case of overcurrent            1<sub>H</sub> <b>Local Shutdown</b>, only local bridge will be shut down in case of overcurrent</p>
<b>LS1_OC_STS</b>	6	r	<p><b>External Low Side 1 FET Over-current Status</b></p> <p>0<sub>B</sub> <b>no Over-current</b>, no over-current Condition occurred.            1<sub>B</sub> <b>Over-current</b>, over-current occurred; switch is automatically shut down.</p>
<b>LS1_SUPERR_STS</b>	5	r	<p><b>Low Side Driver 1 Supply Error Status</b></p> <p>0<sub>B</sub> <b>NORMAL</b>, supply is in required range.            1<sub>B</sub> <b>SUPPLY ERROR</b>, detected; this flag is an OR of the VDS_x_STS and VCP_x_STS flags.</p>
<b>LS1_DS_STS</b>	4	r	<p><b>Low Side Driver 1 Drain Source Monitoring Status in OFF-State</b></p> <p><i>Note: the status of the bit is valid only after HSx_DCS_EN bit was set to one.</i></p> <p>0<sub>B</sub> <b>no short on external FET</b>, no short detected.            1<sub>B</sub> <b>short on external FET detected</b>, short detected.</p>

---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
<b>LS1_DCS_EN</b>	3	rw	<p><b>Low Side Driver 1 Diagnosis Current Source Enable</b></p> <p><i>Note: this bit has no effect as a low side driver diagnosis current source is not implemented.</i></p> <p>0<sub>H</sub> <b>DISABLE</b>, disable current source            1<sub>H</sub> <b>ENABLE</b>, enable current source; short diagnosis can be performed by evaluating the LSx/HSx_DS_STS Flag</p>
<b>LS1_ON</b>	2	rwhir	<p><b>Low Side Driver 1 On</b></p> <p>0<sub>B</sub> <b>OFF</b>, Driver off            1<sub>B</sub> <b>ON</b>, Driver on</p>
<b>LS1_PWM</b>	1	rwhir	<p><b>Low Side Driver 1 PWM Enable</b></p> <p>0<sub>B</sub> <b>DISABLE</b>, disables control by PWM input            1<sub>B</sub> <b>ENABLE</b>, enables control by PWM input</p>
<b>LS1_EN</b>	0	rw	<p><b>Low Side Driver 1 Enable</b></p> <p>0<sub>B</sub> <b>DISABLE</b>, Driver circuit power off            1<sub>B</sub> <b>ENABLE</b>, Driver circuit power on</p>

## Bridge Driver (incl. Charge Pump)

### B6-Bridge Driver Control Register 2

The register is reset by RESET\_TYPE\_3.

CTRL2	Offset	Reset Value
B6-Bridge Driver Control 2	04 <sub>H</sub>	0000 0000 <sub>H</sub>

31	30	28	27	26	25											16
DLY_DIA*	DLY_DIAG_C_HSEL		DLY_DIA*	DLY_DIA*	DLY_DIAG_TIM											
rw	rw		r	w	r											
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
HS3_OC*	HS3_OC*	HS3_SUP*	HS3_DS*	HS3_DCS*	HS3_ON	HS3_PWM	HS3_EN	LS3_OC*	LS3_OC*	LS3_SUP*	LS3_DS*	LS3_DCS*	LS3_ON	LS3_PWM	LS3_EN	
rw	r	r	r	rw	rwhir	rwhir	rw	rw	r	r	r	rw	rwhir	rwhir	rw	

Field	Bits	Type	Description
DLY_DIAG_DIRSEL	31	rw	<b>Ext. power diag timer on / off select</b> 0 <sub>B</sub> <b>TURN-OFF</b> , measure turn-off time 1 <sub>B</sub> <b>TURN-ON</b> , measure turn-on time
DLY_DIAG_CHSEL	30:28	rw	<b>Ext. power diag timer channel select</b> 000 <sub>B</sub> <b>DISABLE</b> , diag timer deactivated. 001 <sub>B</sub> <b>HB1 LS select</b> , measure LS1 on/off delay time. 010 <sub>B</sub> <b>HB2 LS select</b> , measure LS2 on/off delay time. 011 <sub>B</sub> <b>HB3 LS select</b> , measure LS3 on/off delay time. 100 <sub>B</sub> <b>DISABLE</b> , diag timer deactivated. 101 <sub>B</sub> <b>HB1 HS select</b> , measure HS1 on/off delay time. 110 <sub>B</sub> <b>HB2 HS select</b> , measure HS2 on/off delay time. 111 <sub>B</sub> <b>HB3 HS select</b> , measure HS3 on/off delay time.
DLY_DIAG_STS	27	r	<b>Ext. power diag timer valid flag</b>  <i>Note: Clear flag to start a measurement.</i>  0 <sub>B</sub> <b>Diag timer invalid</b> , diag timer measurement ongoing 1 <sub>B</sub> <b>Diag timer valid</b> , diag timer measurement finished
DLY_DIAG_SCLR	26	w	<b>Ext. power diag timer valid flag clear</b> 0 <sub>B</sub> <b>Diag timer valid not clear</b> , 1 <sub>B</sub> <b>Diag timer valid clear</b> ,
DLY_DIAG_TIM	25:16	r	<b>Ext. power diag timer result register</b>
HS3_OC_DIS	15	rw	<b>High Side Driver 3 Over-current Shutdown Select</b> 0 <sub>H</sub> <b>Global Shutdown</b> , all bridges will be shut down in case of overcurrent 1 <sub>H</sub> <b>Local Shutdown</b> , only local bridge will be shut down in case of overcurrent

---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
HS3_OC_STS	14	r	<b>External High Side 3 FET Over-current Status</b> 0 <sub>B</sub> <b>no Over-current</b> , no over-current Condition occurred. 1 <sub>B</sub> <b>Over-current</b> , over-current occurred; switch is automatically shut down.
HS3_SUPERR_STS	13	r	<b>High Side Driver 3 Supply Error Status</b> 0 <sub>B</sub> <b>NORMAL</b> , supply is in required range. 1 <sub>B</sub> <b>SUPPLY ERROR</b> , detected; this flag is an OR of the VDS_x_STS and VCP_x_STS flags.
HS3_DS_STS	12	r	<b>High Side Driver 3 Drain Source Monitoring Status</b>  <i>Note: the status of the bit is valid only after HSx_DCS_EN bit was set to one.</i>  0 <sub>B</sub> <b>no short on external FET</b> , no short detected. 1 <sub>B</sub> <b>short on external FET detected</b> , short detected.
HS3_DCS_EN	11	rw	<b>High Side Driver 3 Diagnosis Current Source Enable</b> 0 <sub>H</sub> <b>DISABLE</b> , disable current source 1 <sub>H</sub> <b>ENABLE</b> , enable current source; short diagnosis can be performed by evaluating the LSx/HSx_DS_STS Flag
HS3_ON	10	rwhir	<b>High Side Driver 3 On</b> 0 <sub>B</sub> <b>OFF</b> , Driver off 1 <sub>B</sub> <b>ON</b> , Driver on
HS3_PWM	9	rwhir	<b>High Side Driver 3 PWM Enable</b> 0 <sub>B</sub> <b>DISABLE</b> , disables control by PWM input 1 <sub>B</sub> <b>ENABLE</b> , enables control by PWM input
HS3_EN	8	rw	<b>High Side Driver 3 Enable</b> 0 <sub>B</sub> <b>DISABLE</b> , Driver circuit power off 1 <sub>B</sub> <b>ENABLE</b> , Driver circuit power on
LS3_OC_DIS	7	rw	<b>Low Side Driver 3 Over-current Shutdown Select</b> 0 <sub>H</sub> <b>Global Shutdown</b> , all bridges will be shut down in case of overcurrent 1 <sub>H</sub> <b>Local Shutdown</b> , only local bridge will be shut down in case of overcurrent
LS3_OC_STS	6	r	<b>External Low Side 3 FET Over-current Status</b> 0 <sub>B</sub> <b>no Over-current</b> , no over-current Condition occurred. 1 <sub>B</sub> <b>Over-current</b> , over-current occurred; switch is automatically shut down.
LS3_SUPERR_STS	5	r	<b>Low Side Driver 3 Supply Error Status</b> 0 <sub>B</sub> <b>NORMAL</b> , supply is in required range. 1 <sub>B</sub> <b>SUPPLY ERROR</b> , detected; this flag is an OR of the VDS_x_STS and VCP_x_STS flags.

---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
<b>LS3_DS_STS</b>	4	r	<p><b>Low Side Driver 3 Drain Source Monitoring Status in OFF-State</b></p> <p><i>Note:</i> the status of the bit is valid only after HSx_DCS_EN bit was set to one.</p> <p>0<sub>B</sub> <b>no short on external FET</b>, no short detected.            1<sub>B</sub> <b>short on external FET detected</b>, short detected.</p>
<b>LS3_DCS_EN</b>	3	rw	<p><b>Low Side Driver 3 Diagnosis Current Source Enable</b></p> <p><i>Note:</i> this bit has no effect as a low side driver diagnosis current source is not implemented.</p> <p>0<sub>H</sub> <b>DISABLE</b>, disable current source            1<sub>H</sub> <b>ENABLE</b>, enable current source; short diagnosis can be performed by evaluating the LSx/HSx_DS_STS Flag</p>
<b>LS3_ON</b>	2	rwhir	<p><b>Low Side Driver 3 On</b></p> <p>0<sub>B</sub> <b>OFF</b>, Driver off            1<sub>B</sub> <b>ON</b>, Driver on</p>
<b>LS3_PWM</b>	1	rwhir	<p><b>Low Side Driver 3 PWM Enable</b></p> <p>0<sub>B</sub> <b>DISABLE</b>, disables control by PWM input            1<sub>B</sub> <b>ENABLE</b>, enables control by PWM input</p>
<b>LS3_EN</b>	0	rw	<p><b>Low Side Driver 3 Enable</b></p> <p>0<sub>B</sub> <b>DISABLE</b>, Driver circuit power off            1<sub>B</sub> <b>ENABLE</b>, Driver circuit power on</p>

## Bridge Driver (incl. Charge Pump)

### B6-Bridge Driver Control 3

The register is reset by RESET\_TYPE\_3.

This register is being initialized by the BootROM during the bootup process to a value of 0003\_1F1F<sub>H</sub>

CTRL3	Offset	Reset Value
<b>B6-Bridge Driver Control 3</b>	<b>08<sub>H</sub></b>	<b>0001 1111<sub>H</sub></b>

31	30	29	27	26	25	24	23	19	18	16
RES	RES	RES	RES	DRV CCP*	DRV CCP TIMSEL	RES	RES	RES	DSMONVTH	RES
r	r	r	r	rw	rw	r	r	r	rw	r
15	14	13	12	8	7	6	5	4		0
RES	IDIS CHA*	RES	RES	IDISCHARGE_TRIM	RES	ICHARGE*	RES	RES	ICHARGE_TRIM	RES
rw	rw	r	r	rw	rw	rw	rw	r	rw	r

Field	Bits	Type	Description
RES	31:30	r	<b>Reserved</b> Always read as 0b10
RES	29:27	r	<b>Reserved</b> Always read as 1
DRV_CCP_DIS	26	rw	<b>Dynamic cross conduction protection Disable</b>  <i>Note: The cross conduction protection consists of two stages. This flag disables the first stage which is the activation of the delayed gate clamp after the configured cross conduction protection time. The second stage which is represented by the delayed gate clamp is still active and will be activated as soon as the opposite MOSFET within a inverter stage is activated.</i>  0 <sub>B</sub> <b>CCP Enable</b> , dynamic ccp is active. 1 <sub>B</sub> <b>CCP Disable</b> , dynamic ccp is disabled, delayed gate clamp remains active.
DRV_CCP_TIMSEL	25:24	rw	<b>Minimum cross conduction protection time setting<sup>1)</sup></b> 00 <sub>B</sub> <b>0.2us</b> , 200ns cross conduction protection time 01 <sub>B</sub> <b>0.4us</b> , 400ns cross conduction protection time 10 <sub>B</sub> <b>0.8us</b> , 800ns cross conduction protection time 11 <sub>B</sub> <b>1.6us</b> , 1.6us cross conduction protection time
RES	23:19	r	<b>Reserved</b> Always read as 0



---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
<b>DSMONVTH</b>	18:16	rw	<b>Voltage Threshold for Drain-Source Monitoring of external FETs</b> 000 <sub>B</sub> <b>0.25_V</b> , Threshold 0 for VDS at 0.25 V 001 <sub>B</sub> <b>0.5_V</b> , Threshold 1 for VDS at 0.5 V 010 <sub>B</sub> <b>0.75_V</b> , Threshold 2 for VDS at 0.75 V 011 <sub>B</sub> <b>1.0_V</b> , Threshold 3 for VDS at 1.0 V 100 <sub>B</sub> <b>1.25_V</b> , Threshold 4 for VDS at 1.25 V 101 <sub>B</sub> <b>1.5_V</b> , Threshold 5 for VDS at 1.5 V 110 <sub>B</sub> <b>1.75_V</b> , Threshold 6 for VDS at 1.75 V 111 <sub>B</sub> <b>2.0_V</b> , Threshold 7 for VDS at 2.0 V
<b>OFF_SEQ_EN</b>	15	rw	<b>Turn-Off Slewrate Sequencer enable</b> 0 <sub>B</sub> <b>Disabled</b> , Turn-off Slewrate Sequencer disabled 1 <sub>B</sub> <b>Enabled</b> , Turn-off Slewrate Sequencer enabled
<b>IDISCHARGEDIV2_N</b>	14	rw	<b>IDISCHARGE Current divide by 2 not</b> 0 <sub>B</sub> <b>Half Range</b> , available for charge current (max. is 150 mA) 1 <sub>B</sub> <b>Full Range</b> , available for charge current (max. is 300 mA)
<b>RES</b>	13	r	<b>Reserved</b> Always read as 0

---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
<b>IDISCHARGE_TRIM</b>	12:8	rw	<b>Trimming of the internal driver dis-charge current</b> 00000 <sub>B</sub> <b>HiZ</b> , Slew Rate Control is inactive 00001 <sub>B</sub> <b>min discharge current</b> , lowest gate discharge current selected (do not use this setting!) 00010 <sub>B</sub> , typ. current 19.80 mA 00011 <sub>B</sub> , typ. current 31.10 mA 00100 <sub>B</sub> , typ. current 42.30 mA 00101 <sub>B</sub> , typ. current 53.90 mA 00110 <sub>B</sub> , typ. current 64.90 mA 00111 <sub>B</sub> , typ. current 76.20 mA 01000 <sub>B</sub> , typ. current 86.80 mA 01001 <sub>B</sub> , typ. current 98.00 mA 01010 <sub>B</sub> , typ. current 108.50 mA 01011 <sub>B</sub> , typ. current 119.40 mA 01100 <sub>B</sub> , typ. current 129.70 mA 01101 <sub>B</sub> , typ. current 140.30 mA 01110 <sub>B</sub> , typ. current 150.40 mA 01111 <sub>B</sub> , typ. current 160.80 mA 10000 <sub>B</sub> , typ. current 170.10 mA 10001 <sub>B</sub> , typ. current 180.30 mA 10010 <sub>B</sub> , typ. current 189.80 mA 10011 <sub>B</sub> , typ. current 199.60 mA 10100 <sub>B</sub> , typ. current 208.90 mA 10101 <sub>B</sub> , typ. current 218.40 mA 10110 <sub>B</sub> , typ. current 227.40 mA 10111 <sub>B</sub> , typ. current 236.70 mA 11000 <sub>B</sub> , typ. current 245.30 mA 11001 <sub>B</sub> , typ. current 254.30 mA 11010 <sub>B</sub> , typ. current 262.80 mA 11011 <sub>B</sub> , typ. current 271.50 mA 11100 <sub>B</sub> , typ. current 279.60 mA 11101 <sub>B</sub> , typ. current 288.00 mA 11110 <sub>B</sub> , typ. current 295.90 mA 11111 <sub>B</sub> <b>max charge current</b> , typ. current 304 mA
<b>ON_SEQ_EN</b>	7	rw	<b>Turn On Slewrate Sequencer enable</b> 0 <sub>B</sub> <b>Disabled</b> , Turn-on Slewrate Sequencer disabled 1 <sub>B</sub> <b>Enabled</b> , Turn-on Slewrate Sequencer enabled
<b>ICHARGEDIV2_N</b>	6	rw	<b>ICHARGE Current divide by 2 not</b> 0 <sub>B</sub> <b>Half Range</b> , available for charge current (max. is 150 mA) 1 <sub>B</sub> <b>Full Range</b> , available for charge current (max. is 300 mA)
<b>RES</b>	5	r	<b>Reserved</b> Always read as 0

---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
ICHARGE_TRIM	4:0	rw	<p><b>Trimming of the internal driver charge current</b></p> <p>00000<sub>B</sub> <b>HiZ</b>, Slew Rate Control is inactive</p> <p>00001<sub>B</sub> <b>min charge current</b>, lowest gate charge current selected (do not use this setting!)</p> <p>00010<sub>B</sub>, typ. current 19.80 mA</p> <p>00011<sub>B</sub>, typ. current 31.10 mA</p> <p>00100<sub>B</sub>, typ. current 42.30 mA</p> <p>00101<sub>B</sub>, typ. current 53.90 mA</p> <p>00110<sub>B</sub>, typ. current 64.90 mA</p> <p>00111<sub>B</sub>, typ. current 76.20 mA</p> <p>01000<sub>B</sub>, typ. current 86.80 mA</p> <p>01001<sub>B</sub>, typ. current 98.00 mA</p> <p>01010<sub>B</sub>, typ. current 108.50 mA</p> <p>01011<sub>B</sub>, typ. current 119.40 mA</p> <p>01100<sub>B</sub>, typ. current 129.70 mA</p> <p>01101<sub>B</sub>, typ. current 140.30 mA</p> <p>01110<sub>B</sub>, typ. current 150.40 mA</p> <p>01111<sub>B</sub>, typ. current 160.80 mA</p> <p>10000<sub>B</sub>, typ. current 170.10 mA</p> <p>10001<sub>B</sub>, typ. current 180.30 mA</p> <p>10010<sub>B</sub>, typ. current 189.80 mA</p> <p>10011<sub>B</sub>, typ. current 199.60 mA</p> <p>10100<sub>B</sub>, typ. current 208.90 mA</p> <p>10101<sub>B</sub>, typ. current 218.40 mA</p> <p>10110<sub>B</sub>, typ. current 227.40 mA</p> <p>10111<sub>B</sub>, typ. current 236.70 mA</p> <p>11000<sub>B</sub>, typ. current 245.30 mA</p> <p>11001<sub>B</sub>, typ. current 254.30 mA</p> <p>11010<sub>B</sub>, typ. current 262.80 mA</p> <p>11011<sub>B</sub>, typ. current 271.50 mA</p> <p>11100<sub>B</sub>, typ. current 279.60 mA</p> <p>11101<sub>B</sub>, typ. current 288.00 mA</p> <p>11110<sub>B</sub>, typ. current 295.90 mA</p> <p>11111<sub>B</sub> <b>max charge current</b>, typ. current 304 mA</p>


1) if MI\_CLK = 20 MHz

## Bridge Driver (incl. Charge Pump)

### Turn-off Slewrate Sequencer Control

The register is reset by RESET\_TYPE\_3.

OFF_SEQ_CTRL	Offset	Reset Value
Turn-off Slewrate Sequencer Control	10 <sub>H</sub>	0000 0000 <sub>H</sub>

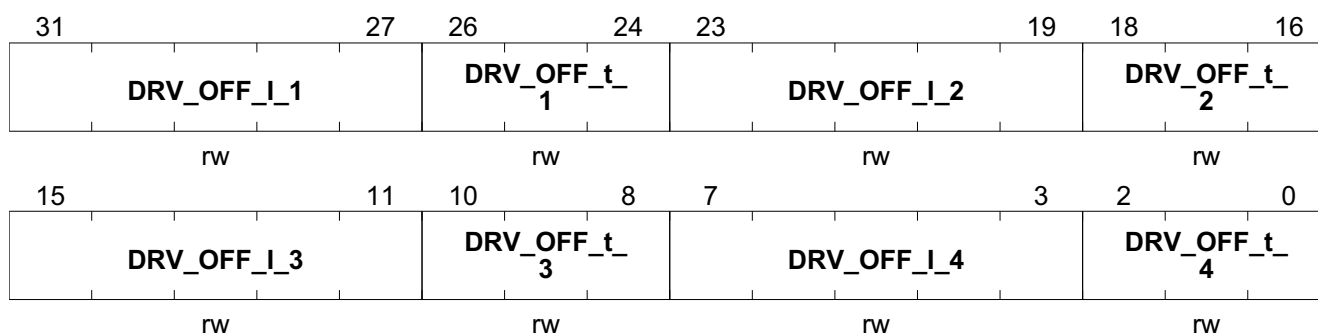


Field	Bits	Type	Description
DRV_OFF_I_1	31:27	rw	<b>Slew rate sequencer off phase 1 current</b> 0 <sub>H</sub> <b>Disabled</b> , Slew Rate Control is disabled 1f <sub>H</sub> <b>Maximum</b> , maximum output discharge current
DRV_OFF_t_1	26:24	rw	<b>Slew rate sequencer off phase 1 time</b> 0 <sub>H</sub> <b>50ns</b> , 50ns phase duration 7 <sub>H</sub> <b>400ns</b> , 400ns phase duration
DRV_OFF_I_2	23:19	rw	<b>Slew rate sequencer off phase 2 current</b> 0 <sub>H</sub> <b>Disabled</b> , Slew Rate Control is disabled 1f <sub>H</sub> <b>Maximum</b> , maximum output discharge current
DRV_OFF_t_2	18:16	rw	<b>Slew rate sequencer off phase 2 time</b> 0 <sub>H</sub> <b>50ns</b> , 50ns phase duration 7 <sub>H</sub> <b>400ns</b> , 400ns phase duration
DRV_OFF_I_3	15:11	rw	<b>Slew rate sequencer off phase 3 current</b> 0 <sub>H</sub> <b>Disabled</b> , Slew Rate Control is disabled 1f <sub>H</sub> <b>Maximum</b> , maximum output discharge current
DRV_OFF_t_3	10:8	rw	<b>Slew rate sequencer off phase 3 time</b> 0 <sub>H</sub> <b>50ns</b> , 50ns phase duration 7 <sub>H</sub> <b>400ns</b> , 400ns phase duration
DRV_OFF_I_4	7:3	rw	<b>Slew rate sequencer off phase 4 current</b> 0 <sub>H</sub> <b>Disabled</b> , Slew Rate Control is disabled 1f <sub>H</sub> <b>Maximum</b> , maximum output discharge current
DRV_OFF_t_4	2:0	rw	<b>Slew rate sequencer off phase 4 time</b> 0 <sub>H</sub> <b>50ns</b> , 50ns phase duration 7 <sub>H</sub> <b>400ns</b> , 400ns phase duration

## Bridge Driver (incl. Charge Pump)

### Turn-on Slewrate Sequencer Control

The register is reset by RESET\_TYPE\_3.

ON_SEQ_CTRL	Offset	Reset Value
Turn-on Slewrate Sequencer Control	14 <sub>H</sub>	0000 0000 <sub>H</sub>

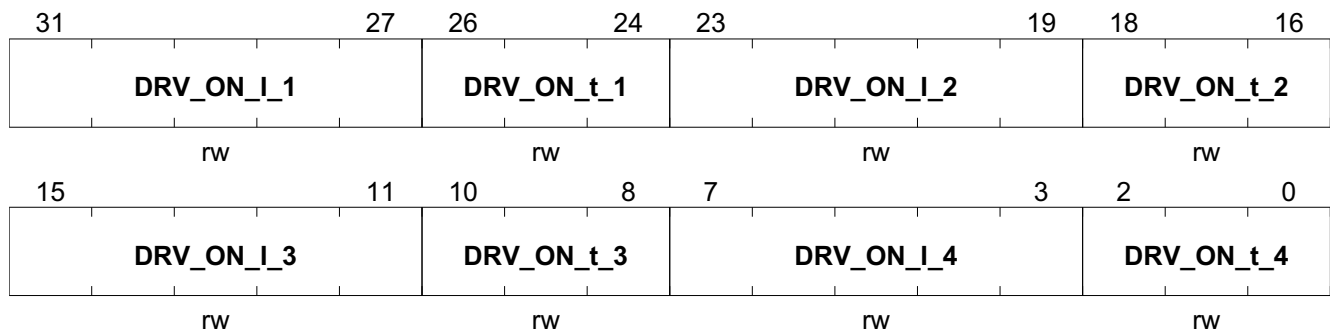

Field	Bits	Type	Description
DRV_ON_I_1	31:27	rw	<b>Slew rate sequencer on phase 1 current</b> 0 <sub>H</sub> <b>Disabled</b> , Slew Rate Control is disabled 1f <sub>H</sub> <b>Maximum</b> , maximum output discharge current
DRV_ON_t_1	26:24	rw	<b>Slew rate sequencer on phase 1 time</b> 0 <sub>H</sub> <b>50ns</b> , 50ns phase duration 7 <sub>H</sub> <b>400ns</b> , 400ns phase duration
DRV_ON_I_2	23:19	rw	<b>Slew rate sequencer on phase 2 current</b> 0 <sub>H</sub> <b>Disabled</b> , Slew Rate Control is disabled 1f <sub>H</sub> <b>Maximum</b> , maximum output discharge current
DRV_ON_t_2	18:16	rw	<b>Slew rate sequencer on phase 2 time</b> 0 <sub>H</sub> <b>50ns</b> , 50ns phase duration 7 <sub>H</sub> <b>400ns</b> , 400ns phase duration
DRV_ON_I_3	15:11	rw	<b>Slew rate sequencer on phase 3 current</b> 0 <sub>H</sub> <b>Disabled</b> , Slew Rate Control is disabled 1f <sub>H</sub> <b>Maximum</b> , maximum output discharge current
DRV_ON_t_3	10:8	rw	<b>Slew rate sequencer on phase 3 time</b> 0 <sub>H</sub> <b>50ns</b> , 50ns phase duration 7 <sub>H</sub> <b>400ns</b> , 400ns phase duration
DRV_ON_I_4	7:3	rw	<b>Slew rate sequencer on phase 4 current</b> 0 <sub>H</sub> <b>Disabled</b> , Slew Rate Control is disabled 1f <sub>H</sub> <b>Maximum</b> , maximum output discharge current
DRV_ON_t_4	2:0	rw	<b>Slew rate sequencer on phase 4 time</b> 0 <sub>H</sub> <b>50ns</b> , 50ns phase duration 7 <sub>H</sub> <b>400ns</b> , 400ns phase duration

## Bridge Driver (incl. Charge Pump)

### 27.5.2 Driver Trimming Register

#### Trimming Driver

This register is password protected, see **PASSWD**. Writing to it is only possible if password is set. Write access without opened passwd scheme will cause a HardFault.

TRIM_DRVx		Offset		Reset Value										
Trimming of Driver		18 <sub>H</sub>		8000 0000 <sub>H</sub>										
31	30	26	25	24	23	22	21	20	19	18	17	16		
RES		RES		CPLW_T FILTS*	HS3D RV_*	HS2D RV_*	HS1D RV_*	HS3D RV_*	HS2D RV_*	HS1D RV_*	HSDRV_D S_TFIL*			
r		r		rwp2	rwp2	rwp2	rwp2	rwp2	rwp2	rwp2	rwp2	rwp2		
15	14	13	12	11	10	9	8	7	6	5	4	2	1	0
LS3D RV_*	LS2D RV_*	LS1D RV_*	LS3D RV_*	LS2D RV_*	LS1D RV_*	LSDRV_D S_TFIL*	RES	DRV_CCP TIMMUL			RES		LS_HS_B T_TFIL*	
rwp2	rwp2	rwp2	rwp2	rwp2	rwp2	rwp2	r	rwp2			r		rwp2	

Field	Bits	Type	Description
RES	31	r	<b>Reserved</b> Always read as 1
RES	30:26	r	<b>Reserved</b> Always read as 0
CPLW_TFILTS_SEL	25:24	rwp2	<b>Filter Time for Charge Pump Voltage Low Diagnosis</b>  <i>Note: this SFR can only be written if the corresponding SCU_DM password register is written!</i>  00 <sub>B</sub> <b>4_μs</b> , 4 μs filter time 01 <sub>B</sub> <b>8_μs</b> , 8 μs filter time 10 <sub>B</sub> <b>16_μs</b> , 16 μs filter time 11 <sub>B</sub> <b>32_μs</b> , 32 μs filter time
HS3DRV_OCSDN_DIS	23	rwp2	<b>High Side 3 Predriver in overcurrent situation disable</b>  <i>Note: this SFR can only be written if the corresponding SCU_DM password register is written!</i>  0 <sub>B</sub> <b>Enable</b> , Predriver shutdown in overcurrent situation enable 1 <sub>B</sub> <b>Disable</b> , Predriver shutdown in overcurrent situation disable

---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
HS2DRV_OCSDN_DIS	22	rwp2	<p><b>High Side 2 Predriver in overcurrent situation disable</b></p> <p><i>Note:</i> this SFR can only be written if the corresponding SCU_DM password register is written!</p> <p>0<sub>B</sub> <b>Enable</b>, Predriver shutdown in overcurrent situation enable</p> <p>1<sub>B</sub> <b>Disable</b>, Predriver shutdown in overcurrent situation disable</p>
HS1DRV_OCSDN_DIS	21	rwp2	<p><b>High Side 1 Predriver in overcurrent situation disable</b></p> <p><i>Note:</i> this SFR can only be written if the corresponding SCU_DM password register is written!</p> <p>0<sub>B</sub> <b>Enable</b>, Predriver shutdown in overcurrent situation enable</p> <p>1<sub>B</sub> <b>Disable</b>, Predriver shutdown in overcurrent situation disable</p>
HS3DRV_FDISCHG_DIS	20	rwp2	<p><b>High Side 3 Predriver fast discharge disable</b></p> <p><i>Note:</i> this SFR can only be written if the corresponding SCU_DM password register is written!</p> <p>0<sub>B</sub> <b>Enable</b>, Predriver shutdown fast discharge enable</p> <p>1<sub>B</sub> <b>Disable</b>, Predriver shutdown fast discharge disable</p>
HS2DRV_FDISCHG_DIS	19	rwp2	<p><b>High Side 2 Predriver fast discharge disable</b></p> <p><i>Note:</i> this SFR can only be written if the corresponding SCU_DM password register is written!</p> <p>0<sub>B</sub> <b>Enable</b>, Predriver shutdown fast discharge enable</p> <p>1<sub>B</sub> <b>Disable</b>, Predriver shutdown fast discharge disable</p>
HS1DRV_FDISCHG_DIS	18	rwp2	<p><b>High Side 1 Predriver fast discharge disable</b></p> <p><i>Note:</i> this SFR can only be written if the corresponding SCU_DM password register is written!</p> <p>0<sub>B</sub> <b>Enable</b>, Predriver shutdown fast discharge enable</p> <p>1<sub>B</sub> <b>Disable</b>, Predriver shutdown fast discharge disable</p>

---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
<b>HSDRV_DS_TFILT_SEL</b>	17:16	rwp2	<p><b>Filter Time for Drain-Source Monitoring of High Side Drivers</b></p> <p><i>Note: this SFR can only be written if the corresponding SCU_DM password register is written!</i></p> <p>00<sub>B</sub> <b>1_μs</b>, 1 μs filter time            01<sub>B</sub> <b>2_μs</b>, 2 μs filter time            10<sub>B</sub> <b>4_μs</b>, 4 μs filter time            11<sub>B</sub> <b>8_μs</b>, 8 μs filter time</p>
<b>LS3DRV_OCSDN_DIS</b>	15	rwp2	<p><b>Low Side 3 Predriver in overcurrent situation disable</b></p> <p><i>Note: this SFR can only be written if the corresponding SCU_DM password register is written!</i></p> <p>0<sub>B</sub> <b>Enable</b>, Predriver shutdown in overcurrent situation enable            1<sub>B</sub> <b>Disable</b>, Predriver shutdown in overcurrent situation disable</p>
<b>LS2DRV_OCSDN_DIS</b>	14	rwp2	<p><b>Low Side 2 Predriver in overcurrent situation disable</b></p> <p><i>Note: this SFR can only be written if the corresponding SCU_DM password register is written!</i></p> <p>0<sub>B</sub> <b>Enable</b>, Predriver shutdown in overcurrent situation enable            1<sub>B</sub> <b>Disable</b>, Predriver shutdown in overcurrent situation disable</p>
<b>LS1DRV_OCSDN_DIS</b>	13	rwp2	<p><b>Low Side 1 Predriver in overcurrent situation disable</b></p> <p><i>Note: this SFR can only be written if the corresponding SCU_DM password register is written!</i></p> <p>0<sub>B</sub> <b>Enable</b>, Predriver shutdown in overcurrent situation enable            1<sub>B</sub> <b>Disable</b>, Predriver shutdown in overcurrent situation disable</p>



---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
LS3DRV_FDISCHG_DIS	12	rwp2	<p><b>Low Side 3 Predriver fast discharge disable</b></p> <p><i>Note: this SFR can only be written if the corresponding SCU_DM password register is written!</i></p> <p>0<sub>B</sub> <b>Enable</b>, Predriver shutdown fast discharge enable 1<sub>B</sub> <b>Disable</b>, Predriver shutdown fast discharge disable</p>
LS2DRV_FDISCHG_DIS	11	rwp2	<p><b>Low Side 2 Predriver fast discharge disable</b></p> <p><i>Note: this SFR can only be written if the corresponding SCU_DM password register is written!</i></p> <p>0<sub>B</sub> <b>Enable</b>, Predriver shutdown fast discharge enable 1<sub>B</sub> <b>Disable</b>, Predriver shutdown fast discharge disable</p>
LS1DRV_FDISCHG_DIS	10	rwp2	<p><b>Low Side 1 Predriver fast discharge disable</b></p> <p><i>Note: this SFR can only be written if the corresponding SCU_DM password register is written!</i></p> <p>0<sub>B</sub> <b>Enable</b>, Predriver shutdown fast discharge enable 1<sub>B</sub> <b>Disable</b>, Predriver shutdown fast discharge disable</p>
LSDRV_DS_TFILT_SEL	9:8	rwp2	<p><b>Filter Time for Drain-Source Monitoring of Low Side Drivers</b></p> <p><i>Note: this SFR can only be written if the corresponding SCU_DM password register is written!</i></p> <p>00<sub>B</sub> <b>1_μs</b>, 1 μs filter time 01<sub>B</sub> <b>2_μs</b>, 2 μs filter time 10<sub>B</sub> <b>4_μs</b>, 4 μs filter time 11<sub>B</sub> <b>8_μs</b>, 8 μs filter time</p>
RES	7	r	<p><b>Reserved</b></p> <p>Always read as 0</p>
DRV_CCPTIMMUL	6:5	rwp2	<p><b>Multiplier bits for cross conduction time settings in register DRV_CCP_TIMSEL, BF-Step only</b></p> <p><i>Note: this SFR can only be written if the corresponding SCU_DM password register is written!</i></p> <p>00<sub>B</sub> <b>MUL1</b>, DRV_CCP_TIMSEL value is multiplied by 1 01<sub>B</sub> <b>MUL2</b>, DRV_CCP_TIMSEL value is multiplied by 2 10<sub>B</sub> <b>MUL4</b>, DRV_CCP_TIMSEL value is multiplied by 4 11<sub>B</sub> <b>MUL4</b>, DRV_CCP_TIMSEL value is multiplied by 4</p>

---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
RES	4:2	r	<b>Reserved</b> Always read as 0
LS_HS_BT_TFILT_SEL	1:0	rwp2	<b>Blanking Time for Drain-Source Monitoring of Low / High Side Drivers</b>  <i>Note: this SFR can only be written if the corresponding SCU_DM password register is written!</i>  00 <sub>B</sub> <b>1_μs</b> , 1 μs filter time 01 <sub>B</sub> <b>2_μs</b> , 2 μs filter time 10 <sub>B</sub> <b>4_μs</b> , 4 μs filter time 11 <sub>B</sub> <b>8_μs</b> , 8 μs filter time

---

 Bridge Driver (incl. Charge Pump)

### 27.5.3 Charge Pump Control and Status Register

#### Charge Pump Control and Status Register

The register is reset by RESET\_TYPE\_3.

CP_CTRL_STS	Offset	Reset Value
Charge Pump Control and Status Register	20 <sub>H</sub>	0000 0004 <sub>H</sub>

31	28	27	26	25	24	23	22	21	20	19	18	17	16	
RES				VTHVCP9 V_TRIM	VCP9 V_S*	CPLO PWR*	VSD UPT*	DRVx _VS*	VSD LOT*	DRVx _VS*	VCP UPT*	DRVx _VC*	VCP LOT*	DRVx _VC*
r				rw		rw	rw	r	rw	r	rw	r	rw	
15	11	10	8	7	6	5	4	3	2	1	0			
RES				VCP_LOWTH2		RES	VCP LOT*	RES	CP_R DY_*	RES	CP_E N			
r				rw		r	r	r	rw	r	rw			

Field	Bits	Type	Description
RES	31:28	r	<b>Reserved</b> Always read as 0
VTHVCP9V_TRIM	27:26	rw	<b>Charge Pump Output Voltage 9V Trimming</b> 0 0 <sub>B</sub> <b>7.5_V</b> , Threshold 0 0 1 <sub>B</sub> <b>8.0_V</b> , Threshold 1 1 0 <sub>B</sub> <b>8.5_V</b> , Threshold 2 1 1 <sub>B</sub> <b>9.0_V</b> , Threshold 3
VCP9V_SET	25	rw	<b>Charge Pump 9 V Output Voltage Set</b> 0 <sub>B</sub> <b>14V Set</b> , output voltage set to 14V 1 <sub>B</sub> <b>9V Set</b> , output voltage set to 9V
CPLOPWRM_EN	24	rw	<b>Charge Pump Low Power Mode Enable</b> 0 <sub>B</sub> <b>Low Power Mode Disable</b> , low power mode inactive 1 <sub>B</sub> <b>Low Power Mode Enable</b> , low power mode active
VSD_UPTH_STS	23	r	<b>Driver Supply MU High Status</b> 0 <sub>B</sub> <b>Driver Supply Voltage ok</b> , no overvoltage detected 1 <sub>B</sub> <b>Driver Supply Voltage too high</b> , overvoltage on VSD Pin detected
DRVx_VSDUP_DIS	22	rw	<b>Driver shutdown in case of VSD overvoltage</b> 0 <sub>B</sub> <b>Driver Enable</b> , DRVx not shutdown 1 <sub>B</sub> <b>Driver Disable</b> , DRVx shutdown in case of VSD overvoltage
VSD_LOTH_STS	21	r	<b>Driver Supply MU Low Status</b> 0 <sub>B</sub> <b>Driver Supply Voltage ok</b> , no undervoltage detected. 1 <sub>B</sub> <b>Driver Supply Voltage too low</b> , undervoltage on VSD Pin detected.

---

**Bridge Driver (incl. Charge Pump)**

Field	Bits	Type	Description
<b>DRVx_VSDLO_DIS</b>	20	rw	<b>Driver shutdown in case VSD undervoltage</b> 0 <sub>B</sub> <b>Driver Enable</b> , DRVx not shutdown 1 <sub>B</sub> <b>Driver Disable</b> , DRVx shutdown in case of VSD undervoltage
<b>VCP_UPTH_STS</b>	19	r	<b>Charge Pump MU High Status</b> 0 <sub>B</sub> <b>Charge Pump Output Voltage ok</b> , no overvoltage detected 1 <sub>B</sub> <b>Charge Pump Output Voltage too high</b> , overvoltage on charge pump output detected
<b>DRVx_VCPUP_DIS</b>	18	rw	<b>Driver shutdown in case of VCP overvoltage</b> 0 <sub>B</sub> <b>Driver Enable</b> , DRVx not shutdown 1 <sub>B</sub> <b>Driver Disable</b> , DRVx shutdown in case of VCP overvoltage
<b>VCP_LOTH1_STS</b>	17	r	<b>Charge Pump MU Low Status</b> 0 <sub>B</sub> <b>Charge Pump Output Voltage ok</b> , no undervoltage detected. 1 <sub>B</sub> <b>Charge Pump Output Voltage too low</b> , undervoltage on chargepump output detected.
<b>DRVx_VCPLO_DIS</b>	16	rw	<b>Driver shutdown in case VCP undervoltage</b> 0 <sub>B</sub> <b>Driver Enable</b> , DRVx not shutdown 1 <sub>B</sub> <b>Driver Disable</b> , DRVx shutdown in case of VCP undervoltage
<b>RES</b>	15:11	r	<b>Reserved</b> Always read as 0
<b>VCP_LOWTH2</b>	10:8	rw	<b>Charge Pump Output Voltage Lower Threshold Detection Level</b> 000 <sub>B</sub> <b>7.325_V</b> , Threshold 0 001 <sub>B</sub> <b>7.654_V</b> , Threshold 1 010 <sub>B</sub> <b>7.982_V</b> , Threshold 2 011 <sub>B</sub> <b>8.309_V</b> , Threshold 3 100 <sub>B</sub> <b>8.638_V</b> , Threshold 4 101 <sub>B</sub> <b>8.966_V</b> , Threshold 5 110 <sub>B</sub> <b>9.293_V</b> , Threshold 6 111 <sub>B</sub> <b>9.620_V</b> , Threshold 7
<b>RES</b>	7:6	r	<b>Reserved</b> Always read as 0
<b>VCP_LOTH2_STS</b>	5	r	<b>Charge Pump Low Status<sup>1)</sup></b> 0 <sub>B</sub> <b>Charge Pump Output Voltage ok</b> , no undervoltage detected. 1 <sub>B</sub> <b>Charge Pump Output Voltage too low</b> , undervoltage on chargepump output detected.
<b>RES</b>	4:3	r	<b>Reserved</b> Always read as 0

---

**Bridge Driver (incl. Charge Pump)**


Field	Bits	Type	Description
CP_RDY_EN	2	rw	<b>Bridge Driver on Charge Pump Ready Enable</b> 0 <sub>B</sub> <b>OFF</b> , Bridge Driver can be enabled immediately 1 <sub>B</sub> <b>ON</b> , Bridge Driver can only be enabled when Charge Pump is ready
RES	1	r	<b>Reserved</b> Always read as 0
CP_EN	0	rw	<b>Charge Pump Enable</b> 0 <sub>B</sub> <b>DISABLE</b> , Charge Pump, circuit power off 1 <sub>B</sub> <b>ENABLE</b> , Charge Pump, circuit power on

- 1) VCP\_LOW: a potential root cause for VCP undervoltage is an external short of a gate driver output. Reactivation of the bridge driver should only be done when the short circuit condition is removed to avoid repetitive stress of the affected output stage.

**Bridge Driver (incl. Charge Pump)**
**Charge Pump Clock Control Register**

The register is reset by RESET\_TYPE\_3.

CP_CLK_CTRL	Offset	Reset Value
Charge Pump Clock Control Register	24 <sub>H</sub>	0000 CA16 <sub>H</sub>

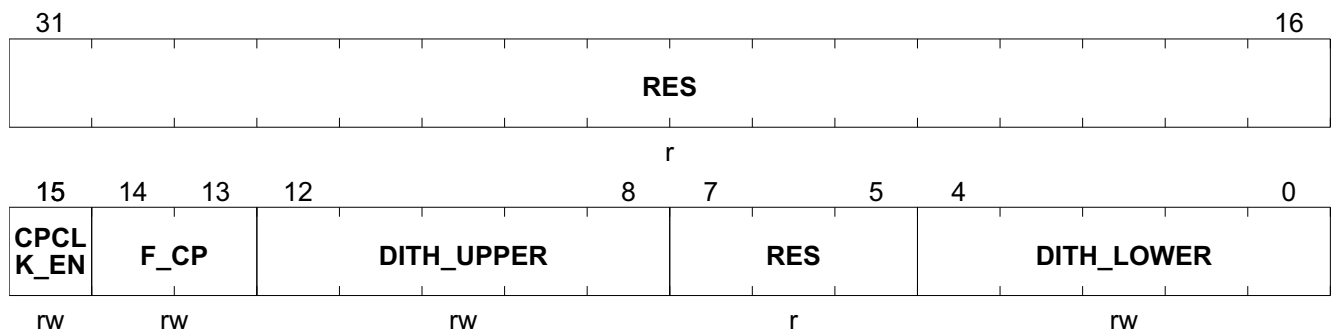

Field	Bits	Type	Description
RES	31:16	r	<b>Reserved</b> Always read as 0
CPCLK_EN	15	rw	<b>Charge Pump Clock Enable</b> 0 <sub>B</sub> <b>DISABLE</b> , Charge Pump Clock is switched off and has value of 0 1 <sub>B</sub> <b>ENABLE</b> , Charge Pump Clock is running
F_CP	14:13	rw	<b>MSB of CP_CLK divider</b> CP_CLK frequency is defined by the concatenation of f_cp and dith_upper for the upper boundary during dithering, and dith_lower for the lower boundary
DITH_UPPER	12:8	rw	<b>CP_CLK upper frequency boundary during dithering</b> legal values are equal or greater than DITH_LOWER, see definition of f_cp
RES	7:5	r	<b>Reserved</b> Always read as 0
DITH_LOWER	4:0	rw	<b>CP_CLK lower frequency boundary during dithering</b> legal values are equal or less than DITH_UPPER, see definition of f_cp

## 28 Current Sense Amplifier

### 28.1 Features

#### Main Features

- Programmable gain settings: G (see data sheet for values)
- Differential input voltage:  $V_{IX}$  (see data sheet for values)
- Wide common mode input range:  $V_{CM}$  (see data sheet for values)
- Low setting time:  $T_{SET}$  (see data sheet for values)

### 28.2 Introduction

The current sense amplifier in the following figure can be used to measure near ground differential voltages via the 10-bit ADC. Its gain is digitally programmable through internal control registers.

Linear calibration has to be applied to achieve high gain accuracy, e.g. end-of-line calibration including the shunt resistor.

The following figure shows how the current sense amplifier can be used as a low-side current sense amplifier where the motor current is converted to a voltage by means of a shunt resistor  $R_{SH}$ . A differential amplifier input is used in order to eliminate measurement errors due to voltage drop across the stray resistance  $R_{Stray}$  and differences between the external and internal ground. If the voltage at one or both inputs is out of the operating range, the input circuit is overloaded and requires a certain specified **recovery time**.

In general, the external low pass filter should provide suppression of EMI.

The CSA is able to measure positive as well as negative currents through the shunt. Since the ADC1 only provides single-ended inputs the output of the CSA will be offset by  $V_{zero}$ .  $V_{zero}$  is  $0.4 * V_{AREF}$ , approx. 2V. In order to measure the real CSA output at 0A input the user has to perform an ADC1 Ch1 measurement with ideally 0A through the shunt, with **CTRL.VZERO** bit set to '0'. The desired gain has to be set before that. The offset might vary from one gain setting to another, therefore if the gain has been changed the offset measurement has to be repeated.

The bit **CTRL.VZERO** switches between the CSA output and the  $V_{zero}$  voltage reference, as displayed in the following figure. The CSA is not ideal, it shows an input offset, therefore the  $V_{zero}$  voltage reference, if measured by the ADC1, may differ from the CSA output value at 0A current input by  $+/-\sim 1mV * Gain$ .

Current Sense Amplifier

28.2.1 Block Diagram

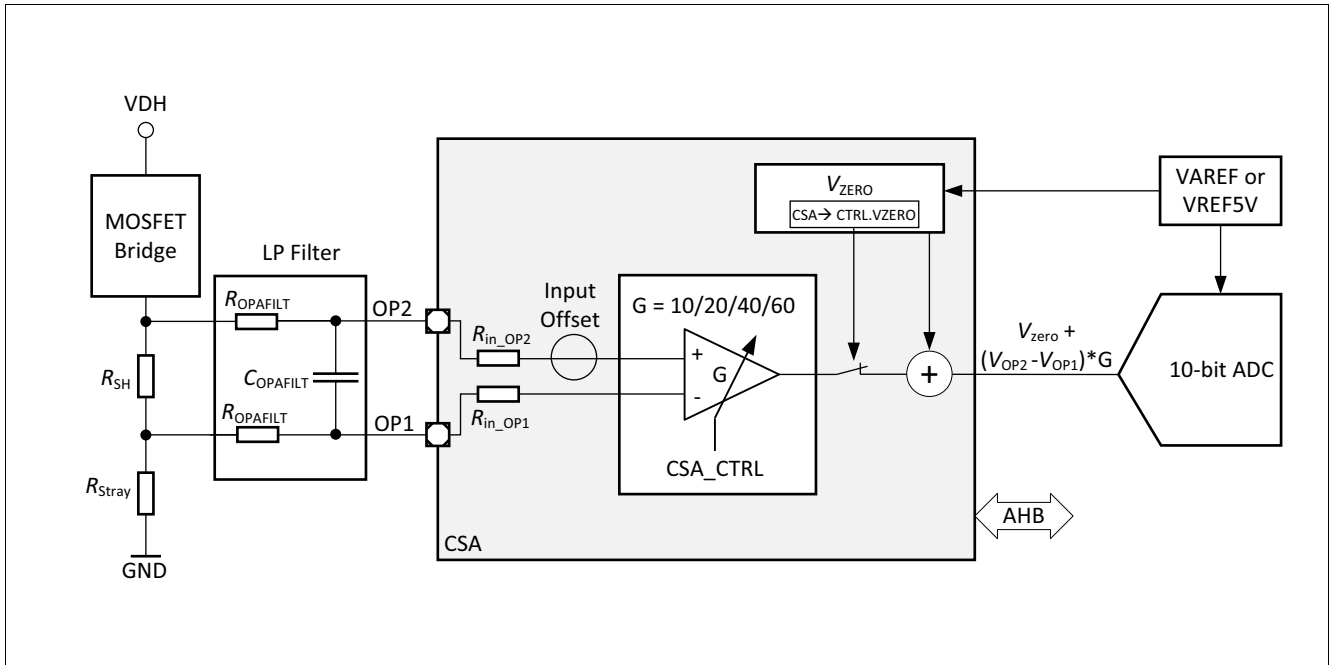


Figure 227 Simplified Application Diagram



## Current Sense Amplifier


### 28.2.2 Recommended Offset Calibration

In order to perform a correct offset calibration the complete path from shunt resistor through the CSA to the ADC1 should be measured. For this purpose it should be ensured that there is no current flow (0A) through the shunt. The following list collects the steps to perform a recommended offset calibration:

- connect the CSA output to the ADC1 Channel 1 input by closing the switch, CSA->**CTRL.VZERO**=0
- set desired CSA gain, CSA->**CTRL.GAIN**=x
- ensure 0A current flowing through the shunt, therefore 0V differential voltage at the CSA input
- perform an ADC1 Channel 1 measurement, using the software mode, would be suitable
- the ADC1 Channel 1 digital output, **RES\_OUT1**, holds the CSA output offset including the CSA input offset
- repeat the measurement for other CSA gain settings if needed

*Note: By applying the recommended calibration procedure the violated output offset is compensated.*

**Figure 228** displays the effective signal path for the recommended offset calibration.

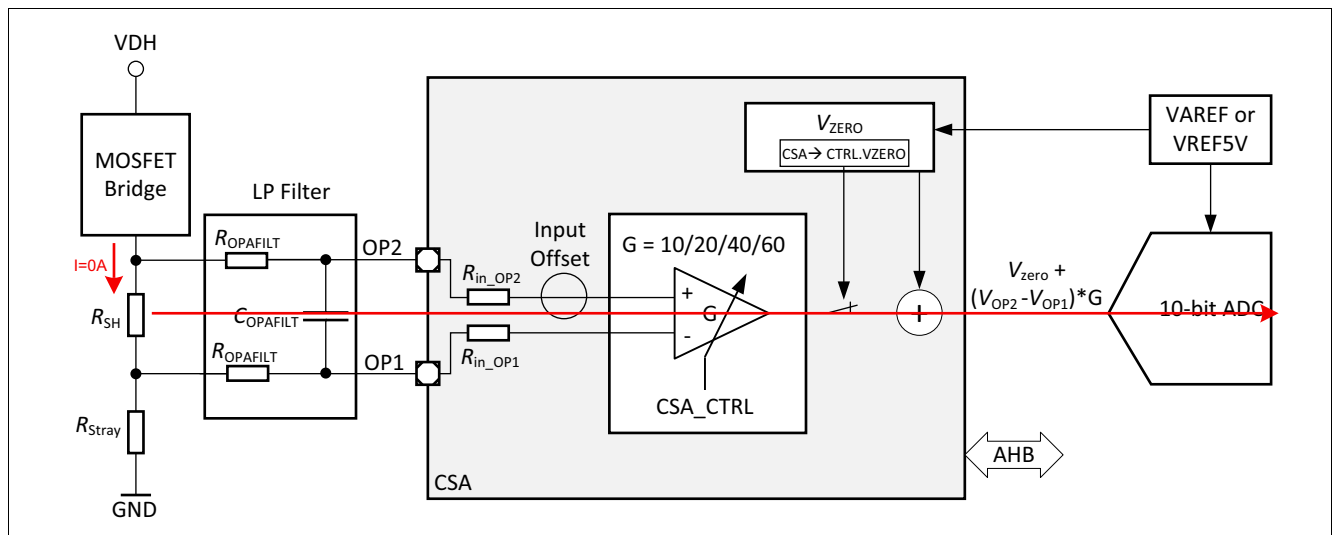

**Figure 228** CSA simplified internal structure - offset calibration path

---

**Current Sense Amplifier**
**28.3 Functional Description**
**28.3.1 ADC Code Calculation**

The differential input voltage  $V_{OP2} - V_{OP1}$  of the embedded Current Sense Amplifier (CSA) is converted to an ADC code by the following equation:

$$\text{ADC1out} = \text{floor} \left( \frac{V_{zero} + (V_{OP2} - V_{OP1}) * G}{V_{LSB}} \right) \quad (28.1)$$

wherein the parameter  $V_{OP1}$  and  $V_{OP2}$  are the voltages at the inputs of the amplifier and G is the configured gain.

The CSA output voltage  $V_{CSAout} = (V_{OP2} - V_{OP1}) * G$  is centered around an offset voltage  $V_{zero}$  which has the following dependency on the reference voltage  $V_{AREF}$  of ADC1:

$$V_{zero} = 0.4 * V_{AREF} \quad (28.2)$$

The typ. value of  $V_{AREF}$  is 5V @ 27 °C.  $V_{LSB}$  defined as follows:

$$V_{LSB} = \frac{V_{AREF}}{1023} \quad (28.3)$$

---

**Current Sense Amplifier**

## 28.4 Register Definition

The next chapter lists the configuration possibilities of the Current Sense Amplifier (CSA) which can be used for external current sensing.

**Table 189 Amplifier Module Base Address List**

Module	Base Address
CSA	48018000 <sub>H</sub>

The base address of the module is the same as for the measurement unit (MU) as the current sense amplifier is a sub-block of the MU.

**Table 190 Register Overview**

Register Short Name	Register Long Name	Offset Address	Reset Value
<b>Register Definition</b>			
<b>CTRL</b>	Operational Amplifier Control and Status	0C <sub>H</sub>	0000 0000 <sub>H</sub>


The registers are addressed wordwise.

**Current Sense Amplifier**

**Operational Amplifier Control and Status**

The following register consists of control and status bits. This Register is cleared by every reset.  
The register is reset by RESET\_TYPE\_3.

<b>CTRL</b>	<b>Offset</b>	<b>Reset Value</b>
<b>Operational Amplifier Control and Status</b>	<b>0C<sub>H</sub></b>	<b>0000 0000<sub>H</sub></b>

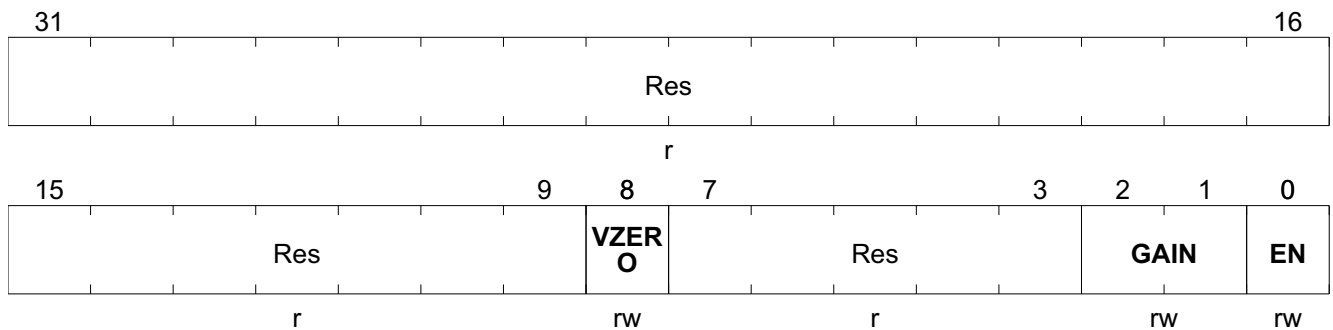

Field	Bits	Type	Description
<b>Res</b>	31:9	r	<b>Reserved</b> Always read as 0
<b>VZERO</b>	8	rw	<b>Current Sense Output Selection</b> 0 <sub>B</sub> <b>VOUT</b> , CSA output connected to ADC1 Ch1 1 <sub>B</sub> <b>VZERO</b> , voltage reference connected to ADC1 Ch1
<b>Res</b>	7:3	r	<b>Reserved</b> Always read as 0
<b>GAIN</b>	2:1	rw	<b>Operational Amplifier Gain Setting</b> 00 <sub>B</sub> <b>10</b> , Gain Factor 10 01 <sub>B</sub> <b>20</b> , Gain Factor 20 10 <sub>B</sub> <b>40</b> , Gain Factor 40 11 <sub>B</sub> <b>60</b> , Gain Factor 60
<b>EN</b>	0	rw	<b>OPA Enable</b> 0 <sub>B</sub> <b>DISABLE</b> , OPA switched off 1 <sub>B</sub> <b>ENABLE</b> , OPA switched on

## Revision History

## 29 Revision History

Revision	Date	Changes
1.4	2018-08-03	Added: Introduction “About this document”, Listing of product variants Grade 1 and Grade 0 derivatives
		TLE9879-2QXA40, including SDADC (ADC3/4) added
		Chapter “Block diagram” removed, it can be found in the datasheet
		Chapter “Device Pinout and Pin configuration” removed, it can be found in the data sheet
		<b>Chapter 3</b> , editorial changes
		Application diagram removed, it can be found in the data sheet
		<b>Figure 2</b> , System Overtemperature added to transition from active to sleep
		<b>Chapter 5.2.2</b> - Stop Mode, number values replaced by electrical characteristics symbol
		<b>Chapter 5.3.2</b> , number values replaced by electrical characteristics symbols
		<b>Chapter 5.3.3</b> , hint for ADC3/4 usage added
		<b>Chapter 5.4.1.1</b> , SUPP_TMOU replaced by SUPP_SHORT
		<b>Table 11</b> , CNF_CYC_WAKE reset value updated
		<b>Figure 18</b> , naming of reset sources updated, following list updated
		<b>Chapter 7.7</b> , added
		<b>Figure 19</b> , Footnote added to XTAL1, XTAL2
		<b>Figure 20</b> , Footnote added to XTAL1, XTAL2, register naming updated
		<b>Figure 21</b> , XTAL frequencies replaced by EC symbol, output renamed to $f_{OSC\_int}$
		<b>Chapter 6.3.3.1</b> , electrical parameters replaced by symbols
		<b>Chapter 6.3.3</b> , $f_{OSC}$ as output of the HP_OSC replaced by $f_{OSC\_int}$
		<b>Chapter 6.3.3.7</b> , editorial changes
		<b>Figure 24</b> , Clock tree updated, SDADC added
		<b>OSC_CON</b> , reset value set by bootrom added
		<b>OSC_CON.OSC2L</b> , $f_{OSC}$ replaced by $f_{OSC\_int}$
		<b>SYSCON0</b> , reset value set by bootrom added
		<b>SYSCON0.SYSCLKSEL</b> , $f_{OSC}$ replaced by $f_{OSC\_int}$
		<b>APCLK_CTRL1</b> , reset value set by bootrom added
		<b>APCLK_CTRL1.APCLK_SET</b> , SDADCCLK_DIV included
		<b>APCLK_CTRL2</b> .SDADCCLK_DIV bit field added
		<b>APCLK1</b> , reset value set by bootrom added
		<b>APCLK2</b> , reset value set by bootrom added
		<b>Chapter 6.4.1</b> , editorial changes
		<b>Chapter 6.4.2</b> , editorial changes
		<b>Chapter 6.4.4.2</b> , editorial changes
		<b>Table 32</b> , Power Down replaced by Stop Mode

---

**Revision History**

Revision	Date	Changes
		<b>Table 33</b> , naming of reset sources updated
		<b>Chapter 6.5.2.2</b> , 1.5V replaced by $V_{DDCOUT}$ , 0.9V replaced by $V_{DDCOUT\_Stop\_Red}$
		<b>PMCON0</b> , bit field description update, Power Down relaced by Stop Mode
		<b>Table 36</b> , MU-ADC8/T3, SDADC added to node 2
		<b>MODIEN1</b> , reset value set by bootrom added
		<b>MODIEN2</b> , reset value set by bootrom added
		<b>GPT12IEN</b> , reset value set by bootrom added
		<b>Chapter 6.6.3.2</b> , SDADC added
		<b>DMAIEN2</b> .SDADCIE bit field added
		<b>Chapter 6.6.5</b> , FNMIOCDS replaced by FNMIOT, WDT1RST renamed to WDT1 reset
		<b>MODPISEL1</b> .T21EXCON/.T2EXCON description updated
		<b>MODPISEL2</b> , related port pins added to the description
		<b>MODPISEL3</b> , related port pins added to the description
		<b>NVM_PROT_STS</b> , reset value set by bootrom added
		<b>Chapter 6.13</b> , added
		<b>AMCLK_FREQ_STS</b> , frequency calculation added to description
		<b>AMCLK_TH_HYS</b> , frequency calculation added to description
		<b>Figure 34</b> , German-style logic symbol replaced by named logic symbol
		<b>SYS_IS</b> , <b>SYS_ISCLR</b> , <b>SYS_IRQ_CTRL</b> , SDADC added (ADC3/4)
		<b>Chapter 7.5.1</b> , editorial changes, figure removed
		<b>Chapter 7.5.2</b> , 150°C replaced by symbol $T_{j,max}$
		<b>PCU_CTRL_STS</b> , reset value set by bootrom added
		<b>Chapter 7.7</b> , added
		<b>Table 47</b> lists abriviations for <b>Figure 39</b>
		<b>Table 66</b> , ADC34 (SDADC) added, PPORTS replaced by PORT
		<b>Chapter 11.3</b> , number values replaced by electrical characteristics symbols
		<b>Chapter 11.3.2</b> , number values replaced by electrical characteristics symbols
		<b>Chapter 11.3.2.6</b> , number values replaced by electrical characteristics symbols
		<b>Table 67</b> , SDADC added to Node 2
		<b>Chapter 12.3.1</b> , German-style logic symbol replaced by named logic symbol in all figures
		<b>Table 69</b> , ADC3/4 (SDADC) added to Node 2
		<b>Chapter 12.3.2</b> , Interrupt Structure 1 heading removed
		<b>Table 71</b> , SDADC added to Node 2
		<b>Figure 53</b> , SDADC added to Node 2
		<b>Figure 62</b> , DMA Channel 13 - SDADC added
		<b>EXICON0</b> , reset value set by bootrom added

---

**Revision History**

Revision	Date	Changes
		<b>DMAIRC2</b> , <b>DMAIRC2CLR</b> , SDADC added
		<b>DMAIRC2CLR</b> , FNMIOCDs replaced by FNMIOT
		<b>Chapter 13.1</b> , Low Power mode replaced by Stop Mode
		<b>WDT1_TRIG</b> , footnote updated
		<b>Figure 71</b> , DIR register added to figure
		<b>Table 89</b> , SDADC added to P2.0, P2.2, P2.4, P2.5
		<b>P2_DATA</b> , bit 7 and bit 1 updated to be reserved
		<b>P2_DIR</b> , bit 7 and bit 1 updated to be reserved
		<b>P2_PUDSEL</b> , bit 7 and bit 1 updated to be reserved
		<b>P2_PUDEN</b> , bit 7 and bit 1 updated to be reserved
		<b>P2_DIR</b> , reset value set by bootrom added
		<b>Chapter 15</b> , German-style logic symbol replaced by named logic symbol in all figures
		<b>Figure 119</b> , updated figure
		<b>T3_TRIGG_CTRL</b> , bitfield T3_TRIGG_INP_SEL updated for Mode 3b
		<b>Figure 152</b> , updated figure
		<b>Figure 153</b> , figure title updated
		<b>Figure 174</b> , pull up resistor value has been replaced by electrical characteristics symbol
		<b>CTRL_STS</b> , reset value set by bootrom added
		<b>Chapter 20.5</b> , added
		<b>Figure 185</b> , attenuator values and reference voltage values replaced by the electrical characteristics symbol
		<b>Figure 185</b> , added for TLE9879-2QXA40
		<b>Table 157</b> , <b>P2_ADCSEL_CTRL</b> register added to the table
		<b>Chapter 22.3.2</b> , $V_{BG}$ value updated on the formulars
		former chapter 23.3.3 removed
		<b>Chapter 22.4.2</b> added
		<b>Chapter 22.5.1</b> , attenuator values and input resistance replaced by the electrical characteristics symbol
		<b>Figure 189</b> , physical values replaced by electrical characteristics symbol
		<b>VMON_SEN_CTRL</b> .VMON_SEN_SEL bit description updated
		<b>TRIM_BEMFx</b> , register description updated
		<b>Chapter 22.7.1</b> , $V_{BG}$ value updated on the formulars
		<b>Figure 194</b> updated
		<b>REF1_STS</b> , reset value set by bootrom added
		<b>CTRL_STS</b> .VS_RANGE bit description updated
		<b>Chapter 23.4.1</b> , conversion time calculation updated
		<b>Figure 196</b> updated

---

**Revision History**

Revision	Date	Changes
		<b>CTRL1</b> bits 11..8, always read as 0 removed
		<b>Table 172</b> , footnotes updated
		<b>Table 173</b> , footnotes updated
		<b>Figure 203</b> , German-style logic symbol replaced by named logic symbol
		<b>Chapter 25</b> , chapter added for TLE9879-2QXA40 only
		<b>Chapter 27.1</b> , physical values replaced by electrical characteristics symbols
		<b>Figure 214</b> , German-style logic symbol replaced by named logic symbol
		<b>Figure 218</b> , updated
		<b>CTRL3</b> , bit31 and bit30 set to reserved
		<b>CP_CTRL_STS.DRVx_VSDUP_DIS</b> description updated
		<b>CP_CTRL_STS.DRVx_VSDLO_DIS</b> description updated
		<b>CP_CTRL_STS.DRVx_VCPUP_DIS</b> description updated
		<b>CP_CTRL_STS.DRVx_VCPLO_DIS</b> description updated
		<b>Chapter 28.1</b> , physical values replaced by electrical characteristics symbols
		“Application Information” chapter removed, it can be found in the datasheet
1.3	2017-06-27	User Manual generalized for the entire TLE987x family
		TLE987xQX product variants chapter added
		SYS_IS description for bit LIN_TMOU_OUT_IS corrected
		In Table 158 the settings for channels 7..9 updated
		Table 140 was added to support proper synch break recognition
		ADC2.FILT_OUT0 and following, description updated
		SFRs Associated with Timer Block GPT1 updated
		SFRs Associated with Timer Block GPT2 updated
		Interrupt Node Assignment all figures updated
		Interrupt Flags Overview table updated
		Table 172, ADC2 default upper/lower thresholds updated (Grade1)
		Table 173, ADC2 default upper/lower thresholds updated (Grade0)
		SCON2 register removed, all information available in SCON register
		CSA Chapter 28.2 updated
		Figure 227 added, simplified internal CSA diagram
		ADC2 Figure 205 register naming updated
		PMU Sleep Mode Entry Timing figure updated
		PMU Sleep Mode LIN Wake-Up Timing figure updated
		PMU Stop Mode Entry Timing figure updated
		PMU VDDP figure updated
		PMU VDDC figure updated
		PMU Stop Mode Exit Timing figured updated
		PMU Timing Diagram for Cyclic Sense figure updated
		SCU PLL Block Diagram updated



---

**Revision History**

Revision	Date	Changes
		SCU Clock Tree, DMA added
		SCUPM Block diagram of CGU including Clock Watchdogs updated
		Information about Re-enabling of VAREF updated
		ADC1 Trigger Selection GPT12.T6 selection corrected
		GPT12E Table 97 for Capture Mode added
		P1_OD register population updated
		Alternate Function Map for GPIOs added
		DMA Registers, descriptions updated: DMAIEN1, DMAIEN2, DMASRCCLR, DMASRCSEL2, DMAIRC1, DMAIRC1CLR, DMAIRC2, DMAIRC2CLR
1.2	2016-10-05	ADC2 IIR-Filter updated
		BEMF Comparator Interrupt Structure added
		ADC2.Ch4 (MON) interrupts routing to NMI supply interrupt SYS_SUPPLY_IRQ_CTRL.MON_OV_IE added SYS_SUPPLY_IRQ_CTRL.MON_UV_IE added SYS_SUPPLY_IRQ_STS.MON_OV_IS added SYS_SUPPLY_IRQ_STS.MON_UV_IS added SYS_SUPPLY_IRQ_STS.MON_OV_STS added SYS_SUPPLY_IRQ_STS.MON_OV_STS added
		Structure of PREWARN_SUP MON connection updated
		External Voltage Regulator 5.0V (VDDEXT) editorial changes
		Simplified Application Diagram Example reverse polarity simplified
		Timer 2 Module I/O Interface updated, P2.5 direction corrected
		ADC1 Trigger Selection CCU6.T13 and GPT12.T6 selection added
		UART1 Module I/O Interface updated, P1.4 stated to be input and output
		UART2 Module I/O Interface updated, P1.2/TXD2 replaced by P1.1/TXD2
		Information about Re-enabling of VAREF added
		Bridge Driver Diagnosis editorial changes, IDISCHARGE_TRIM value corrected to 1
		CSA ADC Code Calculation formulars corrected
		Driver Module Block Diagram (incl. system connections) updated
		LIN Baud Rate Detection chapter reworked
		LINSCLR moved into UART chapter
		In chapter Hardware Reset the register link corrected
1.1	2016-06-14	PLL Functional Description Normal Mode editorial changes
		Clock Tree figure updated
		MODPISEL1.GPT12CAPINB updated
		EXICON0.MON renamed to MON_Trig_Sel
		External Interrupt Control Registers editorial changes
		DMAIRC2.SSC1 renamed to SSC1RDY

---

**Revision History**

<b>Revision</b>	<b>Date</b>	<b>Changes</b>
		DMAIRC2.SSC2 renamed to SSC2RDY
		GPT12E.PISEL.ISCAPIN editorial changes
		CCU6.PISEL0.ISPOSx BEMF assignment corrected
		Chapter BEMF Comparators updated, figures and registers updated
		Register TRIM_DRVx updated, DRV_CCP_TIMMUL added (BF-Step)
1.0	2015-06-02	Initial Release

## Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2018-08-03**

**Published by**

**Infineon Technologies AG**

**81726 Munich, Germany**

**© 2018 Infineon Technologies AG.**

**All Rights Reserved.**

**Do you have a question about any aspect of this document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference**

## IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

## WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.