

## LCB100 Series

### Up to 100 Watts

### Low Power

**Total Power:** Up to 100 Watts  
**Input Voltage:** 88 to 264 Vac  
125 to 373 Vdc

**# of Outputs:** Single

### Special Features

- No-load power consumption 0.5 W
- Low cost
- 5.1" x 3.9" x 1.5"
- -25 °C to 70 °C with derating
- High efficiency: 89% @ 230 Vac
- Power ON with LED indicator
- Withstand 5G vibration test
- 2 Years warranty

### Safety

UL /cUL 60950-1  
TUV 60950-1  
CE



## Product Descriptions

The LCB100 series features a universal 88-264Vac input – enabling it to be used anywhere in the world – and is also capable of operating from a 125-373Vdc Input. The LCB100 series offers a power rating up to 100W with convection cooling, and it provide precisely regulated output voltages of 3.3V, 5V, 12V, 15V, 24V and 48Vdc.

The LCB100 series power supply is comprehensively protected against over voltage, over load and short-circuit conditions.

## Model Numbers

Model	Output Voltage (Vdc)	Minimum Load (A)	Maximum Load (A)	Efficiency <sup>1</sup> (%)
LCB100D	3.3	0	20	79
LCB100E	5	0	16	83
LCB100L	12	0	8.5	86
LCB100N	15	0	7	88
LCB100Q	24	0	4.5	88
LCB100W	48	0	2.3	89

Note 1 - Typical value at nominal input voltage(230Vac) and maximum load.

## Options

None

## Electrical Specifications

### Absolute Maximum Ratings

Stress in excess of those listed in the “Absolute Maximum Ratings” may cause permanent damage to the power supply. These are stress ratings only and functional operation of the unit is not implied at these or any other conditions above those given in the operational sections of this TRN. Exposure to any absolute maximum rated condition for extended periods may adversely affect the power supply’s reliability.

Table 1. Absolute Maximum Ratings:

Parameter	Model	Symbol	Min	Typ	Max	Unit
Input Voltage	AC continuous operation	$V_{IN,AC}$	88	-	264	Vac
	DC continuous operation	$V_{IN,DC}$	125	-	373	Vdc
Maximum Output Power Convection continuous operation	LCB100D	$P_{O,max}$	-	-	66	W
	LCB100E		-	-	80	W
	LCB100L		-	-	102	W
	LCB100N		-	-	105	W
	LCB100Q		-	-	108	W
	LCB100W		-	-	110	W
Isolation Voltage	Input to Output	All models	-	-	3000	Vac
	Input to Safety Ground	All models	-	-	1500	Vac
	Output to Earth Ground	All models	-	-	500	Vdc
Ambient Operating Temperature	All models	$T_A$	-25	-	+70 <sup>1</sup>	°C
Storage Temperature	All models	$T_{STG}$	-40	-	+85	°C
Humidity (non-condensing)	Operating	All models	20	-	90	%
	Non-operating	All models	10	-	95	%

Note 1 - Derate each output at 2.5% per degree C from 50 °C to 70 °C.

## Input Specifications

Table 2. Input Specifications:

Parameter	Conditions	Symbol	Min	Typ	Max	Unit	
Operating Input Voltage, AC <sup>1</sup>	All	$V_{IN,AC}$	88	115/230	264	Vac	
Operating Input Voltage, DC	All	$V_{IN,DC}$	125	-	373	Vdc	
Input AC Frequency	All	$f_{IN}$	47	50/60	63	Hz	
Input Current	$V_{IN,AC} = 115Vac$ $V_{IN,AC} = 230Vac$	$I_{IN,max}$	-	2.5 1.4	-	A	
No Load Input Power ( $V_O = ON, I_O = 0A$ )	$V_{IN,AC} = 115/230Vac$	$P_{IN,no-load}$	-	-	0.5	W	
Harmonic Line Currents	All	THD	EN61000-3-2/EN61000-3-3				
Startup Surge Current (Inrush) @ 25°C	$V_{IN,AC} = 230Vac$	$I_{IN,surge}$	-	40	-	$A_{PK}$	
Efficiency ( $T_A = 25°C$ , free air convection cooling)	LCB100D	$V_{IN,AC} = 230Vac$ $I_O = I_{O,max}$	$\eta$	-	79	-	%
	LCB100E			-	83	-	
	LCB100L			-	86	-	
	LCB100N			-	88	-	
	LCB100Q			-	88	-	
	LCB100W			-	89	-	
Hold Up Time	$V_{IN,AC} = 115Vac$ $P_O = P_{O,max}$	$t_{Hold-Up}$	10	-	-	mSec	
	$V_{IN,AC} = 230Vac$ $P_O = P_{O,max}$	$t_{Hold-Up}$	32	-	-	mSec	
Turn On Delay	$V_{IN,AC} = 115Vac$ $P_O = P_{O,max}$	$t_{Turn-On}$	-	1000	-	mSec	
	$V_{IN,AC} = 230Vac$ $P_O = P_{O,max}$	$t_{Turn-On}$	-	800	-	mSec	
Leakage Current to safety ground	$V_{IN} = 240Vac$ $f_{IN} = 50/60Hz$	$I_{IN,leakage}$	-	-	2000	$\mu A$	

Note 1 - Withstand 300Vac surge for 5sec, without damage.


## Output Specifications

Table 3. Output Specifications:


Parameter		Condition	Symbol	Min	Typ	Max	Unit
Factory Set Point Accuracy	LCB100D	Inclusive of setpoint, line, load change	%V <sub>O</sub>	-3	-	+3	%
	LCB100E			-2	-	+2	
	LCB100L			-1	-	+1	
	LCB100N			-1	-	+1	
	LCB100Q			-1	-	+1	
	LCB100W			-1	-	+1	
Output Adjust Range	LCB100D	All	V <sub>O</sub>	2.97	3.3	3.63	V
	LCB100E			4.5	5	5.5	
	LCB100L			10.8	12	13.2	
	LCB100N			13.5	15	16.5	
	LCB100Q			21.6	24	26.4	
	LCB100W			43.2	48	52.8	
Output Ripple, pk-pk	LCB100D	Measure with a 0.1µF ceramic capacitor in parallel with a 47µF aluminum electrolytic capacitor	V <sub>O</sub>	-	-	150	mV <sub>PK-PK</sub>
	LCB100E			-	-	150	
	LCB100L			-	-	150	
	LCB100N			-	-	150	
	LCB100Q			-	-	150	
	LCB100W			-	-	200	
Convection Output Current, continuous	LCB100D	Convection cooling	I <sub>O,max</sub>	0	-	20	A
	LCB100E			0	-	16	
	LCB100L			0	-	8.5	
	LCB100N			0	-	7	
	LCB100Q			0	-	4.5	
	LCB100W			0	-	2.3	
Line Regulation	All Modules	$V_{IN,DC} = V_{IN,min} \text{ to } V_{IN,max}$ $I_O = I_{O,max}$	%V <sub>O</sub>	-0.5	-	+0.5	%
Load Regulation	LCB100D	All	%V <sub>O</sub>	-3.0	-	+3.0	%
	LCB100E			-2.0	-	+2.0	
	LCB100L			-0.5	-	+0.5	
	LCB100N			-0.5	-	+0.5	
	LCB100Q			-0.5	-	+0.5	
	LCB100W			-0.5	-	+0.5	
Temperature Coefficient		All		-0.03	-	+0.03	%/°C
Load Capacitance	LCB100D	Start up		-	-	2200	µF
	LCB100E			-	-	2200	
	LCB100L			-	-	1500	
	LCB100N			-	-	1000	
	LCB100Q			-	-	470	
	LCB100W			-	-	220	
V <sub>O</sub> Over Voltage Protection	LCB100D	Latch off (AC recycle to reset)	V <sub>O</sub>	115	-	175	%
	Other Models			115	-	150	%
V <sub>O</sub> Over Current Protection <sup>1</sup>		All	I <sub>O</sub>	110	-	-	%I <sub>O,max</sub>

Note 1 - Hiccup Mode and Auto recovery after fault load is remove.


## LCB100D Performance Curves

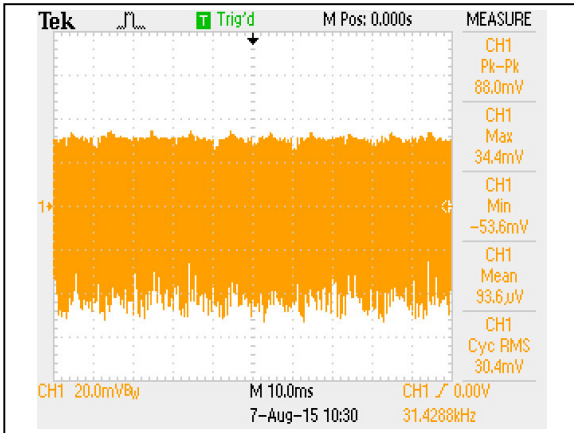


**Figure 1: LCB100D Output Ripple Voltage**  
Vin = 115Vac Load: Io = 20A Ta = 25 °C  
Ch 1: Vo

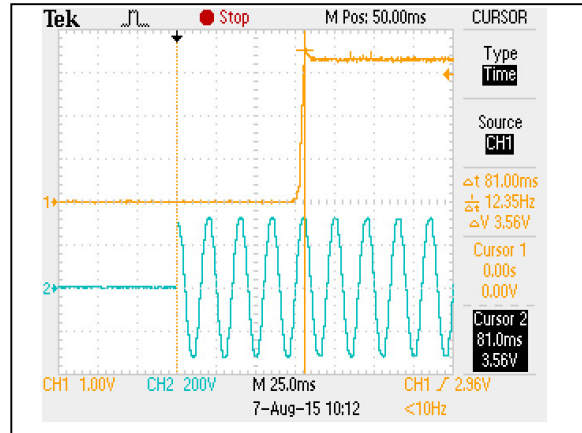


**Figure 2: LCB100D Turn On delay**  
Vin = 230Vac Load: Io = 20A Ta = 25 °C  
Ch 1: Vo Ch 2: AC Mains

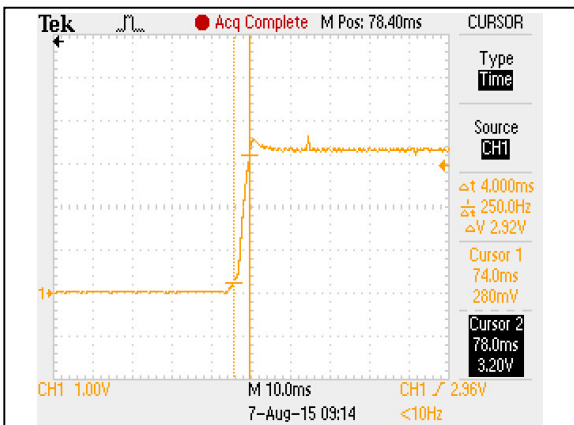


**Figure 3: LCB100D Rise Time**  
Vin = 230Vac Load: Io = 20A Ta = 25 °C  
Ch 1: Vo

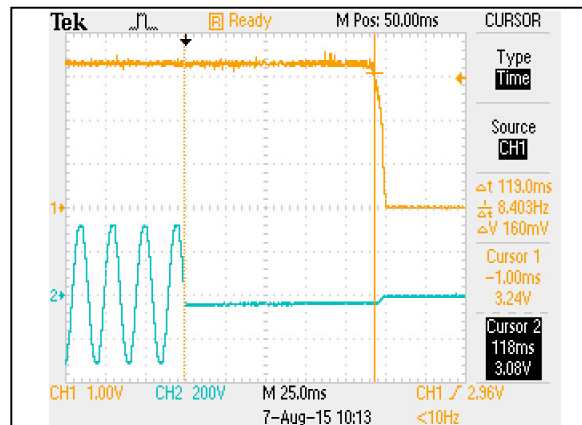

**Figure 4: LCB100D Hold Up Time**  
Vin = 230Vac Load: Io = 20A Ta = 25 °C  
Ch 1: Vo Ch 2: AC Mains

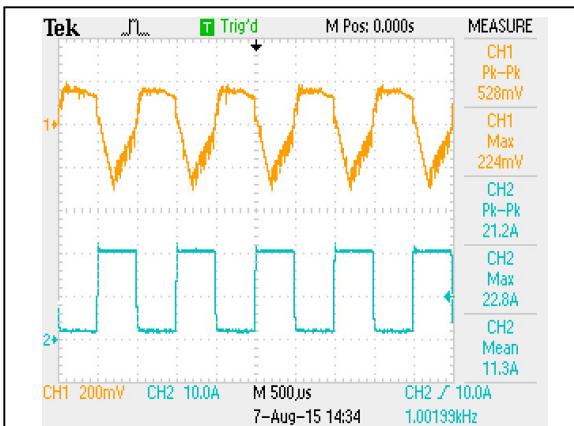


**Figure 5: LCB100D Transient Response**  
Vin = 230Vac Load: Io = FULL/MIN LOAD, 90%DUTY/1KHZ  
Ch 1: Vo Ch 2: Iin

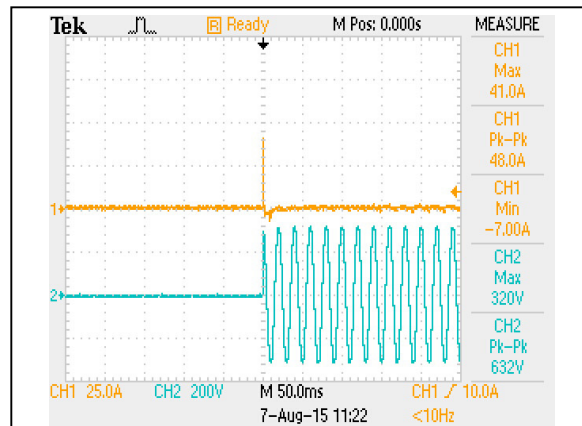


**Figure 6: LCB100D Inrush Current**  
Vin = 230Vac Load: Io = 20A Ta = 25 °C  
Ch 1: Iin Ch 2: AC Mains


## LCB100E Performance Curves

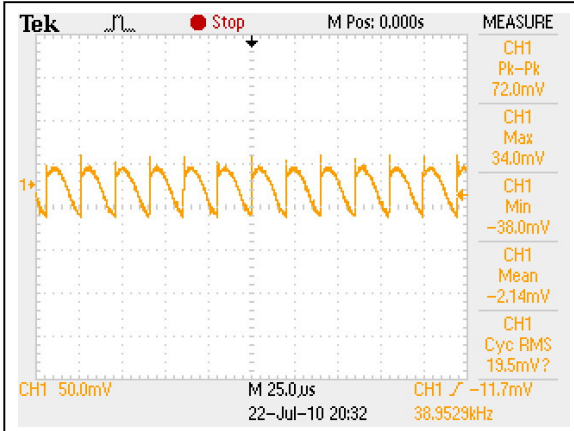


**Figure 7: LCB100E Output Ripple Voltage**  
Vin = 230Vac Load: Io = 16A Ta = 25 °C  
Ch 1: Vo

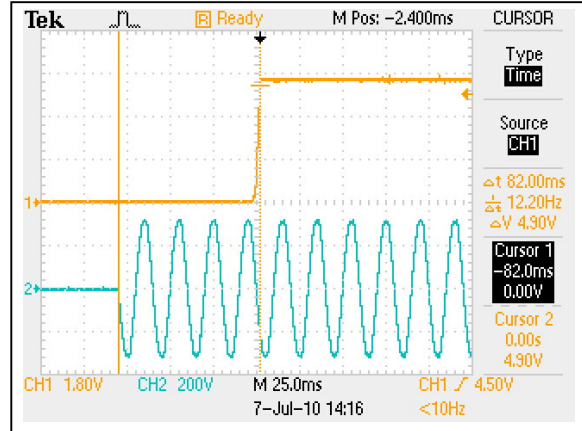


**Figure 8: LCB100E Turn On Delay**  
Vin = 230Vac Load: Io = 16A Ta = 25 °C  
Ch 1: Vo Ch 2: AC Mains

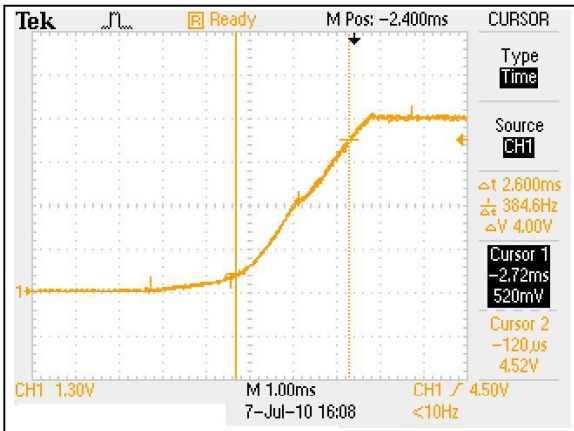


**Figure 9: LCB100E Rise Time**  
Vin = 230Vac Load: Io = 16A Ta = 25 °C  
Ch 1: Vo

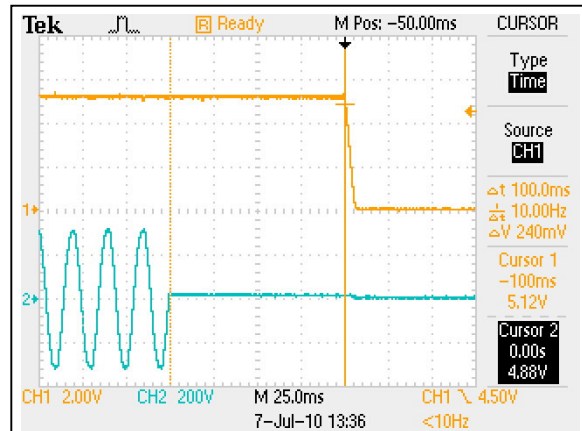

**Figure 10: LCB100E Hold Up Time**  
Vin = 230Vac Load: Io = 16A Ta = 25 °C  
Ch 1: Vo Ch 2: AC Mains

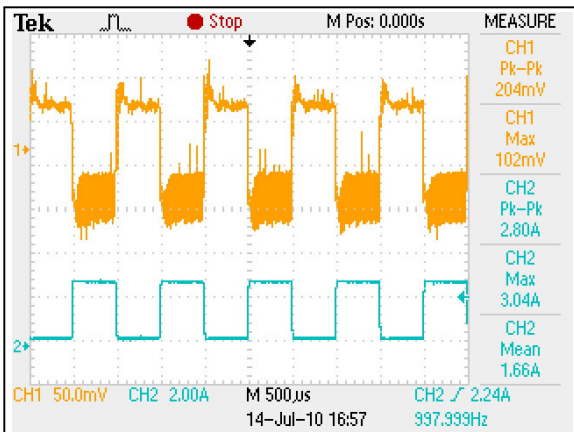


**Figure 11: LCB100E Transient Response**  
Vin = 230Vac Load: Io = FULL/MIN LOAD, 90% DUTY/1KHZ  
Ch 1: Vo Ch 2: Iin

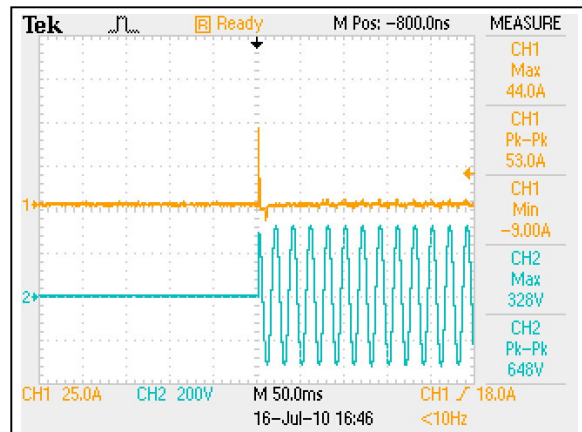


**Figure 12: LCB100E Inrush Current**  
Vin = 230Vac Load: Io = 16A Ta = 25 °C  
Ch 1: Iin Ch 2: AC Mains


## LCB100L Performance Curves

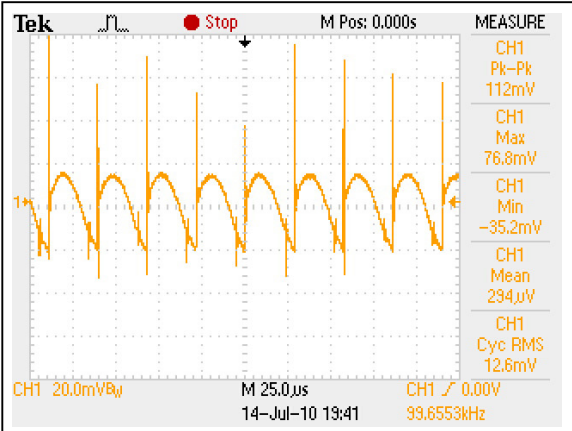


**Figure 13: LCB100L Output Ripple Voltage**  
Vin = 230Vac Load: Io = 8.5A Ta = 25 °C  
Ch 1: Vo

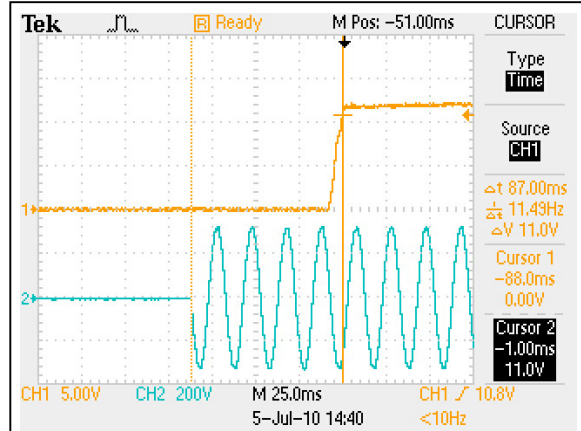


**Figure 14: LCB100L Turn On delay**  
Vin = 230Vac Load: Io = 8.5A Ta = 25 °C  
Ch 1: Vo Ch 2: AC Mains

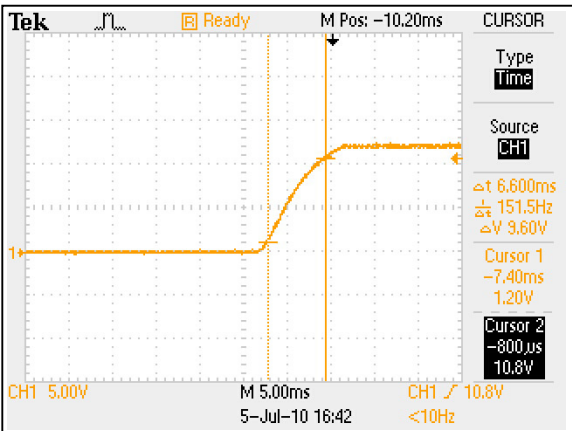


**Figure 15: LCB100L Rise Time**  
Vin = 115Vac Load: Io = 8.5A Ta = 25 °C  
Ch 1: Vo

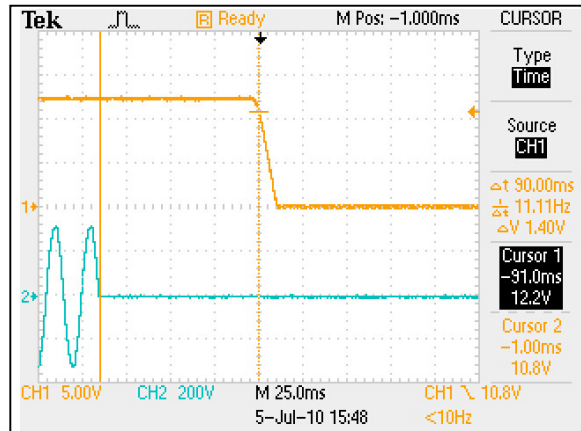

**Figure 16: LCB100L Hold Up Time**  
Vin = 230Vac Load: Io = 8.5A Ta = 25 °C  
Ch 1: Vo Ch 2: AC Mains

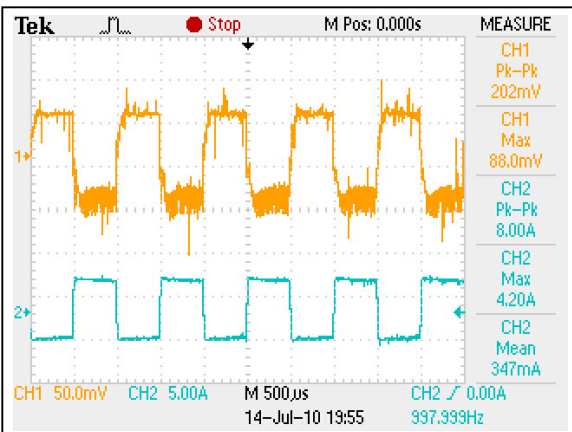

**Figure 17: LCB100L Transient Response**  
Vin = 230Vac Load: Io = FULL/MIN LOAD, 90%DUTY/1KHZ  
Ch 1: Vo Ch 2: Iin

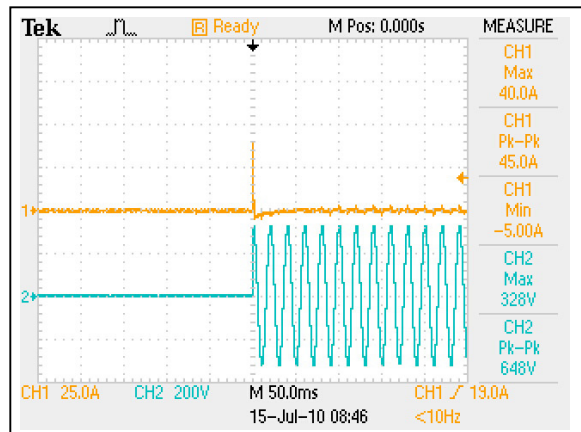

**Figure 18: LCB100L Inrush Current**  
Vin = 230Vac Load: Io = 8.5A Ta = 25 °C  
Ch 1: Iin Ch 2: AC Mains



## LCB100N Performance Curves

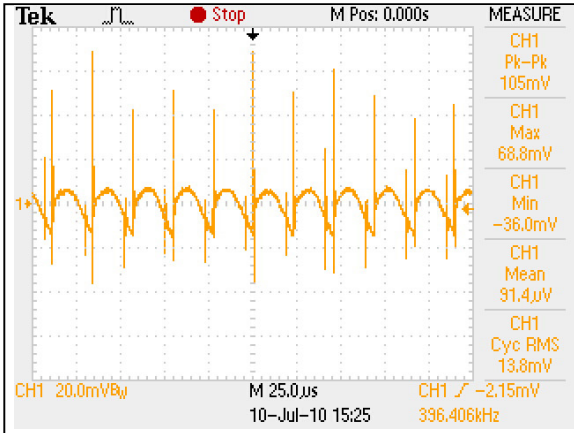


Figure 19: LCB100N Output Ripple Voltage  
Vin = 230Vac Load: Io = 7A Ta = 25 °C  
Ch 1: Vo

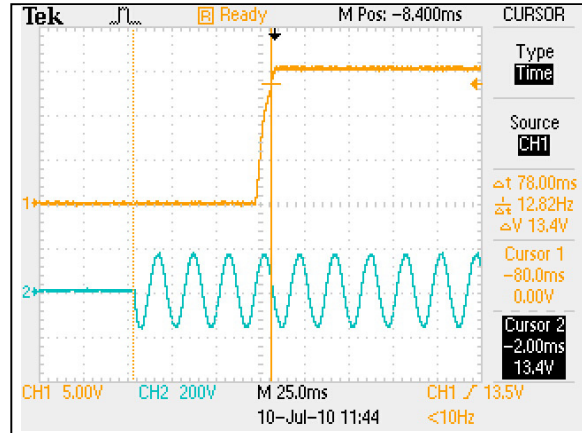


Figure 20: LCB100N Turn On delay  
Vin = 115Vac Load: Io = 7A Ta = 25 °C  
Ch 1: Vo Ch 2: AC Mains

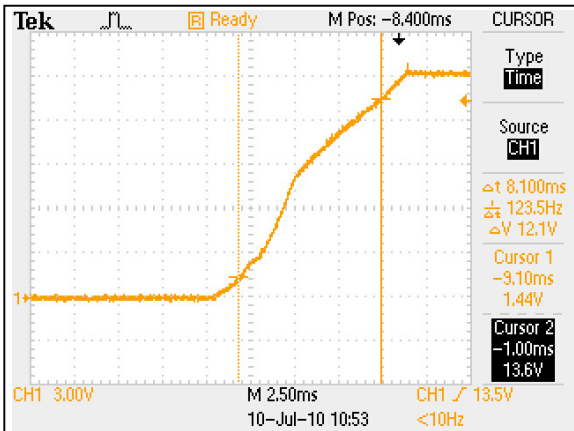


Figure 21: LCB100N Rise Time  
Vin = 230Vac Load: Io = 7A Ta = 25 °C  
Ch 1: Vo

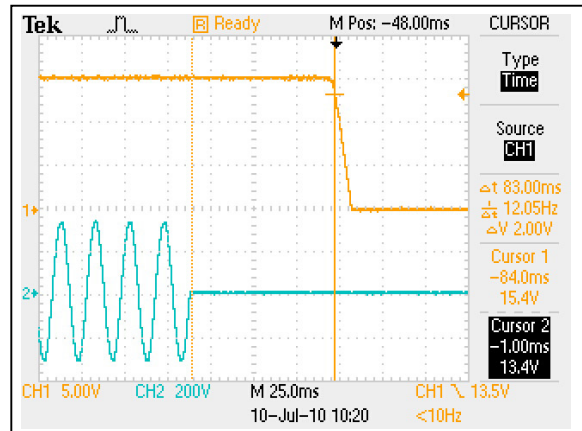


Figure 22: LCB100N Hold Up Time  
Vin = 230Vac Load: Io = 7A Ta = 25 °C  
Ch 1: Vo Ch 2: AC Mains

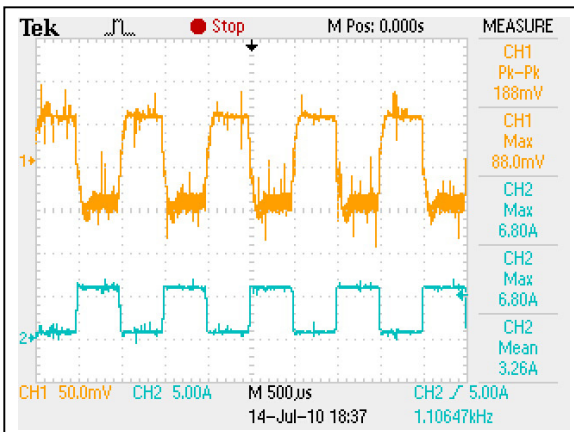


Figure 23: LCB100N Transient Response  
Vin = 230Vac Load: Io = FULL/MIN LOAD, 90% DUTY/1KHZ  
Ch 1: Vo Ch 2: Iin



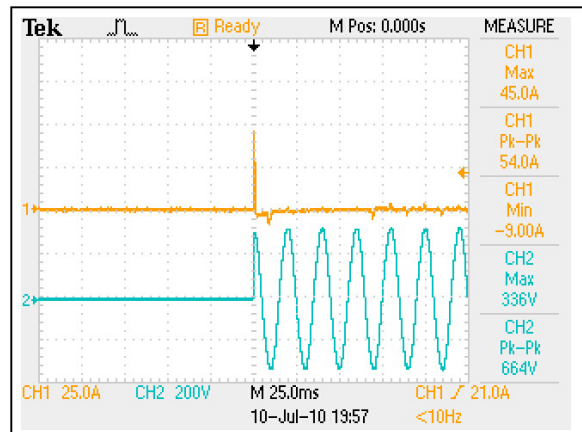


Figure 24: LCB100N Inrush Current  
Vin = 230Vac Load: Io = 7A Ta = 25 °C  
Ch 1: Iin Ch 2: AC Mains


## LCB100Q Performance Curves

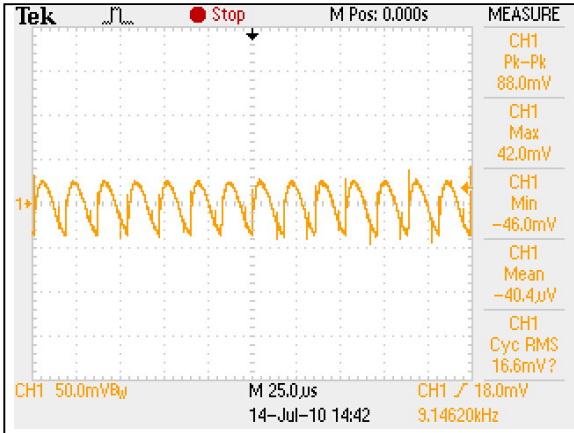


**Figure 25: LCB100Q Output Ripple Voltage**  
Vin = 230Vac Load: Io = 4.5A Ta = 25 °C  
Ch 1: Vo

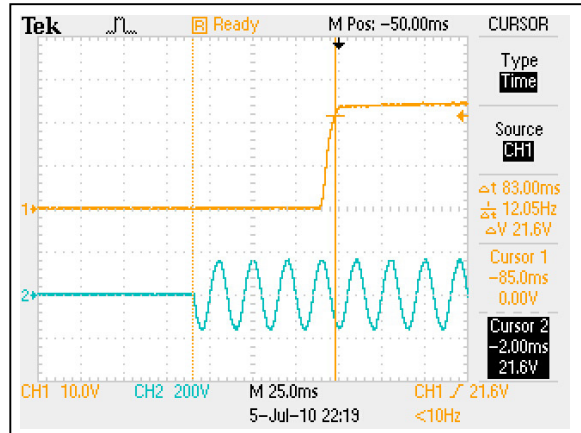


**Figure 26: LCB100Q Turn On delay**  
Vin = 115Vac Load: Io = 4.5A Ta = 25 °C  
Ch 1: Vo Ch 2: AC Mains

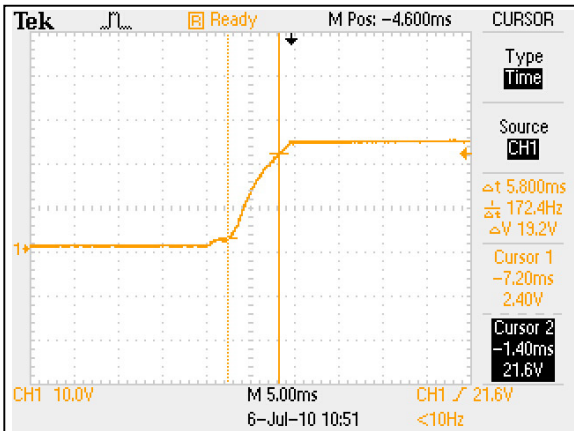


**Figure 27: LCB100Q Rise Time**  
Vin = 230Vac Load: Io = 4.5A Ta = 25 °C  
Ch 1: Vo

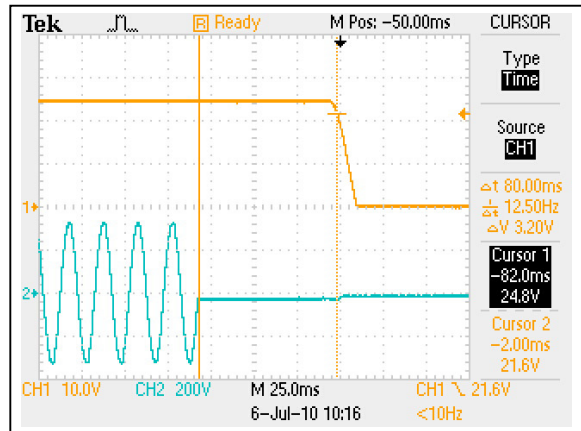

**Figure 28: LCB100Q Hold Up Time**  
Vin = 230Vac Load: Io = 4.5A Ta = 25 °C  
Ch 1: Vo Ch 2: AC Mains

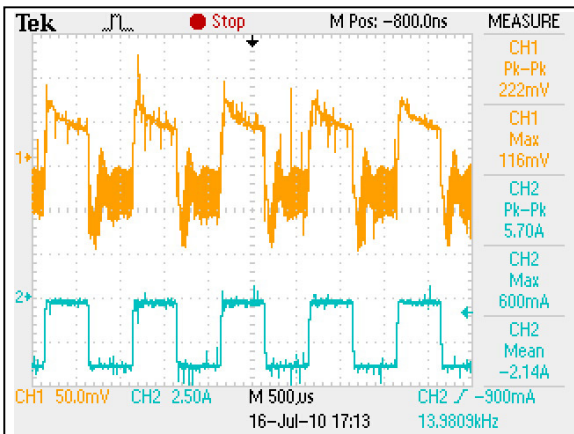

**Figure 29: LCB100Q Transient Response**  
Vin = 230Vac Load: Io = FULL/MIN LOAD, 90%DUTY/1KHZ  
Ch 1: Vo Ch 2: Iin

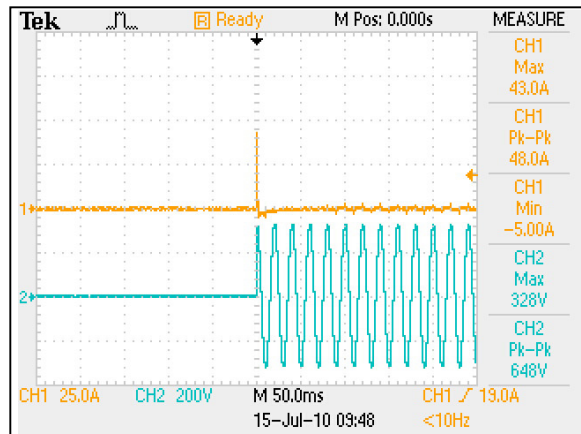

**Figure 30: LCB100Q Inrush Current**  
Vin = 230Vac Load: Io = 7A Ta = 25 °C  
Ch 1: Iin Ch 2: AC Mains

## LCB100W Performance Curves

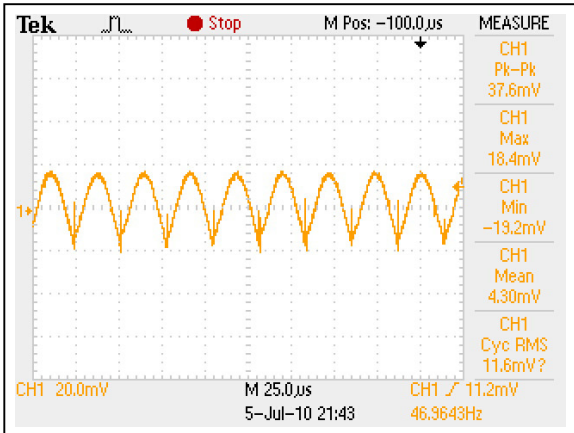


Figure 31: LCB100W Output Ripple Voltage  
Vin = 230Vac Load: Io = 2.3A Ta = 25 °C  
Ch 1: Vo

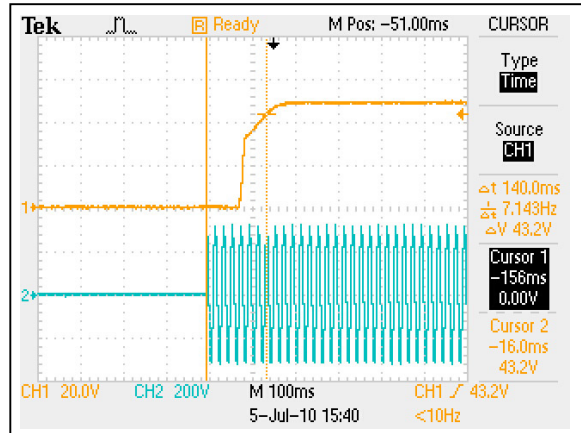


Figure 32: LCB100W Turn On delay  
Vin = 230Vac Load: Io = 2.3A Ta = 25 °C  
Ch 1: Vo Ch 2: AC Mains

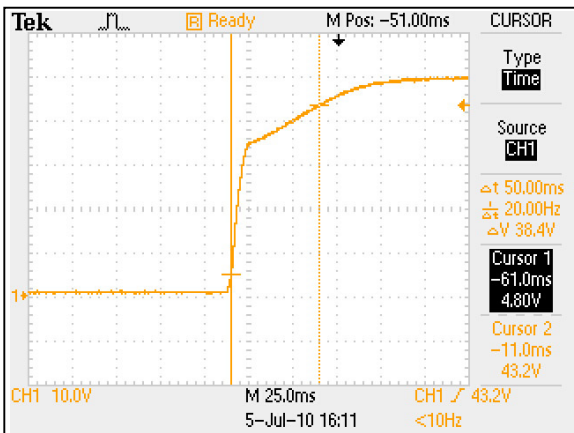


Figure 33: LCB100W Rise Time  
Vin = 115Vac Load: Io = 2.3A Ta = 25 °C  
Ch 1: Vo

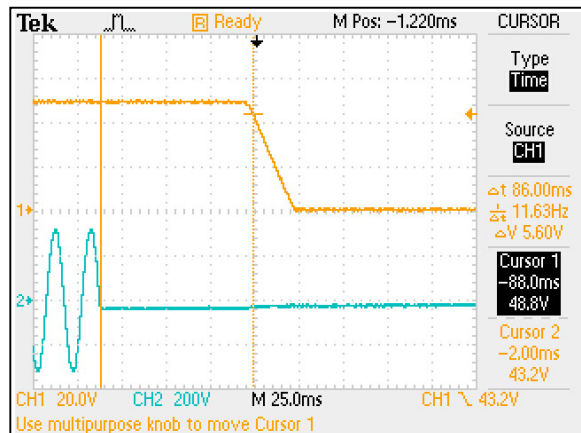


Figure 34: LCB100W Hold Up Time  
Vin = 230Vac Load: Io = 2.3A Ta = 25 °C  
Ch 1: Vo Ch 2: AC Mains

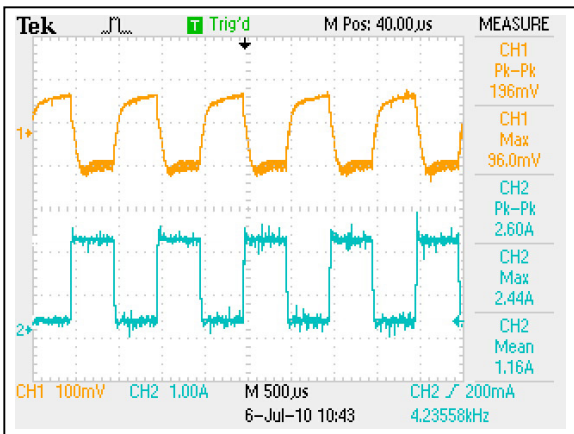


Figure 35: LCB100W Transient Response  
Vin = 230Vac Load: Io = FULL/MIN LOAD, 90%DUTY/1KHZ  
Ch 1: Vo Ch 2: Iin

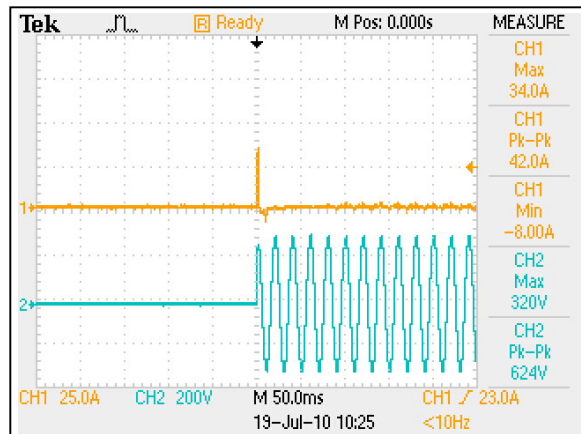


Figure 36: LCB100W Inrush Current  
Vin = 230Vac Load: Io = 2.3A Ta = 25 °C  
Ch 1: Iin Ch 2: AC Mains

## Protective Function Specifications

### Over Voltage Protection (OVP)

The power supply output voltage latches off during output overvoltage with the AC line recycled to reset the latch.

#### LCB100D

Parameter	Min	Nom	Max	Unit
3.3V Output Overvoltage	3.795	/	5.775	V

#### LCB100E

Parameter	Min	Nom	Max	Unit
5V Output Overvoltage	5.75	/	7.5	V

#### LCB100L

Parameter	Min	Nom	Max	Unit
12V Output Overvoltage	13.8	/	18	V

#### LCB100N

Parameter	Min	Nom	Max	Unit
15V Output Overvoltage	17.25	/	22.5	V

#### LCB100Q

Parameter	Min	Nom	Max	Unit
24V Output Overvoltage	27.6	/	36	V

#### LCB100W

Parameter	Min	Nom	Max	Unit
48V Output Overvoltage	55.2	/	72	V

## Over Current Protection (OCP)

LCB100 series power supply includes internal current limit circuitry to prevent damage in the event of overload or short circuit. In the event of overloads, the output voltage may deviate from the regulation band but recovery is automatic when the load is reduced to within specified limits.

### LCB100D

Parameter	Min	Nom	Max	Unit
3.3V Output Overcurrent	22	/	/	A

### LCB100E

Parameter	Min	Nom	Max	Unit
5V Output Overcurrent	17.6	/	/	A

### LCB100L

Parameter	Min	Nom	Max	Unit
12V Output Overcurrent	9.35	/	/	A

### LCB100N

Parameter	Min	Nom	Max	Unit
15V Output Overcurrent	7.7	/	/	A

### LCB100Q



Parameter	Min	Nom	Max	Unit
24V Output Overcurrent	4.55	/	/	A

### LCB100W

Parameter	Min	Nom	Max	Unit
48V Output Overcurrent	2.53	/	/	A

## Mechanical Specifications

### Mechanical Drawing (Dimensioning and Mounting Locations)

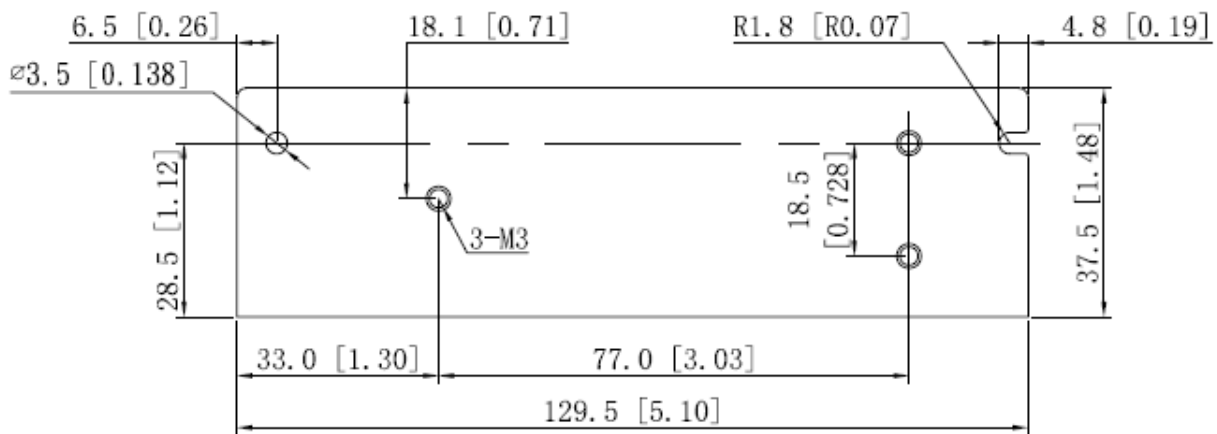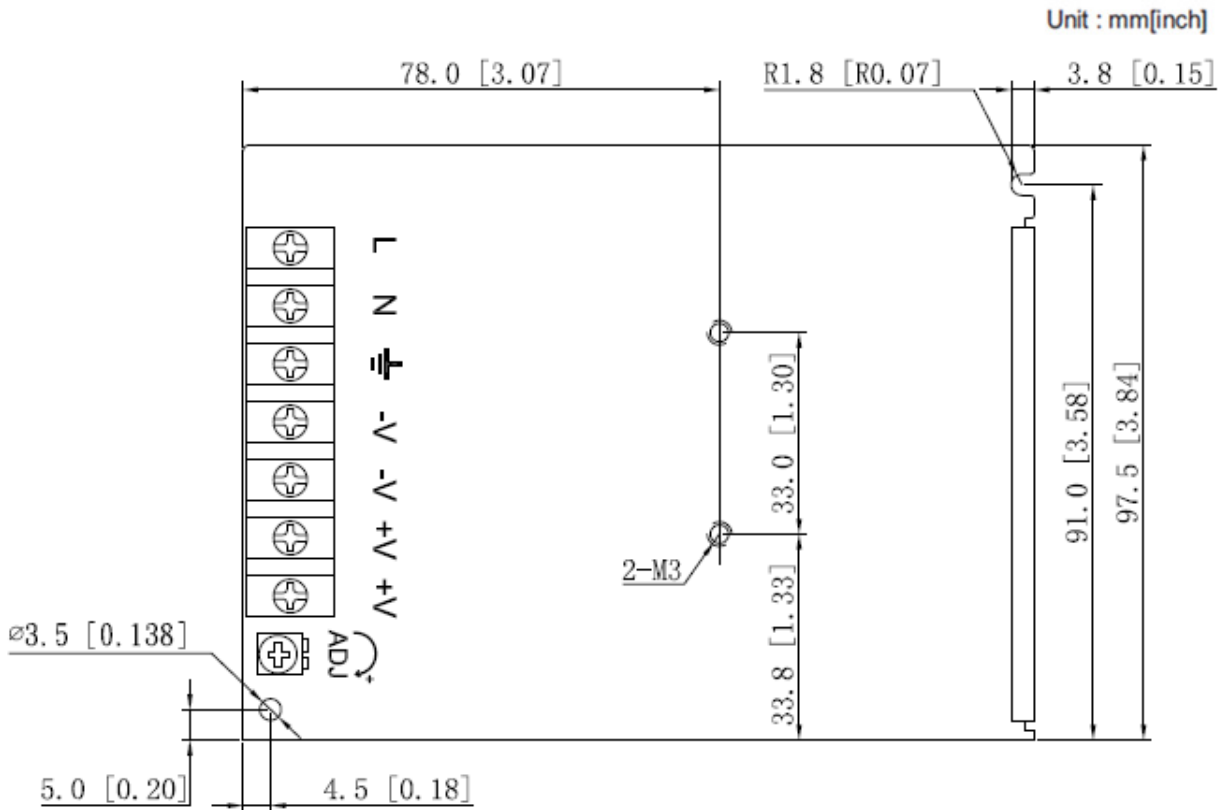

### **Weight**

The LCB100 Series packing weight is 0.99lb/0.45kg typical.

## Environmental Specifications

### **EMC Immunity**

LCB100 series power supply is designed to meet the following EMC immunity specifications:

Table 4. Environmental Specifications:

<b>Document</b>	<b>Description</b>
EN 55022	Conducted Level B and Radiated Level B (stand alone)
EN 61000-3-2	Harmonic Distortion
EN 61000-3-3	Harmonic Distortion
EN 61204-3	EMS immunity
EN 55024	EMS immunity



## **Safety Certifications**

The LCB100 series power supply is intended for inclusion in other equipment and the installer must ensure that it is in compliance with all the requirements of the end application. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

Table 5. Safety Certifications for LCB100 series power supply system:

<b>Document</b>	<b>Description</b>
UL 60950-1	US and Canada Requirements
TUV EN 60950-1	Germany and European Requirements (All CENELEC Countries)


## EMI Emissions

The LCB100 series has been designed to comply with the Class B limits of EMI requirements of EN55022 (FCC Part 15) and CISPR 22 (EN55022) for emissions and relevant sections of EN61000 (IEC 61000) for immunity.

The unit is enclosed inside a metal box, tested at full load using resistive load.

### Conducted Emissions

The applicable standard for conducted emissions is EN55022 (FCC Part 15). Conducted noise can appear as both differential mode and common mode noise currents. Differential mode noise is measured between the two input lines, with the major components occurring at the supply fundamental switching frequency and its harmonics. Common mode noise, a contributor to both radiated emissions and input conducted emissions, is measured between the input lines and system ground and can be broadband in nature.

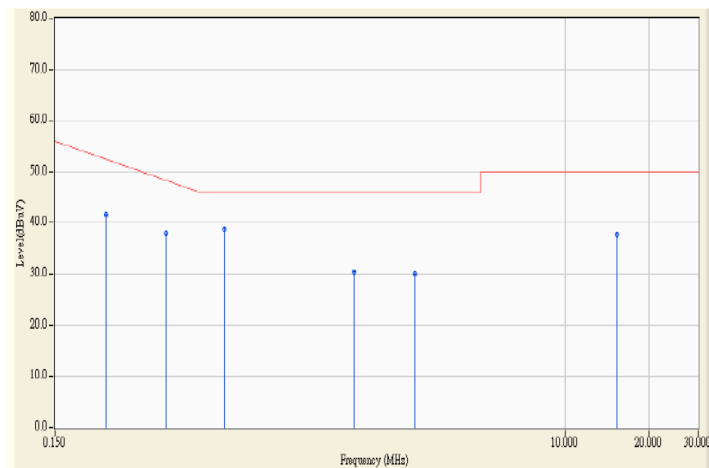

The LCB100 series power supply have internal EMI filters to ensure the convertor’s conducted EMI levels comply with EN55022 (FCC Part 15) Class B and EN55022 (CISPR 22) Class B limits. The EMI measurements are performed with resistive loads under forced air convection at maximum rated loading.

Sample of EN55022 Conducted EMI Measurement at 230Vac input.

Note: Red Line refers to Artesyn Quasi Peak margin, which is 6dB below the CISPR international limit. Blue Line refers to the Artesyn Average margin, which is 6dB below the CISPR international limit.

Table 6. Conducted EMI emission specifications of the LCB100 series

Parameter	Model	Symbol	Min	Typ	Max	Unit
FCC Part 15, class B	All	Margin	-	-	6	dB
CISPR 22 (EN55022) class B	All	Margin	-	-	6	dB

### **Radiated Emissions**

Unlike conducted EMI, radiated EMI performance in a system environment may differ drastically from that in a stand-alone power supply. It is thus recommended that radiated EMI be evaluated in a system environment. The applicable standard is EN55022 Class B (FCC Part 15). Testing ac-dc convertors as a stand-alone component to the exact requirements of EN55022 can be difficult, because the standard calls for 1m leads to be attached to the input and outputs and aligned such as to maximize the disturbance. In such a set-up, it is possible to form a perfect dipole antenna that very few ac-dc convertors could pass. However, the standard also states that 'an attempt should be made to maximize the disturbance consistent with the typical application by varying the configuration of the test sample'.

## **MTBF and Reliability**

The MTBF of LCB100 series of AC/DC converters has been calculated using MIL-HDBK 217F.  
Operating Temperature @25 °C, Ground Benign.

<b>Model</b>	<b>MTBF</b>	<b>Unit</b>
LCB100E	206	K Hrs
LCB100D		
LCB100L		
LCB100N		
LCB100Q		
LCB100W		


## Operating Temperature

The LCB100 series start and operate within stated specifications at an ambient temperature from  $-25^{\circ}\text{C}$  to  $70^{\circ}\text{C}$  under all load conditions (see below derating curves for other amount of convection and orientation. Derate output current and power by 2.5% per degree above  $50^{\circ}\text{C}$ . Maximum operating ambient temperature is  $70^{\circ}\text{C}$  (which implies a 50% derating at max  $70^{\circ}\text{C}$  ambient).


Under convection cooling condition, the maximum output power derates linearly from full load. When input voltage is 90Vac, the maximum output power will derate to 90% full load.

## Derating Curve

Load V.S Temp.

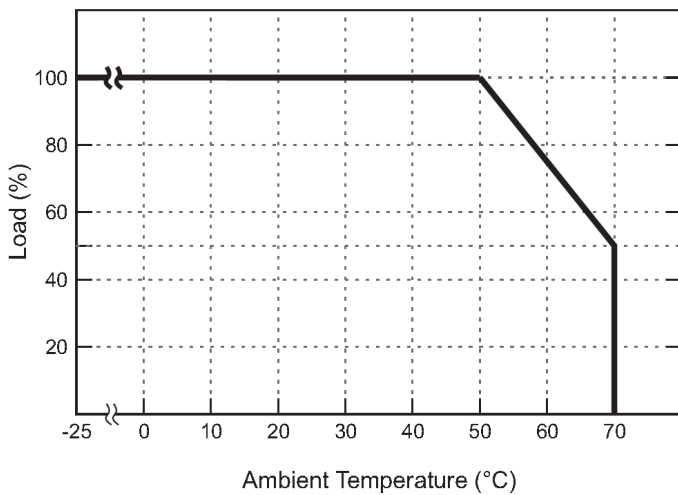

Load V.S I/P Voltage

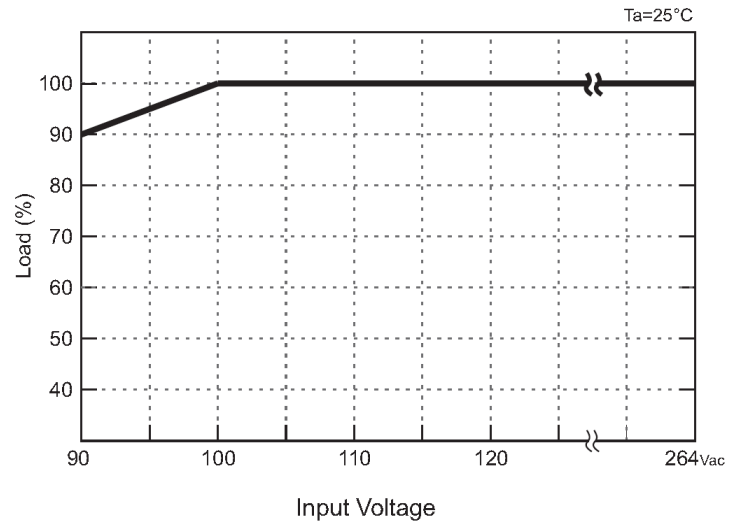

## Storage and Shipping Temperature / Humidity

The LCB100 series can be stored or shipped at temperatures between -40 °C to +85 °C and relative humidity from 10% to 95%, non-condensing.

## Humidity

The LCB100 series will operate within specifications when subjected to a relative humidity from 20% to 90% non-condensing. The LCB100 series can be stored in a relative humidity from 10% to 95% non-condensing.

## Vibration


The LCB100 series will pass the following vibration specifications:

Acceleration	5	gRMS
Frequency Range	10-500	Hz
Duration	60	mins
Direction	3 mutually perpendicular axis	
PSD Profile	<p><b>FREQ</b> 10-500 Hz</p>	<p><b>SLOPE</b> <b>dB/oct</b> ---</p>
		<p><b>PSD</b> <b>g<sup>2</sup>/Hz</b> ---</p>

## Application Notes

### Output Ripple and Noise Measurement

The setup outlined in the diagram below has been used for output voltage ripple and noise measurements on the LCB100 series. When measuring output ripple and noise, a scope jack in parallel with a 0.1uF ceramic chip capacitor, and a 47uF aluminum electrolytic capacitor should be used. Oscilloscope should be set to 20MHz bandwidth for this measurement.

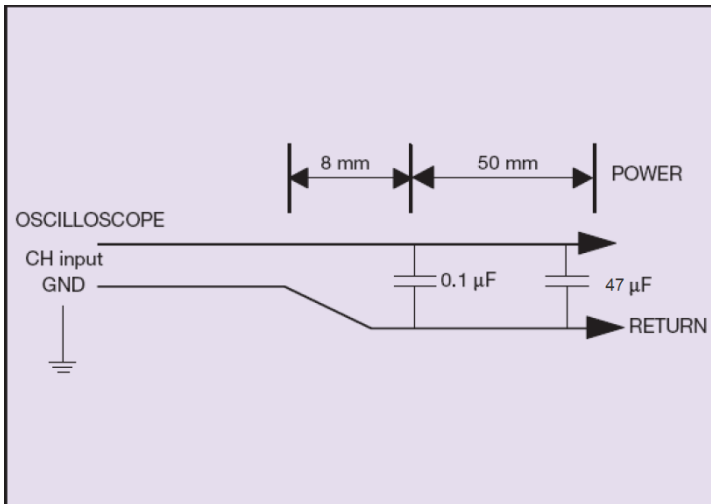

## Record of Revision and Changes

Issue	Date	Description	Originators
1.0	07.24.2015	First Issue	E.Wang
1.1	09.11.2015	Update LCB100D performance curves	E.Wang

### WORLDWIDE OFFICES

#### Americas

2900 S.Diablo Way  
 Tempe, AZ 85282  
 USA  
 +1 888 412 7832

#### Europe (UK)

Waterfront Business Park  
 Merry Hill, Dudley  
 West Midlands, DY5 1LX  
 United Kingdom  
 +44 (0) 1384 842 211

#### Asia (HK)

14/F, Lu Plaza  
 2 Wing Yip Street  
 Kwun Tong, Kowloon  
 Hong Kong  
 +852 2176 3333



[www.artesyn.com](http://www.artesyn.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.  
 © 2014 All rights reserved.

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
 For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)