


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: DC TO 8.0 GHz
- 1.2 MAXIMUM INPUT POWER: 0.5 WATTS @ +25°C
DERATED LINEARLY TO 0 WATTS @ +125°C
- 1.3 OPERATING TEMP. RANGE: -55°C TO +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 VSWR: 1.05 +0.008f(GHz) MAX.

2.0 DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.

 MARK UNIT AS SHOWN

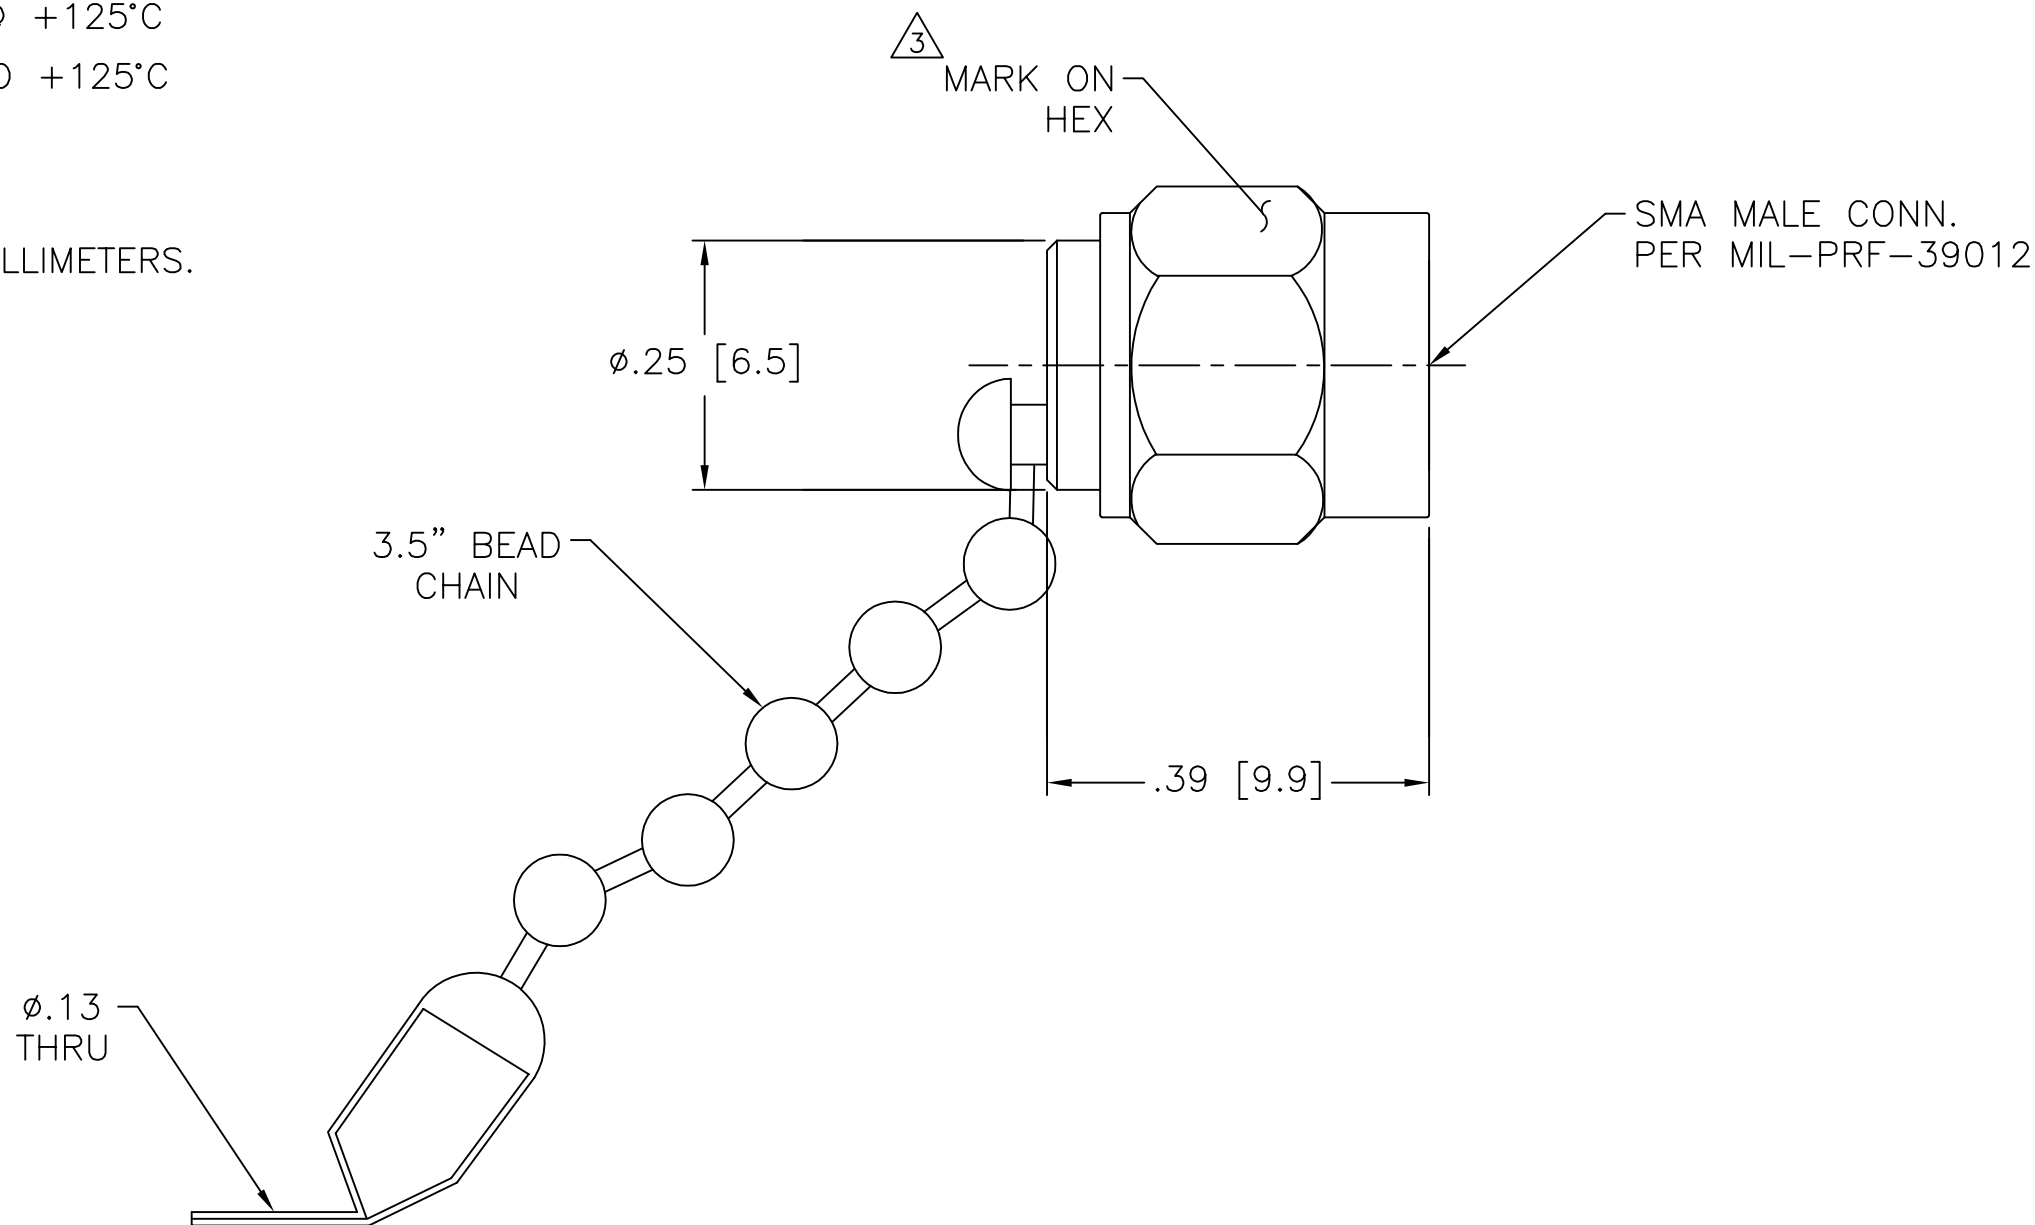

REV.	DESCRIPTION	DATE
-	RELEASED	3/6/93
A	ECN 15059	2/1/96
A1	ADDED TITLEBLOCK	11/16/05
A2	ECO 23675	7/7/11
B	ECO 24259	5/31/12

<p>NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.</p> <p>UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°</p>	<p>CAGE CODE</p> <p>34078</p>	<p>MIDWEST MICROWAVE</p>	
	<p>EMERSON Network Power Connectivity Solutions</p>	<p>TITLE</p> <p>TERMINATION OUTLINE DRAWING</p>	
<p>DRAWN/DATE</p> <p>A.BEATTY 3/4/93</p>	<p>ENG./DATE</p> <p>G.KOZAK 3/5/93</p>	<p>DRAWING NUMBER</p> <p>TRM-2446-MC-SMA-02-01</p>	<p>REV.</p> <p>B</p>
<p>CHECKED/DATE</p> <p>M.HOLLMAN 3/4/93</p>	<p>APPROVED/DATE</p>	<p>SCALE: 5=1</p>	<p>SHEET 1 of 1</p>