



DIMENSIONS:	
A	2.500" ±0.063
B	2.685" ±0.125
C	3.060" ±0.063
D	2.000" ±0.063
E	1.688" ±0.063
G	0.203" x 0.375" ±0.015

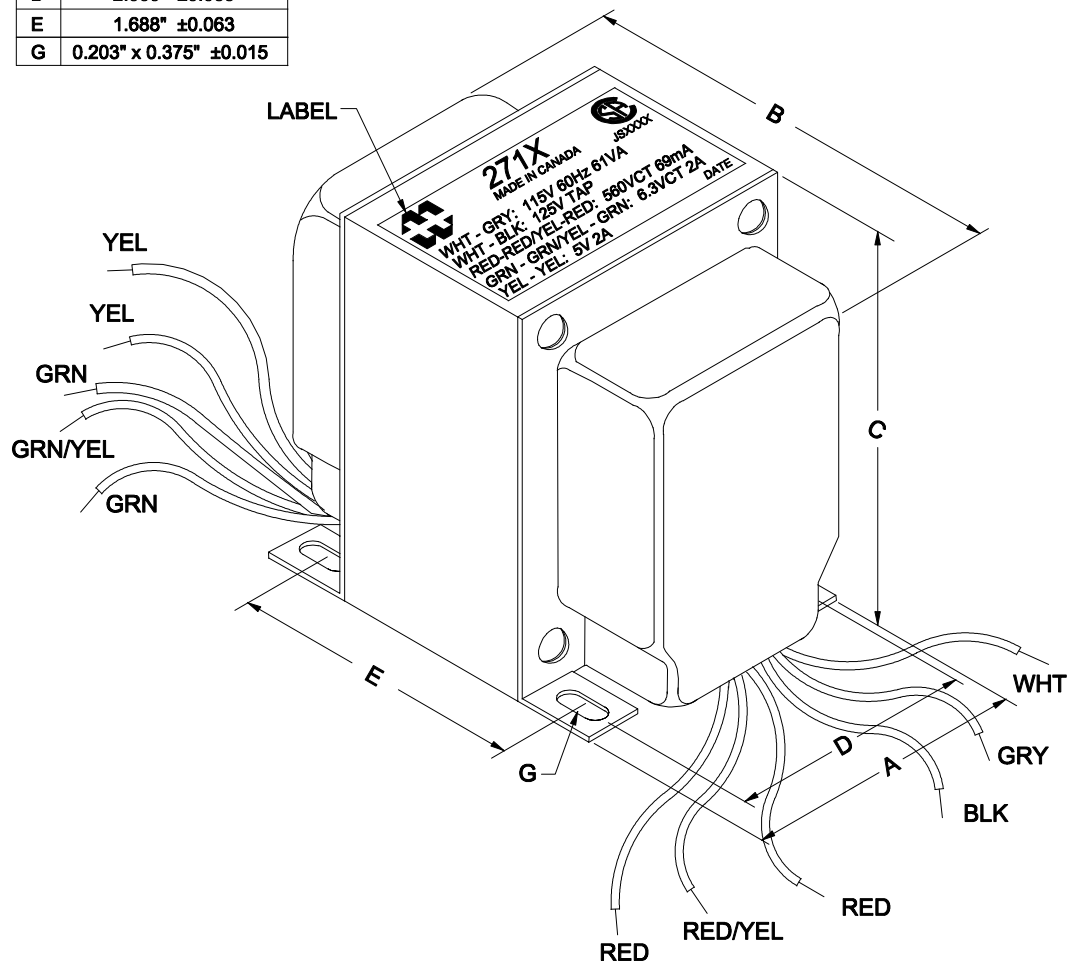

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

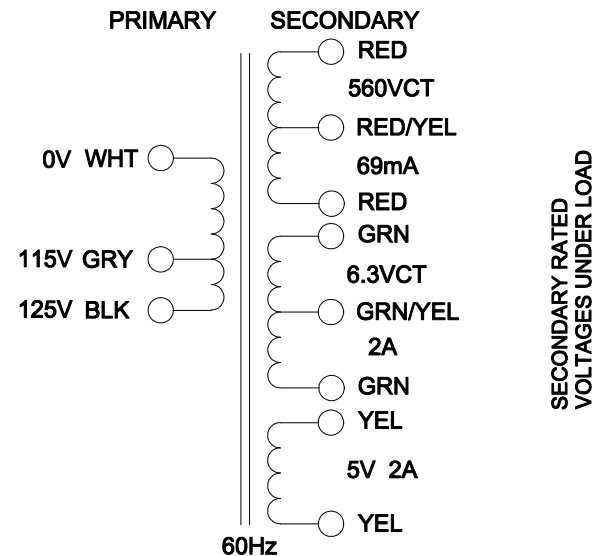

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 125V, 60Hz, WHT - BLK	170.4mA Max.
Sec. N.L.V	@ 125V, 60Hz, WHT - BLK	
	RED - RED =	623.8V ±2%
	RED - RED/YEL = RED/YEL - RED =	311.9V ±2%
	YEL - YEL =	5.693V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.558V ±2%
	GRN - GRN =	7.116V ±2%
DCR	@ 20°C, WHT - BLK =	7.612 Ω ±20%
	@ 20°C, RED - RED =	355.7 Ω ±20%
	@ 20°C, YEL - YEL =	0.159 Ω ±20%
	@ 20°C, GRN - GRN =	0.184 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION	
0	RELEASED. C.I.	11/07/12	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5	
			PH # (519) 886-6181 FAX # (519) 886-9540	
			DWG. BY: C. ILIE	CHK'D BY:
			DATE: 11/07/12	APP'D. BY:
			DIMENSIONS: IN(X) MM()	
			TITLE: POWER TRANSFORMER	DWG. NO. 271X