
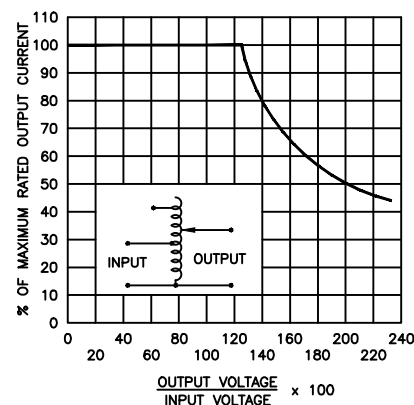
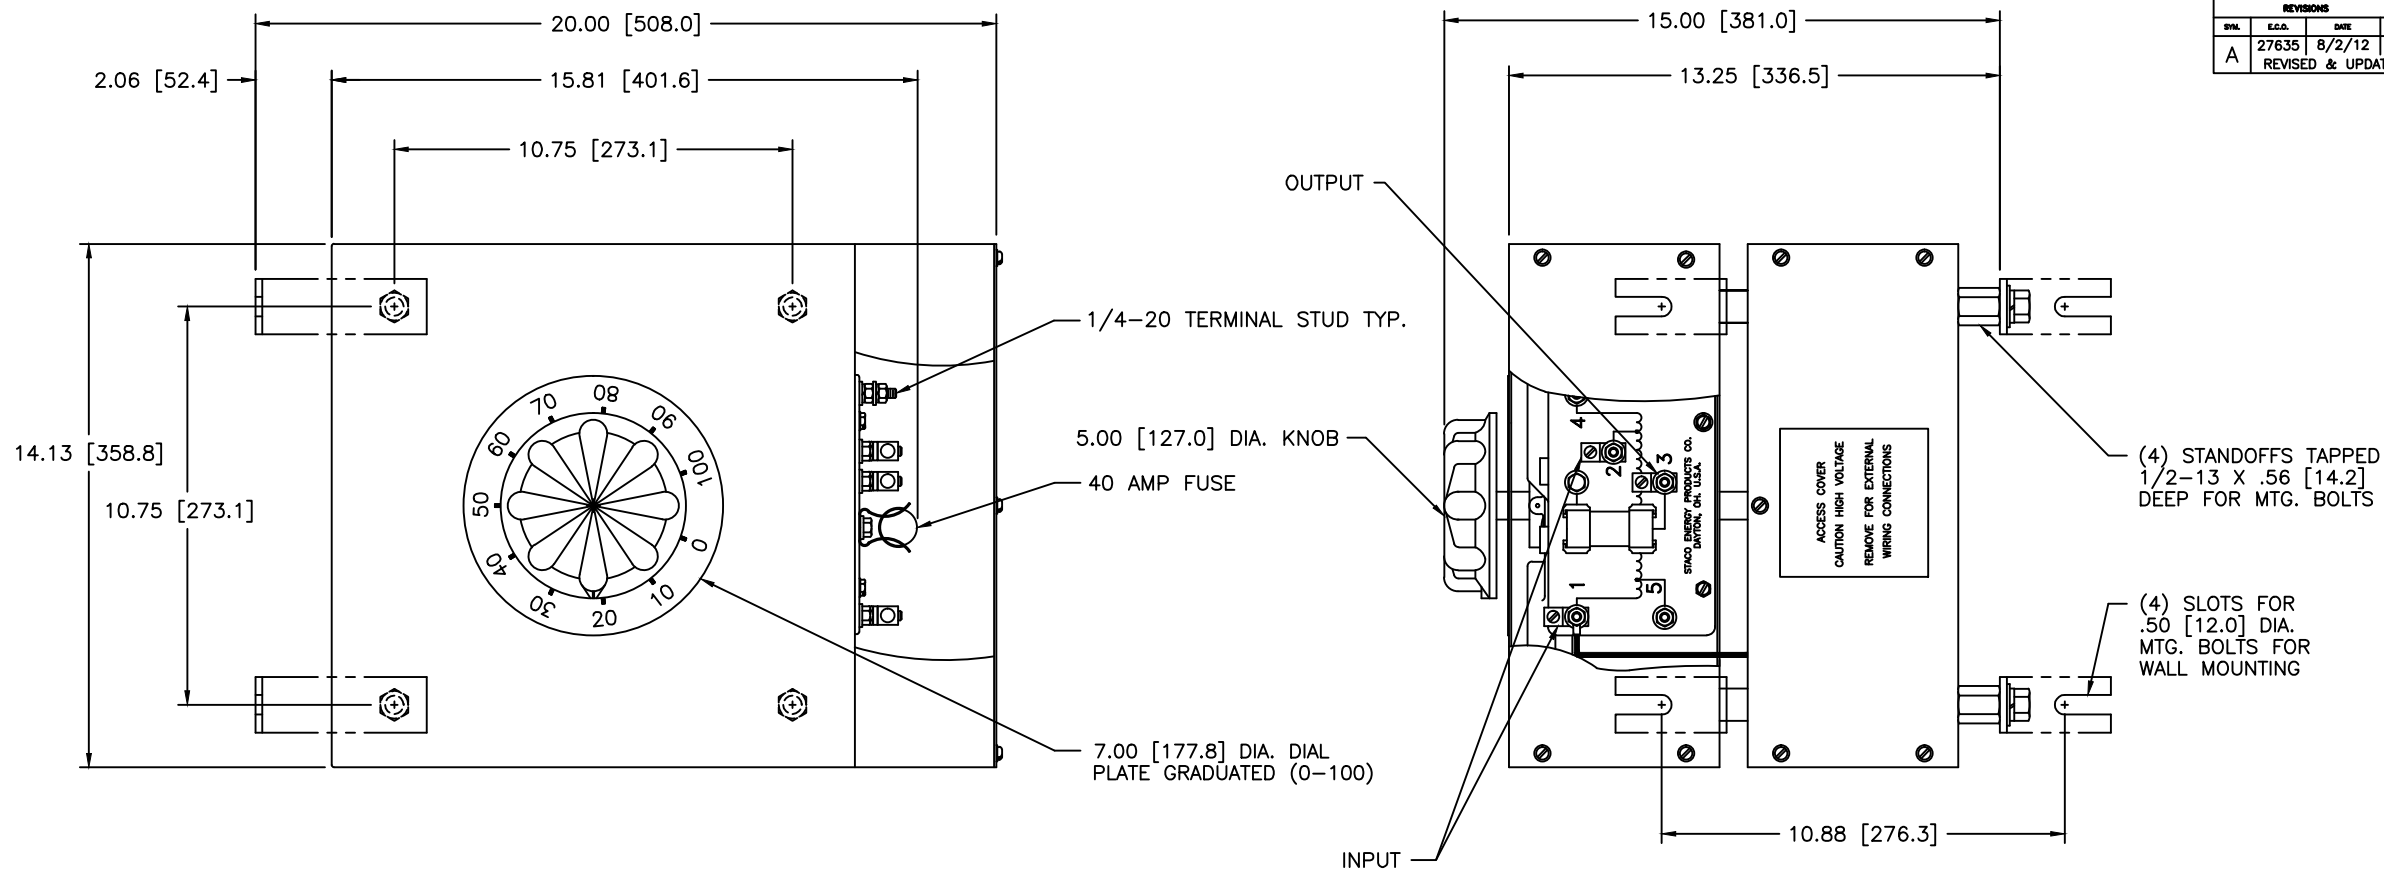


Dwg. No.		032-8140	
REVISIONS			
SYL.	E.C.O.	DATE	APVD.
A	27635	8/2/12	
REVISED & UPDATED			



**FIGURE A**  
MAXIMUM OUTPUT CURRENT OF ANY DUAL INPUT VOLTAGE OR VOLTAGE DOUBLER UNIT OPERATED AT LOWER INPUT VOLTAGE.

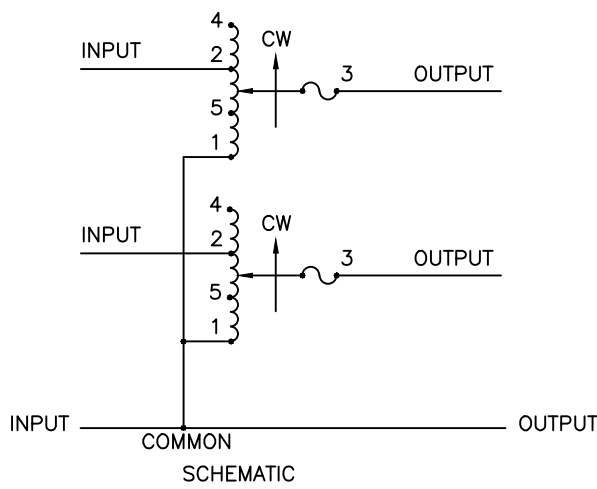

\* MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25% ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, OUTPUT CURRENT MUST BE REDUCED ACCORDING TO RATING CURVE FIGURE A.

++ MAXIMUM KVA AT MAXIMUM OUTPUT AND CORRESPONDING DE-RATED CURRENT. MAXIMUM KVA AT LOWER OUTPUT VOLTAGES MAY BE CALCULATED FROM RATING CURVE, FIGURE A.

V.D. = VOLTAGE DOUBLER.

SPECIFICATIONS								
WIRING	INPUT		OUTPUT			SHAFT ROTATION FOR INCREASE VOLTAGE	TERMINAL CONNECTIONS	
	VOLTS	HERTZ	VOLTS	MAX. AMPS	MAX. KVA		FOR INCREASING VOLTAGE AS VIEWED FROM ROTOR END	
THREE PHASE OPEN DELTA	240	50/60	0-240	35	14.5	CW	4-1-4	3-1-3
			0-280	35	16.9	CW	2-1-2	3-1-3
	120	50/60	0-280	35-15 V.D.	7.3 ++	CW	5-1-5	3-1-3
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±			DIMENSIONS APPLY AFTER PLATING			TITLE: SPEC. CONTROL DRAWING VARIABLE TRANSFORMER TYPE: 6020CT-2D		
DECIMALS .001 FRACTIONS 1/32 ANGLES 1°			HITS IN [ ]			DRAWN BY: TIM RAU DATE: 10/23/97		
MATERIAL:			WEIGHT APPROX. 146 LBS.			FIRST USED ON: 8.3.008		
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights therein, and to any articles disclosed therein, except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.			CHECKER: DATE:			DO NOT SCALE DIMS. SCALE: .5=1 SHEET 1 of 1		
ENGINEER: DATE:			Dwg. No. 032-8140			D 032-8140		

