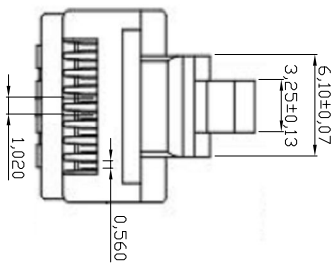
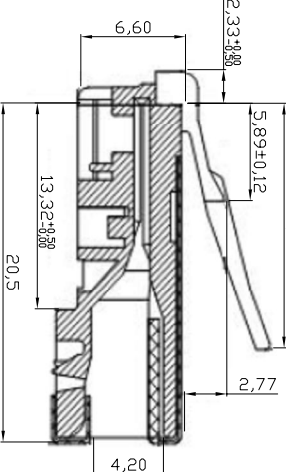
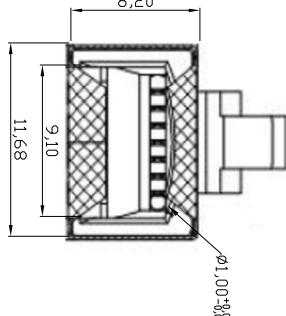
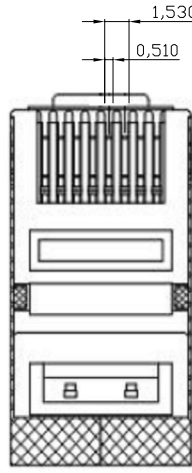


	1	2	3	4	5	6	7																				
A	   <p>The shaded part means shielding shell</p>																										
B	<p>Specifications:</p> <p>Material: Poly Carbonate(PC) UL94V-2 Housing: High strength copper alloy Contact blade: High strength copper alloy 100 micron Nickel underplated Plating type: 8% Phosphor Bronze Plating thickness: 6u" gold plated Operating temperature: -40°C to +125°C</p>																										
C	<p>Electrical: Current rating: 250V AC max. at 2A Dielectric: 500V AC Insulation resistance: 500MΩ Complies with FCC68/F</p>																										
D																											
E																											
F																											
G	<p>RoHS compliant Unit: mm</p> <table border="1" data-bbox="287 582 462 761"> <thead> <tr> <th>Scale</th> <th>Free TOLERANCE</th> </tr> </thead> <tbody> <tr> <td>X.X</td> <td>±0.20</td> </tr> <tr> <td>X.XX</td> <td>±0.10</td> </tr> <tr> <td>X.XXX</td> <td>±0.05</td> </tr> <tr> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>Angle</td> <td>±2°</td> </tr> <tr> <td>Angle</td> <td>TOL</td> </tr> </tbody> </table>							Scale	Free TOLERANCE	X.X	±0.20	X.XX	±0.10	X.XXX	±0.05	DIM	TOL	Angle	±2°	Angle	TOL						
Scale	Free TOLERANCE																										
X.X	±0.20																										
X.XX	±0.10																										
X.XXX	±0.05																										
DIM	TOL																										
Angle	±2°																										
Angle	TOL																										
H	<table border="1" data-bbox="119 582 287 1299"> <thead> <tr> <th>①</th> <th>Update the drawing</th> <th>12.06.2016</th> <th>Amy</th> </tr> </thead> <tbody> <tr> <td>② <th>Drawn</th> <th>29.04.2016</th> <th>Amy</th> </td></tr> </tbody> </table> <table border="1" data-bbox="119 1321 287 1635"> <thead> <tr> <th>Date</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td>29.04.2016</td> <td>Amy</td> </tr> <tr> <td>12.06.2016</td> <td>Amy</td> </tr> </tbody> </table> <table border="1" data-bbox="119 1657 287 2161"> <thead> <tr> <th>Customer-No.</th> <th>ASSMANN WSV-No.</th> <th>Drawing-No.</th> </tr> </thead> <tbody> <tr> <td></td> <td>A-MO 8/8-SRS</td> <td>ASS 7232 CO rev01</td> </tr> </tbody> </table>							①	Update the drawing	12.06.2016	Amy	② <th>Drawn</th> <th>29.04.2016</th> <th>Amy</th>	Drawn	29.04.2016	Amy	Date	Name	29.04.2016	Amy	12.06.2016	Amy	Customer-No.	ASSMANN WSV-No.	Drawing-No.		A-MO 8/8-SRS	ASS 7232 CO rev01
①	Update the drawing	12.06.2016	Amy																								
② <th>Drawn</th> <th>29.04.2016</th> <th>Amy</th>	Drawn	29.04.2016	Amy																								
Date	Name																										
29.04.2016	Amy																										
12.06.2016	Amy																										
Customer-No.	ASSMANN WSV-No.	Drawing-No.																									
	A-MO 8/8-SRS	ASS 7232 CO rev01																									
1	2	3	4	5	6	7	H																				

①

The shaded part means shielding shell

Specifications:

Material: Poly Carbonate(PC) UL94V-2
Housing: High strength copper alloy
Contact blade: High strength copper alloy
100 micron Nickel underplated
Plating type: 8% Phosphor Bronze
Plating thickness: 6u" gold plated
Operating temperature: -40°C to +125°C

Electrical:
Current rating: 250V AC max. at 2A
Dielectric: 500V AC
Insulation resistance: 500MΩ
Complies with FCC68/F

RoHS compliant
Unit: mm

Scale	Free TOLERANCE
X.X	±0.20
X.XX	±0.10
X.XXX	±0.05
DIM	TOL
Angle	±2°
Angle	TOL

①	Update the drawing	12.06.2016	Amy
②	Drawn	29.04.2016	Amy

Date	Name
29.04.2016	Amy
12.06.2016	Amy

Customer-No.	ASSMANN WSV-No.	Drawing-No.
	A-MO 8/8-SRS	ASS 7232 CO rev01



ASSMANN WSV components