
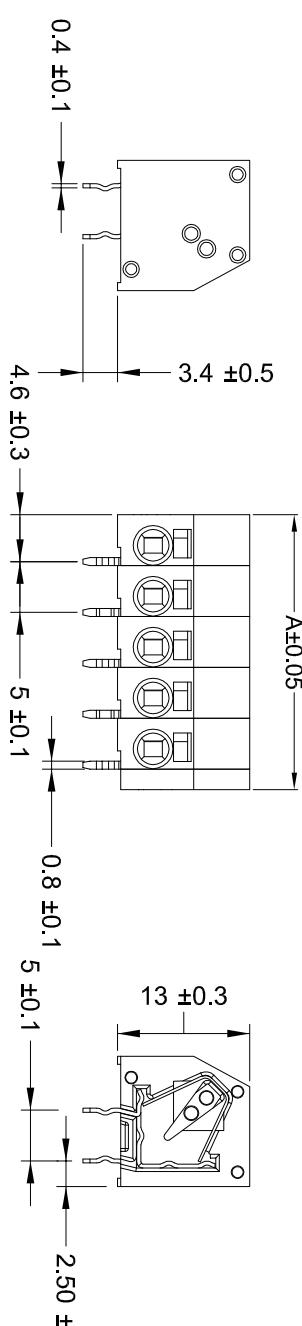


- NOTES :
- △ MATERIALS AND FINISH:
    - HOUSING: PA66
    - CONTACTS: COPPER ALLOY, FINISH: TIN OVER NICKEL UNDERPLATE
    - SPRING: STAINLESS STRIP STEEL
  - 2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
  - 3. WIRE TYPES AND SIZES ACCEPTED  
 SOLID WIRE: 16AWG~20AWG,  
 STRIP LENGTH: 7.5mm~8.5mm
  - 4. PACKAGED IN TRAY.
  - 5. CURRENT RATING: 10Amp AC300V.
  - 6. OPERATION TEMPERATURE: -40°C TO +105°C

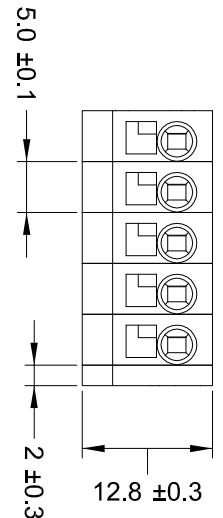

COLOR CODE: \_\_\_\_\_

SERIES CODE \_\_\_\_\_



PIN No: \_\_\_\_\_

P/N: \*-2834014-\*

1=GREEN 2=2 POSN  
 2=BLUE 3=3 POSN  
 3=BROWN 4=4 POSN  
 4=ORANGE 5=5 POSN  
 5=GREY 6=6 POSN  
 6=RED 7=7 POSN  
 7=YELLOW 8=8 POSN  
 8=PURPLE  
 9=WHITE  
 0=BLACK

REMARK: THE DIFFERENT COLORS COULD BE COMBINED TO THE NEW CONNECTOR P/Ns FOR CUSTOMER REQUEST.

42.00	8 POSN
37.00	7 POSN
32.00	6 POSN
27.00	5 POSN
22.00	4 POSN
17.00	3 POSN
12.00	2 POSN
A	NO. OF POSITIONS

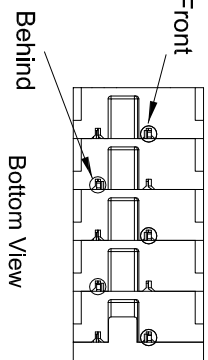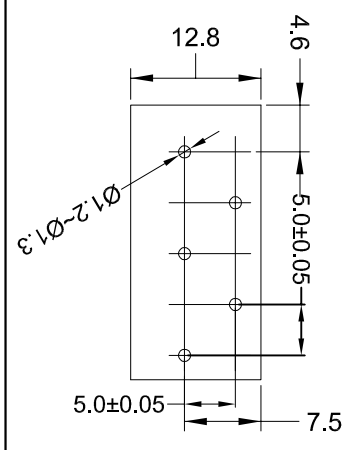

THIS DRAWING IS A CONTROLLED DOCUMENT

DESIGNER	CHK	DATE	REV
INTEGRATOR	APP	DATE	REV
TESTER	APP	DATE	REV
ASSEMBLER	APP	DATE	REV

DESIGNER: GEORGE ELISABETH  
 CHK: SHI XIANG  
 INTEGRATOR: ISJANZONIS  
 TESTER: ISJANZONIS  
 ASSEMBLER: ISJANZONIS

DATE: 108-13/078  
 APP: 11-4-10/078  
 VER: 1

CUSTOMER DRAWING

50mm Pitch Modular Screwless Conn.

SCALE: 1:1

REV: A