


REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
	13.07.26	A	INITIAL RELEASE.	Andrew

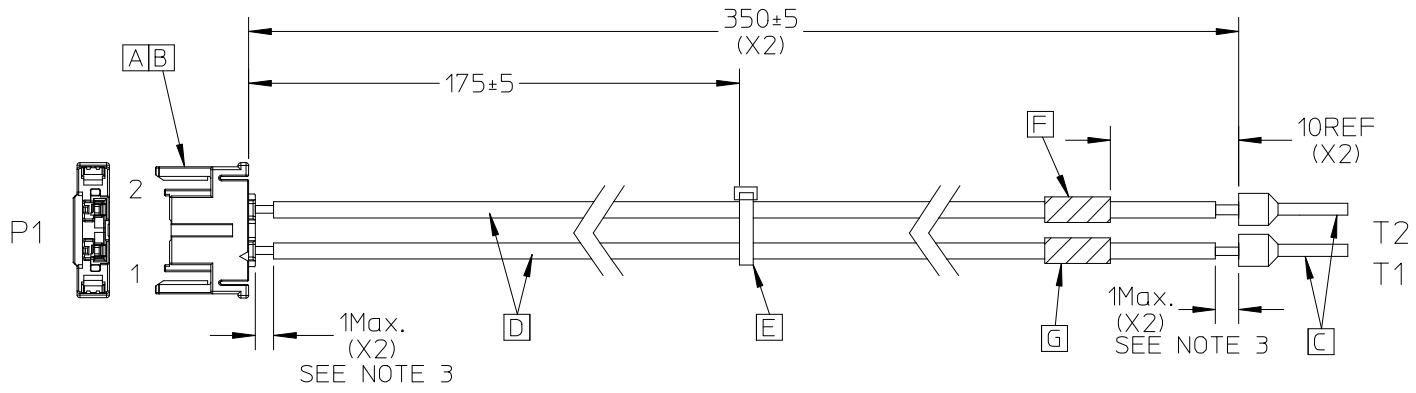

NOTES
 1. THIS PRODUCT MUST MEET EU 2002/95 EC ROHS COMPLIANCE.
 2. ELECTRICAL PERFORMANCE REFER TO ES-000.
 3. THE INNER INSULATION EXPOSED LENGTH.

G	HST 2.0mm RED	10REF	1
F	HST 2.0mm BLACK	10REF	1
E	CABLE TIE		1
D	WIRE UL11047 24AWG DOUBLE INSULATION WHITE	A/R	
C	FERRULE END TERMINAL 24AWG		2
B	TERMINAL 24AWG		2
A	HSG 2CKT WHITE		1
ITEM	DESCRIPTION	L(MM)	Q'TY

WIRING CHART			
P1		WIRE COLOR	HST COLOR
1	T1	WHITE	RED
2	T2	WHITE	BLACK

EC NO: CPG2014-0268 DRWN: JXIA004 CHKD: YXZOU APPR: FNIE	2013/07/27 2013/07/27 2013/07/29	QUALITY SYMBOLS $\nabla_F = 0$ $\nabla_E = 0$ $\nabla_G = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
			4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- 0 PLACE ± --- ± ---	mm INCH	DRAWN BY JXIA004	DATE 2013/07/27	TITLE FLEXIMATE TO FERRULE 350MM		
A	REV	DESCRIPTION	ANGULAR ± ---° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. 688014645	DOCUMENT NO. SD-68801-103		SHEET NO. 1 OF 1	
			SIZE A 4		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				