


SERIES 04 4PST

FEATURES

- Joy Stick Action
- Position Locator On CRT Screens
- Moves Cursor On Menu Display



DIMENSIONS in inches (and millimeters)

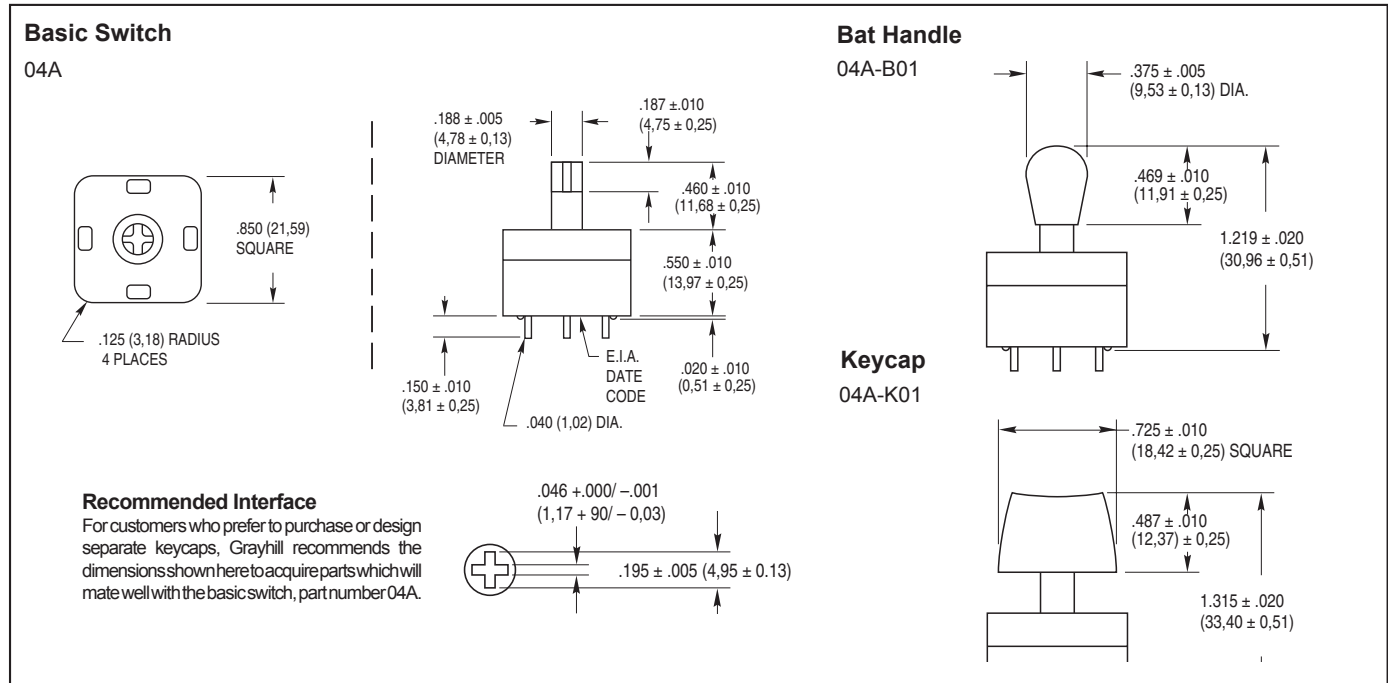

Pushbutton Switches

SPECIFICATIONS


Rating Criteria

Rated: Make and break 250 mA at 115 Vac or 125 mA at 220 Vac resistive load for 500,000 operations
 Contact Resistance: 25 milliohms maximum on a new switch
 Insulation Resistance: 1,000 megohms at 100 Vdc
 Dielectric Strength: 500 Vac RMS minimum
 Operating Temperature: -40°C to +85°
 Actuation Force: 13 oz. +/- 3 oz.
 Actuation travel: 0.095" +/- .020"
 Actuation lever stop strength: 20 lbs. min.

Materials and Finishes

Base, Cover and Switch Actuator: Polyester (Black)
 Terminals: Brass, gold-plated over nickel
 Shorting Bar: Phosphor bronze, gold-plated over nickel
 Spring: Tinned music wire
 Keycap: ABS or equivalent
 Bat-Handle: ABS

CIRCUITRY

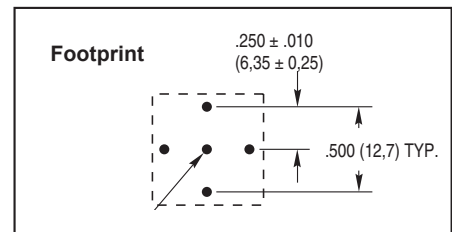

ORDERING INFORMATION

Description	Part No.
Basic Switch	04A
Switch with Arrowhead Keycap	04A-K01
Switch with Bat-Handle	04A-B01*

*Shipped with bat handle permanently attached.

Available from your local Grayhill Distributor.
 For prices and discounts, contact a local Sales Office,
 an authorized local Distributor or Grayhill.